

FLTK 1.3.0 Programming Manual



Revision 8 by Michael Sweet, Craig P. Earls,
Matthias Melcher, and Bill Spitzak.

Copyright 1998-2008 by Bill Spitzak and others.

Generated by Doxygen 1.5.7.1

Mon Oct 6 20:25:35 2008

Contents

1	FLTK Programming Manual	1
2	Preface	3
2.1	Organization	4
2.2	Conventions	5
2.3	Abbreviations	5
2.4	Copyrights and Trademarks	5
3	1 - Introduction to FLTK	7
3.1	History of FLTK	8
3.2	Features	8
3.3	Licensing	9
3.4	What Does "FLTK" Mean?	9
3.5	Building and Installing FLTK Under UNIX and MacOS X	10
3.6	Building FLTK Under Microsoft Windows	11
3.6.1	Using the Visual C++ DLL Library	12
3.7	Building FLTK Under OS/2	12
3.8	Internet Resources	12
3.9	Reporting Bugs	13
4	2 - FLTK Basics	15
4.1	Writing Your First FLTK Program	16
4.1.1	Creating the Widgets	17
4.1.2	Creating Widget hierarchies	17
4.1.3	Get/Set Methods	17
4.1.4	Redrawing After Changing Attributes	17
4.1.5	Labels	17
4.1.6	Showing the Window	18
4.1.7	The Main Event Loop	18

4.2	Compiling Programs with Standard Compilers	18
4.3	Compiling Programs with Microsoft Visual C++	19
4.4	Naming	20
4.5	Header Files	20
5	3 - Common Widgets and Attributes	21
5.1	Buttons	22
5.2	Text	23
5.3	Valuators	23
5.4	Groups	24
5.5	Setting the Size and Position of Widgets	25
5.6	Colors	25
5.7	Box Types	26
5.7.1	Box Types	27
5.8	Labels and Label Types	28
5.9	Callbacks	31
5.10	Shortcuts	32
6	5 - Drawing Things in FLTK	33
6.1	When Can You Draw Things in FLTK?	34
6.2	Drawing Functions	34
6.2.1	Boxes	35
6.2.2	Clipping	35
6.3	Colors	36
6.3.1	Line Dashes and Thickness	37
6.3.2	Drawing Fast Shapes	38
6.3.3	Drawing Complex Shapes	40
6.3.4	Drawing Text	42
6.3.5	Fonts	43
6.3.6	Character Encoding	44
6.3.7	Drawing Overlays	44
6.4	Drawing Images	45
6.4.1	Direct Image Drawing	45
6.4.2	Direct Image Reading	46
6.4.3	Image Classes	47
6.4.4	Offscreen Drawing	48
7	4 - Designing a Simple Text Editor	49

7.1	Determining the Goals of the Text Editor	50
7.2	Designing the Main Window	50
7.3	Variables	50
7.4	Menubars and Menus	51
7.5	Editing the Text	51
7.6	The Replace Dialog	52
7.7	Callbacks	52
7.7.1	changed_cb()	52
7.7.2	copy_cb()	52
7.7.3	cut_cb()	53
7.7.4	delete_cb()	53
7.7.5	find_cb()	53
7.7.6	find2_cb()	53
7.7.7	new_cb()	54
7.7.8	open_cb()	54
7.7.9	paste_cb()	54
7.7.10	quit_cb()	54
7.7.11	replace_cb()	55
7.7.12	replace2_cb()	55
7.7.13	replall_cb()	55
7.7.14	replcan_cb()	56
7.7.15	save_cb()	56
7.7.16	saveas_cb()	56
7.8	Other Functions	57
7.8.1	check_save()	57
7.8.2	load_file()	57
7.8.3	save_file()	57
7.8.4	set_title()	58
7.9	The main() Function	58
7.10	Compiling the Editor	58
7.11	The Final Product	59
7.12	Advanced Features	59
7.12.1	Syntax Highlighting	59
8	6 - Handling Events	65
8.1	The FLTK Event Model	66
8.2	Mouse Events	66

8.2.1	FL_PUSH	66
8.2.2	FL_DRAG	66
8.2.3	FL_RELEASE	66
8.2.4	FL_MOVE	66
8.2.5	FL_MOUSEWHEEL	66
8.3	Focus Events	67
8.3.1	FL_ENTER	67
8.3.2	FL_LEAVE	67
8.3.3	FL_FOCUS	67
8.3.4	FL_UNFOCUS	67
8.4	Keyboard Events	67
8.4.1	FL_KEYDOWN, FL_KEYUP	67
8.4.2	FL_SHORTCUT	68
8.5	Widget Events	68
8.5.1	FL_DEACTIVATE	68
8.5.2	FL_ACTIVATE	68
8.5.3	FL_HIDE	68
8.5.4	FL_SHOW	68
8.6	Clipboard Events	68
8.6.1	FL_PASTE	68
8.6.2	FL_SELECTIONCLEAR	68
8.7	Drag and Drop Events	69
8.7.1	FL_DND_ENTER	69
8.7.2	FL_DND_DRAG	69
8.7.3	FL_DND_LEAVE	69
8.7.4	FL_DND_RELEASE	69
8.8	Fl::event_*() methods	69
8.9	Event Propagation	70
8.10	FLTK Compose-Character Sequences	71
9	7 - Adding and Extending Widgets	73
9.1	Subclassing	74
9.2	Making a Subclass of Fl_Widget	74
9.3	The Constructor	74
9.4	Protected Methods of Fl_Widget	75
9.5	Handling Events	77
9.6	Drawing the Widget	78

9.7	Resizing the Widget	78
9.8	Making a Composite Widget	79
9.9	Cut and Paste Support	80
9.10	Drag And Drop Support	81
9.11	Making a subclass of Fl_Window	81
10	8 - Using OpenGL	83
10.1	Using OpenGL in FLTK	84
10.2	Making a Subclass of Fl_Gl_Window	84
10.2.1	Defining the Subclass	84
10.2.2	The draw() Method	85
10.2.3	The handle() Method	85
10.3	Using OpenGL in Normal FLTK Windows	86
10.4	OpenGL Drawing Functions	87
10.5	Speeding up OpenGL	88
10.6	Using OpenGL Optimizer with FLTK	88
11	9 - Programming with FLUID	91
11.1	What is FLUID?	92
11.2	Running FLUID Under UNIX	92
11.3	Running FLUID Under Microsoft Windows	93
11.4	Compiling .fl files	93
11.5	A Short Tutorial	94
11.5.1	The CubeView Class	94
11.5.2	The CubeViewUI Class	97
11.5.3	Adding Constructor Initialization Code	101
11.5.4	Generating the Code	101
11.6	FLUID Reference	101
11.6.1	The Widget Browser	101
11.6.2	Menu Items	102
11.6.3	The Widget Panel	107
11.7	GUI Attributes	108
11.7.1	Style Attributes	110
11.7.2	C++ Attributes	112
11.8	Selecting and Moving Widgets	114
11.9	Image Labels	115
11.10	Internationalization with FLUID	116

11.10.1 I18N Methods	116
11.10.2 Using GNU gettext for I18N	116
11.10.3 Using POSIX catgets for I18N	117
11.11 Known limitations	118
12 10 - Advanced FLTK	119
12.1 Multithreading	120
13 11 - Unicode and utf-8 Support	123
13.1 About Unicode and utf-8	124
13.2 Unicode in FLTK	124
14 C - FLTK Enumerations	127
14.1 Version Numbers	128
14.2 Events	128
14.3 Callback "When" Conditions	129
14.4 Fl::event_button() Values	129
14.5 Fl::event_key() Values	130
14.6 Fl::event_state() Values	131
14.7 Alignment Values	131
14.8 Fonts	132
14.9 Colors	132
14.9.1 Color Constants	133
14.10 Cursors	134
14.11 FD "When" Conditions	134
14.12 Damage Masks	134
15 D - GLUT Compatibility	135
15.1 Using the GLUT Compatibility Header File	136
15.2 Known Problems	136
15.3 Mixing GLUT and FLTK Code	137
15.4 class Fl_Glut_Window	137
16 E - Forms Compatibility	139
16.1 Importing Forms Layout Files	140
16.2 Using the Compatibility Header File	140
16.3 Problems You Will Encounter	140
16.4 Additional Notes	142

17 F - Operating System Issues	145
17.1 Accessing the OS Interfaces	146
17.2 The UNIX (X11) Interface	146
17.2.1 Handling Other X Events	146
17.2.2 Drawing using Xlib	147
17.2.3 Changing the Display, Screen, or X Visual	147
17.2.4 Using a Subclass of Fl_Window for Special X Stuff	148
17.2.5 Setting the Icon of a Window	150
17.2.6 X Resources	150
17.3 The Windows (WIN32) Interface	151
17.3.1 Handling Other WIN32 Messages	151
17.3.2 Drawing Things Using the WIN32 GDI	152
17.3.3 Setting the Icon of a Window	152
17.3.4 How to Not Get a MSDOS Console Window	152
17.3.5 Known WIN32 Bugs and Problems	153
17.4 The MacOS Interface	153
17.4.1 Apple "Quit" Event	153
17.4.2 Apple "Open" Event	154
17.4.3 Drawing Things Using QuickDraw	154
17.4.4 Drawing Things Using Quartz	154
17.4.5 Mac File System Specifics	154
17.4.6 Known MacOS Bugs and Problems	155
18 G - Migrating Code from FLTK 1.0 to 1.1	157
18.1 Color Values	158
18.2 Cut and Paste Support	158
18.3 File Chooser	158
18.4 Function Names	158
18.5 Image Support	159
18.6 Keyboard Navigation	159
19 H - Migrating Code from FLTK 1.1 to 1.3	161
20 I - Developer Information	163
20.1 Non-ASCII characters	166
20.2 Document Structure	167
20.3 Creating Links	167
20.4 Changing Old Links	168

20.5 Paragraph Layout	169
20.6 Hack for missing "tiny.gif" file	170
20.7 5 Navigation Proposals	170
21 J - Software License	171
22 K - Example Source Code	179
22.1 Example Applications	180
22.1.1 adjuster	180
22.1.2 arc	180
22.1.3 ask	180
22.1.4 bitmap	180
22.1.5 blocks	181
22.1.6 boxtyle	181
22.1.7 browser	181
22.1.8 button	181
22.1.9 buttons	181
22.1.10 checkers	181
22.1.11 clock	181
22.1.12 colrowser	182
22.1.13 color_chooser	182
22.1.14 cube	182
22.1.15 CubeView	182
22.1.16 cursor	182
22.1.17 curve	182
22.1.18 demo	182
22.1.19 doublebuffer	183
22.1.20 editor	183
22.1.21 fast_slow	183
22.1.22 file_chooser	183
22.1.23 fonts	183
22.1.24 forms	183
22.1.25 fractals	183
22.1.26 fullscreen	184
22.1.27 gl_overlay	184
22.1.28 glpuzzle	184
22.1.29 hello	184

22.1.30 help	184
22.1.31 iconize	184
22.1.32 image	184
22.1.33 inactive	185
22.1.34 input	185
22.1.35 input_choice	185
22.1.36 keyboard	185
22.1.37 label	185
22.1.38 line_style	185
22.1.39 list_visuals	185
22.1.40 mandelbrot	186
22.1.41 menubar	186
22.1.42 message	186
22.1.43 minimum	186
22.1.44 navigation	186
22.1.45 output	186
22.1.46 overlay	186
22.1.47 pack	187
22.1.48 pixmap_browser	187
22.1.49 pixmap	187
22.1.50 preferences	187
22.1.51 radio	187
22.1.52 resizebox	187
22.1.53 resize	187
22.1.54 scroll	187
22.1.55 shape	188
22.1.56 subwindow	188
22.1.57 sudoku	188
22.1.58 symbols	188
22.1.59 tabs	188
22.1.60 threads	188
22.1.61 tile	189
22.1.62 tiled_image	189
22.1.63 valuators	189
22.1.64 fluid	189

24 Deprecated List	195
25 Module Index	197
25.1 Modules	197
26 Class Index	199
26.1 Class Hierarchy	199
27 Class Index	203
27.1 Class List	203
28 File Index	207
28.1 File List	207
29 Module Documentation	213
29.1 Windows handling functions	213
29.1.1 Detailed Description	214
29.1.2 Function Documentation	214
29.1.2.1 default_atclose	214
29.1.2.2 first_window	214
29.1.2.3 grab	214
29.1.2.4 grab	214
29.1.2.5 modal	215
29.1.2.6 next_window	215
29.1.2.7 set_atclose	215
29.1.3 Variable Documentation	215
29.1.3.1 atclose	215
29.2 Events handling functions	216
29.2.1 Detailed Description	218
29.2.2 Function Documentation	218
29.2.2.1 add_handler	218
29.2.2.2 belowmouse	219
29.2.2.3 belowmouse	219
29.2.2.4 compose	219
29.2.2.5 compose_reset	220
29.2.2.6 event	220
29.2.2.7 event_alt	220
29.2.2.8 event_button	220
29.2.2.9 event_button1	220

29.2.2.10 event_button2	221
29.2.2.11 event_button3	221
29.2.2.12 event_buttons	221
29.2.2.13 event_clicks	221
29.2.2.14 event_clicks	221
29.2.2.15 event_ctrl	222
29.2.2.16 event_dx	222
29.2.2.17 event_dy	222
29.2.2.18 event_inside	222
29.2.2.19 event_inside	222
29.2.2.20 event_is_click	222
29.2.2.21 event_key	222
29.2.2.22 event_key	223
29.2.2.23 event_length	223
29.2.2.24 event_original_key	224
29.2.2.25 event_shift	224
29.2.2.26 event_state	224
29.2.2.27 event_text	225
29.2.2.28 event_x_root	225
29.2.2.29 event_y_root	225
29.2.2.30 focus	225
29.2.2.31 focus	225
29.2.2.32 get_key	226
29.2.2.33 get_mouse	226
29.2.2.34 handle	226
29.2.2.35 pushed	226
29.2.2.36 pushed	226
29.2.2.37 test_shortcut	227
29.3 Selection & Clipboard functions	228
29.3.1 Detailed Description	228
29.3.2 Function Documentation	228
29.3.2.1 copy	228
29.3.2.2 dnd	228
29.3.2.3 paste	229
29.3.2.4 paste	229
29.3.2.5 selection	229

29.3.2.6 selection_owner	229
29.3.2.7 selection_owner	230
29.4 Screen functions	231
29.4.1 Detailed Description	231
29.4.2 Function Documentation	231
29.4.2.1 h	231
29.4.2.2 screen_xywh	231
29.4.2.3 screen_xywh	232
29.4.2.4 screen_xywh	232
29.4.2.5 w	232
29.4.2.6 x	232
29.4.2.7 y	233
29.5 Color & Font functions	234
29.5.1 Detailed Description	234
29.5.2 Function Documentation	235
29.5.2.1 free_color	235
29.5.2.2 get_color	235
29.5.2.3 get_font	235
29.5.2.4 get_font_name	235
29.5.2.5 get_font_sizes	235
29.5.2.6 set_color	236
29.5.2.7 set_color	236
29.5.2.8 set_font	236
29.5.2.9 set_font	236
29.5.2.10 set_fonts	236
29.6 Multithreading support functions	237
29.6.1 Detailed Description	237
29.6.2 Function Documentation	237
29.6.2.1 awake	237
29.6.2.2 awake	237
29.6.2.3 lock	238
29.6.2.4 thread_message	238
29.6.2.5 unlock	238
29.7 Safe widget deletion support functions	239
29.7.1 Detailed Description	239
29.7.2 Function Documentation	239

29.7.2.1	delete_widget	239
29.7.2.2	do_widget_deletion	239
29.7.2.3	watch_widget_pointer	239
29.8	Cairo support functions and classes	241
29.8.1	Function Documentation	241
29.8.1.1	cairo_autolink_context	241
29.8.1.2	cairo_autolink_context	242
29.8.1.3	cairo_cc	242
29.8.1.4	cairo_cc	242
29.8.1.5	cairo_make_current	242
29.9	Common Dialogs classes and functions	243
29.9.1	Function Documentation	244
29.9.1.1	fl_alert	244
29.9.1.2	fl_ask	244
29.9.1.3	fl_choice	245
29.9.1.4	fl_color_chooser	245
29.9.1.5	fl_color_chooser	246
29.9.1.6	fl_dir_chooser	246
29.9.1.7	fl_file_chooser	247
29.9.1.8	fl_file_chooser_callback	248
29.9.1.9	fl_file_chooser_callback	248
29.9.1.10	fl_file_chooser_ok_label	248
29.9.1.11	fl_file_chooser_ok_label	248
29.9.1.12	fl_input	248
29.9.1.13	fl_message	248
29.9.1.14	fl_password	249
29.9.2	Variable Documentation	249
29.9.2.1	error	249
29.9.2.2	fatal	249
29.9.2.3	warning	249
30	Class Documentation	251
30.1	Fl Class Reference	251
30.1.1	Detailed Description	261
30.1.2	Member Function Documentation	261
30.1.2.1	add_awake_handler_	261
30.1.2.2	add_check	261

30.1.2.3 add_fd	262
30.1.2.4 add_idle	262
30.1.2.5 add_timeout	262
30.1.2.6 arg	263
30.1.2.7 args	263
30.1.2.8 background	264
30.1.2.9 background2	265
30.1.2.10 box_dh	265
30.1.2.11 box_dw	265
30.1.2.12 box_dx	265
30.1.2.13 box_dy	266
30.1.2.14 check	266
30.1.2.15 damage	266
30.1.2.16 display	267
30.1.2.17 dnd_text_ops	267
30.1.2.18 dnd_text_ops	267
30.1.2.19 draw_box_active	267
30.1.2.20 flush	267
30.1.2.21 foreground	267
30.1.2.22 get_awake_handler_	267
30.1.2.23 get_boxtyle	268
30.1.2.24 get_system_colors	268
30.1.2.25 gl_visual	268
30.1.2.26 own_colormap	268
30.1.2.27 ready	268
30.1.2.28 release	269
30.1.2.29 reload_scheme	269
30.1.2.30 remove_check	269
30.1.2.31 remove_fd	269
30.1.2.32 remove_fd	269
30.1.2.33 remove_timeout	269
30.1.2.34 repeat_timeout	270
30.1.2.35 run	270
30.1.2.36 scheme	270
30.1.2.37 set_boxtyle	270
30.1.2.38 set_boxtyle	270

30.1.2.39	set_idle	271
30.1.2.40	set_labeltype	271
30.1.2.41	set_labeltype	271
30.1.2.42	version	271
30.1.2.43	visible_focus	271
30.1.2.44	visible_focus	271
30.1.2.45	visual	271
30.1.2.46	wait	272
30.1.3	Member Data Documentation	272
30.1.3.1	help	272
30.1.3.2	idle	273
30.2	Fl_Adjuster Class Reference	274
30.2.1	Detailed Description	274
30.2.2	Constructor & Destructor Documentation	275
30.2.2.1	Fl_Adjuster	275
30.2.3	Member Function Documentation	275
30.2.3.1	draw	275
30.2.3.2	handle	275
30.2.3.3	soft	276
30.2.3.4	soft	276
30.3	Fl_Bitmap Class Reference	277
30.3.1	Detailed Description	278
30.3.2	Constructor & Destructor Documentation	278
30.3.2.1	Fl_Bitmap	278
30.3.2.2	Fl_Bitmap	278
30.3.3	Member Function Documentation	278
30.3.3.1	copy	278
30.3.3.2	copy	278
30.3.3.3	draw	279
30.3.3.4	draw	279
30.3.3.5	label	279
30.3.3.6	label	279
30.3.3.7	uncache	279
30.4	Fl_BMP_Image Class Reference	281
30.4.1	Detailed Description	281
30.4.2	Constructor & Destructor Documentation	281

30.4.2.1	FL_BMP_Image	281
30.5	FL_Box Class Reference	282
30.5.1	Detailed Description	282
30.5.2	Constructor & Destructor Documentation	282
30.5.2.1	FL_Box	282
30.5.3	Member Function Documentation	283
30.5.3.1	draw	283
30.5.3.2	handle	283
30.6	FL_Browser Class Reference	284
30.6.1	Detailed Description	288
30.6.2	Constructor & Destructor Documentation	288
30.6.2.1	FL_Browser	288
30.6.2.2	~FL_Browser	288
30.6.3	Member Function Documentation	288
30.6.3.1	_remove	288
30.6.3.2	add	289
30.6.3.3	bottomline	289
30.6.3.4	column_char	289
30.6.3.5	column_char	289
30.6.3.6	column_widths	289
30.6.3.7	column_widths	289
30.6.3.8	data	289
30.6.3.9	format_char	290
30.6.3.10	format_char	290
30.6.3.11	full_height	291
30.6.3.12	hide	291
30.6.3.13	hide	291
30.6.3.14	incr_height	291
30.6.3.15	insert	291
30.6.3.16	insert	292
30.6.3.17	item_first	292
30.6.3.18	item_next	292
30.6.3.19	item_prev	292
30.6.3.20	item_select	292
30.6.3.21	item_selected	292
30.6.3.22	item_width	292

30.6.3.23	lineposition	293
30.6.3.24	load	293
30.6.3.25	make_visible	293
30.6.3.26	middleline	293
30.6.3.27	replace	293
30.6.3.28	select	293
30.6.3.29	selected	294
30.6.3.30	show	294
30.6.3.31	show	294
30.6.3.32	size	294
30.6.3.33	size	294
30.6.3.34	swap	295
30.6.3.35	text	295
30.6.3.36	topline	295
30.6.3.37	topline	295
30.6.3.38	value	295
30.6.3.39	value	295
30.7	Fl_Browser_ Class Reference	296
30.7.1	Detailed Description	300
30.7.2	Constructor & Destructor Documentation	300
30.7.2.1	Fl_Browser_	300
30.7.3	Member Function Documentation	300
30.7.3.1	deleting	300
30.7.3.2	deselect	300
30.7.3.3	display	300
30.7.3.4	draw	301
30.7.3.5	find_item	301
30.7.3.6	full_height	301
30.7.3.7	full_width	301
30.7.3.8	handle	301
30.7.3.9	has_scrollbar	302
30.7.3.10	incr_height	302
30.7.3.11	inserting	302
30.7.3.12	item_first	302
30.7.3.13	item_height	302
30.7.3.14	item_next	303

30.7.3.15 item_prev	303
30.7.3.16 item_quick_height	303
30.7.3.17 item_select	303
30.7.3.18 item_selected	303
30.7.3.19 item_width	303
30.7.3.20 new_list	304
30.7.3.21 redraw_lines	304
30.7.3.22 replacing	304
30.7.3.23 resize	304
30.7.3.24 scrollbar_left	304
30.7.3.25 scrollbar_right	304
30.7.3.26 select	304
30.7.3.27 select_only	305
30.7.3.28 selection	305
30.7.3.29 top	305
30.7.4 Member Data Documentation	305
30.7.4.1 scrollbar	305
30.8 Fl_Button Class Reference	306
30.8.1 Detailed Description	307
30.8.2 Constructor & Destructor Documentation	308
30.8.2.1 Fl_Button	308
30.8.3 Member Function Documentation	308
30.8.3.1 clear	308
30.8.3.2 down_box	308
30.8.3.3 down_box	308
30.8.3.4 draw	308
30.8.3.5 handle	309
30.8.3.6 set	309
30.8.3.7 shortcut	310
30.8.3.8 shortcut	310
30.8.3.9 value	310
30.9 Fl_Cairo_State Class Reference	311
30.9.1 Detailed Description	311
30.10 Fl_Cairo_Window Class Reference	312
30.10.1 Detailed Description	312
30.11 Fl_Chart Class Reference	314

30.11.1 Detailed Description	315
30.11.2 Constructor & Destructor Documentation	316
30.11.2.1 Fl_Chart	316
30.11.3 Member Function Documentation	316
30.11.3.1 add	316
30.11.3.2 autosize	317
30.11.3.3 autosize	317
30.11.3.4 bounds	317
30.11.3.5 bounds	317
30.11.3.6 draw	317
30.11.3.7 insert	318
30.11.3.8 maxsize	318
30.11.3.9 replace	318
30.11.3.10 size	318
30.11.3.11 textcolor	319
30.11.3.12 textfont	319
30.11.3.13 textszie	319
30.12 FL_CHART_ENTRY Struct Reference	320
30.12.1 Detailed Description	320
30.12.2 Member Data Documentation	320
30.12.2.1 col	320
30.12.2.2 str	320
30.12.2.3 val	320
30.13 Fl_Check_Browser Class Reference	321
30.13.1 Detailed Description	322
30.13.2 Constructor & Destructor Documentation	322
30.13.2.1 Fl_Check_Browser	322
30.13.2.2 ~Fl_Check_Browser	322
30.13.3 Member Function Documentation	323
30.13.3.1 add	323
30.13.3.2 check_all	323
30.13.3.3 check_none	323
30.13.3.4 checked	323
30.13.3.5 checked	323
30.13.3.6 clear	323
30.13.3.7 handle	323

30.13.3.8 <code>nchecked</code>	323
30.13.3.9 <code>nitems</code>	324
30.13.3.10 <code>remove</code>	324
30.13.3.11 <code>set_checked</code>	324
30.13.3.12 <code>text</code>	324
30.13.3.13 <code>value</code>	324
30.14 <code>Fl_Check_Button</code> Class Reference	325
30.14.1 Detailed Description	325
30.14.2 Constructor & Destructor Documentation	326
30.14.2.1 <code>Fl_Check_Button</code>	326
30.15 <code>Fl_Choice</code> Class Reference	327
30.15.1 Detailed Description	327
30.15.2 Constructor & Destructor Documentation	328
30.15.2.1 <code>Fl_Choice</code>	328
30.15.3 Member Function Documentation	329
30.15.3.1 <code>draw</code>	329
30.15.3.2 <code>handle</code>	329
30.15.3.3 <code>value</code>	330
30.15.3.4 <code>value</code>	330
30.15.3.5 <code>value</code>	330
30.16 <code>Fl_Clock</code> Class Reference	332
30.16.1 Detailed Description	332
30.16.2 Constructor & Destructor Documentation	333
30.16.2.1 <code>Fl_Clock</code>	333
30.16.2.2 <code>Fl_Clock</code>	333
30.16.3 Member Function Documentation	334
30.16.3.1 <code>handle</code>	334
30.16.3.2 <code>update</code>	334
30.17 <code>Fl_Clock_Output</code> Class Reference	335
30.17.1 Detailed Description	336
30.17.2 Constructor & Destructor Documentation	336
30.17.2.1 <code>Fl_Clock_Output</code>	336
30.17.3 Member Function Documentation	337
30.17.3.1 <code>draw</code>	337
30.17.3.2 <code>hour</code>	337
30.17.3.3 <code>minute</code>	337

30.17.3.4 second	337
30.17.3.5 value	337
30.17.3.6 value	338
30.17.3.7 value	338
30.18 Fl_Color_Chooser Class Reference	339
30.18.1 Detailed Description	340
30.18.2 Constructor & Destructor Documentation	341
30.18.2.1 Fl_Color_Chooser	341
30.18.3 Member Function Documentation	341
30.18.3.1 b	341
30.18.3.2 g	341
30.18.3.3 hsv	341
30.18.3.4 hsv2rgb	342
30.18.3.5 hue	342
30.18.3.6 r	342
30.18.3.7 rgb	342
30.18.3.8 rgb2hsv	342
30.18.3.9 saturation	343
30.18.3.10 value	343
30.19 Fl_Counter Class Reference	344
30.19.1 Detailed Description	345
30.19.2 Constructor & Destructor Documentation	346
30.19.2.1 Fl_Counter	346
30.19.3 Member Function Documentation	346
30.19.3.1 draw	346
30.19.3.2 handle	346
30.19.3.3 lstep	347
30.19.3.4 step	347
30.19.3.5 step	347
30.20 Fl_Dial Class Reference	348
30.20.1 Detailed Description	349
30.20.2 Constructor & Destructor Documentation	349
30.20.2.1 Fl_Dial	349
30.20.3 Member Function Documentation	349
30.20.3.1 angle1	349
30.20.3.2 draw	350

30.20.3.3 handle	350
30.21 Fl_Double_Window Class Reference	351
30.21.1 Detailed Description	352
30.21.2 Constructor & Destructor Documentation	352
30.21.2.1 ~Fl_Double_Window	352
30.21.3 Member Function Documentation	352
30.21.3.1 flush	352
30.21.3.2 hide	353
30.21.3.3 resize	353
30.21.3.4 show	353
30.22 Fl_End Class Reference	354
30.22.1 Detailed Description	354
30.23 Fl_File_Browser Class Reference	355
30.23.1 Detailed Description	356
30.23.2 Constructor & Destructor Documentation	356
30.23.2.1 Fl_File_Browser	356
30.23.3 Member Function Documentation	356
30.23.3.1 filetype	356
30.23.3.2 filetype	356
30.23.3.3 filter	356
30.23.3.4 filter	356
30.23.3.5 iconsize	357
30.23.3.6 iconsize	357
30.23.3.7 load	357
30.24 Fl_File_Chooser Class Reference	358
30.24.1 Detailed Description	362
30.24.2 Constructor & Destructor Documentation	363
30.24.2.1 Fl_File_Chooser	363
30.24.2.2 ~Fl_File_Chooser	363
30.24.3 Member Function Documentation	364
30.24.3.1 add_extra	364
30.24.3.2 color	364
30.24.3.3 color	364
30.24.3.4 count	364
30.24.3.5 directory	364
30.24.3.6 directory	364

30.24.3.7 filter	364
30.24.3.8 filter_value	365
30.24.3.9 filter_value	365
30.24.3.10 hide	365
30.24.3.11 ico_size	365
30.24.3.12 icon_size	365
30.24.3.13 label	365
30.24.3.14 label	365
30.24.3.15 preview	366
30.24.3.16 preview	366
30.24.3.17 rescan	366
30.24.3.18 show	366
30.24.3.19 text_color	366
30.24.3.20 text_color	366
30.24.3.21 text_font	366
30.24.3.22 text_font	367
30.24.3.23 text_size	367
30.24.3.24 text_size	367
30.24.3.25 type	367
30.24.3.26 type	367
30.24.3.27 value	367
30.24.3.28 visible	368
30.25 FL_File_Icon Class Reference	369
30.25.1 Detailed Description	370
30.25.2 Constructor & Destructor Documentation	370
30.25.2.1 FL_File_Icon	370
30.25.3 Member Function Documentation	371
30.25.3.1 add	371
30.25.3.2 add_color	371
30.25.3.3 add_vertex	371
30.25.3.4 add_vertex	371
30.25.3.5 clear	372
30.25.3.6 draw	372
30.25.3.7 find	372
30.25.3.8 first	372
30.25.3.9 label	372

30.25.3.10	labeltype	373
30.25.3.11	load	373
30.25.3.12	load_fti	373
30.25.3.13	load_image	373
30.25.3.14	load_system_icons	374
30.25.3.15	next	374
30.25.3.16	pattern	374
30.25.3.17	size	374
30.25.3.18	type	374
30.25.3.19	value	374
30.26	FL_File_Input Class Reference	375
30.26.1	Detailed Description	376
30.26.2	Constructor & Destructor Documentation	376
30.26.2.1	FL_File_Input	376
30.26.3	Member Function Documentation	376
30.26.3.1	down_box	376
30.26.3.2	down_box	376
30.26.3.3	errorcolor	376
30.26.3.4	handle	377
30.26.3.5	value	377
30.26.3.6	value	377
30.27	FL_Fill_Dial Class Reference	378
30.27.1	Detailed Description	378
30.27.2	Constructor & Destructor Documentation	378
30.27.2.1	FL_Fill_Dial	378
30.28	FL_Fill_Slider Class Reference	379
30.28.1	Detailed Description	379
30.28.2	Constructor & Destructor Documentation	379
30.28.2.1	FL_Fill_Slider	379
30.29	FL_Float_Input Class Reference	380
30.29.1	Detailed Description	380
30.29.2	Constructor & Destructor Documentation	380
30.29.2.1	FL_Float_Input	380
30.30	FL_Font_Descriptor Class Reference	381
30.30.1	Detailed Description	381
30.31	FL_FormsBitmap Class Reference	382

30.31.1 Detailed Description	382
30.31.2 Member Function Documentation	382
30.31.2.1 bitmap	382
30.31.2.2 bitmap	382
30.31.2.3 draw	383
30.31.2.4 set	383
30.32 Fl_FormsPixmap Class Reference	384
30.32.1 Detailed Description	384
30.32.2 Constructor & Destructor Documentation	384
30.32.2.1 Fl_FormsPixmap	384
30.32.3 Member Function Documentation	385
30.32.3.1 draw	385
30.32.3.2 Pixmap	385
30.32.3.3 Pixmap	385
30.32.3.4 set	385
30.33 Fl_Free Class Reference	386
30.33.1 Detailed Description	386
30.33.2 Constructor & Destructor Documentation	387
30.33.2.1 Fl_Free	387
30.33.3 Member Function Documentation	387
30.33.3.1 draw	387
30.33.3.2 handle	388
30.34 Fl_GIF_Image Class Reference	389
30.34.1 Detailed Description	389
30.34.2 Constructor & Destructor Documentation	389
30.34.2.1 Fl_GIF_Image	389
30.35 Fl_Gl_Window Class Reference	390
30.35.1 Detailed Description	392
30.35.2 Constructor & Destructor Documentation	392
30.35.2.1 Fl_Gl_Window	392
30.35.2.2 Fl_Gl_Window	392
30.35.3 Member Function Documentation	393
30.35.3.1 can_do	393
30.35.3.2 can_do	393
30.35.3.3 can_do	393
30.35.3.4 can_do_overlay	393

30.35.3.5 context	393
30.35.3.6 context_valid	393
30.35.3.7 draw	393
30.35.3.8 flush	394
30.35.3.9 make_current	394
30.35.3.10make_overlay_current	394
30.35.3.11mode	394
30.35.3.12ortho	395
30.35.3.13redraw_overlay	395
30.35.3.14resize	395
30.35.3.15show	396
30.35.3.16swap_buffers	396
30.35.3.17valid	396
30.36Fl_Glut_Bitmap_Font Struct Reference	398
30.36.1 Detailed Description	398
30.37Fl_Glut_Window Class Reference	399
30.37.1 Detailed Description	400
30.37.2 Constructor & Destructor Documentation	400
30.37.2.1 Fl_Glut_Window	400
30.37.2.2 ~Fl_Glut_Window	400
30.37.3 Member Function Documentation	400
30.37.3.1 draw	400
30.37.3.2 draw_overlay	400
30.37.3.3 handle	401
30.37.3.4 make_current	401
30.38Fl_Group Class Reference	403
30.38.1 Detailed Description	406
30.38.2 Constructor & Destructor Documentation	406
30.38.2.1 Fl_Group	406
30.38.2.2 ~Fl_Group	406
30.38.3 Member Function Documentation	406
30.38.3.1 array	406
30.38.3.2 begin	406
30.38.3.3 child	407
30.38.3.4 clear	407
30.38.3.5 clip_children	407

30.38.3.6 current	407
30.38.3.7 draw	407
30.38.3.8 draw_child	408
30.38.3.9 draw_children	408
30.38.3.10 draw_outside_label	408
30.38.3.11 lend	408
30.38.3.12 find	408
30.38.3.13 focus	409
30.38.3.14 handle	409
30.38.3.15 init_sizes	410
30.38.3.16 insert	410
30.38.3.17 insert	410
30.38.3.18 remove	410
30.38.3.19 remove	410
30.38.3.20 resizable	411
30.38.3.21 resize	412
30.38.3.22 sizes	412
30.38.3.23 update_child	412
30.39 Fl_Help_Dialog Class Reference	414
30.39.1 Detailed Description	415
30.39.2 Constructor & Destructor Documentation	415
30.39.2.1 Fl_Help_Dialog	415
30.39.3 Member Function Documentation	416
30.39.3.1 h	416
30.39.3.2 hide	416
30.39.3.3 load	416
30.39.3.4 position	416
30.39.3.5 resize	416
30.39.3.6 show	416
30.39.3.7 textSize	416
30.39.3.8 textSize	416
30.39.3.9 value	417
30.39.3.10 value	417
30.39.3.11 visible	417
30.39.3.12 w	417
30.39.3.13 x	417

30.39.3.14y	417
30.40Fl_Help_Link Struct Reference	418
30.40.1 Detailed Description	418
30.41Fl_Help_Target Struct Reference	419
30.41.1 Detailed Description	419
30.42Fl_Help_View Class Reference	420
30.42.1 Detailed Description	422
30.42.2 Constructor & Destructor Documentation	422
30.42.2.1 ~Fl_Help_View	422
30.42.3 Member Function Documentation	422
30.42.3.1 clear_selection	422
30.42.3.2 directory	422
30.42.3.3 filename	422
30.42.3.4 leftline	422
30.42.3.5 leftline	422
30.42.3.6 link	422
30.42.3.7 load	423
30.42.3.8 resize	423
30.42.3.9 select_all	423
30.42.3.10size	423
30.42.3.11textcolor	423
30.42.3.12textcolor	424
30.42.3.13textfont	424
30.42.3.14textfont	424
30.42.3.15textsize	424
30.42.3.16textsize	424
30.42.3.17title	424
30.42.3.18topline	424
30.42.3.19topline	424
30.42.3.20value	424
30.42.3.21value	424
30.43Fl_Hold_Browser Class Reference	426
30.43.1 Detailed Description	426
30.43.2 Constructor & Destructor Documentation	426
30.43.2.1 Fl_Hold_Browser	426
30.44Fl_Image Class Reference	427

30.44.1 Detailed Description	429
30.44.2 Constructor & Destructor Documentation	429
30.44.2.1 <code>FL_Image</code>	429
30.44.3 Member Function Documentation	429
30.44.3.1 <code>color_average</code>	429
30.44.3.2 <code>copy</code>	429
30.44.3.3 <code>copy</code>	429
30.44.3.4 <code>count</code>	430
30.44.3.5 <code>d</code>	430
30.44.3.6 <code>d</code>	430
30.44.3.7 <code>data</code>	430
30.44.3.8 <code>desaturate</code>	430
30.44.3.9 <code>draw</code>	431
30.44.3.10 <code>draw</code>	431
30.44.3.11 <code>draw_empty</code>	431
30.44.3.12 <code>h</code>	431
30.44.3.13 <code>inactive</code>	431
30.44.3.14 <code>label</code>	431
30.44.3.15 <code>label</code>	432
30.44.3.16 <code>d</code>	432
30.44.3.17 <code>uncache</code>	432
30.44.3.18 <code>w</code>	432
30.45 <code>FL_Input</code> Class Reference	433
30.45.1 Detailed Description	433
30.45.2 Constructor & Destructor Documentation	435
30.45.2.1 <code>FL_Input</code>	435
30.45.3 Member Function Documentation	435
30.45.3.1 <code>draw</code>	435
30.45.3.2 <code>handle</code>	435
30.46 <code>FL_Input_</code> Class Reference	437
30.46.1 Detailed Description	440
30.46.2 Constructor & Destructor Documentation	440
30.46.2.1 <code>FL_Input_</code>	440
30.46.3 Member Function Documentation	440
30.46.3.1 <code>copy</code>	440
30.46.3.2 <code>copy_cuts</code>	441

30.46.3.3 cursor_color	441
30.46.3.4 cursor_color	441
30.46.3.5 cut	441
30.46.3.6 drawtext	441
30.46.3.7 index	442
30.46.3.8 input_type	442
30.46.3.9 input_type	442
30.46.3.10 insert	442
30.46.3.11 lmark	442
30.46.3.12 mark	442
30.46.3.13 maximum_size	442
30.46.3.14 maximum_size	442
30.46.3.15 position	443
30.46.3.16 readonly	443
30.46.3.17 readonly	443
30.46.3.18 replace	443
30.46.3.19 resize	443
30.46.3.20 shortcut	444
30.46.3.21 lsize	444
30.46.3.22 size	444
30.46.3.23 static_value	445
30.46.3.24 textcolor	445
30.46.3.25 textcolor	445
30.46.3.26 textfont	445
30.46.3.27 textfont	445
30.46.3.28 textSize	445
30.46.3.29 textSize	445
30.46.3.30 undo	445
30.46.3.31 lup_down_position	446
30.46.3.32 value	446
30.46.3.33 wrap	446
30.46.3.34 wrap	446
30.47 Fl_Input_Choice Class Reference	447
30.47.1 Detailed Description	448
30.47.2 Constructor & Destructor Documentation	449
30.47.2.1 Fl_Input_Choice	449

30.47.3 Member Function Documentation	449
30.47.3.1 add	449
30.47.3.2 changed	449
30.47.3.3 clear	449
30.47.3.4 clear_changed	449
30.47.3.5 input	450
30.47.3.6 menu	450
30.47.3.7 menu	450
30.47.3.8 menubutton	450
30.47.3.9 resize	450
30.47.3.10 set_changed	450
30.47.3.11 value	451
30.48 Fl_Int_Input Class Reference	452
30.48.1 Detailed Description	452
30.48.2 Constructor & Destructor Documentation	452
30.48.2.1 Fl_Int_Input	452
30.49 Fl_JPEG_Image Class Reference	453
30.49.1 Detailed Description	453
30.49.2 Constructor & Destructor Documentation	453
30.49.2.1 Fl_JPEG_Image	453
30.50 Fl_Label Struct Reference	454
30.50.1 Detailed Description	454
30.50.2 Member Function Documentation	455
30.50.2.1 draw	455
30.50.2.2 measure	455
30.50.3 Member Data Documentation	455
30.50.3.1 type	455
30.51 Fl_Light_Button Class Reference	456
30.51.1 Detailed Description	456
30.51.2 Constructor & Destructor Documentation	457
30.51.2.1 Fl_Light_Button	457
30.51.3 Member Function Documentation	457
30.51.3.1 draw	457
30.51.3.2 handle	457
30.52 Fl_Menu_ Class Reference	459
30.52.1 Detailed Description	461

30.52.2 Constructor & Destructor Documentation	462
30.52.2.1 Fl_Menu_	462
30.52.3 Member Function Documentation	462
30.52.3.1 add	462
30.52.3.2 add	462
30.52.3.3 clear	463
30.52.3.4 copy	463
30.52.3.5 down_box	463
30.52.3.6 find_item	463
30.52.3.7 global	463
30.52.3.8 menu	464
30.52.3.9 menu	464
30.52.3.10 mode	464
30.52.3.11 lmode	464
30.52.3.12 mvalue	464
30.52.3.13 picked	464
30.52.3.14 remove	465
30.52.3.15 replace	465
30.52.3.16 shortcut	465
30.52.3.17 size	465
30.52.3.18 &size	465
30.52.3.19 test_shortcut	466
30.52.3.20 text	466
30.52.3.21 ltext	466
30.52.3.22 extcolor	466
30.52.3.23 textcolor	466
30.52.3.24 textfont	466
30.52.3.25 textfont	466
30.52.3.26 textsize	466
30.52.3.27 textsize	466
30.52.3.28 value	467
30.52.3.29 value	467
30.52.3.30 value	467
30.53 Fl_Menu_Bar Class Reference	468
30.53.1 Detailed Description	468
30.53.2 Constructor & Destructor Documentation	469

30.53.2.1 <code>Fl_Menu_Bar</code>	469
30.53.3 Member Function Documentation	469
30.53.3.1 <code>draw</code>	469
30.53.3.2 <code>handle</code>	469
30.54 <code>Fl_Menu_Button</code> Class Reference	471
30.54.1 Detailed Description	471
30.54.2 Constructor & Destructor Documentation	472
30.54.2.1 <code>Fl_Menu_Button</code>	472
30.54.3 Member Function Documentation	472
30.54.3.1 <code>draw</code>	472
30.54.3.2 <code>handle</code>	473
30.54.3.3 <code>popup</code>	473
30.55 <code>Fl_Menu_Item</code> Struct Reference	474
30.55.1 Detailed Description	478
30.55.2 Member Function Documentation	479
30.55.2.1 <code>activate</code>	479
30.55.2.2 <code>active</code>	480
30.55.2.3 <code>activevisible</code>	480
30.55.2.4 <code>add</code>	480
30.55.2.5 <code>argument</code>	480
30.55.2.6 <code>argument</code>	480
30.55.2.7 <code>callback</code>	480
30.55.2.8 <code>check</code>	480
30.55.2.9 <code>checkbox</code>	481
30.55.2.10 <code>checked</code>	481
30.55.2.11 <code>clear</code>	481
30.55.2.12 <code>deactivate</code>	481
30.55.2.13 <code>do_callback</code>	481
30.55.2.14 <code>do_callback</code>	481
30.55.2.15 <code>do_callback</code>	481
30.55.2.16 <code>draw</code>	482
30.55.2.17 <code>find_shortcut</code>	482
30.55.2.18 <code>first</code>	482
30.55.2.19 <code>first</code>	482
30.55.2.20 <code>hide</code>	482
30.55.2.21 <code>label</code>	482

30.55.2.2 <code>labelcolor</code>	482
30.55.2.23 <code>labelfont</code>	483
30.55.2.24 <code>labelfont</code>	483
30.55.2.25 <code>labelsize</code>	483
30.55.2.26 <code>labelsize</code>	483
30.55.2.27 <code>labeltype</code>	483
30.55.2.28 <code>labeltype</code>	483
30.55.2.29 <code>measure</code>	483
30.55.2.30 <code>next</code>	484
30.55.2.31 <code>next</code>	484
30.55.2.32 <code>popup</code>	484
30.55.2.33 <code>popupdown</code>	484
30.55.2.34 <code>radio</code>	485
30.55.2.35 <code>set</code>	485
30.55.2.36 <code>setonly</code>	485
30.55.2.37 <code>shortcut</code>	485
30.55.2.38 <code>shortcut</code>	485
30.55.2.39 <code>show</code>	485
30.55.2.40 <code>submenu</code>	485
30.55.2.41 <code>test_shortcut</code>	486
30.55.2.42 <code>uncheck</code>	486
30.55.2.43 <code>value</code>	486
30.55.2.44 <code>visible</code>	486
30.56<code>Fl_Menu_Window</code> Class Reference	487
30.56.1 Detailed Description	488
30.56.2 Constructor & Destructor Documentation	488
30.56.2.1 <code>~Fl_Menu_Window</code>	488
30.56.2.2 <code>Fl_Menu_Window</code>	488
30.56.2.3 <code>Fl_Menu_Window</code>	488
30.56.3 Member Function Documentation	488
30.56.3.1 <code>clear_overlay</code>	488
30.56.3.2 <code>flush</code>	488
30.56.3.3 <code>hide</code>	488
30.56.3.4 <code>set_overlay</code>	489
30.56.3.5 <code>show</code>	489
30.57<code>Fl_Multi_Browser</code> Class Reference	490

30.57.1 Detailed Description	490
30.57.2 Constructor & Destructor Documentation	490
30.57.2.1 Fl_Multi_Browser	490
30.58 Fl_Multiline_Input Class Reference	491
30.58.1 Detailed Description	491
30.58.2 Constructor & Destructor Documentation	491
30.58.2.1 Fl_Multiline_Input	491
30.59 Fl_Multiline_Output Class Reference	492
30.59.1 Detailed Description	492
30.59.2 Constructor & Destructor Documentation	492
30.59.2.1 Fl_Multiline_Output	492
30.60 Fl_Output Class Reference	493
30.60.1 Detailed Description	493
30.60.2 Constructor & Destructor Documentation	494
30.60.2.1 Fl_Output	494
30.61 Fl_Overlay_Window Class Reference	495
30.61.1 Detailed Description	496
30.61.2 Constructor & Destructor Documentation	496
30.61.2.1 Fl_Overlay_Window	496
30.61.3 Member Function Documentation	496
30.61.3.1 hide	496
30.61.3.2 redraw_overlay	496
30.61.3.3 resize	496
30.61.3.4 show	497
30.62 Fl_Pack Class Reference	498
30.62.1 Detailed Description	498
30.62.2 Constructor & Destructor Documentation	499
30.62.2.1 Fl_Pack	499
30.62.3 Member Function Documentation	499
30.62.3.1 draw	499
30.63 Fl_Pixmap Class Reference	500
30.63.1 Detailed Description	501
30.63.2 Constructor & Destructor Documentation	501
30.63.2.1 Fl_Pixmap	501
30.63.2.2 Fl_Pixmap	501
30.63.2.3 Fl_Pixmap	501

30.63.2.4 FL_Pixmap	501
30.63.3 Member Function Documentation	502
30.63.3.1 color_average	502
30.63.3.2 copy	502
30.63.3.3 copy	502
30.63.3.4 desaturate	502
30.63.3.5 draw	502
30.63.3.6 draw	503
30.63.3.7 label	503
30.63.3.8 label	503
30.63.3.9 uncache	503
30.64 FL_PNG_Image Class Reference	504
30.64.1 Detailed Description	504
30.64.2 Constructor & Destructor Documentation	504
30.64.2.1 FL_PNG_Image	504
30.65 FL_PNM_Image Class Reference	505
30.65.1 Detailed Description	505
30.65.2 Constructor & Destructor Documentation	505
30.65.2.1 FL_PNM_Image	505
30.66 FL_Positioner Class Reference	506
30.66.1 Detailed Description	507
30.66.2 Constructor & Destructor Documentation	508
30.66.2.1 FL_Positioner	508
30.66.3 Member Function Documentation	508
30.66.3.1 draw	508
30.66.3.2 handle	508
30.66.3.3 value	509
30.66.3.4 xbounds	509
30.66.3.5 xstep	509
30.66.3.6 xvalue	509
30.66.3.7 xvalue	509
30.66.3.8 ybounds	509
30.66.3.9 ystep	509
30.66.3.10 yvalue	509
30.66.3.1 lyvalue	509
30.67 FL_Preferences Class Reference	510

30.67.1 Detailed Description	512
30.67.2 Member Enumeration Documentation	512
30.67.2.1 Root	512
30.67.3 Constructor & Destructor Documentation	513
30.67.3.1 Fl_Preferences	513
30.67.3.2 Fl_Preferences	513
30.67.3.3 Fl_Preferences	514
30.67.3.4 Fl_Preferences	514
30.67.3.5 ~Fl_Preferences	514
30.67.4 Member Function Documentation	515
30.67.4.1 deleteEntry	515
30.67.4.2 deleteGroup	515
30.67.4.3 entries	515
30.67.4.4 entry	515
30.67.4.5 entryExists	516
30.67.4.6 flush	516
30.67.4.7 get	516
30.67.4.8 get	517
30.67.4.9 get	517
30.67.4.10get	518
30.67.4.11get	518
30.67.4.12get	518
30.67.4.13get	519
30.67.4.14getUserdataPath	519
30.67.4.15group	519
30.67.4.16groupExists	520
30.67.4.17groups	520
30.67.4.18&set	520
30.67.4.19set	521
30.67.4.20set	521
30.67.4.21set	521
30.67.4.22set	522
30.67.4.23set	522
30.67.4.24set	522
30.67.4.25size	523
30.68Fl_Preferences::Entry Struct Reference	524

30.68.1 Detailed Description	524
30.69 FL_Preferences::Name Class Reference	525
30.69.1 Detailed Description	525
30.69.2 Constructor & Destructor Documentation	525
30.69.2.1 Name	525
30.69.2.2 Name	525
30.70 FL_Progress Class Reference	527
30.70.1 Detailed Description	527
30.70.2 Constructor & Destructor Documentation	528
30.70.2.1 FL_Progress	528
30.70.3 Member Function Documentation	528
30.70.3.1 draw	528
30.70.3.2 maximum	528
30.70.3.3 maximum	528
30.70.3.4 minimum	528
30.70.3.5 minimum	528
30.70.3.6 value	528
30.70.3.7 value	529
30.71 FL_Repeat_Button Class Reference	530
30.71.1 Detailed Description	530
30.71.2 Constructor & Destructor Documentation	530
30.71.2.1 FL_Repeat_Button	530
30.71.3 Member Function Documentation	530
30.71.3.1 deactivate	530
30.71.3.2 handle	531
30.72 FL_Return_Button Class Reference	532
30.72.1 Detailed Description	532
30.72.2 Constructor & Destructor Documentation	533
30.72.2.1 FL_Return_Button	533
30.72.3 Member Function Documentation	533
30.72.3.1 draw	533
30.72.3.2 handle	533
30.73 FL_RGB_Image Class Reference	535
30.73.1 Detailed Description	536
30.73.2 Constructor & Destructor Documentation	536
30.73.2.1 FL_RGB_Image	536

30.73.2.2 ~Fl_RGB_Image	536
30.73.3 Member Function Documentation	536
30.73.3.1 color_average	536
30.73.3.2 copy	536
30.73.3.3 copy	537
30.73.3.4 desaturate	537
30.73.3.5 draw	537
30.73.3.6 draw	537
30.73.3.7 label	538
30.73.3.8 label	538
30.73.3.9 uncache	538
30.74 Fl_Roller Class Reference	539
30.74.1 Detailed Description	539
30.74.2 Constructor & Destructor Documentation	540
30.74.2.1 Fl_Roller	540
30.74.3 Member Function Documentation	540
30.74.3.1 draw	540
30.74.3.2 handle	540
30.75 Fl_Round_Button Class Reference	542
30.75.1 Detailed Description	542
30.76 Fl_Round_Clock Class Reference	544
30.76.1 Detailed Description	544
30.76.2 Constructor & Destructor Documentation	544
30.76.2.1 Fl_Round_Clock	544
30.77 Fl_Scroll Class Reference	545
30.77.1 Detailed Description	546
30.77.2 Constructor & Destructor Documentation	547
30.77.2.1 Fl_Scroll	547
30.77.3 Member Function Documentation	547
30.77.3.1 clear	547
30.77.3.2 draw	547
30.77.3.3 handle	548
30.77.3.4 resize	548
30.77.3.5 scroll_to	548
30.77.3.6 xposition	549
30.77.3.7 yposition	549

30.78	Fl_Scrollbar Class Reference	550
30.78.1	Detailed Description	551
30.78.2	Constructor & Destructor Documentation	551
30.78.2.1	Fl_Scrollbar	551
30.78.2.2	~Fl_Scrollbar	551
30.78.3	Member Function Documentation	551
30.78.3.1	draw	551
30.78.3.2	handle	552
30.78.3.3	linesize	552
30.78.3.4	linesize	552
30.78.3.5	value	553
30.79	Fl_Secret_Input Class Reference	554
30.79.1	Detailed Description	554
30.79.2	Constructor & Destructor Documentation	554
30.79.2.1	Fl_Secret_Input	554
30.80	Fl_Select_Browser Class Reference	555
30.80.1	Detailed Description	555
30.80.2	Constructor & Destructor Documentation	555
30.80.2.1	Fl_Select_Browser	555
30.81	Fl_Shared_Image Class Reference	556
30.81.1	Detailed Description	558
30.81.2	Constructor & Destructor Documentation	558
30.81.2.1	Fl_Shared_Image	558
30.81.2.2	Fl_Shared_Image	558
30.81.2.3	~Fl_Shared_Image	558
30.81.3	Member Function Documentation	558
30.81.3.1	color_average	558
30.81.3.2	copy	559
30.81.3.3	copy	559
30.81.3.4	desaturate	559
30.81.3.5	draw	559
30.81.3.6	draw	560
30.81.3.7	get	560
30.81.3.8	num_images	560
30.81.3.9	refcount	560
30.81.3.10	release	560

30.81.3.1 <code>luncache</code>	560
30.82 <code>FL_Simple_Counter</code> Class Reference	561
30.82.1 Detailed Description	561
30.83 <code>FL_Single_Window</code> Class Reference	562
30.83.1 Detailed Description	562
30.83.2 Member Function Documentation	563
30.83.2.1 <code>flush</code>	563
30.83.2.2 <code>make_current</code>	563
30.83.2.3 <code>show</code>	563
30.84 <code>FL_Slider</code> Class Reference	564
30.84.1 Detailed Description	565
30.84.2 Constructor & Destructor Documentation	565
30.84.2.1 <code>Fl_Slider</code>	565
30.84.2.2 <code>Fl_Slider</code>	566
30.84.3 Member Function Documentation	566
30.84.3.1 <code>bounds</code>	566
30.84.3.2 <code>draw</code>	566
30.84.3.3 <code>handle</code>	566
30.84.3.4 <code>scrollvalue</code>	567
30.84.3.5 <code>slider</code>	567
30.84.3.6 <code>slider</code>	567
30.84.3.7 <code>slider_size</code>	567
30.84.3.8 <code>slider_size</code>	567
30.85 <code>FL_Spinner</code> Class Reference	568
30.85.1 Detailed Description	569
30.85.2 Constructor & Destructor Documentation	570
30.85.2.1 <code>Fl_Spinner</code>	570
30.85.3 Member Function Documentation	570
30.85.3.1 <code>format</code>	570
30.85.3.2 <code>format</code>	570
30.85.3.3 <code>handle</code>	570
30.85.3.4 <code>maximum</code>	570
30.85.3.5 <code>maximum</code>	571
30.85.3.6 <code>maxnum</code>	571
30.85.3.7 <code>minimum</code>	571
30.85.3.8 <code>minimum</code>	571

30.85.3.9 <code>minum</code>	571
30.85.3.10 <code>range</code>	571
30.85.3.11 <code>resize</code>	571
30.85.3.12 <code>step</code>	572
30.85.3.13 <code>textcolor</code>	572
30.85.3.14 <code>textcolor</code>	572
30.85.3.15 <code>textfont</code>	572
30.85.3.16 <code>textfont</code>	572
30.85.3.17 <code>textsize</code>	572
30.85.3.18 <code>textsize</code>	572
30.85.3.19 <code>type</code>	572
30.85.3.20 <code>value</code>	573
30.85.3.21 <code>value</code>	573
30.86 <code>FL_Tabs</code> Class Reference	574
30.86.1 Detailed Description	574
30.86.2 Constructor & Destructor Documentation	575
30.86.2.1 <code>FL_Tabs</code>	575
30.86.3 Member Function Documentation	576
30.86.3.1 <code>draw</code>	576
30.86.3.2 <code>handle</code>	576
30.86.3.3 <code>value</code>	577
30.86.3.4 <code>value</code>	577
30.87 <code>FL_Text_Buffer</code> Class Reference	578
30.87.1 Detailed Description	585
30.87.2 Constructor & Destructor Documentation	586
30.87.2.1 <code>FL_Text_Buffer</code>	586
30.87.3 Member Function Documentation	586
30.87.3.1 <code>add_modify_callback</code>	586
30.87.3.2 <code>add_predelete_callback</code>	586
30.87.3.3 <code>append</code>	586
30.87.3.4 <code>appendfile</code>	586
30.87.3.5 <code>character</code>	586
30.87.3.6 <code>character_width</code>	587
30.87.3.7 <code>clear_rectangular</code>	587
30.87.3.8 <code>count_displayed_characters</code>	587
30.87.3.9 <code>count_lines</code>	587

30.87.3.10	expand_character	588
30.87.3.11	expand_character	588
30.87.3.12	findchar_backward	588
30.87.3.13	findchar_forward	588
30.87.3.14	findchars_backward	588
30.87.3.15	findchars_forward	589
30.87.3.16	highlight	589
30.87.3.17	highlight	589
30.87.3.18	highlight_position	589
30.87.3.19	highlight_position	589
30.87.3.20	highlight_selection	589
30.87.3.21	highlight_text	589
30.87.3.22	insert	590
30.87.3.23	insert_	590
30.87.3.24	insert_column	590
30.87.3.25	insert_column_	590
30.87.3.26	insertfile	590
30.87.3.27	length	591
30.87.3.28	line_start	591
30.87.3.29	line_text	591
30.87.3.30	null_substitution_character	591
30.87.3.31	loutputfile	591
30.87.3.32	overlay_rectangular	591
30.87.3.33	overlay_rectangular_	592
30.87.3.34	primary_selection	592
30.87.3.35	rectangular_selection_boundaries	592
30.87.3.36	remove	592
30.87.3.37	remove_	593
30.87.3.38	remove_modify_callback	593
30.87.3.39	remove_pdelete_callback	593
30.87.3.40	remove_rectangular_	593
30.87.3.41	remove_secondary_selection	593
30.87.3.42	remove_selection	593
30.87.3.43	remove_selection_	594
30.87.3.44	replace_rectangular	594
30.87.3.45	replace_secondary_selection	594

30.87.3.46replace_selection	594
30.87.3.47replace_selection_	594
30.87.3.48rewind_lines	594
30.87.3.49secondary_select	595
30.87.3.50secondary_selection	595
30.87.3.51secondary_selection_position	595
30.87.3.52secondary_selection_position	595
30.87.3.53secondary_selection_text	595
30.87.3.54secondary_unselect	595
30.87.3.55select	595
30.87.3.56selection_text	595
30.87.3.57substitute_null_characters	596
30.87.3.58tab_distance	596
30.87.3.59text	596
30.87.3.60text_in_rectangle	596
30.87.3.61text_range	596
30.87.3.62unhighlight	597
30.87.3.63unsubstitute_null_characters	597
30.87.3.64word_end	597
30.87.4 Member Data Documentation	597
30.87.4.1 mModifyProcs	597
30.87.4.2 mNullSubsChar	597
30.87.4.3 mPredeleteProcs	597
30.87.4.4 mTabDist	597
30.88 Fl_Text_Display Class Reference	599
30.88.1 Detailed Description	606
30.88.2 Constructor & Destructor Documentation	606
30.88.2.1 Fl_Text_Display	606
30.88.2.2 ~Fl_Text_Display	606
30.88.3 Member Function Documentation	606
30.88.3.1 buffer	606
30.88.3.2 buffer	606
30.88.3.3 calc_line_starts	607
30.88.3.4 count_lines	607
30.88.3.5 cursor_color	607
30.88.3.6 cursor_color	607

30.88.3.7 cursor_style	607
30.88.3.8 display_insert	607
30.88.3.9 draw	608
30.88.3.10 draw_line_numbers	608
30.88.3.11 draw_range	608
30.88.3.12 draw_string	608
30.88.3.13 draw_text	609
30.88.3.14 find_line_end	609
30.88.3.15 find_wrap_range	609
30.88.3.16 get_absolute_top_line_number	609
30.88.3.17 handle	609
30.88.3.18 highlight_data	610
30.88.3.19 insert	610
30.88.3.20 line_end	611
30.88.3.21 maintain_absolute_top_line_number	611
30.88.3.22 measure_deleted_lines	611
30.88.3.23 measure_proportional_character	611
30.88.3.24 move_down	612
30.88.3.25 move_left	612
30.88.3.26 move_right	612
30.88.3.27 move_up	612
30.88.3.28 next_word	612
30.88.3.29 offset_line_starts	613
30.88.3.30 overstrike	613
30.88.3.31 position_style	613
30.88.3.32 position_to_line	613
30.88.3.33 position_to_linecol	613
30.88.3.34 position_to_xy	614
30.88.3.35 previous_word	614
30.88.3.36 redisplay_range	614
30.88.3.37 reset_absolute_top_line_number	614
30.88.3.38 scroll	614
30.88.3.39 scrollbar_width	615
30.88.3.40 scrollbar_width	615
30.88.3.41 shortcut	615
30.88.3.42 shortcut	615

30.88.3.43	show_insert_position	615
30.88.3.44	skip_lines	615
30.88.3.45	textcolor	615
30.88.3.46	textcolor	616
30.88.3.47	textfont	616
30.88.3.48	textfont	616
30.88.3.49	textsize	616
30.88.3.50	textsize	616
30.88.3.51	lword_end	616
30.88.3.52	word_start	616
30.88.3.53	wrap_mode	616
30.88.3.54	wrap_uses_character	616
30.88.3.55	wrapped_column	617
30.88.3.56	wrapped_line_counter	617
30.88.3.57	wrapped_row	617
30.88.3.58	y_to_position	618
30.88.3.59	xy_to_rowcol	618
30.89	Fl_Text_Display::Style_Table_Entry Struct Reference	619
30.89.1	Detailed Description	619
30.90	Fl_Text_Editor Class Reference	620
30.90.1	Detailed Description	623
30.90.2	Constructor & Destructor Documentation	623
30.90.2.1	Fl_Text_Editor	623
30.90.3	Member Function Documentation	623
30.90.3.1	add_default_key_bindings	623
30.90.3.2	bound_key_function	623
30.90.3.3	bound_key_function	623
30.90.3.4	default_key_function	624
30.90.3.5	handle	624
30.90.3.6	insert_mode	624
30.90.3.7	insert_mode	624
30.90.3.8	kf_backspace	625
30.90.3.9	kf_c_s_move	625
30.90.3.10	kf_copy	625
30.90.3.11	lfk_cut	625
30.90.3.12	kf_delete	625

30.90.3.13kf_down	625
30.90.3.14kf_end	625
30.90.3.15kf_home	625
30.90.3.16kf_insert	626
30.90.3.17kf_left	626
30.90.3.18kf_move	626
30.90.3.19kf_page_down	626
30.90.3.20kf_page_up	626
30.90.3.21kf_paste	626
30.90.3.22kf_right	626
30.90.3.23kf_select_all	626
30.90.3.24kf_shift_move	627
30.90.3.25kf_undo	627
30.90.3.26kf_up	627
30.90.3.27remove_all_key_bindings	627
30.90.3.28remove_all_key_bindings	627
30.90.3.29remove_key_binding	627
30.91Fl_Text_Editor::Key_Binding Struct Reference	628
30.91.1 Detailed Description	628
30.92Fl_Text_Selection Class Reference	629
30.92.1 Detailed Description	629
30.93Fl_Tile Class Reference	631
30.93.1 Detailed Description	631
30.93.2 Constructor & Destructor Documentation	632
30.93.2.1 Fl_Tile	632
30.93.3 Member Function Documentation	632
30.93.3.1 handle	632
30.93.3.2 position	633
30.93.3.3 resize	633
30.94Fl_Tiled_Image Class Reference	634
30.94.1 Detailed Description	635
30.94.2 Constructor & Destructor Documentation	635
30.94.2.1 Fl_Tiled_Image	635
30.94.3 Member Function Documentation	635
30.94.3.1 color_average	635
30.94.3.2 copy	635

30.94.3.3 <code>copy</code>	635
30.94.3.4 <code>desaturate</code>	636
30.94.3.5 <code>draw</code>	636
30.94.3.6 <code>draw</code>	636
30.95 <code>FL_Timer</code> Class Reference	637
30.95.1 Detailed Description	638
30.95.2 Constructor & Destructor Documentation	638
30.95.2.1 <code>FL_Timer</code>	638
30.95.3 Member Function Documentation	638
30.95.3.1 <code>direction</code>	638
30.95.3.2 <code>direction</code>	638
30.95.3.3 <code>draw</code>	638
30.95.3.4 <code>handle</code>	639
30.95.3.5 <code>suspended</code>	639
30.95.3.6 <code>suspended</code>	639
30.96 <code>FL_Toggle_Button</code> Class Reference	640
30.96.1 Detailed Description	640
30.96.2 Constructor & Destructor Documentation	640
30.96.2.1 <code>FL_Toggle_Button</code>	640
30.97 <code>FL_Tooltip</code> Class Reference	641
30.97.1 Detailed Description	642
30.97.2 Member Function Documentation	642
30.97.2.1 <code>color</code>	642
30.97.2.2 <code>color</code>	642
30.97.2.3 <code>current</code>	642
30.97.2.4 <code>delay</code>	643
30.97.2.5 <code>delay</code>	643
30.97.2.6 <code>disable</code>	643
30.97.2.7 <code>enable</code>	643
30.97.2.8 <code>enabled</code>	643
30.97.2.9 <code>enter_area</code>	643
30.97.2.10 <code>font</code>	643
30.97.2.11 <code>font</code>	643
30.97.2.12 <code>hoverdelay</code>	644
30.97.2.13 <code>hoverdelay</code>	644
30.97.2.14 <code>size</code>	644

30.97.2.15size	644
30.97.2.16textcolor	644
30.97.2.17textcolor	644
30.98Fl_Valuator Class Reference	645
30.98.1 Detailed Description	647
30.98.2 Constructor & Destructor Documentation	647
30.98.2.1 Fl_Valuator	647
30.98.3 Member Function Documentation	647
30.98.3.1 bounds	647
30.98.3.2 clamp	648
30.98.3.3 format	648
30.98.3.4 handle_drag	648
30.98.3.5 handle_release	648
30.98.3.6 increment	648
30.98.3.7 maximum	649
30.98.3.8 maximum	649
30.98.3.9 minimum	649
30.98.3.10minimum	649
30.98.3.11precision	649
30.98.3.12range	649
30.98.3.13round	649
30.98.3.14set_value	649
30.98.3.15step	650
30.98.3.16value	650
30.98.3.17value	650
30.99Fl_Value_Input Class Reference	651
30.99.1 Detailed Description	652
30.99.2 Constructor & Destructor Documentation	653
30.99.2.1 Fl_Value_Input	653
30.99.3 Member Function Documentation	653
30.99.3.1 cursor_color	653
30.99.3.2 cursor_color	653
30.99.3.3 draw	654
30.99.3.4 handle	654
30.99.3.5 resize	654
30.99.3.6 shortcut	655

30.99.3.7 soft	655
30.99.3.8 textcolor	655
30.99.3.9 textcolor	655
30.99.3.10 textfont	655
30.99.3.11 textfont	655
30.99.3.12 textsize	656
30.99.3.13 textsize	656
30.10 IFl_Value_Output Class Reference	657
30.100.1 Detailed Description	658
30.100.2 Constructor & Destructor Documentation	658
30.100.2.1 IFl_Value_Output	658
30.100.3 Member Function Documentation	659
30.100.3.1 draw	659
30.100.3.2 handle	659
30.100.3.3 soft	659
30.100.3.4 soft	660
30.100.3.5 textcolor	660
30.100.3.6 textcolor	660
30.100.3.7 textfont	660
30.100.3.8 textfont	660
30.100.3.9 textsize	660
30.10 IFl_Value_Slider Class Reference	661
30.101.1 Detailed Description	662
30.101.2 Constructor & Destructor Documentation	662
30.101.2.1 IFl_Value_Slider	662
30.101.3 Member Function Documentation	662
30.101.3.1 draw	662
30.101.3.2 handle	662
30.101.3.3 textcolor	663
30.101.3.4 textcolor	663
30.101.3.5 textfont	663
30.101.3.6 textfont	663
30.101.3.7 textsize	663
30.101.3.8 textsize	663
30.10 IFl_Widget Class Reference	665
30.102.1 Detailed Description	673

30.102.2Member Enumeration Documentation	673
30.102.2.1"@20	673
30.102.3Constructor & Destructor Documentation	673
30.102.3.1Fl_Widget	673
30.102.3.2~Fl_Widget	674
30.102.4Member Function Documentation	674
30.102.4.lactivate	674
30.102.4.2active	674
30.102.4.3active_r	674
30.102.4.4align	675
30.102.4.5align	675
30.102.4.6argument	676
30.102.4.7box	676
30.102.4.8box	676
30.102.4.9callback	677
30.102.4.10callback	677
30.102.4.1dallback	677
30.102.4.1lcallback	677
30.102.4.1lcallback	677
30.102.4.1changed	678
30.102.4.1clear_changed	678
30.102.4.1clear_damage	678
30.102.4.1clear_output	679
30.102.4.1clear_visible	679
30.102.4.1clear_visible_focus	679
30.102.4.2blor	679
30.102.4.2dolor	679
30.102.4.2dolor	680
30.102.4.2dolor2	680
30.102.4.2dolor2	680
30.102.4.25ontains	680
30.102.4.26opy_label	681
30.102.4.27amage	681
30.102.4.28amage	681
30.102.4.29amage	682
30.102.4.30amage_resize	682

30.102.4.3 deactivate	682
30.102.4.3 default_callback	683
30.102.4.3 eimage	683
30.102.4.3 eimage	683
30.102.4.3 eimage	683
30.102.4.3 eo_callback	683
30.102.4.3 eo_callback	684
30.102.4.3 eo_callback	684
30.102.4.3 raw	684
30.102.4.4 raw_box	685
30.102.4.4 draw_box	685
30.102.4.4 draw_focus	685
30.102.4.4 ls	685
30.102.4.4 ll	686
30.102.4.4 handle	686
30.102.4.4 nde	686
30.102.4.4 image	687
30.102.4.4 image	687
30.102.4.4 image	687
30.102.4.5 inside	687
30.102.4.5 label	688
30.102.4.5 label	688
30.102.4.5 label	688
30.102.4.5 label_shortcut	689
30.102.4.5 labelcolor	689
30.102.4.5 labelcolor	689
30.102.4.5 labelfont	689
30.102.4.5 labelfont	689
30.102.4.5 labelsize	690
30.102.4.6 labelsize	690
30.102.4.6 labeltype	690
30.102.4.6 labeltype	690
30.102.4.6 measure_label	691
30.102.4.6 output	691
30.102.4.6 parent	691
30.102.4.6 parent	691

30.102.4.6 position	692
30.102.4.6 draw	692
30.102.4.6 draw_label	692
30.102.4.7 size	692
30.102.4.7 selection_color	693
30.102.4.7 selection_color	693
30.102.4.7 set_changed	694
30.102.4.7 set_output	694
30.102.4.7 set_visible	694
30.102.4.7 set_visible_focus	694
30.102.4.7 show	695
30.102.4.7 size	695
30.102.4.7 take_focus	695
30.102.4.8 akesevents	696
30.102.4.8 est_shortcut	696
30.102.4.8 est_shortcut	696
30.102.4.8 oltip	696
30.102.4.8 oltip	697
30.102.4.8 ype	697
30.102.4.8 ype	697
30.102.4.8 user_data	697
30.102.4.8 user_data	698
30.102.4.8 visible	698
30.102.4.9 visible_focus	698
30.102.4.9 visible_focus	698
30.102.4.9 visible_r	699
30.102.4.9 r	699
30.102.4.9 4	699
30.102.4.9 when	700
30.102.4.9 when	700
30.102.4.9 window	701
30.102.4.9 8	701
30.102.4.9 9	701
30.102.4.1 00	702
30.102.4.1 01	702
30.10FL_Window Class Reference	703

30.103.1Detailed Description	706
30.103.2Constructor & Destructor Documentation	706
30.103.2.1Fl_Window	706
30.103.2.2Fl_Window	707
30.103.2.3~Fl_Window	707
30.103.3Member Function Documentation	707
30.103.3.1lborder	707
30.103.3.2clear_border	707
30.103.3.3copy_label	708
30.103.3.4current	708
30.103.3.5cursor	708
30.103.3.6default_cursor	708
30.103.3.7draw	709
30.103.3.8flush	709
30.103.3.9fullscreen	709
30.103.3.10handle	709
30.103.3.11hide	710
30.103.3.12spot	710
30.103.3.13iconize	710
30.103.3.14iconlabel	711
30.103.3.15label	711
30.103.3.16label	711
30.103.3.17make_current	711
30.103.3.18modal	711
30.103.3.19on_modal	711
30.103.3.20override	712
30.103.3.21resize	712
30.103.3.22set_modal	712
30.103.3.23set_non_modal	712
30.103.3.24show	712
30.103.3.25shown	713
30.103.3.26size_range	713
30.103.3.27class	714
30.103.4Member Data Documentation	714
30.103.4.1current_	714
30.104Fl_Wizard Class Reference	715

30.104.1 Detailed Description	715
30.104.2 Constructor & Destructor Documentation	715
30.104.2.1 <i>IFl_Wizard</i>	715
30.104.3 Member Function Documentation	716
30.104.3.1 <i>Inext</i>	716
30.104.3.2 <i>prev</i>	716
30.104.3.3 <i>value</i>	716
30.104.3.4 <i>value</i>	716
30.105 <i>IFl_XBM_Image</i> Class Reference	717
30.105.1 Detailed Description	717
30.105.2 Constructor & Destructor Documentation	717
30.105.2.1 <i>IFl_XBM_Image</i>	717
30.106 <i>IFl_XPM_Image</i> Class Reference	718
30.106.1 Detailed Description	718
30.106.2 Constructor & Destructor Documentation	718
30.106.2.1 <i>IFl_XPM_Image</i>	718
31 File Documentation	719
31.1 <i>Enumerations.H</i> File Reference	719
31.1.1 Detailed Description	724
31.1.2 Define Documentation	724
31.1.2.1 <i>FL_MAJOR_VERSION</i>	724
31.1.2.2 <i>FL_MINOR_VERSION</i>	724
31.1.2.3 <i>FL_PATCH_VERSION</i>	724
31.1.2.4 <i>FL_VERSION</i>	724
31.1.3 Typedef Documentation	725
31.1.3.1 <i>Fl_Align</i>	725
31.1.3.2 <i>Fl_Font</i>	725
31.1.3.3 <i>Fl_Fontsize</i>	725
31.1.4 Enumeration Type Documentation	725
31.1.4.1 <i>Fl_Boxtype</i>	725
31.1.4.2 <i>Fl_Color</i>	726
31.1.4.3 <i>Fl_Event</i>	727
31.1.4.4 <i>Fl_Labeltype</i>	729
31.1.4.5 <i>Fl_When</i>	730
31.1.5 Variable Documentation	730
31.1.5.1 <i>FL_ALIGN_BOTTOM</i>	730

31.1.5.2 FL_ALIGN_CENTER	730
31.1.5.3 FL_ALIGN_CLIP	731
31.1.5.4 FL_ALIGN_IMAGE_OVER_TEXT	731
31.1.5.5 FL_ALIGN_INSIDE	731
31.1.5.6 FL_ALIGN_LEFT	731
31.1.5.7 FL_ALIGN_RIGHT	731
31.1.5.8 FL_ALIGN_TEXT_OVER_IMAGE	731
31.1.5.9 FL_ALIGN_TOP	731
31.1.5.10 FL_ALIGN_WRAP	732
31.2 Fl.H File Reference	733
31.2.1 Detailed Description	733
31.3 Fl_Adjuster.H File Reference	734
31.3.1 Detailed Description	734
31.4 fl_arc.cxx File Reference	735
31.4.1 Detailed Description	735
31.4.2 Function Documentation	735
31.4.2.1 fl_arc	735
31.5 fl_arci.cxx File Reference	736
31.5.1 Detailed Description	736
31.5.2 Function Documentation	736
31.5.2.1 fl_arc	736
31.5.2.2 fl_pie	736
31.6 Fl_Bitmap.H File Reference	738
31.6.1 Detailed Description	738
31.7 Fl_BMP_Image.H File Reference	739
31.7.1 Detailed Description	739
31.8 Fl_Box.H File Reference	740
31.8.1 Detailed Description	740
31.9 fl_boxtype.cxx File Reference	741
31.9.1 Detailed Description	742
31.9.2 Function Documentation	742
31.9.2.1 fl_draw_box	742
31.9.2.2 fl_frame	743
31.9.2.3 fl_frame2	743
31.9.2.4 fl_internal_boxtype	743
31.10Fl_Browser.H File Reference	744

31.10.1 Detailed Description	744
31.11 Fl_Browser_.H File Reference	745
31.11.1 Detailed Description	745
31.12 Fl_Button.H File Reference	746
31.12.1 Detailed Description	746
31.12.2 Define Documentation	746
31.12.2.1 FL_RADIO_BUTTON	746
31.13 Fl_Cairo.H File Reference	747
31.13.1 Detailed Description	747
31.14 Fl_Cairo_Window.H File Reference	748
31.14.1 Detailed Description	748
31.15 Fl_Chart.H File Reference	749
31.15.1 Detailed Description	750
31.16 Fl_Check_Browser.H File Reference	751
31.16.1 Detailed Description	751
31.17 Fl_Check_Button.H File Reference	752
31.17.1 Detailed Description	752
31.18 Fl_Choice.H File Reference	753
31.18.1 Detailed Description	753
31.19 Fl_Clock.H File Reference	754
31.19.1 Detailed Description	754
31.20 fl_color.cxx File Reference	755
31.20.1 Detailed Description	755
31.20.2 Function Documentation	756
31.20.2.1 fl_color	756
31.20.2.2 fl_color	756
31.21 Fl_Color_Chooser.H File Reference	757
31.21.1 Detailed Description	757
31.22 Fl_Counter.H File Reference	758
31.22.1 Detailed Description	758
31.23 fl_curve.cxx File Reference	759
31.23.1 Detailed Description	759
31.23.2 Function Documentation	759
31.23.2.1 fl_curve	759
31.24 Fl_Dial.H File Reference	760
31.24.1 Detailed Description	760

31.25	Fl_Double_Window.H File Reference	761
31.25.1	Detailed Description	761
31.26	fl_draw.H File Reference	762
31.26.1	Detailed Description	767
31.26.2	Function Documentation	767
31.26.2.1	fl_arc	767
31.26.2.2	fl_arc	767
31.26.2.3	fl_begin_complex_polygon	768
31.26.2.4	fl_begin_points	768
31.26.2.5	fl_circle	768
31.26.2.6	fl_clip_box	768
31.26.2.7	fl_color	769
31.26.2.8	fl_color	769
31.26.2.9	fl_color	769
31.26.2.10	fl_curve	769
31.26.2.11	fl_draw_box	770
31.26.2.12	fl_frame	770
31.26.2.13	fl_frame2	770
31.26.2.14	fl_gap	771
31.26.2.15	fl_mult_matrix	771
31.26.2.16	fl_not_clipped	771
31.26.2.17	fl_pie	771
31.26.2.18	fl_polygon	772
31.26.2.19	fl_polygon	772
31.26.2.20	fl_pop_clip	772
31.26.2.21	fl_push_clip	772
31.26.2.22	fl_push_matrix	772
31.26.2.23	fl_rotate	772
31.26.2.24	fl_scale	773
31.26.2.25	fl_scale	773
31.26.2.26	fl_transform_dx	773
31.26.2.27	fl_transform_dy	773
31.26.2.28	fl_transform_x	773
31.26.2.29	fl_transform_y	774
31.26.2.30	fl_transformed_vertex	774
31.26.2.31	fl_translate	774

31.26.2.32fl_vertex	774
31.27FL_File_Browser.H File Reference	775
31.27.1 Detailed Description	775
31.28FL_File_Icon.H File Reference	776
31.28.1 Detailed Description	776
31.29FL_File_Input.H File Reference	777
31.29.1 Detailed Description	777
31.30FL_Fill_Dial.H File Reference	778
31.30.1 Detailed Description	778
31.31FL_Fill_Slider.H File Reference	779
31.31.1 Detailed Description	779
31.32FL_Float_Input.H File Reference	780
31.32.1 Detailed Description	780
31.33FL_FormsBitmap.H File Reference	781
31.33.1 Detailed Description	781
31.34FL_FormsPixmap.H File Reference	782
31.34.1 Detailed Description	782
31.35FL_Free.H File Reference	783
31.35.1 Detailed Description	784
31.36FL_GIF_Image.H File Reference	785
31.36.1 Detailed Description	785
31.37FL_Gl_Window.H File Reference	786
31.37.1 Detailed Description	786
31.38FL_Group.H File Reference	787
31.38.1 Detailed Description	787
31.39FL_Help_Dialog.H File Reference	788
31.39.1 Detailed Description	788
31.40FL_Help_View.H File Reference	789
31.40.1 Detailed Description	789
31.41FL_Hold_Browser.H File Reference	790
31.41.1 Detailed Description	790
31.42FL_Hor_Fill_Slider.H File Reference	791
31.42.1 Detailed Description	791
31.43FL_Hor_Nice_Slider.H File Reference	792
31.43.1 Detailed Description	792
31.44FL_Hor_Slider.H File Reference	793

31.44.1 Detailed Description	793
31.45Fl_Hor_Value_Slider.H File Reference	794
31.45.1 Detailed Description	794
31.46Fl_Image.H File Reference	795
31.46.1 Detailed Description	795
31.47Fl_Input.H File Reference	796
31.47.1 Detailed Description	796
31.48Fl_Input_.H File Reference	797
31.48.1 Detailed Description	797
31.49Fl_Input_Choice.H File Reference	798
31.49.1 Detailed Description	798
31.50Fl_Int_Input.H File Reference	799
31.50.1 Detailed Description	799
31.51Fl_JPEG_Image.H File Reference	800
31.51.1 Detailed Description	800
31.52Fl_Light_Button.H File Reference	801
31.52.1 Detailed Description	801
31.53Fl_Line_Dial.H File Reference	802
31.53.1 Detailed Description	802
31.54Fl_Menu_.H File Reference	803
31.54.1 Detailed Description	803
31.55Fl_Menu_Bar.H File Reference	804
31.55.1 Detailed Description	804
31.56Fl_Menu_Button.H File Reference	805
31.56.1 Detailed Description	805
31.57Fl_Menu_Window.H File Reference	806
31.57.1 Detailed Description	806
31.58Fl_Multi_Browser.H File Reference	807
31.58.1 Detailed Description	807
31.59Fl_Multiline_Input.H File Reference	808
31.59.1 Detailed Description	808
31.60Fl_Multiline_Output.H File Reference	809
31.60.1 Detailed Description	809
31.61Fl_Nice_Slider.H File Reference	810
31.61.1 Detailed Description	810
31.62Fl_Output.H File Reference	811

31.62.1 Detailed Description	811
31.63FL_Overlay_Window.H File Reference	812
31.63.1 Detailed Description	812
31.64FL_Pack.H File Reference	813
31.64.1 Detailed Description	813
31.65FL_Pixmap.H File Reference	814
31.65.1 Detailed Description	814
31.66FL_PNG_Image.H File Reference	815
31.66.1 Detailed Description	815
31.67FL_PNM_Image.H File Reference	816
31.67.1 Detailed Description	816
31.68FL_Positioner.H File Reference	817
31.68.1 Detailed Description	817
31.69FL_Preferences.H File Reference	818
31.69.1 Detailed Description	818
31.70FL_Progress.H File Reference	819
31.70.1 Detailed Description	819
31.71FL_Radio_Button.H File Reference	820
31.71.1 Detailed Description	820
31.72FL_Radio_Light_Button.H File Reference	821
31.72.1 Detailed Description	821
31.73FL_Radio_Round_Button.H File Reference	822
31.73.1 Detailed Description	822
31.74fl_rect.cxx File Reference	823
31.74.1 Detailed Description	824
31.74.2 Function Documentation	825
31.74.2.1 fl_clip_box	825
31.74.2.2 fl_clip_region	825
31.74.2.3 fl_clip_region	825
31.74.2.4 fl_not_clipped	825
31.74.2.5 fl_polygon	826
31.74.2.6 fl_polygon	826
31.74.2.7 fl_pop_clip	826
31.74.2.8 fl_push_clip	826
31.75FL_Repeat_Button.H File Reference	827
31.75.1 Detailed Description	827

31.76FL_Return_Button.H File Reference	828
31.76.1 Detailed Description	828
31.77FL_Roller.H File Reference	829
31.77.1 Detailed Description	829
31.78FL_Round_Button.H File Reference	830
31.78.1 Detailed Description	830
31.79FL_Round_Clock.H File Reference	831
31.79.1 Detailed Description	831
31.80FL_Scroll.H File Reference	832
31.80.1 Detailed Description	832
31.81FL_Scrollbar.H File Reference	833
31.81.1 Detailed Description	833
31.82FL_Secret_Input.H File Reference	834
31.82.1 Detailed Description	834
31.83FL_Select_Browser.H File Reference	835
31.83.1 Detailed Description	835
31.84FL_Shared_Image.H File Reference	836
31.84.1 Detailed Description	836
31.85FL_Simple_Counter.H File Reference	837
31.85.1 Detailed Description	837
31.86FL_Single_Window.H File Reference	838
31.86.1 Detailed Description	838
31.87FL_Slider.H File Reference	839
31.87.1 Detailed Description	839
31.88FL_Spinner.H File Reference	840
31.88.1 Detailed Description	840
31.89FL_Tabs.H File Reference	841
31.89.1 Detailed Description	841
31.90FL_Text_Buffer.H File Reference	842
31.90.1 Detailed Description	842
31.91FL_Text_Display.H File Reference	843
31.91.1 Detailed Description	843
31.92FL_Text_Editor.H File Reference	844
31.92.1 Detailed Description	844
31.93FL_Tile.H File Reference	845
31.93.1 Detailed Description	845

31.94Fl_Tiled_Image.H File Reference	846
31.94.1 Detailed Description	846
31.95Fl_Timer.H File Reference	847
31.95.1 Detailed Description	847
31.96Fl_Toggle_Button.H File Reference	848
31.96.1 Detailed Description	848
31.97Fl_Tooltip.H File Reference	849
31.97.1 Detailed Description	849
31.98fl_types.h File Reference	850
31.98.1 Detailed Description	850
31.98.2 Typedef Documentation	850
31.98.2.1 Fl_CString	850
31.98.2.2 Fl_String	850
31.99Fl_Valuator.H File Reference	851
31.99.1 Detailed Description	851
31.10Fl_Value_Input.H File Reference	852
31.100.1 Detailed Description	852
31.10Fl_Value_Output.H File Reference	853
31.101.1 Detailed Description	853
31.10Fl_Value_Slider.H File Reference	854
31.102.1 Detailed Description	854
31.10fl_vertex.cxx File Reference	855
31.103.1 Detailed Description	857
31.103.2 Function Documentation	857
31.103.2.1 fl_begin_complex_polygon	857
31.103.2.2 fl_begin_points	857
31.103.2.3 fl_circle	857
31.103.2.4 fl_gap	857
31.103.2.5 fl_mult_matrix	858
31.103.2.6 fl_push_matrix	858
31.103.2.7 fl_rotate	858
31.103.2.8 fl_scale	858
31.103.2.9 fl_scale	858
31.103.2.10 fl_transform_dx	859
31.103.2.11 fl_transform_dy	859
31.103.2.12 fl_transform_x	859

31.103.2. Ifl_transform_y	859
31.103.2. Ifl_transformed_vertex	860
31.103.2. Ifl_translate	860
31.103.2. Ifl_vertex	860
31.10 FL_Widget.H File Reference	861
31.104.1 Detailed Description	861
31.104.2 Define Documentation	861
31.104.2.1 FL_RESERVED_TYPE	861
31.10 FL_Window.H File Reference	862
31.105.1 Detailed Description	862
31.10 FL_Wizard.H File Reference	863
31.106.1 Detailed Description	863
31.10 FL_XBM_Image.H File Reference	864
31.107.1 Detailed Description	864
31.10 FL_XPM_Image.H File Reference	865
31.108.1 Detailed Description	865

Chapter 1

FLTK Programming Manual



FLTK 1.3.0 Programming Manual

Revision 8 by Michael Sweet, Craig P. Earls,
Matthias Melcher, and Bill Spitzak
Copyright 1998-2008 by Bill Spitzak and others.

This software and manual are provided under the terms of the GNU Library General Public License.
Permission is granted to reproduce this manual or any portion for any purpose, provided this copyright
and permission notice are preserved.

Preface	10 - Advanced FLTK
1 - Introduction to FLTK	11 - Unicode and utf-8 Support
2 - FLTK Basics	A - Class Reference
3 - Common Widgets and Attributes	B - Function Reference
<ul style="list-style-type: none">• Colors• Box Types• Labels and Label Types• Drawing Images	C - FLTK Enumerations
4 - Designing a Simple Text Editor	D - GLUT Compatibility
5 - Drawing Things in FLTK	<ul style="list-style-type: none">• class Fl_Glut_Window
6 - Handling Events	E - Forms Compatibility
<ul style="list-style-type: none">• Fl::event_*() methods• Event Propagation	F - Operating System Issues
7 - Adding and Extending Widgets	G - Migrating Code from FLTK 1.0 to 1.1
8 - Using OpenGL	H - Migrating Code from FLTK 1.1 to 1.3
9 - Programming with FLUID	I - Developer Information
<ul style="list-style-type: none">• GUI Attributes• Selecting and Moving Widgets• Image Labels	J - Software License
	K - Example Source Code

Chapter 2

Preface

This manual describes the Fast Light Tool Kit ("FLTK") version 1.3.0, a C++ Graphical User Interface ("GUI") toolkit for UNIX, Microsoft Windows and MacOS.

Each of the chapters in this manual is designed as a tutorial for using FLTK, while the appendices provide a convenient reference for all FLTK widgets, functions, and operating system interfaces.

This manual may be printed, modified, and/or used under the terms of the FLTK license provided in J - Software License.

2.1 Organization

This manual is organized into the following chapters and appendices:

- [1 - Introduction to FLTK](#)
- [2 - FLTK Basics](#)
- [3 - Common Widgets and Attributes](#)
- [4 - Designing a Simple Text Editor](#)
- [5 - Drawing Things in FLTK](#)
- [6 - Handling Events](#)
- [7 - Adding and Extending Widgets](#)
- [8 - Using OpenGL](#)
- [9 - Programming with FLUID](#)
- [10 - Advanced FLTK](#)
- [11 - Unicode and utf-8 Support](#)
- [A - Class Reference](#)
- [B - Function Reference](#)
- [C - FLTK Enumerations](#)
- [D - GLUT Compatibility](#)
- [E - Forms Compatibility](#)
- [F - Operating System Issues](#)
- [G - Migrating Code from FLTK 1.0 to 1.1](#)
- [H - Migrating Code from FLTK 1.1 to 1.3](#)
- [I - Developer Information](#)
- [J - Software License](#)
- [K - Example Source Code](#)

2.2 Conventions

The following typeface conventions are used in this manual:

- Function and constant names are shown in **bold courier type**
- Code samples and commands are shown in **regular courier type**

2.3 Abbreviations

The following abbreviations are used in this manual:

X11

The X Window System version 11.

Xlib

The X Window System interface library.

WIN32

The Microsoft Windows 32-bit Application Programmer's Interface.

MacOS

The Apple Macintosh OS 8.6 and later, including OS X.

2.4 Copyrights and Trademarks

FLTK is Copyright 1998-2008 by Bill Spitzak and others. Use and distribution of FLTK is governed by the GNU Library General Public License with 4 exceptions, located in [J - Software License](#).

UNIX is a registered trademark of the X Open Group, Inc. Microsoft and Windows are registered trademarks of Microsoft Corporation. OpenGL is a registered trademark of Silicon Graphics, Inc. Apple, Macintosh, MacOS, and Mac OS X are registered trademarks of Apple Computer, Inc.

Chapter 3

1 - Introduction to FLTK

The Fast Light Tool Kit ("FLTK", pronounced "fulltick") is a cross-platform C++ GUI toolkit for UNIX®/Linux®(X11), Microsoft®Windows®, and MacOS®X.

FLTK provides modern GUI functionality without the bloat and supports 3D graphics via OpenGL®and its built-in GLUT emulation. It was originally developed by Mr. Bill Spitzak and is currently maintained by a small group of developers across the world with a central repository in the US.

3.1 History of FLTK

It has always been Bill's belief that the GUI API of all modern systems is much too high level. Toolkits (even FLTK) are *not* what should be provided and documented as part of an operating system. The system only has to provide arbitrary shaped but featureless windows, a powerful set of graphics drawing calls, and a simple *unalterable* method of delivering events to the owners of the windows. NeXT (if you ignored NextStep) provided this, but they chose to hide it and tried to push their own baroque toolkit instead.

Many of the ideas in FLTK were developed on a NeXT (but *not* using NextStep) in 1987 in a C toolkit Bill called "views". Here he came up with passing events downward in the tree and having the handle routine return a value indicating whether it used the event, and the table-driven menus. In general he was trying to prove that complex UI ideas could be entirely implemented in a user space toolkit, with no knowledge or support by the system.

After going to film school for a few years, Bill worked at Sun Microsystems on the (doomed) NeWS project. Here he found an even better and cleaner windowing system, and he reimplemented "views" atop that. NeWS did have an unnecessarily complex method of delivering events which hurt it. But the designers did admit that perhaps the user could write just as good of a button as they could, and officially exposed the lower level interface.

With the death of NeWS Bill realized that he would have to live with X. The biggest problem with X is the "window manager", which means that the toolkit can no longer control the window borders or drag the window around.

At Digital Domain Bill discovered another toolkit, "Forms". Forms was similar to his work, but provided many more widgets, since it was used in many real applications, rather than as theoretical work. He decided to use Forms, except he integrated his table-driven menus into it. Several very large programs were created using this version of Forms.

The need to switch to OpenGL and GLX, portability, and a desire to use C++ subclassing required a rewrite of Forms. This produced the first version of FLTK. The conversion to C++ required so many changes it made it impossible to recompile any Forms objects. Since it was incompatible anyway, Bill decided to incorporate his older ideas as much as possible by simplifying the lower level interface and the event passing mechanism.

Bill received permission to release it for free on the Internet, with the GNU general public license. Response from Internet users indicated that the Linux market dwarfed the SGI and high-speed GL market, so he rewrote it to use X for all drawing, greatly speeding it up on these machines. That is the version you have now.

Digital Domain has since withdrawn support for FLTK. While Bill is no longer able to actively develop it, he still contributes to FLTK in his free time and is a part of the FLTK development team.

3.2 Features

FLTK was designed to be statically linked. This was done by splitting it into many small objects and designing it so that functions that are not used do not have pointers to them in the parts that are used, and thus do not get linked in. This allows you to make an easy-to-install program or to modify FLTK to the

exact requirements of your application without worrying about bloat. FLTK works fine as a shared library, though, and is now included with several Linux distributions.

Here are some of the core features unique to FLTK:

- `sizeof(Fl_Widget) == 64 to 92.`
- The "core" (the "hello" program compiled & linked with a static FLTK library using `gcc` on a 486 and then stripped) is 114K.
- The FLUID program (which includes every widget) is 538k.
- Written directly atop core libraries (Xlib, WIN32 or Carbon) for maximum speed, and carefully optimized for code size and performance.
- Precise low-level compatibility between the X11, WIN32 and MacOS versions - only about 10% of the code is different.
- Interactive user interface builder program. Output is human-readable and editable C++ source code.
- Support for overlay hardware, with emulation if none is available.
- Very small & fast portable 2-D drawing library to hide Xlib, WIN32, or QuickDraw.
- OpenGL/Mesa drawing area widget.
- Support for OpenGL overlay hardware on both X11 and WIN32, with emulation if none is available.
- Text widgets with Emacs key bindings, X cut & paste, and foreign letter compose!
- Compatibility header file for the GLUT library.
- Compatibility header file for the XForms library.

3.3 Licensing

FLTK comes with complete free source code. FLTK is available under the terms of the [GNU Library General Public License](#) with exceptions that allow for static linking. Contrary to popular belief, it can be used in commercial software - even Bill Gates could use it!

3.4 What Does "FLTK" Mean?

FLTK was originally designed to be compatible with the Forms Library written for SGI machines. In that library all the functions and structures started with "fl_". This naming was extended to all new methods and widgets in the C++ library, and this prefix was taken as the name of the library. It is almost impossible to search for "FL" on the Internet, due to the fact that it is also the abbreviation for Florida. After much debating and searching for a new name for the toolkit, which was already in use by several people, Bill came up with "FLTK", including a bogus excuse that it stands for "The Fast Light Toolkit".

3.5 Building and Installing FLTK Under UNIX and MacOS X

In most cases you can just type "make". This will run configure with the default of no options and then compile everything.

FLTK uses GNU autoconf to configure itself for your UNIX platform. The main things that the configure script will look for are the X11 and OpenGL (or Mesa) header and library files. If these cannot be found in the standard include/library locations you'll need to define the `CFLAGS`, `CXXFLAGS`, and `LDFLAGS` environment variables. For the Bourne and Korn shells you'd use:

```
CFLAGS=-Iincludedir; export CFLAGS  
CXXFLAGS=-Iincludedir; export CXXFLAGS  
LDFLAGS=-Llibdir; export LDFLAGS
```

For C shell and tcsh, use:

```
setenv CFLAGS "-Iincludedir"  
setenv CXXFLAGS "-Iincludedir"  
setenv LDFLAGS "-Llibdir"
```

By default configure will look for a C++ compiler named `CC`, `c++`, `g++`, or `gcc` in that order. To use another compiler you need to set the `CXX` environment variable:

```
CXX=xlc; export CXX  
setenv CXX "xlc"
```

The `CC` environment variable can also be used to override the default C compiler (`cc` or `gcc`), which is used for a few FLTK source files.

You can run configure yourself to get the exact setup you need. Type `./configure <options>`, where options are:

-enable-cygwin

Enable the Cygwin libraries under WIN32

-enable-debug

Enable debugging code & symbols

-disable-gl

Disable OpenGL support

-enable-shared

Enable generation of shared libraries

-enable-threads

Enable multithreading support

-enable-xdbe

Enable the X double-buffer extension

-enable-xft

Enable the Xft library for anti-aliased fonts under X11

-bindir=/path

Set the location for executables [default = \$prefix/bin]

-datadir=/path

Set the location for data files. [default = \$prefix/share]

-libdir=/path

Set the location for libraries [default = \$prefix/lib]

-includedir=/path

Set the location for include files. [default = \$prefix/include]

-mandir=/path

Set the location for man pages. [default = \$prefix/man]

-prefix=dir

Set the directory prefix for files [default = /usr/local]

When the configure script is done you can just run the "make" command. This will build the library, FLUID tool, and all of the test programs.

To install the library, become root and type "make install". This will copy the "fluid" executable to "bindir", the header files to "includedir", and the library files to "libdir".

3.6 Building FLTK Under Microsoft Windows

There are three ways to build FLTK under Microsoft Windows. The first is to use the Visual C++ 5.0 project files under the "visualc" directory. Just open (or double-click on) the "fltk.dsw" file to get the whole shebang.

The second method is to use the `configure` script included with the FLTK software; this has only been tested with the CygWin tools:

```
sh configure --prefix=C:/FLTK  
make
```

The final method is to use a GNU-based development tool with the files in the "makefiles" directory. To build using one of these tools simply copy the appropriate makeinclude and config files to the main directory and do a make:

```
copy makefiles\Makefile.<env> Makefile  
make
```

3.6.1 Using the Visual C++ DLL Library

The "fltkdll.dsp" project file builds a DLL-version of the FLTK library. Because of name mangling differences between PC compilers (even between different versions of Visual C++!) you can only use the DLL that is generated with the same version compiler that you built it with.

When compiling an application or DLL that uses the FLTK DLL, you will need to define the `FL_DLL` preprocessor symbol to get the correct linkage commands embedded within the FLTK header files.

3.7 Building FLTK Under OS/2

The current OS/2 build requires XFree86 for OS/2 to work. A native Presentation Manager version has not been implemented yet (volunteers are welcome!).

The current set of Makefiles/configuration files assumes that EMX 0.9d and libExt (from [posix2.sourceforge.net](#)) is installed.

To build the XFree86 version of FLTK for OS/2, copy the appropriate makeinclude and config files to the main directory and do a make:

```
copy makefiles\Makefile.os2x Makefile  
make
```

3.8 Internet Resources

FLTK is available on the 'net in a bunch of locations:

WWW

<http://www.fltk.org/>
<http://www.fltk.org/str.php> [for reporting bugs]
<http://www.fltk.org/software.php> [source code]

FTP

California, USA ([ftp.fltk.org](ftp://ftp.fltk.org))
Maryland, USA ([ftp2.fltk.org](ftp://ftp2.fltk.org))
Espoo, Finland ([ftp.funet.fi](ftp://ftp.funet.fi))
Germany ([linux.mathematik.tu-darmstadt.de](ftp://linux.mathematik.tu-darmstadt.de))
Austria ([gd.tuwien.ac.at](ftp://gd.tuwien.ac.at))

EMail

fltk@fltk.org [see instructions below]
fltk-bugs@fltk.org [for reporting bugs]

NNTP Newsgroups

news.easysw.com

To send a message to the FLTK mailing list ("fltk@fltk.org") you must first join the list. Non-member submissions are blocked to avoid problems with unsolicited email.

To join the FLTK mailing list, send a message to "majordomo@fltk.org" with "subscribe fltk" in the message body. A digest of this list is available by subscribing to the "fltk-digest" mailing list.

3.9 Reporting Bugs

To report a bug in FLTK, send an email to "fltk-bugs@fltk.org". Please include the FLTK version, operating system & version, and compiler that you are using when describing the bug or problem. We will be unable to provide any kind of help without that basic information.

Bugs can also be reported to the "fltk.bugs" newsgroup or on the SourceForge bug tracker pages.

For general support and questions, please use the FLTK mailing list at "fltk@fltk.org" or one of the newsgroups.

Chapter 4

2 - FLTK Basics

This chapter teaches you the basics of compiling programs that use FLTK.

4.1 Writing Your First FLTK Program

All programs must include the file `<FL/Fl.H>`. In addition the program must include a header file for each FLTK class it uses. Listing 1 shows a simple "Hello, World!" program that uses FLTK to display the window.

Listing 1 - "hello.cxx"

```
#include <FL/Fl.H>
#include <FL/Fl_Window.H>
#include <FL/Fl_Box.H>

int main(int argc, char **argv) {
    Fl_Window *window = new Fl_Window(300,180);
    Fl_Box *box = new Fl_Box(20,40,260,100,"Hello, World!");
    box->box(Fl_UP_BOX);
    box->labelsize(36);
    box->labelfont(Fl_BOLD+Fl_ITALIC);
    box->labeltype(Fl_SHADOW_LABEL);
    window->end();
    window->show(argc, argv);
    return Fl::run();
}
```

After including the required header files, the program then creates a window. All following widgets will automatically be children of this window.

```
Fl_Window *window = new Fl_Window(300,180);
```

Then we create a box with the "Hello, World!" string in it. FLTK automatically adds the new box to `window`, the current grouping widget.

```
Fl_Box *box = new Fl_Box(20,40,260,100,"Hello, World!");
```

Next, we set the type of box and the size, font, and style of the label:

```
box->box(Fl_UP_BOX);
box->labelsize(36);
box->labelfont(Fl_BOLD+Fl_ITALIC);
box->labeltype(Fl_SHADOW_LABEL);
```

We tell FLTK that we will not add any more widgets to `window`.

```
window->end();
```

Finally, we show the window and enter the FLTK event loop:

```
window->show(argc, argv);
return Fl::run();
```

The resulting program will display the window in Figure 2-1. You can quit the program by closing the window or pressing the ESCape key.

Figure 4.1: The Hello, World! Window

4.1.1 Creating the Widgets

The widgets are created using the C++ `new` operator. For most widgets the arguments to the constructor are:

```
Fl_Widget(x, y, width, height, label)
```

The `x` and `y` parameters determine where the widget or window is placed on the screen. In FLTK the top left corner of the window or screen is the origin (i.e. `x = 0, y = 0`) and the units are in pixels.

The `width` and `height` parameters determine the size of the widget or window in pixels. The maximum widget size is typically governed by the underlying window system or hardware.

`label` is a pointer to a character string to label the widget with or `NULL`. If not specified the label defaults to `NULL`. The label string must be in static storage such as a string constant because FLTK does not make a copy of it - it just uses the pointer.

4.1.2 Creating Widget hierarchies

Widgets are commonly ordered into functional groups, which in turn may be grouped again, creating a hierarchy of widgets. FLTK makes it easy to fill groups by automatically adding all widgets that are created between a `myGroup->begin()` and `myGroup->end()`. In this example, `myGroup` would be the *current* group.

Newly created groups and their derived widgets implicitly call `begin()` in the constructor, effectively adding all subsequently created widgets to itself until `end()` is called.

Setting the current group to `NULL` will stop automatic hierarchies. New widgets can now be added manually using `Fl_Group::add(...)` and `Fl_Group::insert(...)`.

4.1.3 Get/Set Methods

`box->box(FL_UP_BOX)` sets the type of box the `Fl_Box` draws, changing it from the default of `FL_NO_BOX`, which means that no box is drawn. In our "Hello, World!" example we use `FL_UP_BOX`, which means that a raised button border will be drawn around the widget. You can learn more about boxtypes in [Chapter 3](#).

You could examine the boxtyle in by doing `box->box()`. FLTK uses method name overloading to make short names for get/set methods. A "set" method is always of the form "void name(type)", and a "get" method is always of the form "type name() const".

4.1.4 Redrawing After Changing Attributes

Almost all of the set/get pairs are very fast, short inline functions and thus very efficient. However, the "set" methods do not call `redraw()` - you have to call it yourself. This greatly reduces code size and execution time. The only common exceptions are `value()` which calls `redraw()` and `label()` which calls `redraw_label()` if necessary.

4.1.5 Labels

All widgets support labels. In the case of window widgets, the label is used for the label in the title bar. Our example program calls the `labelfont()`, `labelsize`, and `labeltype()` methods.

All widgets support labels. In the case of window widgets, the label is used for the label in the title bar. Our example program calls the `labelfont`, `labelsize`, and `labeltype` methods.

The `labelfont` method sets the typeface and style that is used for the label, which for this example we are using `FL_BOLD` and `FL_ITALIC`. You can also specify typefaces directly.

The `labelsize` method sets the height of the font in pixels.

The `labeltype` method sets the type of label. FLTK supports normal, embossed, and shadowed labels internally, and more types can be added as desired.

A complete list of all label options can be found in [Chapter 3](#).

4.1.6 Showing the Window

The `show()` method shows the widget or window. For windows you can also provide the command-line arguments to allow users to customize the appearance, size, and position of your windows.

4.1.7 The Main Event Loop

All FLTK applications (and most GUI applications in general) are based on a simple event processing model. User actions such as mouse movement, button clicks, and keyboard activity generate events that are sent to an application. The application may then ignore the events or respond to the user, typically by redrawing a button in the "down" position, adding the text to an input field, and so forth.

FLTK also supports idle, timer, and file pseudo-events that cause a function to be called when they occur. Idle functions are called when no user input is present and no timers or files need to be handled - in short, when the application is not doing anything. Idle callbacks are often used to update a 3D display or do other background processing.

Timer functions are called after a specific amount of time has expired. They can be used to pop up a progress dialog after a certain amount of time or do other things that need to happen at more-or-less regular intervals. FLTK timers are not 100% accurate, so they should not be used to measure time intervals, for example.

File functions are called when data is ready to read or write, or when an error condition occurs on a file. They are most often used to monitor network connections (sockets) for data-driven displays.

FLTK applications must periodically check (`Fl::check()`) or wait (`Fl::wait()`) for events or use the `Fl::run()` method to enter a standard event processing loop. Calling `Fl::run()` is equivalent to the following code:

```
while (Fl::wait());
```

`Fl::run()` does not return until all of the windows under FLTK control are closed by the user or your program.

4.2 Compiling Programs with Standard Compilers

Under UNIX (and under Microsoft Windows when using the GNU development tools) you will probably need to tell the compiler where to find the header files. This is usually done using the `-I` option:

```
CC -I/usr/local/include ...
gcc -I/usr/local/include ...
```

The `fltk-config` script included with FLTK can be used to get the options that are required by your compiler:

```
CC `fltk-config --cxxflags` ...
```

Similarly, when linking your application you will need to tell the compiler to use the FLTK library:

```
CC ... -L/usr/local/lib -lfltk -lXext -lX11 -lm  
gcc ... -L/usr/local/lib -lfltk -lXext -lX11 -lm
```

Aside from the "fltk" library, there is also a "fltk_forms" library for the XForms compatibility classes, "fltk_gl" for the OpenGL and GLUT classes, and "fltk_images" for the image file classes, [Fl_Help_Dialog](#) widget, and system icon support.

Note:

The libraries are named "fltk.lib", "fltkgl.lib", "fltkforms.lib", and "fltkimages.lib", respectively under Windows.

As before, the `fltk-config` script included with FLTK can be used to get the options that are required by your linker:

```
CC ... `fltk-config --ldflags`
```

The forms, GL, and images libraries are included with the "`-use-foo`" options, as follows:

```
CC ... `fltk-config --use-forms --ldflags`  
CC ... `fltk-config --use-gl --ldflags`  
CC ... `fltk-config --use-images --ldflags`  
CC ... `fltk-config --use-forms --use-gl --use-images --ldflags`
```

Finally, you can use the `fltk-config` script to compile a single source file as a FLTK program:

```
fltk-config --compile filename.cpp  
fltk-config --use-forms --compile filename.cpp  
fltk-config --use-gl --compile filename.cpp  
fltk-config --use-images --compile filename.cpp  
fltk-config --use-forms --use-gl --use-images --compile filename.cpp
```

Any of these will create an executable named `filename`.

4.3 Compiling Programs with Microsoft Visual C++

In Visual C++ you will need to tell the compiler where to find the FLTK header files. This can be done by selecting "Settings" from the "Project" menu and then changing the "Preprocessor" settings under the "C/C++" tab. You will also need to add the FLTK and WinSock2 (WS2_32.LIB) libraries to the "Link" settings.

You can build your Microsoft Windows applications as Console or WIN32 applications. If you want to use the standard C `main()` function as the entry point, FLTK includes a `WinMain()` function that will call your `main()` function for you.

Note: The Visual C++ 5.0 optimizer is known to cause problems with many programs. We only recommend using the "Favor Small Code" optimization setting. The Visual C++ 6.0 optimizer seems to be much better and can be used with the "optimized for speed" setting.

4.4 Naming

All public symbols in FLTK start with the characters 'F' and 'L':

- Functions are either `F1::foo()` or `f1_foo()`.
- Class and type names are capitalized: `F1_Foo`.
- `Constants and enumerations` are uppercase: `FL_FOO`.
- All header files start with `<FL/...>`.

4.5 Header Files

The proper way to include FLTK header files is:

```
#include <FL/F1_xyz.H>
```

Note:

Case *is* significant on many operating systems, and the C standard uses the forward slash (/) to separate directories. *Do not use any of the following include lines:*

```
#include <FL\F1_xyz.H>
#include <f1/f1_xyz.h>
#include <F1/f1_xyz.h>
```

Chapter 5

3 - Common Widgets and Attributes

This chapter describes many of the widgets that are provided with FLTK and covers how to query and set the standard attributes.

5.1 Buttons

FLTK provides many types of buttons:

- [Fl_Button](#) - A standard push button.
- [Fl_Check_Button](#) - A button with a check box.
- [Fl_Light_Button](#) - A push button with a light.
- [Fl_Repeat_Button](#) - A push button that repeats when held.
- [Fl_Return_Button](#) - A push button that is activated by the `Enter` key.
- [Fl_Round_Button](#) - A button with a radio circle.

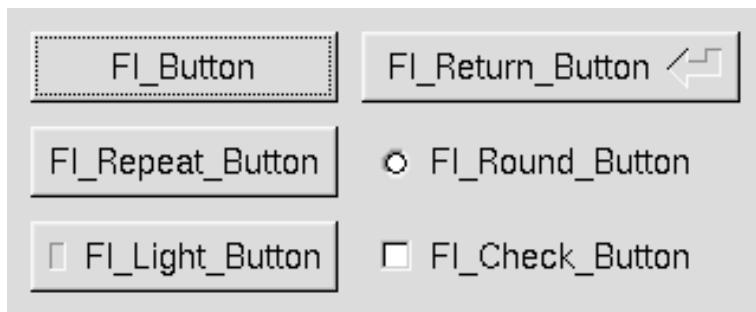


Figure 5.1: FLTK Button Widgets

All of these buttons just need the corresponding `<FL/Fl_xyz_Button.h>` header file. The constructor takes the bounding box of the button and optionally a label string:

```
Fl_Button *button = new Fl_Button(x, y, width, height, "label");
Fl_Light_Button *lbutton = new Fl_Light_Button(x, y, width, height);
Fl_Round_Button *rbutton = new Fl_Round_Button(x, y, width, height, "label");
```

Each button has an associated `type()` which allows it to behave as a push button, toggle button, or radio button:

```
button->type(Fl.NORMAL_BUTTON);
lbutton->type(Fl.TOGGLE_BUTTON);
rbutton->type(Fl.RADIO_BUTTON);
```

For toggle and radio buttons, the `value()` method returns the current button state (`0` = off, `1` = on). The `set()` and `clear()` methods can be used on toggle buttons to turn a toggle button on or off, respectively. Radio buttons can be turned on with the `setonly()` method; this will also turn off other radio buttons in the same group.

5.2 Text

FLTK provides several text widgets for displaying and receiving text:

- [Fl_Input](#) - A one-line text input field.
- [Fl_Output](#) - A one-line text output field.
- [Fl_Multiline_Input](#) - A multi-line text input field.
- [Fl_Multiline_Output](#) - A multi-line text output field.
- [Fl_Text_Display](#) - A multi-line text display widget.
- [Fl_Text_Editor](#) - A multi-line text editing widget.
- [Fl_Help_View](#) - A HTML text display widget.

The [Fl_Output](#) and [Fl_Multiline_Output](#) widgets allow the user to copy text from the output field but not change it.

The `value()` method is used to get or set the string that is displayed:

```
Fl_Input *input = new Fl_Input(x, y, width, height, "label");
input->value("Now is the time for all good men...");
```

The string is copied to the widget's own storage when you set the `value()` of the widget.

The [Fl_Text_Display](#) and [Fl_Text_Editor](#) widgets use an associated [Fl_Text_Buffer](#) class for the value, instead of a simple string.

5.3 Valuators

Unlike text widgets, valuators keep track of numbers instead of strings. FLTK provides the following valuators:

- [Fl_Counter](#) - A widget with arrow buttons that shows the current value.
- [Fl_Dial](#) - A round knob.
- [Fl_Roller](#) - An SGI-like dolly widget.
- [Fl_Scrollbar](#) - A standard scrollbar widget.
- [Fl_Slider](#) - A scrollbar with a knob.
- [Fl_Value_Slider](#) - A slider that shows the current value.

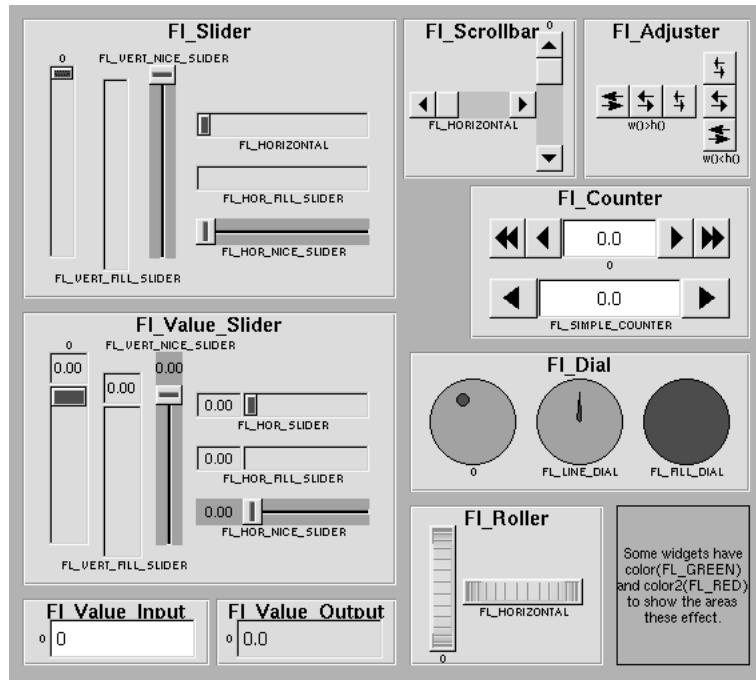


Figure 5.2: FLTK valuator widgets

The `value()` method gets and sets the current value of the widget. The `minimum()` and `maximum()` methods set the range of values that are reported by the widget.

5.4 Groups

The `Fl_Group` widget class is used as a general purpose "container" widget. Besides grouping radio buttons, the groups are used to encapsulate windows, tabs, and scrolled windows. The following group classes are available with FLTK:

- [Fl_Double_Window](#) - A double-buffered window on the screen.
- [Fl_Gl_Window](#) - An OpenGL window on the screen.
- [Fl_Group](#) - The base container class; can be used to group any widgets together.
- [Fl_Pack](#) - A collection of widgets that are packed into the group area.
- [Fl_Scroll](#) - A scrolled window area.
- [Fl_Tabs](#) - Displays child widgets as tabs.
- [Fl_Tile](#) - A tiled window area.
- [Fl_Window](#) - A window on the screen.
- [Fl_Wizard](#) - Displays one group of widgets at a time.

5.5 Setting the Size and Position of Widgets

The size and position of widgets is usually set when you create them. You can access them with the `x()`, `y()`, `w()`, and `h()` methods.

You can change the size and position by using the `position()`, `resize()`, and `size()` methods:

```
button->position(x, y);
group->resize(x, y, width, height);
window->size(width, height);
```

If you change a widget's size or position after it is displayed you will have to call `redraw()` on the widget's parent.

5.6 Colors

FLTK stores the colors of widgets as an 32-bit unsigned number that is either an index into a color palette of 256 colors or a 24-bit RGB color. The color palette is *not* the X or WIN32 colormap, but instead is an internal table with fixed contents.

There are symbols for naming some of the more common colors:

- `FL_BLACK`
- `FL_RED`
- `FL_GREEN`
- `FL_YELLOW`
- `FL_BLUE`
- `FL_MAGENTA`
- `FL_CYAN`
- `FL_WHITE`
- `FL_WHITE`

These symbols are the default colors for all FLTK widgets. They are explained in more detail in the chapter [Enumerations](#)

- `FL_FOREGROUND_COLOR`
- `FL_BACKGROUND_COLOR`
- `FL_INACTIVE_COLOR`
- `FL_SELECTION_COLOR`

RGB colors can be set using the `fl_rgb_color()` function:

```
Fl_Color c = fl_rgb_color(85, 170, 255);
```

The widget color is set using the `color()` method:

```
button->color(FL_RED);
```

Similarly, the label color is set using the `labelcolor()` method:

```
button->labelcolor(FL_WHITE);
```

5.7 Box Types

The type `Fl_Boxtype` stored and returned in `Fl_Widget::box()` is an enumeration defined in [Enumerations.H](#).

Figure 3-3 shows the standard box types included with FLTK.

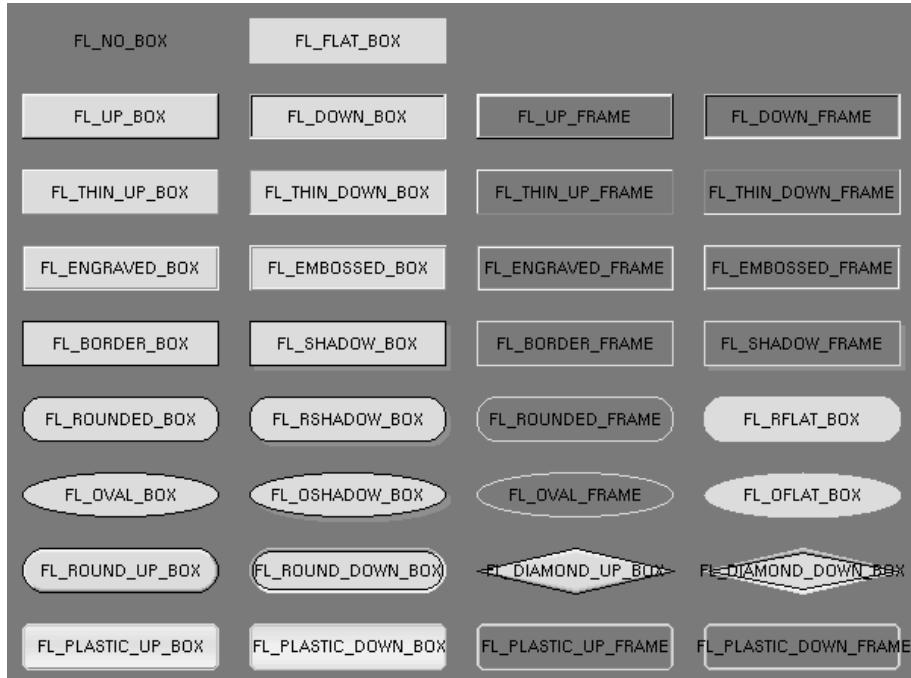


Figure 5.3: FLTK box types

`FL_NO_BOX` means nothing is drawn at all, so whatever is already on the screen remains. The `FL_..._FRAME` types only draw their edges, leaving the interior unchanged. The blue color in Figure 3-3 is the area that is not drawn by the frame types.

5.7.1 Box Types

You can define your own boxtypes by making a small function that draws the box and adding it to the table of boxtypes.

Note:

This interface has changed in FLTK 2.0!

The Drawing Function

The drawing function is passed the bounding box and background color for the widget:

```
void xyz_draw(int x, int y, int w, int h, Fl_Color c) {  
    ...  
}
```

A simple drawing function might fill a rectangle with the given color and then draw a black outline:

```
void xyz_draw(int x, int y, int w, int h, Fl_Color c) {  
    fl_color(c);  
    fl_rectf(x, y, w, h);  
    fl_color(FL_BLACK);  
    fl_rect(x, y, w, h);  
}
```

Fl_Boxtype fl_down(Fl_Boxtype)

`fl_down` returns the "pressed" or "down" version of a box. If no "down" version of a given box exists, the behavior of this function is undefined and some random box or frame is returned. See also: [fl_frame drawing](#).

Fl_Boxtype fl_frame(Fl_Boxtype)

`fl_frame` returns the unfilled, frame-only version of a box. If no frame version of a given box exists, the behavior of this function is undefined and some random box or frame is returned. See also: [fl_frame drawing](#).

Fl_Boxtype fl_box(Fl_Boxtype)

`fl_box` returns the filled version of a frame. If no filled version of a given frame exists, the behavior of this function is undefined and some random box or frame is returned. See also: [fl_frame](#).

Adding Your Box Type

The `Fl::set_boxtype()` method adds or replaces the specified box type:

```
#define XYZ_BOX FL_FREE_BOXTYPE
Fl::set_boxtype(XYZ_BOX, xyz_draw, 1, 1, 2, 2);
```

The last 4 arguments to `Fl::set_boxtype()` are the offsets for the x, y, width, and height values that should be subtracted when drawing the label inside the box.

A complete box design contains four box types in this order: a filled, neutral box (UP_BOX), a filled, depressed box (DOWN_BOX), and the same as outlines only (UP_FRAME and DOWN_FRAME). The function `fl_down(Fl_Boxtype)` expects the neutral design on a boxtyle with a numerical value evenly divideable by two. `fl_frame(Fl_Boxtype)` expects the UP_BOX design at a value divideable by four.

5.8 Labels and Label Types

The `label()`, `align()`, `labelfont()`, `labelsize()`, `labeltype()`, `image()`, and `deimage()` methods control the labeling of widgets.

label()

The `label()` method sets the string that is displayed for the label. Symbols can be included with the label string by escaping them using the "@" symbol - "@@" displays a single at sign. Figure 3-4 shows the available symbols.

The @ sign may also be followed by the following optional "formatting" characters, in this order:

- '#' forces square scaling, rather than distortion to the widget's shape.
- +[1-9] or -[1-9] tweaks the scaling a little bigger or smaller.
- '\$' flips the symbol horizontally, " flips it vertically.
- [0-9] - rotates by a multiple of 45 degrees. '5' and '6' do no rotation while the others point in the direction of that key on a numeric keypad. '0', followed by four more digits rotates the symbol by that amount in degrees.

Thus, to show a very large arrow pointing downward you would use the label string "@+92 → ".

align()

The `align()` method positions the label. The following constants are defined and may be OR'd together as needed:

- `FL_ALIGN_CENTER` - center the label in the widget.
- `FL_ALIGN_TOP` - align the label at the top of the widget.

- `FL_ALIGN_BOTTOM` - align the label at the bottom of the widget.
- `FL_ALIGN_LEFT` - align the label to the left of the widget.
- `FL_ALIGN_RIGHT` - align the label to the right of the widget.
- `FL_ALIGN_INSIDE` - align the label inside the widget.
- `FL_ALIGN_CLIP` - clip the label to the widget's bounding box.
- `FL_ALIGN_WRAP` - wrap the label text as needed.
- `FL_TEXT_OVER_IMAGE` - show the label text over the image.
- `FL_IMAGE_OVER_TEXT` - show the label image over the text (default).

labeltype()

The `labeltype()` method sets the type of the label. The following standard label types are included:

- `FL_NORMAL_LABEL` - draws the text.
- `FL_NO_LABEL` - does nothing.
- `FL_SHADOW_LABEL` - draws a drop shadow under the text.
- `FL_ENGRAVED_LABEL` - draws edges as though the text is engraved.
- `FL_EMBOSS_LABEL` - draws edges as though the text is raised.
- `FL_ICON_LABEL` - draws the icon associated with the text.

image() and deimage()

The `image()` and `deimage()` methods set an image that will be displayed with the widget. The `deimage()` method sets the image that is shown when the widget is inactive, while the `image()` method sets the image that is shown when the widget is active.

To make an image you use a subclass of `F1_Image`.

Making Your Own Label Types

Label types are actually indexes into a table of functions that draw them. The primary purpose of this is to use this to draw the labels in ways inaccessible through the `f1_font` mechanism (e.g. `FL_ENGRAVED_LABEL`) or with program-generated letters or symbology.

Note:

This interface has changed in FLTK 2.0!

Label Type Functions

To setup your own label type you will need to write two functions: one to draw and one to measure the label. The draw function is called with a pointer to a `F1_Label` structure containing the label information, the bounding box for the label, and the label alignment:

```
void xyz_draw(const F1_Label *label, int x, int y, int w, int h, F1_Align align) {
...
}
```

The label should be drawn *inside* this bounding box, even if `FL_ALIGN_INSIDE` is not enabled. The function is not called if the label value is NULL.

The measure function is called with a pointer to a `F1_Label` structure and references to the width and height:

```
void xyz_measure(const F1_Label *label, int &w, int &h) {
...
}
```

The function should measure the size of the label and set `w` and `h` to the size it will occupy.

Adding Your Label Type

The `F1::set_labeltype` method creates a label type using your draw and measure functions:

```
#define XYZ_LABEL FL_FREELABELTYPE
F1::set_labeltype(XYZ_LABEL, xyz_draw, xyz_measure);
```

The label type number `n` can be any integer value starting at the constant `FL_FREELABELTYPE`. Once you have added the label type you can use the `labeltype()` method to select your label type.

The `F1::set_labeltype` method can also be used to overload an existing label type such as `FL_NORMAL_LABEL`.

Making your own symbols

It is also possible to define your own drawings and add them to the symbol list, so they can be rendered as part of any label.

To create a new symbol, you implement a drawing function `void drawit(F1_Color c)` which typically uses the `complex drawing functions` to generate a vector shape inside a two-by-two units sized box around the origin. This function is then linked into the symbols table using `fl_add_symbol`:

```
int fl_add_symbol(const char *name, void (*drawit)(F1_Color), int scalable)
```

name is the name of the symbol without the "@"; *scalable* must be set to 1 if the symbol is generated using scalable vector drawing functions.

```
int fl_draw_symbol(const char *name,int x,int y,int w,int h,Fl_Color col)
```

This function draws a named symbol fitting the given rectangle.

5.9 Callbacks

Callbacks are functions that are called when the value of a widget changes. A callback function is sent a [Fl_Widget](#) pointer of the widget that changed and a pointer to data that you provide:

```
void xyz_callback(Fl_Widget *w, void *data) {
...
}
```

The `callback()` method sets the callback function for a widget. You can optionally pass a pointer to some data needed for the callback:

```
int xyz_data;
button->callback(xyz_callback, &xyz_data);
```

Normally callbacks are performed only when the value of the widget changes. You can change this using the [Fl_Widget::when\(\)](#) method:

```
button->when(FL_WHEN_NEVER);
button->when(FL_WHEN_CHANGED);
button->when(FL_WHEN_RELEASE);
button->when(FL_WHEN_RELEASE_ALWAYS);
button->when(FL_WHEN_ENTER_KEY);
button->when(FL_WHEN_ENTER_KEY_ALWAYS);
button->when(FL_WHEN_CHANGED | FL_WHEN_NOT_CHANGED);
```

Note:

You cannot delete a widget inside a callback, as the widget may still be accessed by FLTK after your callback is completed. Instead, use the [Fl::delete_widget\(\)](#) method to mark your widget for deletion when it is safe to do so.

Hint:

Many programmers new to FLTK or C++ try to use a non-static class method instead of a static class method or function for their callback. Since callbacks are done outside a C++ class, the `this` pointer is not initialized for class methods.

To work around this problem, define a static method in your class that accepts a pointer to the class, and then have the static method call the class method(s) as needed. The data pointer you provide to the `callback()` method of the widget can be a pointer to the instance of your class.

```
class Foo {
    void my_callback(Fl_Widget *w);
    static void my_static_callback(Fl_Widget *w, void *f) { ((Foo *)f)->my_callback(w); }
    ...
}
...
w->callback(my_static_callback, (void *)this);
```

5.10 Shortcuts

Shortcuts are key sequences that activate widgets such as buttons or menu items. The `shortcut()` method sets the shortcut for a widget:

```
button->shortcut(FL_Enter);
button->shortcut(FL_SHIFT + 'b');
button->shortcut(FL_CTRL + 'b');
button->shortcut(FL_ALT + 'b');
button->shortcut(FL_CTRL + FL_ALT + 'b');
button->shortcut(0); // no shortcut
```

The `shortcut` value is the key event value - the ASCII value or one of the special keys like `FL_Enter` - combined with any modifiers like Shift, Alt, and Control.

Chapter 6

5 - Drawing Things in FLTK

This chapter covers the drawing functions that are provided with FLTK.

6.1 When Can You Draw Things in FLTK?

There are only certain places you can execute drawing code in FLTK. Calling these functions at other places will result in undefined behavior!

- The most common place is inside the virtual `Fl_Widget::draw()` method. To write code here, you must subclass one of the existing `Fl_Widget` classes and implement your own version of `draw()`.
- The most common place is inside the virtual method `Fl_Widget::draw()`. To write code here, you must subclass one of the existing `Fl_Widget` classes and implement your own version of `draw()`.
- You can also write `boxtypes` and `labeltypes`. These are small procedures that can be called by existing `Fl_Widget::draw()` methods. These "types" are identified by an 8-bit index that is stored in the widget's `box()`, `labeltype()`, and possibly other properties.
- You can call `Fl_Window::make_current()` to do incremental update of a widget. Use `Fl_Widget::window()` to find the window.

6.2 Drawing Functions

To use the drawing functions you must first include the `<FL/fl_draw.H>` header file. FLTK provides the following types of drawing functions:

- [Boxes](#)
- [Clipping](#)
- [Colors](#)
- [Line Dashes and Thickness](#)
- [Drawing Fast Shapes](#)
- [Drawing Complex Shapes](#)
- [Drawing Text](#)
- [Image Classes](#)
- [Drawing Overlays](#)
- [Offscreen Drawing](#)

6.2.1 Boxes

FLTK provides three functions that can be used to draw boxes for buttons and other UI controls. Each function uses the supplied upper-lefthand corner and width and height to determine where to draw the box.

```
void fl_draw_box(Fl_Boxtype b, int x, int y, int w, int h, Fl_Color c);
```

The first box drawing function is `fl_draw_box()` which draws a standard boxtyle *b* in the specified color *c*.

```
void fl_frame(const char *s, int x, int y, int w, int h)
```

The `fl_frame()` function draws a series of line segments around the given box. The string *s* must contain groups of 4 letters which specify one of 24 standard grayscale values, where 'A' is black and 'X' is white. The order of each set of 4 characters is: top, left, bottom, right. The results of calling `fl_frame()` with a string that is not a multiple of 4 characters in length are undefined.

The only difference between this function and `fl_frame2()` is the order of the line segments.

See also: `fl_frame boxtype`.

```
void fl_frame2(const char *s, int x, int y, int w, int h);
```

The `fl_frame2()` function draws a series of line segments around the given box. The string *s* must contain groups of 4 letters which specify one of 24 standard grayscale values, where 'A' is black and 'X' is white. The order of each set of 4 characters is: bottom, right, top, left. The results of calling `fl_frame2()` with a string that is not a multiple of 4 characters in length are undefined.

The only difference between this function and `fl_frame()` is the order of the line segments.

6.2.2 Clipping

You can limit all your drawing to a rectangular region by calling `fl_push_clip()`, and put the drawings back by using `fl_pop_clip()`. This rectangle is measured in pixels and is unaffected by the current transformation matrix.

In addition, the system may provide clipping when updating windows which may be more complex than a simple rectangle.

```
void fl_clip(int x, int y, int w, int h)
```

```
void fl_push_clip(int x, int y, int w, int h)
```

Intersect the current clip region with a rectangle and push this new region onto the stack. The `fl_clip()` name is deprecated and will be removed from future releases.

```
void fl_push_no_clip()
```

Pushes an empty clip region on the stack so nothing will be clipped.

```
void fl_pop_clip()
```

Restore the previous clip region.

Note: You must call `fl_pop_clip()` once for every time you call `fl_push_clip()`. If you return to FLTK with the clip stack not empty unpredictable results occur.

```
int fl_not_clipped(int x, int y, int w, int h)
```

Returns non-zero if any of the rectangle intersects the current clip region. If this returns 0 you don't have to draw the object.

Note: Under X this returns 2 if the rectangle is partially clipped, and 1 if it is entirely inside the clip region.

```
int fl_clip_box(int x, int y, int w, int h, int &X, int &Y, int &W, int &H)
```

Intersect the rectangle `x, y, w, h` with the current clip region and returns the bounding box of the result in `X, Y, W, H`. Returns non-zero if the resulting rectangle is different than the original. This can be used to limit the necessary drawing to a rectangle. `W` and `H` are set to zero if the rectangle is completely outside the region.

```
void fl_clip_region(Fl_Region r)
Fl_Region fl_clip_region()
```

Replace the top of the clip stack with a clipping region of any shape. `Fl_Region` is an operating system specific type. The second form returns the current clipping region.

6.3 Colors

FLTK manages colors as 32-bit unsigned integers. Values from 0 to 255 represent colors from the FLTK 1.0.x standard colormap and are allocated as needed on screens without TrueColor support. The `Fl_Color` enumeration type defines the standard colors and color cube for the first 256 colors. All of these are named with symbols in `<FL/Enumerations.H>`.

Color values greater than 255 are treated as 24-bit RGB values. These are mapped to the closest color supported by the screen, either from one of the 256 colors in the FLTK 1.0.x colormap or a direct RGB value on TrueColor screens. You can generate 24-bit RGB color values using the `fl_rgb_color()` function.

```
void fl_color(Fl_Color)
```

Sets the color for all subsequent drawing operations.

For colormapped displays, a color cell will be allocated out of `fl_colormap` the first time you use a color. If the colormap fills up then a least-squares algorithm is used to find the closest color.

`Fl_Color fl_color()`

Returns the last `fl_color()` that was set. This can be used for state save/restore.

`void fl_color(uchar r, uchar g, uchar b)`

Set the color for all subsequent drawing operations. The closest possible match to the RGB color is used. The RGB color is used directly on TrueColor displays. For colormap visuals the nearest index in the gray ramp or color cube is used.

6.3.1 Line Dashes and Thickness

FLTK supports drawing of lines with different styles and widths. Full functionality is not available under Windows 95, 98, and Me due to the reduced drawing functionality these operating systems provide.

`void fl_line_style(int style, int width=0, char* dashes=0)`

Set how to draw lines (the "pen"). If you change this it is your responsibility to set it back to the default with `fl_line_style(0)`.

Note: Because of how line styles are implemented on WIN32 systems, you *must* set the line style *after* setting the drawing color. If you set the color after the line style you will lose the line style settings!

`style` is a bitmask which is a bitwise-OR of the following values. If you don't specify a dash type you will get a solid line. If you don't specify a cap or join type you will get a system-defined default of whatever value is fastest.

- `FL_SOLID` -----
- `FL_DASH` - - - -
- `FL_DOT`
- `FL_DASHDOT` - . - .
- `FL_DASHDOTDOT` - .. -
- `FL_CAP_FLAT`
- `FL_CAP_ROUND`
- `FL_CAP_SQUARE` (extends past end point 1/2 line width)
- `FL_JOIN_MITER` (pointed)

- `FL_JOIN_ROUND`
- `FL_JOIN_BEVEL (flat)`

`width` is the number of pixels thick to draw the lines. Zero results in the system-defined default, which on both X and Windows is somewhat different and nicer than 1.

`dashes` is a pointer to an array of dash lengths, measured in pixels. The first location is how long to draw a solid portion, the next is how long to draw the gap, then the solid, etc. It is terminated with a zero-length entry. A NULL pointer or a zero-length array results in a solid line. Odd array sizes are not supported and result in undefined behavior.

Note:

The dashes array does not work under Windows 95, 98, or Me, since those operating systems do not support complex line styles.

6.3.2 Drawing Fast Shapes

These functions are used to draw almost all the FLTK widgets. They draw on exact pixel boundaries and are as fast as possible. Their behavior is duplicated exactly on all platforms FLTK is ported. It is undefined whether these are affected by the `transformation matrix`, so you should only call these while the matrix is set to the identity matrix (the default).

`void fl_point(int x, int y)`

Draw a single pixel at the given coordinates.

`void fl_rectf(int x, int y, int w, int h)`

`void fl_rectf(int x, int y, int w, int h)`

Color a rectangle that exactly fills the given bounding box.

`void fl_rectf(int x, int y, int w, int h, uchar r, uchar g, uchar b)`

Color a rectangle with "exactly" the passed `r, g, b` color. On screens with less than 24 bits of color this is done by drawing a solid-colored block using `fl_draw_image()` so that the correct color shade is produced.

`void fl_rect(int x, int y, int w, int h)`

`void fl_rect(int x, int y, int w, int h, Fl_Color c)`

Draw a 1-pixel border *inside* this bounding box.

`void fl_line(int x, int y, int x1, int y1)`

`void fl_line(int x, int y, int x1, int y1, int x2, int y2)`

Draw one or two lines between the given points.

```
void fl_loop(int x, int y, int x1, int y1, int x2, int y2)  
void fl_loop(int x, int y, int x1, int y1, int x2, int y2, int x3, int y3)
```

Outline a 3 or 4-sided polygon with lines.

```
void fl_polygon(int x, int y, int x1, int y1, int x2, int y2)  
void fl_polygon(int x, int y, int x1, int y1, int x2, int y2, int x3, int y3)
```

Fill a 3 or 4-sided polygon. The polygon must be convex.

```
void fl_xyline(int x, int y, int x1)  
void fl_xyline(int x, int y, int x1, int y2)  
void fl_xyline(int x, int y, int x1, int y2, int x3)
```

Draw horizontal and vertical lines. A horizontal line is drawn first, then a vertical, then a horizontal.

```
void fl_yxline(int x, int y, int y1)  
void fl_yxline(int x, int y, int y1, int x2)  
void fl_yxline(int x, int y, int y1, int x2, int y3)
```

Draw vertical and horizontal lines. A vertical line is drawn first, then a horizontal, then a vertical.

```
void fl_arc(int x, int y, int w, int h, double a1, double a2)  
void fl_pie(int x, int y, int w, int h, double a1, double a2)
```

Draw ellipse sections using integer coordinates. These functions match the rather limited circle drawing code provided by X and WIN32. The advantage over using `fl_arc` with floating point coordinates is that they are faster because they often use the hardware, and they draw much nicer small circles, since the small sizes are often hard-coded bitmaps.

If a complete circle is drawn it will fit inside the passed bounding box. The two angles are measured in degrees counterclockwise from 3'oclock and are the starting and ending angle of the arc, `a2` must be greater or equal to `a1`.

`fl_arc()` draws a series of lines to approximate the arc. Notice that the integer version of `fl_arc()` has a different number of arguments than the `fl_arc()` function described later in this chapter.

`fl_pie()` draws a filled-in pie slice. This slice may extend outside the line drawn by `fl_arc()`; to avoid this use `w = 1` and `h = 1`.

```
void fl_scroll(int X, int Y, int W, int H, int dx, int dy, void (*draw_area)(void*, int,int,int,int), void* data)
```

Scroll a rectangle and draw the newly exposed portions. The contents of the rectangular area is first shifted by `dx` and `dy` pixels. The callback is then called for every newly exposed rectangular area,

6.3.3 Drawing Complex Shapes

The complex drawing functions let you draw arbitrary shapes with 2-D linear transformations. The functionality matches that found in the Adobe®PostScript™language. The exact pixels that are filled are less defined than for the fast drawing functions so that FLTK can take advantage of drawing hardware. On both X and WIN32 the transformed vertices are rounded to integers before drawing the line segments: this severely limits the accuracy of these functions for complex graphics, so use OpenGL when greater accuracy and/or performance is required.

```
void fl_push_matrix()
void fl_pop_matrix()
```

Save and restore the current transformation. The maximum depth of the stack is 4.

```
void fl_scale(float x, float y)
void fl_scale(float x)
void fl_translate(float x, float y)
void fl_rotate(float d)
void fl_mult_matrix(float a, float b, float c, float d, float x, float y)
```

Concatenate another transformation onto the current one. The rotation angle is in degrees (not radians) and is counter-clockwise.

```
double fl_transform_x(double x, double y)
double fl_transform_y(double x, double y)
double fl_transform_dx(double x, double y)
double fl_transform_dy(double x, double y)
void fl_transformed_vertex(double xf, double yf)
```

Transform a coordinate or a distance trough the current transformation matrix. After transforming a coordinate pair, it can be added to the vertex list without any further translations using `fl_transformed_vertex`.

```
void fl_begin_points()
void fl_end_points()
```

Start and end drawing a list of points. Points are added to the list with `fl_vertex`.

```
void fl_begin_line()
void fl_end_line()
```

Start and end drawing lines.

```
void fl_begin_loop()  
void fl_end_loop()
```

Start and end drawing a closed sequence of lines.

```
void fl_begin_polygon()  
void fl_end_polygon()
```

Start and end drawing a convex filled polygon.

```
void fl_begin_complex_polygon()  
void fl_gap()  
void fl_end_complex_polygon()
```

Start and end drawing a complex filled polygon. This polygon may be concave, may have holes in it, or may be several disconnected pieces. Call `fl_gap()` to separate loops of the path. It is unnecessary but harmless to call `fl_gap()` before the first vertex, after the last one, or several times in a row.

Note: For portability, you should only draw polygons that appear the same whether "even/odd" or "non-zero" winding rules are used to fill them. Holes should be drawn in the opposite direction of the outside loop.

`fl_gap()` should only be called between `fl_begin_complex_polygon()` and `fl_end_complex_polygon()`. To outline the polygon, use `fl_begin_loop()` and replace each `fl_gap()` with `fl_end_loop();fl_begin_loop()`.

```
void fl_vertex(float x, float y)
```

Add a single vertex to the current path.

```
void fl_curve(float x, float y, float x1, float y1, float x2, float y2, float x3, float y3)
```

Add a series of points on a Bezier curve to the path. The curve ends (and two of the points) are at `x`, `y` and `x3`, `y3`.

```
void fl_arc(float x, float y, float r, float start, float end)
```

Add a series of points to the current path on the arc of a circle; you can get elliptical paths by using scale and rotate before calling `fl_arc()`. `x`, `y` are the center of the circle, and `r` is its radius. `fl_arc()` takes `start` and `end` angles that are measured in degrees counter-clockwise from 3 o'clock. If `end` is less than `start` then it draws the arc in a clockwise direction.

```
void fl_circle(float x, float y, float r)
```

`fl_circle()` is equivalent to `fl_arc(...,0,360)` but may be faster. It must be the *only* thing in the path: if you want a circle as part of a complex polygon you must use `fl_arc()`.

Note: `fl_circle()` draws incorrectly if the transformation is both rotated and non-square scaled.

6.3.4 Drawing Text

All text is drawn in the `current font`. It is undefined whether this location or the characters are modified by the current transformation.

```
void fl_draw(const char *, int x, int y)
void fl_draw(const char *, int n, int x, int y)
```

Draw a nul-terminated string or an array of n characters starting at the given location. Text is aligned to the left and to the baseline of the font. To align to the bottom, subtract `fl_descent()` from y. To align to the top, subtract `fl_descent()` and add `fl_height()`. This version of `fl_draw` provides direct access to the text drawing function of the underlying OS. It does not apply any special handling to control characters.

```
void fl_draw(const char *, int x, int y, int w, int h, Fl_Align align, Fl_Image *img = 0, int draw_symbols = 1)
```

Fancy string drawing function which is used to draw all the labels. The string is formatted and aligned inside the passed box. Handles '\t' and '\n', expands all other control characters to ^X, and aligns inside or against the edges of the box described by x, y, w and h. See `Fl_Widget::align()` for values for align. The value `FL_ALIGN_INSIDE` is ignored, as this function always prints inside the box.

If `img` is provided and is not `NULL`, the image is drawn above or below the text as specified by the align value.

The `draw_symbols` argument specifies whether or not to look for symbol names starting with the "@" character.

The text length is limited to 1024 caracters per line.

```
void fl_measure(const char *, int &w, int &h, int draw_symbols = 1)
```

Measure how wide and tall the string will be when printed by the `fl_draw(...,align)` function. If the incoming `w` is non-zero it will wrap to that width.

```
int fl_height()
```

Recommended minimum line spacing for the current font. You can also just use the value of `size` passed to `fl_font()`.

```
int fl_descent()
```

Recommended distance above the bottom of a fl_height() tall box to draw the text at so it looks centered vertically in that box.

```
float fl_width(const char*)
float fl_width(const char*, int n)
float fl_width(uchar)
```

Return the pixel width of a nul-terminated string, a sequence of n characters, or a single character in the current font.

```
const char *fl_shortcut_label(ulong)
```

Unparse a shortcut value as used by [Fl_Button](#) or [Fl_Menu_Item](#) into a human-readable string like "Alt+N". This only works if the shortcut is a character key or a numbered function key. If the shortcut is zero an empty string is returned. The return value points at a static buffer that is overwritten with each call.

6.3.5 Fonts

FLTK supports a set of standard fonts based on the Times, Helvetica/Arial, Courier, and Symbol typefaces, as well as custom fonts that your application may load. Each font is accessed by an index into a font table.

Initially only the first 16 faces are filled in. There are symbolic names for them: FL_HELVETICA, FL_TIMES, FL_COURIER, and modifier values FL_BOLD and FL_ITALIC which can be added to these, and FL_SYMBOL and FL_ZAPF_DINGBATS. Faces greater than 255 cannot be used in [Fl_Widget](#) labels, since [Fl_Widget](#) stores the index as a byte.

```
void fl_font(int face, int size)
```

Set the current font, which is then used by the routines described above. You may call this outside a draw context if necessary to call fl_width(), but on X this will open the display.

The font is identified by a `face` and a `size`. The size of the font is measured in pixels and not "points". Lines should be spaced `size` pixels apart or more.

```
int fl_font()
int fl_size()
```

Returns the face and size set by the most recent call to fl_font(a,b). This can be used to save/restore the font.

6.3.6 Character Encoding

FLTK 1 supports western character sets using the eight bit encoding of the user-selected global code page. For MS Windows and X11, the code page is assumed to be Windows-1252/Latin1, a superset to ISO 8859-1. On Mac OS X, we assume MacRoman.

FLTK provides the functions `fl_latin1_to_local()`, `fl_local_to_latin1()`, `fl_mac_roman_to_local()`, and `fl_local_to_mac_roman()` to convert strings between both encodings. These functions are only required if your source code contains "C"-strings with international characters and if this source will be compiled on multiple platforms.

Assuming that the following source code was written on MS Windows, this example will output the correct label on OS X and X11 as well. Without the conversion call, the label on OS X would read `Fahrvergngen` with a deformed umlaut u ("cedille", html "¸").

```
btn = new Fl_Button(10, 10, 300, 25);
btn->copy_label(fl_latin1_to_local("Fahrvergnügen"));
```

Note:

If your application uses characters that are not part of both encodings, or it will be used in areas that commonly use different code pages, you might consider upgrading to FLTK 2 which supports UTF-8 encoding.

Todo

drawing.dox: I fixed the above encoding problem of these ¸ and umlaut characters, but this text is obsoleted by FLTK 1.3 with utf-8 encoding, or must be rewritten accordingly: How to use native (e.g. Windows "ANSI", or ISO-8859-x) encoding in embedded strings for labels, error messages and more. Please check this (utf-8) encoding on different OS'es and with different language and font environments.

For more information about character encoding, unicode and utf-8 see chapter [11 - Unicode and utf-8 Support](#).

6.3.7 Drawing Overlays

These functions allow you to draw interactive selection rectangles without using the overlay hardware. FLTK will XOR a single rectangle outline over a window.

```
void fl_overlay_rect(int x, int y, int w, int h);
void fl_overlay_clear();
```

`fl_overlay_rect()` draws a selection rectangle, erasing any previous rectangle by XOR'ing it first. `fl_overlay_clear()` will erase the rectangle without drawing a new one.

Using these functions is tricky. You should make a widget with both a `handle()` and `draw()` method. `draw()` should call `fl_overlay_clear()` before doing anything else. Your `handle()` method should call `window()->make_current()` and then `fl_overlay_rect()` after `FL_DRAG` events, and should call `fl_overlay_clear()` after a `FL_RELEASE` event.

6.4 Drawing Images

To draw images, you can either do it directly from data in your memory, or you can create a [Fl_Image](#) object. The advantage of drawing directly is that it is more intuitive, and it is faster if the image data changes more often than it is redrawn. The advantage of using the object is that FLTK will cache translated forms of the image (on X it uses a server pixmap) and thus redrawing is *much* faster.

6.4.1 Direct Image Drawing

The behavior when drawing images when the current transformation matrix is not the identity is not defined, so you should only draw images when the matrix is set to the identity.

```
void fl_draw_image(const uchar *, int X, int Y, int W, int H, int D = 3, int LD = 0)
void fl_draw_image_mono(const uchar *, int X, int Y, int W, int H, int D = 1, int LD = 0)
```

Draw an 8-bit per color RGB or luminance image. The pointer points at the "r" data of the top-left pixel. Color data must be in *r, g, b* order. *X, Y* are where to put the top-left corner. *W* and *H* define the size of the image. *D* is the delta to add to the pointer between pixels, it may be any value greater or equal to 3, or it can be negative to flip the image horizontally. *LD* is the delta to add to the pointer between lines (if 0 is passed it uses *W * D*), and may be larger than *W * D* to crop data, or negative to flip the image vertically.

It is highly recommended that you put the following code before the first `show()` of *any* window in your program to get rid of the dithering if possible:

```
Fl::visual(FL_RGB);
```

Gray scale (1-channel) images may be drawn. This is done if `abs(D)` is less than 3, or by calling `fl_draw_image_mono()`. Only one 8-bit sample is used for each pixel, and on screens with different numbers of bits for red, green, and blue only gray colors are used. Setting *D* greater than 1 will let you display one channel of a color image.

Note: The X version does not support all possible visuals. If FLTK cannot draw the image in the current visual it will abort. FLTK supports any visual of 8 bits or less, and all common TrueColor visuals up to 32 bits.

```
typedef void (*fl_draw_image_cb)(void *, int x, int y, int w, uchar *)
void fl_draw_image(fl_draw_image_cb, void *, int X, int Y, int W, int H, int D = 3)
void fl_draw_image_mono(fl_draw_image_cb, void *, int X, int Y, int W, int H, int D = 1)
```

Call the passed function to provide each scan line of the image. This lets you generate the image as it is being drawn, or do arbitrary decompression of stored data, provided it can be decompressed to individual scan lines easily.

The callback is called with the `void *` user data pointer which can be used to point at a structure of information about the image, and the *x, y*, and *w* of the scan line desired from the image. 0,0 is the

upper-left corner of the image, *not X, Y*. A pointer to a buffer to put the data into is passed. You must copy *w* pixels from scanline *y*, starting at pixel *x*, to this buffer.

Due to cropping, less than the whole image may be requested. So *x* may be greater than zero, the first *y* may be greater than zero, and *w* may be less than *W*. The buffer is long enough to store the entire *W * D* pixels, this is for convenience with some decompression schemes where you must decompress the entire line at once: decompress it into the buffer, and then if *x* is not zero, copy the data over so the *x*'th pixel is at the start of the buffer.

You can assume the *y*'s will be consecutive, except the first one may be greater than zero.

If *D* is 4 or more, you must fill in the unused bytes with zero.

```
int fl_draw_pixmap(char **data, int X, int Y, Fl_Color = FL_GRAY)
```

Draws XPM image data, with the top-left corner at the given position. The image is dithered on 8-bit displays so you won't lose color space for programs displaying both images and pixmaps. This function returns zero if there was any error decoding the XPM data.

To use an XPM, do:

```
#include "foo.xpm"
...
fl_draw_pixmap(foo, x, y);
```

Transparent colors are replaced by the optional *Fl_Color* argument. To draw with true transparency you must use the [Fl_Pixmap](#) class.

```
int fl_measure_pixmap(char **data, int &w, int &h)
```

An XPM image contains the dimensions in its data. This function finds and returns the width and height. The return value is non-zero if the dimensions were parsed ok and zero if there was any problem.

6.4.2 Direct Image Reading

FLTK provides a single function for reading from the current window or off-screen buffer into a RGB(A) image buffer.

```
uchar *fl_read_image(uchar *p, int X, int Y, int W, int H, int alpha = 0);
```

Read a RGB(A) image from the current window or off-screen buffer. The *p* argument points to a buffer that can hold the image and must be at least *W*H*3* bytes when reading RGB images and *W*H*4* bytes when reading RGBA images. If NULL, *fl_read_image()* will create an array of the proper size which can be freed using *delete []*.

The *alpha* parameter controls whether an alpha channel is created and the value that is placed in the alpha channel. If 0, no alpha channel is generated.

6.4.3 Image Classes

FLTK provides a base image class called [Fl_Image](#) which supports creating, copying, and drawing images of various kinds, along with some basic color operations. Images can be used as labels for widgets using the `image()` and `deimage()` methods or drawn directly.

The [Fl_Image](#) class does almost nothing by itself, but is instead supported by three basic image types:

- [Fl_Bitmap](#)
- [Fl_Pixmap](#)
- [Fl_RGB_Image](#)

The [Fl_Bitmap](#) class encapsulates a mono-color bitmap image. The `draw()` method draws the image using the current drawing color.

The [Fl_Pixmap](#) class encapsulates a colormapped image. The `draw()` method draws the image using the colors in the file, and masks off any transparent colors automatically.

The [Fl_RGB_Image](#) class encapsulates a full-color (or grayscale) image with 1 to 4 color components. Images with an even number of components are assumed to contain an alpha channel that is used for transparency. The transparency provided by the `draw()` method is either a 24-bit blend against the existing window contents or a "screen door" transparency mask, depending on the platform and screen color depth.

```
char fl_can_do_alpha_blending()
```

`fl_can_do_alpha_blending()` will return 1, if your platform supports true alpha blending for RGBA images, or 0, if FLTK will use screen door transparency.

FLTK also provides several image classes based on the three standard image types for common file formats:

- [Fl_GIF_Image](#)
- [Fl_JPEG_Image](#)
- [Fl_PNG_Image](#)
- [Fl_PNM_Image](#)
- [Fl_XBM_Image](#)
- [Fl_XPM_Image](#)

Each of these image classes load a named file of the corresponding format. The [Fl_Shared_Image](#) class can be used to load any type of image file - the class examines the file and constructs an image of the appropriate type.

Finally, FLTK provides a special image class called [Fl_Tiled_Image](#) to tile another image object in the specified area. This class can be used to tile a background image in a [Fl_Group](#) widget, for example.

```
virtual void copy();  
virtual void copy(int w, int h);
```

The `copy()` method creates a copy of the image. The second form specifies the new size of the image - the image is resized using the nearest-neighbor algorithm.

```
void draw(int x, int y, int w, int h, int ox = 0, int oy = 0);
```

The draw() method draws the image object. x, y, w, h indicates a destination rectangle. ox, oy, w, h is a source rectangle. This source rectangle is copied to the destination. The source rectangle may extend outside the image, i.e. ox and oy may be negative and w and h may be bigger than the image, and this area is left unchanged.

```
void draw(int x, int y)
```

Draws the image with the upper-left corner at x, y . This is the same as doing `draw(x,y,img->w(),img->h(),0,0)`.

6.4.4 Offscreen Drawing

Sometimes it can be very useful to generate a complex drawing in memory first and copy it to the screen at a later point in time. This technique can significantly reduce the amount of repeated drawing. [Fl_Double_Window](#) uses offscreen rendering to avoid flickering on systems that don't support double-buffering natively.

```
Fl_Offscreen fl_create_offscreen(int w, int h)
```

Create an RGB offscreen buffer with $w*h$ pixels.

```
void fl_delete_offscreen(Fl_Offscreen)
```

Delete a previously created offscreen buffer. All drawings are lost.

```
void fl_begin_offscreen(Fl_Offscreen)
```

Send all subsequent drawing commands to this offscreen buffer. FLTK can draw into a buffer at any time. There is no need to wait for an [Fl_Widget::draw\(\)](#) to occur.

```
void fl_end_offscreen()
```

Quit sending drawing commands to this offscreen buffer.

```
void fl_copy_offscreen(int x, int y, int w, int h, Fl_Offscreen osrc, int srcx, int srcy)
```

Copy a rectangular area of the size $w*h$ from $srcx, srcy$ in the offscreen buffer into the current buffer at x, y .

Chapter 7

4 - Designing a Simple Text Editor

This chapter takes you through the design of a simple FLTK-based text editor.

7.1 Determining the Goals of the Text Editor

Since this will be the first big project you'll be doing with FLTK, let's define what we want our text editor to do:

1. Provide a menubar/menus for all functions.
2. Edit a single text file, possibly with multiple views.
3. Load from a file.
4. Save to a file.
5. Cut/copy/delete/paste functions.
6. Search and replace functions.
7. Keep track of when the file has been changed.

7.2 Designing the Main Window

Now that we've outlined the goals for our editor, we can begin with the design of our GUI. Obviously the first thing that we need is a window, which we'll place inside a class called `EditorWindow`:

```
class EditorWindow : public Fl_Double_Window {
public:
    EditorWindow(int w, int h, const char* t);
    ~EditorWindow();

    Fl_Window      *replace_dlg;
    Fl_Input       *replace_find;
    Fl_Input       *replace_with;
    Fl_Button      *replace_all;
    Fl_Return_Button *replace_next;
    Fl_Button      *replace_cancel;

    Fl_Text_Editor *editor;
    char           search[256];
};
```

7.3 Variables

Our text editor will need some global variables to keep track of things:

```
int          changed = 0;
char         filename[256] = "";
Fl_Text_Buffer *textbuf;
```

The `textbuf` variable is the text editor buffer for our window class described previously. We'll cover the other variables as we build the application.

7.4 Menubars and Menus

The first goal requires us to use a menubar and menus that define each function the editor needs to perform. The `Fl_Menu_Item` structure is used to define the menus and items in a menubar:

```
Fl_Menu_Item menuitems[] = {
    { "&File", 0, 0, 0, FL_SUBMENU },
    { "&New File", 0, (Fl_Callback *)new_cb },
    { "&Open File...", FL_CTRL + 'o', (Fl_Callback *)open_cb },
    { "&Insert File...", FL_CTRL + 'i', (Fl_Callback *)insert_cb, 0, FL_MENU_DIVIDER },
    { "&Save File", FL_CTRL + 's', (Fl_Callback *)save_cb },
    { "&Save File &As...", FL_CTRL + FL_SHIFT + 's', (Fl_Callback *)saveas_cb, 0, FL_MENU_DIVIDER },
    { "New &View", FL_ALT + 'v', (Fl_Callback *)view_cb, 0 },
    { "&Close View", FL_CTRL + 'w', (Fl_Callback *)close_cb, 0, FL_MENU_DIVIDER },
    { "&Exit", FL_CTRL + 'q', (Fl_Callback *)quit_cb, 0 },
    { 0 },

    { "&Edit", 0, 0, 0, FL_SUBMENU },
    { "&Undo", FL_CTRL + 'z', (Fl_Callback *)undo_cb, 0, FL_MENU_DIVIDER },
    { "&Cu&t", FL_CTRL + 'x', (Fl_Callback *)cut_cb },
    { "&Copy", FL_CTRL + 'c', (Fl_Callback *)copy_cb },
    { "&Paste", FL_CTRL + 'v', (Fl_Callback *)paste_cb },
    { "&Delete", 0, (Fl_Callback *)delete_cb },
    { 0 },

    { "&Search", 0, 0, 0, FL_SUBMENU },
    { "&Find...", FL_CTRL + 'f', (Fl_Callback *)find_cb },
    { "Find Again", FL_CTRL + 'g', find2_cb },
    { "&Replace...", FL_CTRL + 'r', replace_cb },
    { "Re&place Again", FL_CTRL + 't', replace2_cb },
    { 0 },

    { 0 }
};
```

Once we have the menus defined we can create the `Fl_Menu_Bar` widget and assign the menus to it with:

```
Fl_Menu_Bar *m = new Fl_Menu_Bar(0, 0, 640, 30);
m->copy(menuitems);
```

We'll define the callback functions later.

7.5 Editing the Text

To keep things simple our text editor will use the `Fl_Text_Editor` widget to edit the text:

```
w->editor = new Fl_Text_Editor(0, 30, 640, 370);
w->editor->buffer(textbuf);
```

So that we can keep track of changes to the file, we also want to add a "modify" callback:

```
textbuf->add_modify_callback(changed_cb, w);
textbuf->call_modify_callbacks();
```

Finally, we want to use a mono-spaced font like `FL_COURIER`:

```
w->editor->textfont(FL_COURIER);
```

7.6 The Replace Dialog

We can use the FLTK convenience functions for many of the editor's dialogs, however the replace dialog needs its own custom window. To keep things simple we will have a "find" string, a "replace" string, and "replace all", "replace next", and "cancel" buttons. The strings are just `Fl_Input` widgets, the "replace all" and "cancel" buttons are `Fl_Button` widgets, and the "replace next" button is a `Fl_Return_Button` widget:

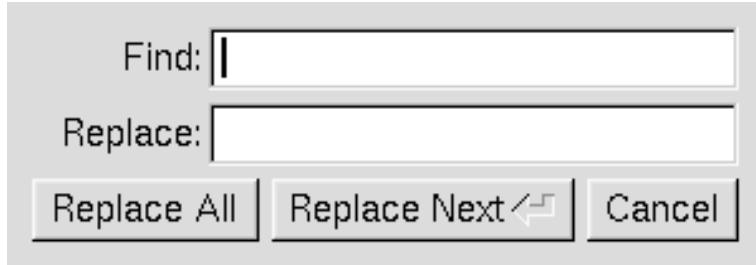


Figure 7.1: The search and replace dialog

```
Fl_Window *replace_dlg = new Fl_Window(300, 105, "Replace");
Fl_Input *replace_find = new Fl_Input(70, 10, 200, 25, "Find:");
Fl_Input *replace_with = new Fl_Input(70, 40, 200, 25, "Replace:");
Fl_Button *replace_all = new Fl_Button(10, 70, 90, 25, "Replace All");
Fl_Button *replace_next = new Fl_Button(105, 70, 120, 25, "Replace Next");
Fl_Button *replace_cancel = new Fl_Button(230, 70, 60, 25, "Cancel");
```

7.7 Callbacks

Now that we've defined the GUI components of our editor, we need to define our callback functions.

7.7.1 changed_cb()

This function will be called whenever the user changes any text in the `editor` widget:

```
void changed_cb(int, int nInserted, int nDeleted, int, const char*, void* v) {
    if ((nInserted || nDeleted) && !loading) changed = 1;
    EditorWindow *w = (EditorWindow *)v;
    set_title(w);
    if (loading) w->editor->show_insert_position();
}
```

The `set_title()` function is one that we will write to set the changed status on the current file. We're doing it this way because we want to show the changed status in the window's title bar.

7.7.2 copy_cb()

This callback function will call `kf_copy()` to copy the currently selected text to the clipboard:

```
void copy_cb(Fl_Widget*, void* v) {
    EditorWindow* e = (EditorWindow*)v;
    Fl_Text_Editor::kf_copy(0, e->editor);
}
```

7.7.3 cut_cb()

This callback function will call `kf_cut()` to cut the currently selected text to the clipboard:

```
void cut_cb(Fl_Widget*, void* v) {
    EditorWindow* e = (EditorWindow*)v;
    Fl_Text_Editor::kf_cut(0, e->editor);
}
```

7.7.4 delete_cb()

This callback function will call `remove_selection()` to delete the currently selected text to the clipboard:

```
void delete_cb(Fl_Widget*, void* v) {
    textbuf->remove_selection();
}
```

7.7.5 find_cb()

This callback function asks for a search string using the `fl_input()` convenience function and then calls the `find2_cb()` function to find the string:

```
void find_cb(Fl_Widget* w, void* v) {
    EditorWindow* e = (EditorWindow*)v;
    const char *val;

    val = fl_input("Search String:", e->search);
    if (val != NULL) {
        // User entered a string - go find it!
        strcpy(e->search, val);
        find2_cb(w, v);
    }
}
```

7.7.6 find2_cb()

This function will find the next occurrence of the search string. If the search string is blank then we want to pop up the search dialog:

```
void find2_cb(Fl_Widget* w, void* v) {
    EditorWindow* e = (EditorWindow*)v;
    if (e->search[0] == '\0') {
        // Search string is blank; get a new one...
        find_cb(w, v);
        return;
    }

    int pos = e->editor->insert_position();
    int found = textbuf->search_forward(pos, e->search, &pos);
    if (found) {
        // Found a match; select and update the position...
        textbuf->select(pos, pos+strlen(e->search));
        e->editor->insert_position(pos+strlen(e->search));
        e->editor->show_insert_position();
    }
    else fl_alert("No occurrences of '%s' found!", e->search);
}
```

If the search string cannot be found we use the `f1_alert()` convenience function to display a message to that effect.

7.7.7 new_cb()

This callback function will clear the editor widget and current filename. It also calls the `check_save()` function to give the user the opportunity to save the current file first as needed:

```
void new_cb(Fl_Widget*, void*) {
    if (!check_save()) return;

    filename[0] = '\0';
    textbuf->select(0, textbuf->length());
    textbuf->remove_selection();
    changed = 0;
    textbuf->call_modify_callbacks();
}
```

7.7.8 open_cb()

This callback function will ask the user for a filename and then load the specified file into the input widget and current filename. It also calls the `check_save()` function to give the user the opportunity to save the current file first as needed:

```
void open_cb(Fl_Widget*, void*) {
    if (!check_save()) return;

    char *newfile = fl_file_chooser("Open File?", "*", filename);
    if (newfile != NULL) load_file(newfile, -1);
}
```

We call the `load_file()` function to actually load the file.

7.7.9 paste_cb()

This callback function will call `kf_paste()` to paste the clipboard at the current position:

```
void paste_cb(Fl_Widget*, void* v) {
    EditorWindow* e = (EditorWindow*)v;
    Fl_Text_Editor::kf_paste(0, e->editor);
}
```

7.7.10 quit_cb()

The quit callback will first see if the current file has been modified, and if so give the user a chance to save it. It then exits from the program:

```
void quit_cb(Fl_Widget*, void*) {
    if (changed && !check_save())
        return;

    exit(0);
}
```

7.7.11 replace_cb()

The replace callback just shows the replace dialog:

```
void replace_cb(Fl_Widget*, void* v) {
    EditorWindow* e = (EditorWindow*)v;
    e->replace_dlg->show();
}
```

7.7.12 replace2_cb()

This callback will replace the next occurrence of the replacement string. If nothing has been entered for the replacement string, then the replace dialog is displayed instead:

```
void replace2_cb(Fl_Widget*, void* v) {
    EditorWindow* e = (EditorWindow*)v;
    const char *find = e->replace_find->value();
    const char *replace = e->replace_with->value();

    if (find[0] == '\0') {
        // Search string is blank; get a new one...
        e->replace_dlg->show();
        return;
    }

    e->replace_dlg->hide();

    int pos = e->editor->insert_position();
    int found = textbuf->search_forward(pos, find, &pos);

    if (found) {
        // Found a match; update the position and replace text...
        textbuf->select(pos, pos+strlen(find));
        textbuf->remove_selection();
        textbuf->insert(pos, replace);
        textbuf->select(pos, pos+strlen(replace));
        e->editor->insert_position(pos+strlen(replace));
        e->editor->show_insert_position();
    }
    else fl_alert("No occurrences of '%s' found!", find);
}
```

7.7.13 replall_cb()

This callback will replace all occurrences of the search string in the file:

```
void replall_cb(Fl_Widget*, void* v) {
    EditorWindow* e = (EditorWindow*)v;
    const char *find = e->replace_find->value();
    const char *replace = e->replace_with->value();

    find = e->replace_find->value();
    if (find[0] == '\0') {
        // Search string is blank; get a new one...
        e->replace_dlg->show();
        return;
    }

    e->replace_dlg->hide();

    e->editor->insert_position(0);
```

```

int times = 0;

// Loop through the whole string
for (int found = 1; found;) {
    int pos = e->editor->insert_position();
    found = textbuf->search_forward(pos, find, &pos);

    if (found) {
        // Found a match; update the position and replace text...
        textbuf->select(pos, pos+strlen(find));
        textbuf->remove_selection();
        textbuf->insert(pos, replace);
        e->editor->insert_position(pos+strlen(replace));
        e->editor->show_insert_position();
        times++;
    }
}

if (times) fl_message("Replaced %d occurrences.", times);
else fl_alert("No occurrences of '\'%s\'' found!", find);
}

```

7.7.14 replcan_cb()

This callback just hides the replace dialog:

```

void replcan_cb(Fl_Widget*, void* v) {
    EditorWindow* e = (EditorWindow*)v;
    e->replace_dlg->hide();
}

```

7.7.15 save_cb()

This callback saves the current file. If the current filename is blank it calls the "save as" callback:

```

void save_cb(void) {
    if (filename[0] == '\0') {
        // No filename - get one!
        saveas_cb();
        return;
    }
    else save_file(filename);
}

```

The `save_file()` function saves the current file to the specified filename.

7.7.16 saveas_cb()

This callback asks the user for a filename and saves the current file:

```

void saveas_cb(void) {
    char *newfile;

    newfile = fl_file_chooser("Save File As?", "*", filename);
    if (newfile != NULL) save_file(newfile);
}

```

The `save_file()` function saves the current file to the specified filename.

7.8 Other Functions

Now that we've defined the callback functions, we need our support functions to make it all work:

7.8.1 check_save()

This function checks to see if the current file needs to be saved. If so, it asks the user if they want to save it:

```
int check_save(void) {
    if (!changed) return 1;

    int r = fl_choice("The current file has not been saved.\n"
                      "Would you like to save it now?",
                      "Cancel", "Save", "Discard");

    if (r == 1) {
        save_cb(); // Save the file...
        return !changed;
    }

    return (r == 2) ? 1 : 0;
}
```

7.8.2 load_file()

This function loads the specified file into the `textbuf` class:

```
int loading = 0;
void load_file(char *newfile, int ipos) {
    loading = 1;
    int insert = (ipos != -1);
    changed = insert;
    if (!insert) strcpy(filename, "");
    int r;
    if (!insert) r = textbuf->loadfile(newfile);
    else r = textbuf->insertfile(newfile, ipos);
    if (r)
        fl_alert("Error reading from file \'%s\':\n%s.", newfile, strerror(errno));
    else
        if (!insert) strcpy(filename, newfile);
    loading = 0;
    textbuf->call_modify_callbacks();
}
```

When loading the file we use the `loadfile()` method to "replace" the text in the buffer, or the `insertfile()` method to insert text in the buffer from the named file.

7.8.3 save_file()

This function saves the current buffer to the specified file:

```
void save_file(char *newfile) {
    if (textbuf->savefile(newfile))
        fl_alert("Error writing to file \'%s\':\n%s.", newfile, strerror(errno));
    else
        strcpy(filename, newfile);
```

```

changed = 0;
textbuf->call_modify_callbacks();
}

```

7.8.4 set_title()

This function checks the `changed` variable and updates the window label accordingly:

```

void set_title(Fl_Window* w) {
    if (filename[0] == '\0') strcpy(title, "Untitled");
    else {
        char *slash;
        slash = strrchr(filename, '/');
    #ifdef WIN32
        if (slash == NULL) slash = strrchr(filename, '\\');
    #endif
        if (slash != NULL) strcpy(title, slash + 1);
        else strcpy(title, filename);
    }

    if (changed) strcat(title, " (modified)");
    w->label(title);
}

```

7.9 The main() Function

Once we've created all of the support functions, the only thing left is to tie them all together with the `main()` function. The `main()` function creates a new text buffer, creates a new view (window) for the text, shows the window, loads the file on the command-line (if any), and then enters the FLTK event loop:

```

int main(int argc, char **argv) {
    textbuf = new Fl_Text_Buffer;

    Fl_Window* window = new_view();

    window->show(1, argv);

    if (argc > 1) load_file(argv[1], -1);

    return Fl::run();
}

```

7.10 Compiling the Editor

The complete source for our text editor can be found in the `test/editor.cxx` source file. Both the Makefile and Visual C++ workspace include the necessary rules to build the editor. You can also compile it using a standard compiler with:

```
CC -o editor editor.cxx -lfltk -lxext -lx11 -lm
```

or by using the `fltk-config` script with:

```
fltk-config --compile editor.cxx
```

As noted in [Chapter 1](#), you may need to include compiler and linker options to tell them where to find the FLTK library. Also, the CC command may also be called `gcc` or `c++` on your system.

Congratulations, you've just built your own text editor!

7.11 The Final Product

The final editor window should look like the image in Figure 4-2.

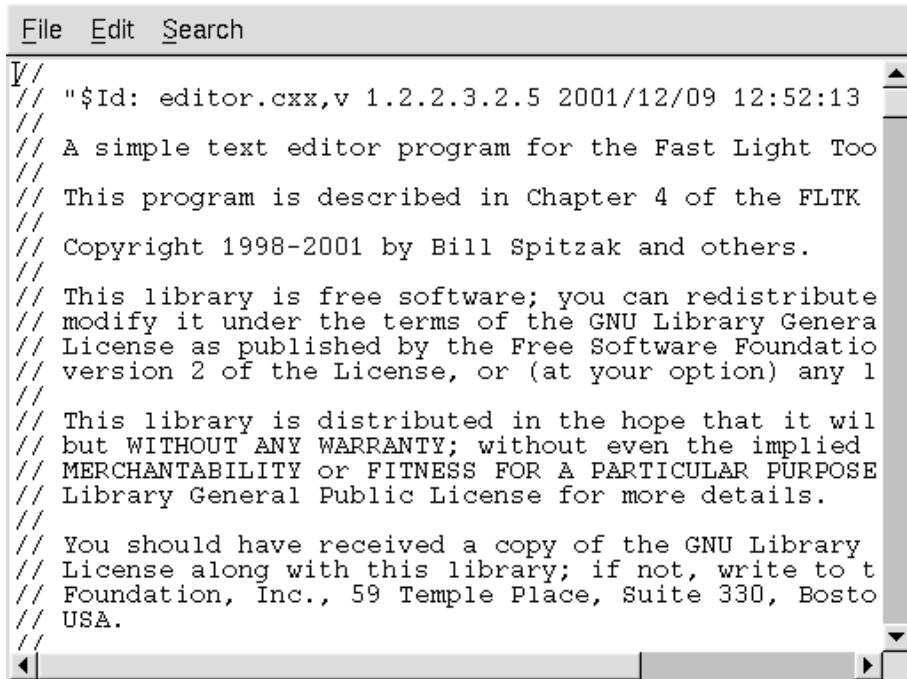


Figure 7.2: The completed editor window

7.12 Advanced Features

Now that we've implemented the basic functionality, it is time to show off some of the advanced features of the `F1_Text_Editor` widget.

7.12.1 Syntax Highlighting

The `F1_Text_Editor` widget supports highlighting of text with different fonts, colors, and sizes. The implementation is based on the excellent `NEdit` text editor core, which uses a parallel "style" buffer which tracks the font, color, and size of the text that is drawn.

Styles are defined using the `F1_Text_Display::Style_Table_Entry` structure defined in `<FL/F1_Text_Display.H>`:

```
struct Style_Table_Entry {
    F1_Color color;
    F1_Font font;
```

```
    int      size;
    unsigned attr;
};
```

The `color` member sets the color for the text, the `font` member sets the FLTK font index to use, and the `size` member sets the pixel size of the text. The `attr` member is currently not used.

For our text editor we'll define 7 styles for plain code, comments, keywords, and preprocessor directives:

```
F1_Text_Display::Style_Table_Entry styletable[] = {      // Style table
{ FL_BLACK,      FL_COURIER,      FL_NORMAL_SIZE }, // A - Plain
{ FL_DARK_GREEN, FL_COURIER_ITALIC, FL_NORMAL_SIZE }, // B - Line comments
{ FL_DARK_GREEN, FL_COURIER_ITALIC, FL_NORMAL_SIZE }, // C - Block comments
{ FL_BLUE,       FL_COURIER,      FL_NORMAL_SIZE }, // D - Strings
{ FL_DARK_RED,   FL_COURIER,      FL_NORMAL_SIZE }, // E - Directives
{ FL_DARK_RED,   FL_COURIER_BOLD, FL_NORMAL_SIZE }, // F - Types
{ FL_BLUE,       FL_COURIER_BOLD, FL_NORMAL_SIZE }  // G - Keywords
};
```

You'll notice that the comments show a letter next to each style - each style in the style buffer is referenced using a character starting with the letter 'A'.

You call the `highlight_data()` method to associate the style data and buffer with the text editor widget:

```
F1_Text_Buffer *stylebuf;

w->editor->highlight_data(stylebuf, styletable,
                           sizeof(styletable) / sizeof(styletable[0]),
                           'A', style_unfinished_cb, 0);
```

Finally, you need to add a callback to the main text buffer so that changes to the text buffer are mirrored in the style buffer:

```
textbuf->add_modify_callback(style_update, w->editor);
```

The `style_update()` function, like the `change_cb()` function described earlier, is called whenever text is added or removed from the text buffer. It mirrors the changes in the style buffer and then updates the style data as necessary:

```
//
// 'style_update()' - Update the style buffer...
//

void
style_update(int      pos,          // I - Position of update
            int      nInserted,     // I - Number of inserted chars
            int      nDeleted,      // I - Number of deleted chars
            int      nRestyled,     // I - Number of restyled chars
            const char *deletedText, // I - Text that was deleted
            void     *cbArg) {      // I - Callback data
    int  start,           // Start of text
        end;              // End of text
    char last,            // Last style on line
    *style,              // Style data
    *text;               // Text data

    // If this is just a selection change, just unselect the style buffer...
    if (nInserted == 0 && nDeleted == 0) {
        stylebuf->unselect();
```

```

        return;
    }

    // Track changes in the text buffer...
    if (nInserted > 0) {
        // Insert characters into the style buffer...
        style = new char[nInserted + 1];
        memset(style, 'A', nInserted);
        style[nInserted] = '\0';

        stylebuf->replace(pos, pos + nDeleted, style);
        delete[] style;
    } else {
        // Just delete characters in the style buffer...
        stylebuf->remove(pos, pos + nDeleted);
    }

    // Select the area that was just updated to avoid unnecessary
    // callbacks...
    stylebuf->select(pos, pos + nInserted - nDeleted);

    // Re-parse the changed region; we do this by parsing from the
    // beginning of the line of the changed region to the end of
    // the line of the changed region... Then we check the last
    // style character and keep updating if we have a multi-line
    // comment character...
    start = textbuf->line_start(pos);
    end   = textbuf->line_end(pos + nInserted - nDeleted);
    text  = textbuf->text_range(start, end);
    style = stylebuf->text_range(start, end);
    last  = style[end - start - 1];

    style_parse(text, style, end - start);

    stylebuf->replace(start, end, style);
    ((Fl_Text_Editor *)cbArg)->redisplay_range(start, end);

    if (last != style[end - start - 1]) {
        // The last character on the line changed styles, so reparse the
        // remainder of the buffer...
        free(text);
        free(style);

        end   = textbuf->length();
        text  = textbuf->text_range(start, end);
        style = stylebuf->text_range(start, end);

        style_parse(text, style, end - start);

        stylebuf->replace(start, end, style);
        ((Fl_Text_Editor *)cbArg)->redisplay_range(start, end);
    }

    free(text);
    free(style);
}

```

The `style_parse()` function scans a copy of the text in the buffer and generates the necessary style characters for display. It assumes that parsing begins at the start of a line:

```

//
// 'style_parse()' - Parse text and produce style data.
//

void
style_parse(const char *text,

```

```

char      *style,
int       length) {
char      current;
int       col;
int       last;
char      buf[255],
          *bufptr;
const char *temp;

for (current = *style, col = 0, last = 0; length > 0; length --, text++) {
    if (current == 'A') {
        // Check for directives, comments, strings, and keywords...
        if (col == 0 && *text == '#') {
            // Set style to directive
            current = 'E';
        } else if (strncmp(text, "//", 2) == 0) {
            current = 'B';
        } else if (strncmp(text, "/*", 2) == 0) {
            current = 'C';
        } else if (strncmp(text, "\\\\"", 2) == 0) {
            // Quoted quote...
            *style++ = current;
            *style++ = current;
            text++;
            length--;
            col += 2;
            continue;
        } else if (*text == '\'') {
            current = 'D';
        } else if (!last && islower(*text)) {
            // Might be a keyword...
            for (temp = text, bufptr = buf;
                 islower(*temp) && bufptr < (buf + sizeof(buf) - 1);
                 *bufptr++ = *temp++);
            if (!islower(*temp)) {
                *bufptr = '\0';

                bufptr = buf;

                if (bsearch(&bufptr, code_types,
                           sizeof(code_types) / sizeof(code_types[0]),
                           sizeof(code_types[0]), compare_keywords)) {
                    while (text < temp) {
                        *style++ = 'F';
                        text++;
                        length--;
                        col++;
                    }
                    text--;
                    length++;
                    last = 1;
                    continue;
                } else if (bsearch(&bufptr, code_keywords,
                                  sizeof(code_keywords) / sizeof(code_keywords[0]),
                                  sizeof(code_keywords[0]), compare_keywords)) {
                    while (text < temp) {
                        *style++ = 'G';
                        text++;
                        length--;
                        col++;
                    }
                    text--;
                    length++;
                    last = 1;
                }
            }
        }
    }
}

```

```
        continue;
    }
}
} else if (current == 'C' && strncmp(text, "*/", 2) == 0) {
    // Close a C comment...
    *style++ = current;
    *style++ = current;
    text++;
    length--;
    current = 'A';
    col += 2;
    continue;
} else if (current == 'D') {
    // Continuing in string...
    if (strncmp(text, "\\\"", 2) == 0) {
        // Quoted end quote...
        *style++ = current;
        *style++ = current;
        text++;
        length--;
        col += 2;
        continue;
    } else if (*text == '\"') {
        // End quote...
        *style++ = current;
        col++;
        current = 'A';
        continue;
    }
}

// Copy style info...
if (current == 'A' && (*text == '{' || *text == '}')) *style++ = 'G';
else *style++ = current;
col++;

last = isalnum(*text) || *text == '.';

if (*text == '\n') {
    // Reset column and possibly reset the style
    col = 0;
    if (current == 'B' || current == 'E') current = 'A';
}
}
```


Chapter 8

6 - Handling Events

This chapter discusses the FLTK event model and how to handle events in your program or widget.

8.1 The FLTK Event Model

Every time a user moves the mouse pointer, clicks a button, or presses a key, an event is generated and sent to your application. Events can also come from other programs like the window manager.

Events are identified by the integer argument passed to the `Fl_Widget::handle()` virtual method. Other information about the most recent event is stored in static locations and acquired by calling the `Fl::event_*` methods. This static information remains valid until the next event is read from the window system, so it is ok to look at it outside of the `handle()` method.

8.2 Mouse Events

8.2.1 FL_PUSH

A mouse button has gone down with the mouse pointing at this widget. You can find out what button by calling `Fl::event_button()`. You find out the mouse position by calling `Fl::event_x()` and `Fl::event_y()`.

A widget indicates that it "wants" the mouse click by returning non-zero from its `handle()` method. It will then become the `Fl::pushed()` widget and will get `FL_DRAG` and the matching `FL_RELEASE` events. If `handle()` returns zero then FLTK will try sending the `FL_PUSH` to another widget.

8.2.2 FL_DRAG

The mouse has moved with a button held down. The current button state is in `Fl::event_state()`. The mouse position is in `Fl::event_x()` and `Fl::event_y()`.

In order to receive `FL_DRAG` events, the widget must return non-zero when handling `FL_PUSH`.

8.2.3 FL_RELEASE

A mouse button has been released. You can find out what button by calling `Fl::event_button()`.

In order to receive the `FL_RELEASE` event, the widget must return non-zero when handling `FL_PUSH`.

8.2.4 FL_MOVE

The mouse has moved without any mouse buttons held down. This event is sent to the `Fl::belowmouse()` widget.

In order to receive `FL_MOVE` events, the widget must return non-zero when handling `FL_ENTER`.

8.2.5 FL_MOUSEWHEEL

The user has moved the mouse wheel. The `Fl::event_dx()` and `Fl::event_dy()` methods can be used to find the amount to scroll horizontally and vertically.

8.3 Focus Events

8.3.1 FL_ENTER

The mouse has been moved to point at this widget. This can be used for highlighting feedback. If a widget wants to highlight or otherwise track the mouse, it indicates this by returning non-zero from its `handle()` method. It then becomes the `Fl::belowmouse()` widget and will receive `FL_MOVE` and `FL_LEAVE` events.

8.3.2 FL_LEAVE

The mouse has moved out of the widget.

In order to receive the `FL_LEAVE` event, the widget must return non-zero when handling `FL_ENTER`.

8.3.3 FL_FOCUS

This indicates an *attempt* to give a widget the keyboard focus.

If a widget wants the focus, it should change itself to display the fact that it has the focus, and return non-zero from its `handle()` method. It then becomes the `Fl::focus()` widget and gets `FL_KEYDOWN`, `FL_KEYUP`, and `FL_UNFOCUS` events.

The focus will change either because the window manager changed which window gets the focus, or because the user tried to navigate using tab, arrows, or other keys. You can check `Fl::event_key()` to figure out why it moved. For navigation it will be the key pressed and interaction with the window manager it will be zero.

8.3.4 FL_UNFOCUS

This event is sent to the previous `Fl::focus()` widget when another widget gets the focus or the window loses focus.

8.4 Keyboard Events

8.4.1 FL_KEYDOWN, FL_KEYUP

A key was pressed or released. The key can be found in `Fl::event_key()`. The text that the key should insert can be found with `Fl::event_text()` and its length is in `Fl::event_length()`. If you use the key `handle()` should return 1. If you return zero then FLTK assumes you ignored the key and will then attempt to send it to a parent widget. If none of them want it, it will change the event into a `FL_SHORTCUT` event.

To receive `FL_KEYBOARD` events you must also respond to the `FL_FOCUS` and `FL_UNFOCUS` events.

If you are writing a text-editing widget you may also want to call the `Fl::compose()` function to translate individual keystrokes into foreign characters.

`FL_KEYUP` events are sent to the widget that currently has focus. This is not necessarily the same widget that received the corresponding `FL_KEYDOWN` event because focus may have changed between events.

8.4.2 FL_SHORTCUT

If the `Fl::focus()` widget is zero or ignores an `FL_KEYBOARD` event then FLTK tries sending this event to every widget it can, until one of them returns non-zero. `FL_SHORTCUT` is first sent to the `Fl::belowmouse()` widget, then its parents and siblings, and eventually to every widget in the window, trying to find an object that returns non-zero. FLTK tries really hard to not to ignore any keystrokes!

You can also make "global" shortcuts by using `Fl::add_handler()`. A global shortcut will work no matter what windows are displayed or which one has the focus.

8.5 Widget Events

8.5.1 FL_DEACTIVATE

This widget is no longer active, due to `deactivate()` being called on it or one of its parents. `active()` may still be true after this, the widget is only active if `active()` is true on it and all its parents (use `active_r()` to check this).

8.5.2 FL_ACTIVATE

This widget is now active, due to `activate()` being called on it or one of its parents.

8.5.3 FL_HIDE

This widget is no longer visible, due to `hide()` being called on it or one of its parents, or due to a parent window being minimized. `visible()` may still be true after this, but the widget is visible only if `visible()` is true for it and all its parents (use `visible_r()` to check this).

8.5.4 FL_SHOW

This widget is visible again, due to `show()` being called on it or one of its parents, or due to a parent window being restored. *Child Fl_Windows respond to this by actually creating the window if not done already, so if you subclass a window, be sure to pass FL_SHOW to the base class handle() method!*

8.6 Clipboard Events

8.6.1 FL_PASTE

You should get this event some time after you call `Fl::paste()`. The contents of `Fl::event_text()` is the text to insert and the number of characters is in `Fl::event_length()`.

8.6.2 FL_SELECTIONCLEAR

The `Fl::selection_owner()` will get this event before the selection is moved to another widget. This indicates that some other widget or program has claimed the selection. Motif programs used this to clear the selection indication. Most modern programs ignore this.

8.7 Drag and Drop Events

FLTK supports drag and drop of text and files from any application on the desktop. Text is transferred using the current code page. Files are received as a list of full path and file names, separated by newline. On some platforms, path names are prepended with `file://`.

The drag and drop data is available in `Fl::event_text()` at the concluding `FL_PASTE`. On some platforms, the event text is also available for the `FL_DND_*` events, however application must not depend on that behavior because it depends on the protocol used on each platform.

`FL_DND_*` events cannot be used in widgets derived from `Fl_Group` or `Fl_Window`.

8.7.1 FL_DND_ENTER

The mouse has been moved to point at this widget. A widget that is interested in receiving drag'n'drop data must return 1 to receive `FL_DND_DRAG`, `FL_DND_LEAVE` and `FL_DND_RELEASE` events.

8.7.2 FL_DND_DRAG

The mouse has been moved inside a widget while dragging data. A widget that is interested in receiving drag'n'drop data should indicate the possible drop position.

8.7.3 FL_DND_LEAVE

The mouse has moved out of the widget.

8.7.4 FL_DND_RELEASE

The user has released the mouse button dropping data into the widget. If the widget returns 1, it will receive the data in the immediately following `FL_PASTE` event.

8.8 Fl::event_*() methods

FLTK keeps the information about the most recent event in static storage. This information is good until the next event is processed. Thus it is valid inside `handle()` and `callback()` methods.

These are all trivial inline functions and thus very fast and small:

- `Fl::event_button`
- `Fl::event_clicks`
- `Fl::event_dx`
- `Fl::event_dy`
- `Fl::event_inside`
- `Fl::event_is_click`

- `Fl::event_key`
- `Fl::event_length`
- `Fl::event_state`
- `Fl::event_text`
- `Fl::event_x`
- `Fl::event_x_root`
- `Fl::event_y`
- `Fl::event_y_root`
- `Fl::get_key`
- `Fl::get_mouse`
- `Fl::test_shortcut`

8.9 Event Propagation

FLTK follows very simple and unchangeable rules for sending events. The major innovation is that widgets can indicate (by returning 0 from the `handle()` method) that they are not interested in an event, and FLTK can then send that event elsewhere. This eliminates the need for "interests" (event masks or tables), and this is probably the main reason FLTK is much smaller than other toolkits.

Most events are sent directly to the `handle()` method of the `Fl_Window` that the window system says they belong to. The window (actually the `Fl_Group` that `Fl_Window` is a subclass of) is responsible for sending the events on to any child widgets. To make the `Fl_Group` code somewhat easier, FLTK sends some events (`FL_DRAG`, `FL_RELEASE`, `FL_KEYBOARD`, `FL_SHORTCUT`, `FL_UNFOCUS`, and `FL_LEAVE`) directly to leaf widgets. These procedures control those leaf widgets:

- `Fl::add_handler`
- `Fl::belowmouse`
- `Fl::focus`
- `Fl::grab`
- `Fl::modal`
- `Fl::pushed`
- `Fl::release`
- `Fl_Widget::take_focus`

8.10 FLTK Compose-Character Sequences

The foreign-letter compose processing done by the `F1_Input` widget is provided in a function that you can call if you are writing your own text editor widget.

FLTK uses its own compose processing to allow "preview" of the partially composed sequence, which is impossible with the usual "dead key" processing.

Although currently only characters in the ISO-8859-1 character set are handled, you should call this in case any enhancements to the processing are done in the future. The interface has been designed to handle arbitrary UTF-8 encoded text.

The following methods are provided for character composition:

- `F1::compose()`
- `F1::compose_reset()`

Chapter 9

7 - Adding and Extending Widgets

This chapter describes how to add your own widgets or extend existing widgets in FLTK.

9.1 Subclassing

New widgets are created by *subclassing* an existing FLTK widget, typically `F1_Widget` for controls and `F1_Group` for composite widgets.

A control widget typically interacts with the user to receive and/or display a value of some sort.

A composite widget holds a list of child widgets and handles moving, sizing, showing, or hiding them as needed. `F1_Group` is the main composite widget class in FLTK, and all of the other composite widgets (`F1_Pack`, `F1_Scroll`, `F1_Tabs`, `F1_Tile`, and `F1_Window`) are subclasses of it.

You can also subclass other existing widgets to provide a different look or user-interface. For example, the button widgets are all subclasses of `F1_Button` since they all interact with the user via a mouse button click. The only difference is the code that draws the face of the button.

9.2 Making a Subclass of `F1_Widget`

Your subclasses can directly descend from `F1_Widget` or any subclass of `F1_Widget`. `F1_Widget` has only four virtual methods, and overriding some or all of these may be necessary.

9.3 The Constructor

The constructor should have the following arguments:

```
MyClass(int x, int y, int w, int h, const char *label = 0);
```

This will allow the class to be used in `FLUID` without problems.

The constructor must call the constructor for the base class and pass the same arguments:

```
MyClass::MyClass(int x, int y, int w, int h, const char *label)
: F1_Widget(x, y, w, h, label) {
// do initialization stuff...
}
```

`F1_Widget`'s protected constructor sets `x()`, `y()`, `w()`, `h()`, and `label()` to the passed values and initializes the other instance variables to:

```
type(0);
box(F1_NO_BOX);
color(F1_BACKGROUND_COLOR);
selection_color(F1_BACKGROUND_COLOR);
labeltype(F1_NORMAL_LABEL);
labelstyle(F1_NORMAL_STYLE);
labelsize(F1_NORMAL_SIZE);
labelcolor(F1_FOREGROUND_COLOR);
align(F1_ALIGN_CENTER);
callback(default_callback,0);
flags(ACTIVE|VISIBLE);
image(0);
deimage(0);
```

9.4 Protected Methods of Fl_Widget

The following methods are provided for subclasses to use:

- `Fl_Widget::clear_visible`
- `Fl_Widget::damage`
- `Fl_Widget::draw_box`
- `Fl_Widget::draw_focus`
- `Fl_Widget::draw_label`
- `Fl_Widget::set_flag`
- `Fl_Widget::set_visible`
- `Fl_Widget::test_shortcut`
- `Fl_Widget::type`

```
void Fl_Widget::damage(uchar mask)
void Fl_Widget::damage(uchar mask, int x, int y, int w, int h)
uchar Fl_Widget::damage()
```

The first form indicates that a partial update of the object is needed. The bits in mask are OR'd into `damage()`. Your `draw()` routine can examine these bits to limit what it is drawing. The public method `Fl_Widget::redraw()` simply does `Fl_Widget::damage(FL_DAMAGE_ALL)`, but the implementation of your widget can call the private `damage(n)`.

The second form indicates that a region is damaged. If only these calls are done in a window (no calls to `damage(n)`) then FLTK will clip to the union of all these calls before drawing anything. This can greatly speed up incremental displays. The mask bits are OR'd into `damage()` unless this is a `Fl_Window` widget.

The third form returns the bitwise-OR of all `damage(n)` calls done since the last `draw()`.

When redrawing your widgets you should look at the damage bits to see what parts of your widget need redrawing. The `handle()` method can then set individual damage bits to limit the amount of drawing that needs to be done:

```
MyClass::handle(int event) {
    ...
    if (change_to_part1) damage(1);
    if (change_to_part2) damage(2);
    if (change_to_part3) damage(4);
}

MyClass::draw() {
    if (damage() & FL_DAMAGE_ALL) {
        ... draw frame/box and other static stuff ...
    }
}
```

```

    if (damage() && (FL_DAMAGE_ALL | 1)) draw_part1();
    if (damage() && (FL_DAMAGE_ALL | 2)) draw_part2();
    if (damage() && (FL_DAMAGE_ALL | 4)) draw_part3();
}

```

```

void Fl_Widget::draw_box() const
void Fl_Widget::draw_box(Fl_Boxtype b, ulong c) const

```

The first form draws this widget's `box()`, using the dimensions of the widget. The second form uses `b` as the box type and `c` as the color for the box.

```

void Fl_Widget::draw_focus() const
void Fl_Widget::draw_focus(Fl_Boxtype b, int x, int y, int w, int h) const

```

Draws a focus box inside the widget's bounding box. The second form allows you to specify a different bounding box.

```

void Fl_Widget::draw_label() const
void Fl_Widget::draw_label(int x, int y, int w, int h) const
void Fl_Widget::draw_label(int x, int y, int w, int h, Fl_Align align) const

```

This is the usual function for a `draw()` method to call to draw the widget's label. It does not draw the label if it is supposed to be outside the box (on the assumption that the enclosing group will draw those labels).

The second form uses the passed bounding box instead of the widget's bounding box. This is useful so "centered" labels are aligned with some feature, like a moving slider.

The third form draws the label anywhere. It acts as though `FL_ALIGN_INSIDE` has been forced on so the label will appear inside the passed bounding box. This is designed for parent groups to draw labels with.

```
void Fl_Widget::set_flag(SHORTCUT_LABEL)
```

Modifies `draw_label()` so that '&' characters cause an underscore to be printed under the next letter.

```

void Fl_Widget::set_visible()
void Fl_Widget::clear_visible()

```

Fast inline versions of `Fl_Widget::hide()` and `Fl_Widget::show()`. These do not send the `FL_HIDE` and `FL_SHOW` events to the widget.

```
int Fl_Widget::test_shortcut() const  
static int Fl_Widget::test_shortcut(const char *s)
```

The first version tests `Fl_Widget::label()` against the current event (which should be a `FL_SHORTCUT` event). If the label contains a '&' character and the character after it matches the key press, this returns true. This returns false if the `SHORTCUT_LABEL` flag is off, if the label is NULL or does not have a '&' character in it, or if the keypress does not match the character.

The second version lets you do this test against an arbitrary string.

```
uchar Fl_Widget::type() const  
void Fl_Widget::type(uchar t)
```

The property `Fl_Widget::type()` can return an arbitrary 8-bit identifier, and can be set with the protected method `type(uchar t)`. This value had to be provided for Forms compatibility, but you can use it for any purpose you want. Try to keep the value less than 100 to not interfere with reserved values.

FLTK does not use RTTI (Run Time Typing Infomation), to enhance portability. But this may change in the near future if RTTI becomes standard everywhere.

If you don't have RTTI you can use the clumsy FLTK mechanism, by having `type()` use a unique value. These unique values must be greater than the symbol `FL_RESERVED_TYPE` (which is 100). Look through the header files for `FL_RESERVED_TYPE` to find an unused number. If you make a subclass of `Fl_Window` you must use `FL_WINDOW + n` (`n` must be in the range 1 to 7).

9.5 Handling Events

The virtual method `int Fl_Widget::handle(int event)` is called to handle each event passed to the widget. It can:

- Change the state of the widget.
- Call `Fl_Widget::redraw()` if the widget needs to be redisplayed.
- Call `Fl_Widget::damage(n)` if the widget needs a partial-update (assuming you provide support for this in your `Fl_Widget::draw()` method).
- Call `Fl_Widget::do_callback()` if a callback should be generated.
- Call `Fl_Widget::handle()` on child widgets.

Events are identified by the integer argument. Other information about the most recent event is stored in static locations and aquired by calling the `Fl::event_*`() functions. This information remains valid until another event is handled.

Here is a sample `handle()` method for a widget that acts as a pushbutton and also accepts the keystroke 'x' to cause the callback:

```

int MyClass::handle(int event) {
    switch(event) {
        case FL_PUSH:
            highlight = 1;
            redraw();
            return 1;
        case FL_DRAG: {
            int t = Fl::event_inside(this);
            if (t != highlight) {
                highlight = t;
                redraw();
            }
        }
        return 1;
    case FL_RELEASE: {
        if (highlight) {
            highlight = 0;
            redraw();
            do_callback();
            // never do anything after a callback, as the callback
            // may delete the widget!
        }
        return 1;
    case FL_SHORTCUT:
        if (Fl::event_key() == 'x') {
            do_callback();
            return 1;
        }
        return 0;
    default:
        return Fl_Widget::handle(event);
    }
}

```

You must return non-zero if your `handle()` method uses the event. If you return zero, the parent widget will try sending the event to another widget.

9.6 Drawing the Widget

The `draw()` virtual method is called when FLTK wants you to redraw your widget. It will be called if and only if `damage()` is non-zero, and `damage()` will be cleared to zero after it returns. The `draw()` method should be declared protected so that it can't be called from non-drawing code.

The `damage()` value contains the bitwise-OR of all the `damage(n)` calls to this widget since it was last drawn. This can be used for minimal update, by only redrawing the parts whose bits are set. FLTK will turn on the `FL_DAMAGE_ALL` bit if it thinks the entire widget must be redrawn, e.g. for an expose event.

Expose events (and the above `damage(b, x, y, w, h)`) will cause `draw()` to be called with FLTK's `clipping` turned on. You can greatly speed up redrawing in some cases by testing `fl_not_clipped(x, y, w, h)` or `fl_clip_box(...)` and skipping invisible parts.

Besides the protected methods described above, FLTK provides a large number of basic drawing functions, which are described [below](#).

9.7 Resizing the Widget

The `resize(int x, int y, int w, int h)` method is called when the widget is being resized or moved. The arguments are the new position, width, and height. `x()`, `y()`, `w()`, and `h()` still remain

the old size. You must call `resize()` on your base class with the same arguments to get the widget size to actually change.

This should *not* call `redraw()`, at least if only the `x()` and `y()` change. This is because composite widgets like `Fl_Scroll` may have a more efficient way of drawing the new position.

9.8 Making a Composite Widget

A "composite" widget contains one or more "child" widgets. To make a composite widget you should subclass `Fl_Group`. It is possible to make a composite object that is not a subclass of `Fl_Group`, but you'll have to duplicate the code in `Fl_Group` anyways.

Instances of the child widgets may be included in the parent:

```
class MyClass : public Fl_Group {
    Fl_Button the_button;
    Fl_Slider the_slider;
    ...
};
```

The constructor has to initialize these instances. They are automatically added to the group, since the `Fl_Group` constructor does `Fl_Group::begin()`. *Don't forget to call `Fl_Group::end()` or use the `Fl_End` pseudo-class:*

```
MyClass::MyClass(int x, int y, int w, int h) :
    Fl_Group(x, y, w, h),
    the_button(x + 5, y + 5, 100, 20),
    the_slider(x, y + 50, w, 20)
{
    ... (you could add dynamically created child widgets here) ...
    end(); // don't forget to do this!
}
```

The child widgets need callbacks. These will be called with a pointer to the children, but the widget itself may be found in the `parent()` pointer of the child. Usually these callbacks can be static private methods, with a matching private method:

```
void MyClass::static_slider_cb(Fl_Widget* v, void *) { // static method
    ((MyClass*) (v->parent()))->slider_cb();
}
void MyClass::slider_cb() { // normal method
    use(the_slider->value());
}
```

If you make the `handle()` method, you can quickly pass all the events to the children using the `Fl_Group::handle()` method. You don't need to override `handle()` if your composite widget does nothing other than pass events to the children:

```
int MyClass::handle(int event) {
    if (Fl_Group::handle(event)) return 1;
    ... handle events that children don't want ...
}
```

If you override `draw()` you need to draw all the children. If `redraw()` or `damage()` is called on a child, `damage(FL_DAMAGE_CHILD)` is done to the group, so this bit of `damage()` can be used to indicate that a child needs to be drawn. It is fastest if you avoid drawing anything else in this case:

```
int MyClass::draw() {
    Fl_Widget *const*a = array();
    if (damage() == FL_DAMAGE_CHILD) { // only redraw some children
        for (int i = children(); i --; a++) update_child(**a);
    } else { // total redraw
        ... draw background graphics ...
        // now draw all the children atop the background:
        for (int i = children_; i --; a++) {
            draw_child(**a);
            draw_outside_label(**a); // you may not need to do this
        }
    }
}
```

[Fl_Group](#) provides some protected methods to make drawing easier:

- [draw_child](#)
- [draw_outside_label](#)
- [update_child](#)

```
void Fl_Group::draw_child(Fl_Widget&)
```

This will force the child's damage () bits all to one and call draw () on it, then clear the damage (). You should call this on all children if a total redraw of your widget is requested, or if you draw something (like a background box) that damages the child. Nothing is done if the child is not visible () or if it is clipped.

```
void Fl_Group::draw_outside_label(Fl_Widget&) const
```

Draw the labels that are *not* drawn by [draw_label\(\)](#). If you want more control over the label positions you might want to call `child->draw_label(x, y, w, h, a)`.

```
void Fl_Group::update_child(Fl_Widget&)
```

Draws the child only if its damage () is non-zero. You should call this on all the children if your own damage is equal to FL_DAMAGE_CHILD. Nothing is done if the child is not visible () or if it is clipped.

9.9 Cut and Paste Support

FLTK provides routines to cut and paste 8-bit text (in the future this may be UTF-8) between applications:

- [Fl::paste](#)
- [Fl::selection](#)
- [Fl::selection_owner](#)

It may be possible to cut/paste non-text data by using [Fl::add_handler\(\)](#).

9.10 Drag And Drop Support

FLTK provides routines to drag and drop 8-bit text between applications:

Drag'n'drop operations are initiated by copying data to the clipboard and calling the function `Fl::dnd()`.

Drop attempts are handled via `events`:

- `FL_DND_ENTER`
- `FL_DND_DRAG`
- `FL_DND_LEAVE`
- `FL_DND_RELEASE`
- `FL_PASTE`

9.11 Making a subclass of `Fl_Window`

You may want your widget to be a subclass of `Fl_Window`, `Fl_Double_Window`, or `FL_Gl_Window`. This can be useful if your widget wants to occupy an entire window, and can also be used to take advantage of system-provided clipping, or to work with a library that expects a system window ID to indicate where to draw.

Subclassing `Fl_Window` is almost exactly like subclassing `Fl_Group`, and in fact you can easily switch a subclass back and forth. Watch out for the following differences:

1. `Fl_Window` is a subclass of `Fl_Group` so *make sure your constructor calls* `end()` unless you actually want children added to your window.
1. When handling events and drawing, the upper-left corner is at 0,0, not `x()`, `y()` as in other `Fl_Widget`'s. For instance, to draw a box around the widget, call `draw_box(0, 0, w(), h())`, rather than `draw_box(x(), y(), w(), h())`.

You may also want to subclass `Fl_Window` in order to get access to different visuals or to change other attributes of the windows. See "[Appendix F – Operating System Issues](#)" for more information.

Chapter 10

8 - Using OpenGL

This chapter discusses using FLTK for your OpenGL applications.

10.1 Using OpenGL in FLTK

The easiest way to make an OpenGL display is to subclass `Fl_Gl_Window`. Your subclass must implement a `draw()` method which uses OpenGL calls to draw the display. Your main program should call `redraw()` when the display needs to change, and (somewhat later) FLTK will call `draw()`.

With a bit of care you can also use OpenGL to draw into normal FLTK windows. This allows you to use Gouraud shading for drawing your widgets. To do this you use the `gl_start()` and `gl_finish()` functions around your OpenGL code.

You must include FLTK's `<FL/gl.h>` header file. It will include the file `<GL/gl.h>`, define some extra drawing functions provided by FLTK, and include the `<windows.h>` header file needed by WIN32 applications.

10.2 Making a Subclass of `Fl_Gl_Window`

To make a subclass of `Fl_Gl_Window`, you must provide:

- A class definition.
- A `draw()` method.
- A `handle()` method if you need to receive input from the user.

If your subclass provides static controls in the window, they must be redrawn whenever the `FL_DAMAGE_ALL` bit is set in the value returned by `damage()`. For double-buffered windows you will need to surround the drawing code with the following code to make sure that both buffers are redrawn:

```
#ifndef MESA
glDrawBuffer(GL_FRONT_AND_BACK);
#endif // !MESA
... draw stuff here ...
#ifndef MESA
glDrawBuffer(GL_BACK);
#endif // !MESA
```

Note:

If you are using the Mesa graphics library, the call to `glDrawBuffer()` is not required and will slow down drawing considerably. The preprocessor instructions shown above will optimize your code based upon the graphics library used.

10.2.1 Defining the Subclass

To define the subclass you just subclass the `Fl_Gl_Window` class:

```
class MyWindow : public Fl_Gl_Window {
    void draw();
    int handle(int);
```

```
public:
    MyWindow(int X, int Y, int W, int H, const char *L)
        : Fl_Gl_Window(X, Y, W, H, L) {}
};
```

The draw() and handle() methods are described below. Like any widget, you can include additional private and public data in your class (such as scene graph information, etc.)

10.2.2 The draw() Method

The draw() method is where you actually do your OpenGL drawing:

```
void MyWindow::draw() {
    if (!valid()) {
        ... set up projection, viewport, etc ...
        ... window size is in w() and h().
        ... valid() is turned on by FLTK after draw() returns
    }
    ... draw ...
}
```

10.2.3 The handle() Method

The handle() method handles mouse and keyboard events for the window:

```
int MyWindow::handle(int event) {
    switch(event) {
    case FL_PUSH:
        ... mouse down event ...
        ... position in Fl::event_x() and Fl::event_y()
        return 1;
    case FL_DRAG:
        ... mouse moved while down event ...
        return 1;
    case FL_RELEASE:
        ... mouse up event ...
        return 1;
    case FL_FOCUS :
    case FL_UNFOCUS :
        ... Return 1 if you want keyboard events, 0 otherwise
        return 1;
    case FL_KEYBOARD:
        ... keypress, key is in Fl::event_key(), ascii in Fl::event_text()
        ... Return 1 if you understand/use the keyboard event, 0 otherwise...
        return 1;
    case FL_SHORTCUT:
        ... shortcut, key is in Fl::event_key(), ascii in Fl::event_text()
        ... Return 1 if you understand/use the shortcut event, 0 otherwise...
        return 1;
    default:
        // pass other events to the base class...
        return Fl_Gl_Window::handle(event);
    }
}
```

When handle() is called, the OpenGL context is not set up! If your display changes, you should call redraw() and let draw() do the work. Don't call any OpenGL drawing functions from inside handle()!

You can call *some* OpenGL stuff like hit detection and texture loading functions by doing:

```

case FL_PUSH:
    make_current();      // make OpenGL context current
    if (!valid()) {
        ... set up projection exactly the same as draw ...
        valid(1);          // stop it from doing this next time
    }
    ... ok to call NON-DRAWING OpenGL code here, such as hit
    detection, loading textures, etc...

```

Your main program can now create one of your windows by doing new MyWindow(...). You can also use **FLUID** by:

1. Putting your class definition in a MyWindow.H file.
2. Creating a **Fl_Box** widget in FLUID.
3. In the widget panel fill in the "class" field with MyWindow. This will make FLUID produce constructors for your new class.
4. In the "Extra Code" field put #include "MyWindow.H", so that the FLUID output file will compile.

You must put glwindow->show() in your main code after calling show() on the window containing the OpenGL window.

10.3 Using OpenGL in Normal FLTK Windows

You can put OpenGL code into an **Fl_Widget::draw()** method or into the code for a **boxtyle** or other places with some care.

Most importantly, before you show *any* windows, including those that don't have OpenGL drawing, you **must** initialize FLTK so that it knows it is going to use OpenGL. You may use any of the symbols described for **Fl_Gl_Window::mode()** to describe how you intend to use OpenGL:

```
Fl::gl_visual(Fl_RGB);
```

You can then put OpenGL drawing code anywhere you can draw normally by surrounding it with:

```

gl_start();
... put your OpenGL code here ...
gl_finish();

```

gl_start() and **gl_finish()** set up an OpenGL context with an orthographic projection so that 0,0 is the lower-left corner of the window and each pixel is one unit. The current clipping is reproduced with OpenGL **glScissor()** commands. These functions also synchronize the OpenGL graphics stream with the drawing done by other X, WIN32, or FLTK functions.

The same context is reused each time. If your code changes the projection transformation or anything else you should use **glPushMatrix()** and **glPopMatrix()** functions to put the state back before calling **gl_finish()**.

You may want to use **Fl_Window::current()->h()** to get the drawable height so that you can flip the Y coordinates.

Unfortunately, there are a bunch of limitations you must adhere to for maximum portability:

- You must choose a default visual with `Fl::gl_visual()`.
- You cannot pass `FL_DOUBLE` to `Fl::gl_visual()`.
- You cannot use `Fl_Double_Window` or `Fl_Overlay_Window`.

Do *not* call `gl_start()` or `gl_finish()` when drawing into an `Fl_Gl_Window` !

10.4 OpenGL Drawing Functions

FLTK provides some useful OpenGL drawing functions. They can be freely mixed with any OpenGL calls, and are defined by including `<FL/gl.H>` which you should include instead of the OpenGL header `<GL/gl.h>`.

`void gl_color(Fl_Color)`

Sets the current OpenGL color to a FLTK color. *For color-index modes it will use fl_xpixel(c), which is only right if this window uses the default colormap!*

`void gl_rect(int x, int y, int w, int h)`

`void gl_rectf(int x, int y, int w, int h)`

Outlines or fills a rectangle with the current color. If `Fl_Gl_Window::ortho()` has been called, then the rectangle will exactly fill the pixel rectangle passed.

`void gl_font(Fl_Font fontid, int size)`

Sets the current OpenGL font to the same font you get by calling `fl_font()`.

```
int gl_height()
int gl_descent()
float gl_width(const char *)
float gl_width(const char *, int n)
float gl_width(uchar)
```

Returns information about the current OpenGL font.

```
void gl_draw(const char *)
void gl_draw(const char *, int n)
```

Draws a nul-terminated string or an array of `n` characters in the current OpenGL font at the current raster position.

```
void gl_draw(const char *, int x, int y)
void gl_draw(const char *, int n, int x, int y)
void gl_draw(const char *, float x, float y)
void gl_draw(const char *, int n, float x, float y)
```

Draws a nul-terminated string or an array of *n* characters in the current OpenGL font at the given position.

```
void gl_draw(const char *, int x, int y, int w, int h, Fl_Align)
```

Draws a string formatted into a box, with newlines and tabs expanded, other control characters changed to [^]X, and aligned with the edges or center. Exactly the same output as [fl_draw\(\)](#).

10.5 Speeding up OpenGL

Performance of [Fl_Gl_Window](#) may be improved on some types of OpenGL implementations, in particular MESA and other software emulators, by setting the `GL_SWAP_TYPE` environment variable. This variable declares what is in the backbuffer after you do a swapbuffers.

- `setenv GL_SWAP_TYPE COPY`

This indicates that the back buffer is copied to the front buffer, and still contains it's old data. This is true of many hardware implementations. Setting this will speed up emulation of overlays, and widgets that can do partial update can take advantage of this as `damage()` will not be cleared to -1.

- `setenv GL_SWAP_TYPE NODAMAGE`

This indicates that nothing changes the back buffer except drawing into it. This is true of MESA and Win32 software emulation and perhaps some hardware emulation on systems with lots of memory.

- All other values for `GL_SWAP_TYPE`, and not setting the variable, cause FLTK to assume that the back buffer must be completely redrawn after a swap.

This is easily tested by running the `gl_overlay` demo program and seeing if the display is correct when you drag another window over it or if you drag the window off the screen and back on. You have to exit and run the program again for it to see any changes to the environment variable.

10.6 Using OpenGL Optimizer with FLTK

[OpenGL Optimizer](#) is a scene graph toolkit for OpenGL available from Silicon Graphics for IRIX and Microsoft Windows. It allows you to view large scenes without writing a lot of OpenGL code.

OptimizerWindow Class Definition

To use OpenGL Optimizer with FLTK you'll need to create a subclass of `Fl_Gl_Widget` that includes several state variables:

```

class OptimizerWindow : public Fl_Gl_Window {
    csContext *context_; // Initialized to 0 and set by draw()...
    csDrawAction *draw_action_; // Draw action...
    csGroup *scene_; // Scene to draw...
    csCamara *camera_; // Viewport for scene...

    void draw();

public:
    OptimizerWindow(int X, int Y, int W, int H, const char *L)
        : Fl_Gl_Window(X, Y, W, H, L) {
        context_ = (csContext *)0;
        draw_action_ = (csDrawAction *)0;
        scene_ = (csGroup *)0;
        camera_ = (csCamara *)0;
    }

    void scene(csGroup *g) { scene_ = g; redraw(); }

    void camera(csCamera *c) {
        camera_ = c;
        if (context_) {
            draw_action_->setCamera(camera_);
            camera_->draw(draw_action_);
            redraw();
        }
    }
};

```

The camera() Method

The `camera()` method sets the camera (projection and viewpoint) to use when drawing the scene. The scene is redrawn after this call.

The draw() Method

The `draw()` method performs the needed initialization and does the actual drawing:

```

void OptimizerWindow::draw() {
    if (!context_) {
        // This is the first time we've been asked to draw; create the
        // Optimizer context for the scene...

#ifndef WIN32
    context_ = new csContext((HDC)fl_getHDC());
    context_->ref();
    context_->makeCurrent((HDC)fl_getHDC());
#else
    context_ = new csContext(fl_display, fl_visual);
    context_->ref();
    context_->makeCurrent(fl_display, fl_window);
#endif // WIN32

    ... perform other context setup as desired ...

    // Then create the draw action to handle drawing things...

    draw_action_ = new csDrawAction;
    if (camera_) {

```

```
    draw_action_->setCamera(camera_);
    camera_->draw(draw_action_);
}
} else {
#endif WIN32
    context_->makeCurrent((HDC)fl_getHDC());
#else
    context_->makeCurrent(fl_display, fl_window);
#endif // WIN32
}

if (!valid()) {
    // Update the viewport for this context...
    context_->setViewport(0, 0, w(), h());
}

// Clear the window...
context_->clear(csContext::COLOR_CLEAR | csContext::DEPTH_CLEAR,
    0.0f,           // Red
    0.0f,           // Green
    0.0f,           // Blue
    1.0f);          // Alpha

// Then draw the scene (if any)...
if (scene_)
    draw_action_->apply(scene_);
}
```

The `scene()` Method

The `scene()` method sets the scene to be drawn. The scene is a collection of 3D objects in a `csGroup`. The scene is redrawn after this call.

Chapter 11

9 - Programming with FLUID

This chapter shows how to use the Fast Light User-Interface Designer ("FLUID") to create your GUIs.

Subchapters:

- [What is FLUID](#)
- [Running FLUID Under UNIX](#)
- [Running FLUID Under Microsoft Windows](#)
- [Compiling .fl Files](#)
- [A Short Tutorial](#)
- [FLUID Reference](#)
- [Internationalization with FLUID](#)
- [Known Limitations](#)

11.1 What is FLUID?

The Fast Light User Interface Designer, or FLUID, is a graphical editor that is used to produce FLTK source code. FLUID edits and saves its state in .fl files. These files are text, and you can (with care) edit them in a text editor, perhaps to get some special effects.

FLUID can "compile" the .fl file into a .cxx and a .h file. The .cxx file defines all the objects from the .fl file and the .h file declares all the global ones. FLUID also supports localization ([Internationalization](#)) of label strings using message files and the GNU gettext or POSIX catgets interfaces.

A simple program can be made by putting all your code (including a `main()` function) into the .fl file and thus making the .cxx file a single source file to compile. Most programs are more complex than this, so you write other .cxx files that call the FLUID functions. These .cxx files must `#include` the .h file or they can `#include` the .cxx file so it still appears to be a single source file.

`latex fluid-org.eps "FLUID organization" width=12cm` Normally the FLUID file defines one or more functions or classes which output C++ code. Each function defines a one or more FLTK windows, and all the widgets that go inside those windows.

Widgets created by FLUID are either "named", "complex named" or "unnamed". A named widget has a legal C++ variable identifier as its name (i.e. only alphanumeric and underscore). In this case FLUID defines a global variable or class member that will point at the widget after the function defining it is called. A complex named object has punctuation such as '.' or '->' or any other symbols in its name. In this case FLUID assigns a pointer to the widget to the name, but does not attempt to declare it. This can be used to get the widgets into structures. An unnamed widget has a blank name and no pointer is stored.

Widgets may either call a named callback function that you write in another source file, or you can supply a small piece of C++ source and FLUID will write a private callback function into the .cxx file.

11.2 Running FLUID Under UNIX

To run FLUID under UNIX, type:

```
fluid filename.fl &
```

to edit the `.fl` file `filename.fl`. If the file does not exist you will get an error pop-up, but if you dismiss it you will be editing a blank file of that name. You can run FLUID without any name, in which case you will be editing an unnamed blank setup (but you can use save-as to write it to a file).

You can provide any of the standard FLTK switches before the filename:

```
-display host:n.n
-geometry WxH+X+Y
-title windowtitle
-name classname
-iconic
-fg color
-bg color
-bg2 color
-scheme schemename
```

Changing the colors may be useful to see what your interface will look at if the user calls it with the same switches. Similarly, using `"-scheme plastic"` will show how the interface will look using the "plastic" scheme.

In the current version, if you don't put FLUID into the background with `'&'` then you will be able to abort FLUID by typing `CTRL-C` on the terminal. It will exit immediately, losing any changes.

11.3 Running FLUID Under Microsoft Windows

To run FLUID under WIN32, double-click on the `FLUID.exe` file. You can also run FLUID from the Command Prompt window. FLUID always runs in the background under WIN32.

11.4 Compiling .fl files

FLUID can also be called as a command-line "compiler" to create the `.cxx` and `.h` file from a `.fl` file. To do this type:

```
fluid -c filename.fl
```

This will read the `filename.fl` file and write `filename.cxx` and `filename.h`. Any leading directory on `filename.fl` will be stripped, so they are always written to the current directory. If there are any errors reading or writing the files, FLUID will print the error and exit with a non-zero code. You can use the following lines in a makefile to automate the creation of the source and header files:

```
my_panels.h my_panels.hxx: my_panels.fl
    fluid -c my_panels.fl
```

Most versions of make support rules that cause `.fl` files to be compiled:

```
.SUFFIXES: .fl .cxx .h
.fl.h .fl.hxx:
    fluid -c $<
```

11.5 A Short Tutorial

FLUID is an amazingly powerful little program. However, this power comes at a price as it is not always obvious how to accomplish seemingly simple tasks with it. This tutorial will show you how to generate a complete user interface class with FLUID that is used for the CubeView program provided with FLTK.

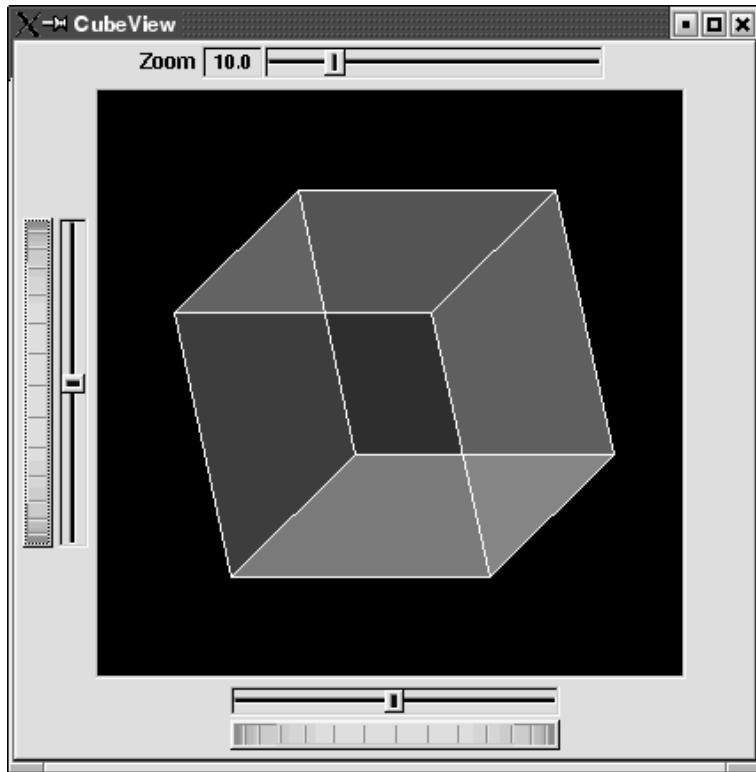


Figure 11.1: CubeView demo

The window is of class `CubeViewUI`, and is completely generated by FLUID, including class member functions. The central display of the cube is a separate subclass of [Fl_Gl_Window](#) called `CubeView`. `CubeViewUI` manages `CubeView` using callbacks from the various sliders and rollers to manipulate the viewing angle and zoom of `CubeView`.

At the completion of this tutorial you will (hopefully) understand how to:

1. Use FLUID to create a complete user interface class, including constructor and any member functions necessary.
2. Use FLUID to set callbacks member functions of a custom widget classes.
3. Subclass an [Fl_Gl_Window](#) to suit your purposes.

11.5.1 The CubeView Class

The `CubeView` class is a subclass of [Fl_Gl_Window](#). It has methods for setting the zoom, the *x* and *y* pan, and the rotation angle about the *x* and *y* axes.

You can safely skip this section as long as you realize the CubeView is a subclass of [Fl_Gl_Window](#) and will respond to calls from CubeViewUI, generated by FLUID.

The CubeView Class Definition

Here is the CubeView class definition, as given by its header file "test/CubeView.h":

```
class CubeView : public Fl_Gl_Window {
public:
    CubeView(int x,int y,int w,int h,const char *l=0);
    // this value determines the scaling factor used to draw the cube.
    double size;
    /* Set the rotation about the vertical (y ) axis.

This function is called by the horizontal roller in CubeViewUI
and the initialize button in CubeViewUI.
    */
    void v_angle(float angle){vAng=angle;};
    // Return the rotation about the vertical (y ) axis.
    float v_angle(){return vAng;};
    /* Set the rotation about the horizontal (x ) axis.

This function is called by the vertical roller in CubeViewUI
and the
initialize button in CubeViewUI.
    */
    void h_angle(float angle){hAng=angle;};
    // the rotation about the horizontal (x ) axis.
    float h_angle(){return hAng;};
    /* Sets the x shift of the cube view camera.

This function is called by the slider in CubeViewUI and the
initialize button in CubeViewUI.
    */
    void panx(float x){xshift=x;};
    /* Sets the y shift of the cube view camera.

This function is called by the slider in CubeViewUI and the
initialize button in CubeViewUI.
    */
    void pany(float y){yshift=y;};
    /* The widget class draw() override.
The draw() function initialize Gl for another round of
drawing then calls specialized functions for drawing each
of the entities displayed in the cube view.
    */
    void draw();

private:
    /* Draw the cube boundaries
Draw the faces of the cube using the boxv[] vertices, using
GL_LINE_LOOP for the faces. The color is #defined by
CUBECOLOR.
    */
    void drawCube();

    float vAng,hAng; float xshift,yshift;

    float boxv0[3];float boxv1[3]; float boxv2[3];float boxv3[3];
    float boxv4[3];float boxv5[3]; float boxv6[3];float boxv7[3];
};
```

The CubeView Class Implementation

Here is the CubeView implementation. It is very similar to the "cube" demo included with FLTK.

```
#include "CubeView.h"
#include <math.h>

CubeView::CubeView(int x,int y,int w,int h,const char *l)
    : Fl_Gl_Window(x,y,w,h,l)
{
    vAng = 0.0; hAng=0.0; size=10.0;
    /* The cube definition. These are the vertices of a unit cube
    centered on the origin.*/
    boxv0[0] = -0.5; boxv0[1] = -0.5; boxv0[2] = -0.5; boxv1[0] = 0.5;
    boxv1[1] = -0.5; boxv1[2] = -0.5; boxv2[0] = 0.5; boxv2[1] = 0.5;
    boxv2[2] = -0.5; boxv3[0] = -0.5; boxv3[1] = 0.5; boxv3[2] = -0.5;
    boxv4[0] = -0.5; boxv4[1] = -0.5; boxv4[2] = 0.5; boxv5[0] = 0.5;
    boxv5[1] = -0.5; boxv5[2] = 0.5; boxv6[0] = 0.5; boxv6[1] = 0.5;
    boxv6[2] = 0.5; boxv7[0] = -0.5; boxv7[1] = 0.5; boxv7[2] = 0.5;
};

// The color used for the edges of the bounding cube.
#define CUBECOLOR 255,255,255,255

void CubeView::drawCube() {
/* Draw a colored cube */
#define ALPHA 0.5
    glShadeModel(GL_FLAT);

    glBegin(GL_QUADS);
    glColor4f(0.0, 0.0, 1.0, ALPHA);
    glVertex3fv(boxv0);
    glVertex3fv(boxv1);
    glVertex3fv(boxv2);
    glVertex3fv(boxv3);

    glColor4f(1.0, 1.0, 0.0, ALPHA);
    glVertex3fv(boxv0);
    glVertex3fv(boxv4);
    glVertex3fv(boxv5);
    glVertex3fv(boxv1);

    glColor4f(0.0, 1.0, 1.0, ALPHA);
    glVertex3fv(boxv2);
    glVertex3fv(boxv6);
    glVertex3fv(boxv7);
    glVertex3fv(boxv3);

    glColor4f(1.0, 0.0, 0.0, ALPHA);
    glVertex3fv(boxv4);
    glVertex3fv(boxv5);
    glVertex3fv(boxv6);
    glVertex3fv(boxv7);

    glColor4f(1.0, 0.0, 1.0, ALPHA);
    glVertex3fv(boxv0);
    glVertex3fv(boxv3);
    glVertex3fv(boxv7);
    glVertex3fv(boxv4);

    glColor4f(0.0, 1.0, 0.0, ALPHA);
    glVertex3fv(boxv1);
    glVertex3fv(boxv5);
    glVertex3fv(boxv6);
    glVertex3fv(boxv2);
}
```

```

glEnd();

glColor3f(1.0, 1.0, 1.0);
glBegin(GL_LINES);
    glVertex3fv(boxv0);
    glVertex3fv(boxv1);

    glVertex3fv(boxv1);
    glVertex3fv(boxv2);

    glVertex3fv(boxv2);
    glVertex3fv(boxv3);

    glVertex3fv(boxv3);
    glVertex3fv(boxv0);

    glVertex3fv(boxv4);
    glVertex3fv(boxv5);

    glVertex3fv(boxv5);
    glVertex3fv(boxv6);

    glVertex3fv(boxv6);
    glVertex3fv(boxv7);

    glVertex3fv(boxv7);
    glVertex3fv(boxv4);

    glVertex3fv(boxv0);
    glVertex3fv(boxv4);

    glVertex3fv(boxv1);
    glVertex3fv(boxv5);

    glVertex3fv(boxv2);
    glVertex3fv(boxv6);

    glVertex3fv(boxv3);
    glVertex3fv(boxv7);
    glEnd();
};//drawCube

void CubeView::draw() {
    if (!valid()) {
        glLoadIdentity(); glViewport(0,0,w(),h());
        glOrtho(-10,10,-10,10,-20000,10000); glEnable(GL_BLEND);
        glBlendFunc(GL_SRC_ALPHA, GL_ONE_MINUS_SRC_ALPHA);
    }

    glClear(GL_COLOR_BUFFER_BIT | GL_DEPTH_BUFFER_BIT);
    glPushMatrix(); glTranslatef(xshift, yshift, 0);
    glRotatef(hAng, 0,1,0); glRotatef(vAng,1,0,0);
    glScalef(float(size),float(size),float(size)); drawCube();
    glPopMatrix();
}

```

11.5.2 The CubeViewUI Class

We will completely construct a window to display and control the CubeView defined in the previous section using FLUID.

Defining the CubeViewUI Class

Once you have started FLUID, the first step in defining a class is to create a new class within FLUID using the **New->Code->Class** menu item. Name the class "CubeViewUI" and leave the subclass blank. We do not need any inheritance for this window. You should see the new class declaration in the FLUID browser window.

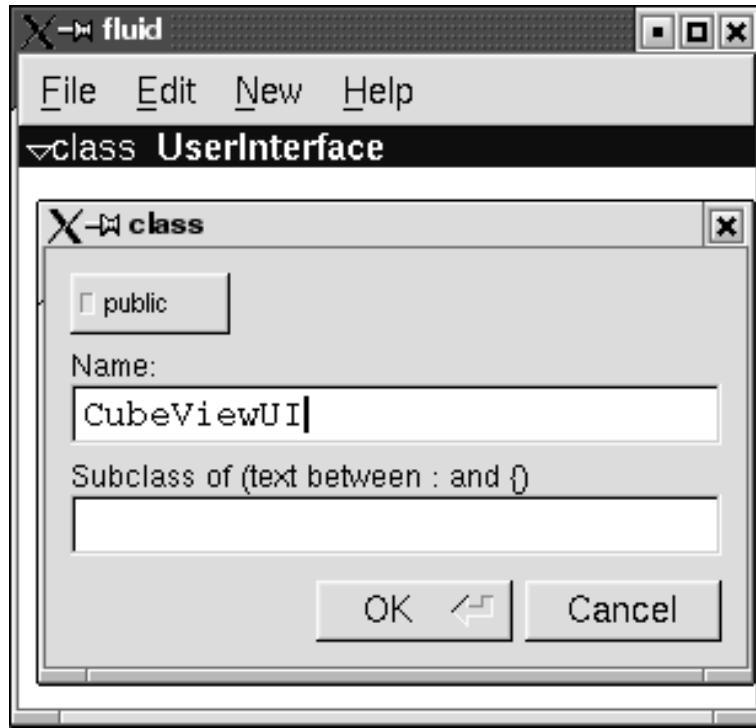


Figure 11.2: FLUID file for CubeView

Adding the Class Constructor

Click on the CubeViewUI class in the FLUID window and add a new method by selecting **New->Code->Function/Method**. The name of the function will also be CubeViewUI. FLUID will understand that this will be the constructor for the class and will generate the appropriate code. Make sure you declare the constructor public.

Then add a window to the CubeViewUI class. Highlight the name of the constructor in the FLUID browser window and click on **New->Group->Window**. In a similar manner add the following to the CubeViewUI constructor:

- A horizontal roller named hrot
- A vertical roller named vrot
- A horizontal slider named xpan
- A vertical slider named ypan
- A horizontal value slider named zoom

None of these additions need be public. And they shouldn't be unless you plan to expose them as part of the interface for CubeViewUI.

When you are finished you should have something like this:

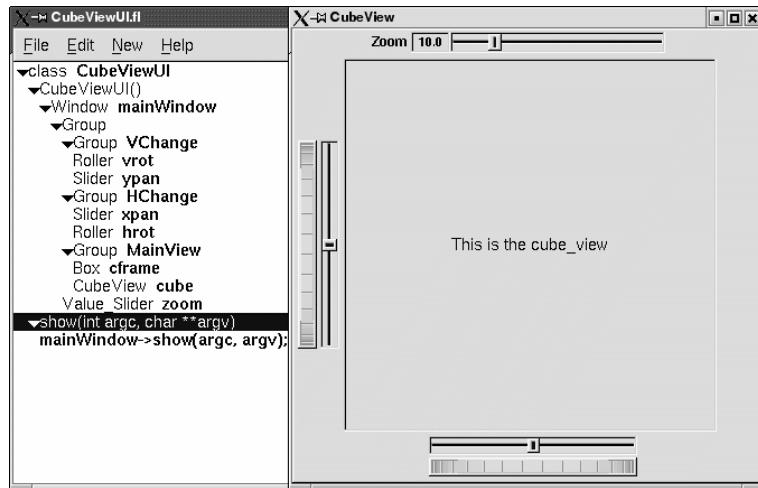


Figure 11.3: FLUID window containing CubeView demo

We will talk about the `show()` method that is highlighted shortly.

Adding the CubeView Widget

What we have is nice, but does little to show our cube. We have already defined the CubeView class and we would like to show it within the CubeViewUI.

The CubeView class inherits the `Fl_GL_Window` class, which is created in the same way as a `Fl_Box` widget. Use **New->Other->Box** to add a square box to the main window. This will be no ordinary box, however.

The Box properties window will appear. The key to letting CubeViewUI display CubeView is to enter CubeView in the "Class:" text entry box. This tells FLUID that it is not an `Fl_Box`, but a similar widget with the same constructor.

In the "Extra Code:" field enter `#include "CubeView.h"`

This `#include` is important, as we have just included CubeView as a member of CubeViewUI, so any public CubeView methods are now available to CubeViewUI.

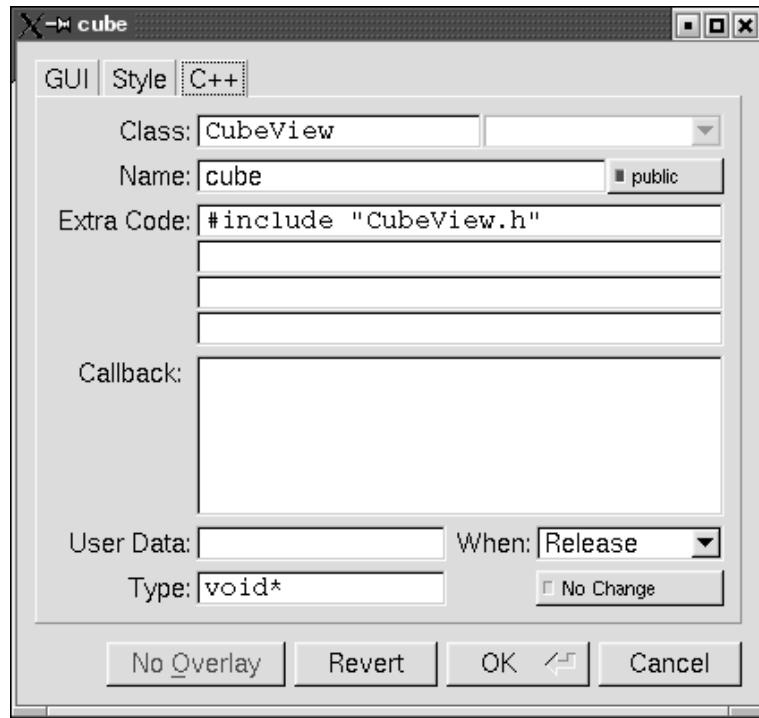


Figure 11.4: CubeView methods

Defining the Callbacks

Each of the widgets we defined before adding CubeView can have callbacks that call CubeView methods. You can call an external function or put in a short amount of code in the "Callback" field of the widget panel. For example, the callback for the ypan slider is:

```
cube->pany(((Fl_Slider *)o)->value());
cube->redraw();
```

We call `cube->redraw()` after changing the value to update the CubeView window. CubeView could easily be modified to do this, but it is nice to keep this exposed in the case where you may want to do more than one view change only redrawing once saves a lot of time.

There is no reason no wait until after you have added CubeView to enter these callbacks. FLUID assumes you are smart enough not to refer to members or functions that don't exist.

Adding a Class Method

You can add class methods within FLUID that have nothing to do with the GUI. An example add a `show` function so that CubeViewUI can actually appear on the screen.

Make sure the top level CubeViewUI is selected and select **New->Code->Function/Method**. Just use the name `show()`. We don't need a return value here, and since we will not be adding any widgets to this method FLUID will assign it a return type of `void`.

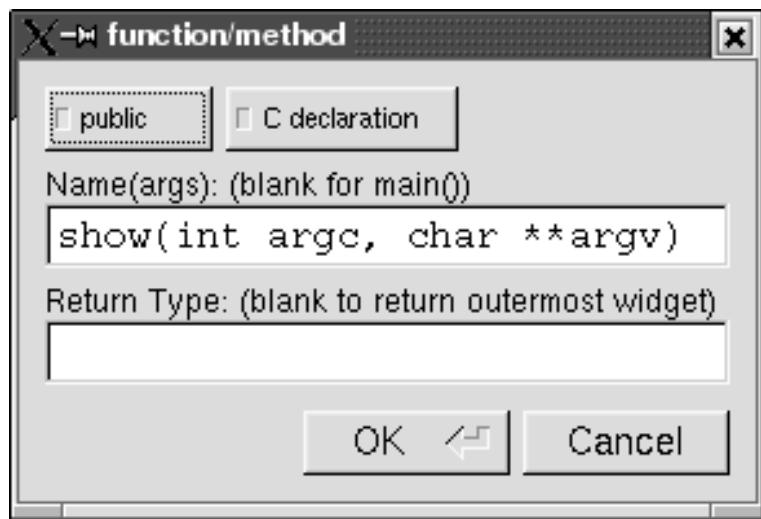


Figure 11.5: CubeView constructor

Once the new method has been added, highlight its name and select **New->Code->Code**. Enter the method's code in the code window.

11.5.3 Adding Constructor Initialization Code

If you need to add code to initialize class, for example setting initial values of the horizontal and vertical angles in the CubeView, you can simply highlight the Constructor and select **New->Code->Code**. Add any required code.

11.5.4 Generating the Code

Now that we have completely defined the CubeViewUI, we have to generate the code. There is one last trick to ensure this all works. Open the preferences dialog from **Edit->Preferences**.

At the bottom of the preferences dialog box is the key: "Include Header from Code". Select that option and set your desired file extensions and you are in business. You can include the CubeViewUI.h (or whatever extension you prefer) as you would any other C++ class.

11.6 FLUID Reference

The following sections describe each of the windows in FLUID.

11.6.1 The Widget Browser

The main window shows a menu bar and a scrolling browser of all the defined widgets. The name of the .f1 file being edited is shown in the window title.

The widgets are stored in a hierarchy. You can open and close a level by clicking the "triangle" at the left of a widget. The leftmost widgets are the *parents*, and all the widgets listed below them are their *children*. Parents don't have to have any children.

The top level of the hierarchy is composed of *functions* and *classes*. Each of these will produce a single C++ public function or class in the output .cxx file. Calling the function or instantiating the class will create all of the child widgets.

The second level of the hierarchy contains the *windows*. Each of these produces an instance of class [F1_Window](#).

Below that are either *widgets* (subclasses of [F1_Widget](#)) or *groups* of widgets (including other groups). Plain groups are for layout, navigation, and resize purposes. *Tab groups* provide the well-known file-card tab interface.

Widgets are shown in the browser by either their *name* (such as "main_panel" in the example), or by their *type* and *label* (such as "Button "the green"").

You *select* widgets by clicking on their names, which highlights them (you can also select widgets from any displayed window). You can select many widgets by dragging the mouse across them, or by using Shift+Click to toggle them on and off. To select no widgets, click in the blank area under the last widget. Note that hidden children may be selected even when there is no visual indication of this.

You *open* widgets by double-clicking on them, or (to open several widgets you have picked) by typing the F1 key. A control panel will appear so you can change the widget(s).

11.6.2 Menu Items

The menu bar at the top is duplicated as a pop-up menu on any displayed window. The shortcuts for all the menu items work in any window. The menu items are:

File/Open... (Ctrl+o)

Discards the current editing session and reads in a different .fl file. You are asked for confirmation if you have changed the current file.

FLUID can also read .fd files produced by the Forms and XForms "fdesign" programs. It is best to File/Merge them instead of opening them. FLUID does not understand everything in a .fd file, and will print a warning message on the controlling terminal for all data it does not understand. You will probably need to edit the resulting setup to fix these errors. Be careful not to save the file without changing the name, as FLUID will write over the .fd file with its own format, which fdesign cannot read!

File/Insert... (Ctrl+i)

Inserts the contents of another .fl file, without changing the name of the current .fl file. All the functions (even if they have the same names as the current ones) are added, and you will have to use cut/paste to put the widgets where you want.

File/Save (Ctrl+s)

Writes the current data to the .fl file. If the file is unnamed then FLUID will ask for a filename.

File/Save As... (Ctrl+Shift+S)

Asks for a new filename and saves the file.

File/Write Code (Ctrl+Shift+C)

"Compiles" the data into a .cxx and .h file. These are exactly the same as the files you get when you run FLUID with the -c switch.

The output file names are the same as the .fl file, with the leading directory and trailing ".fl" stripped, and ".h" or ".cxx" appended.

File/Write Strings (Ctrl+Shift+W)

Writes a message file for all of the text labels defined in the current file.

The output file name is the same as the .fl file, with the leading directory and trailing ".fl" stripped, and ".txt", ".po", or ".msg" appended depending on the [Internationalization Mode](#).

File/Quit (Ctrl+q)

Exits FLUID. You are asked for confirmation if you have changed the current file.

Edit/Undo (Ctrl+z)

This isn't implemented yet. You should do save often so you can recover from any mistakes you make.

Edit/Cut (Ctrl+x)

Deletes the selected widgets and all of their children. These are saved to a "clipboard" file and can be pasted back into any FLUID window.

Edit/Copy (Ctrl+c)

Copies the selected widgets and all of their children to the "clipboard" file.

Edit/Paste (Ctrl+c)

Pastes the widgets from the clipboard file.

If the widget is a window, it is added to whatever function is selected, or contained in the current selection.

If the widget is a normal widget, it is added to whatever window or group is selected. If none is, it is added to the window or group that is the parent of the current selection.

To avoid confusion, it is best to select exactly one widget before doing a paste.

Cut/paste is the only way to change the parent of a widget.

Edit>Select All (Ctrl+a)

Selects all widgets in the same group as the current selection.

If they are all selected already then this selects all widgets in that group's parent. Repeatedly typing Ctrl+a will select larger and larger groups of widgets until everything is selected.

Edit/Open... (F1 or double click)

Displays the current widget in the attributes panel. If the widget is a window and it is not visible then the window is shown instead.

Edit/Sort

Sorts the selected widgets into left to right, top to bottom order. You need to do this to make navigation keys in FLTK work correctly. You may then fine-tune the sorting with "Earlier" and "Later". This does not affect the positions of windows or functions.

Edit/Earlier (F2)

Moves all of the selected widgets one earlier in order among the children of their parent (if possible). This will affect navigation order, and if the widgets overlap it will affect how they draw, as the later widget is drawn on top of the earlier one. You can also use this to reorder functions, classes, and windows within functions.

Edit/Later (F3)

Moves all of the selected widgets one later in order among the children of their parent (if possible).

Edit/Group (F7)

Creates a new [Fl_Group](#) and make all the currently selected widgets children of it.

Edit/Ungroup (F8)

Deletes the parent group if all the children of a group are selected.

Edit/Overlays on/off (Ctrl+Shift+O)

Toggles the display of the red overlays off, without changing the selection. This makes it easier to see box borders and how the layout looks. The overlays will be forced back on if you change the selection.

Edit/Project Settings... (Ctrl+p)

Displays the project settings panel. The output filenames control the extensions or names of the files the are generated by FLUID. If you check the "Include .h from .cxx" button the code file will include the header file automatically.

The internationalization options are described [later in this chapter](#).

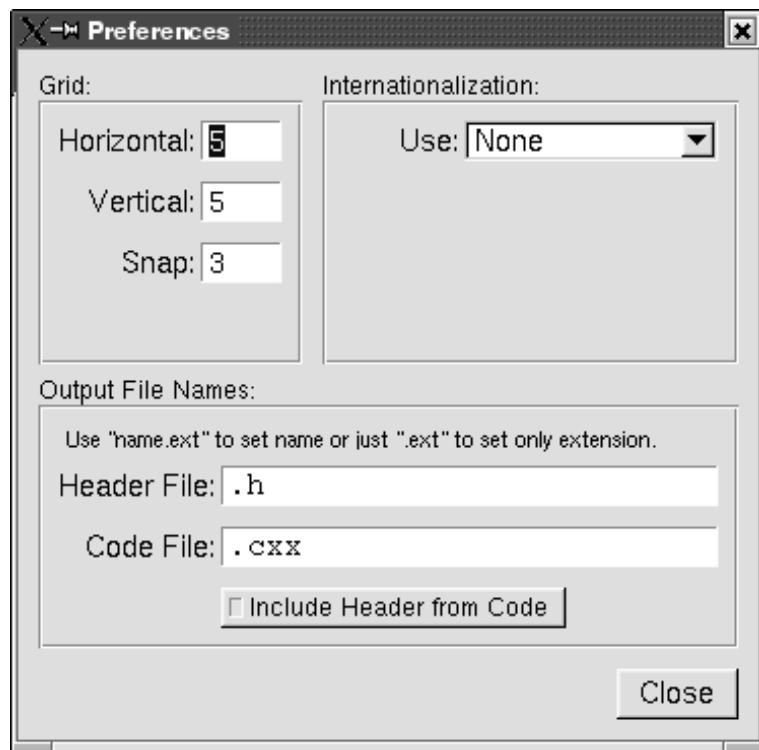


Figure 11.6: FLUID Preferences Window

Edit/GUI Settings... (Shift+Ctrl+p)

Displays the GUI settings panel. This panel is used to control the user interface settings.

New/Code/Function

Creates a new C function. You will be asked for a name for the function. This name should be a legal C++ function template, without the return type. You can pass arguments which can be referred to by code you type into the individual widgets.

If the function contains any unnamed windows, it will be declared as returning a `Fl_Window` pointer. The unnamed window will be returned from it (more than one unnamed window is useless). If the function contains only named windows, it will be declared as returning nothing (`void`).

It is possible to make the `.cxx` output be a self-contained program that can be compiled and executed. This is done by deleting the function name so `main(argc, argv)` is used. The function will call `show()` on all the windows it creates and then call `Fl::run()`. This can also be used to test resize behavior or other parts of the user interface.

You can change the function name by double-clicking on the function.

New/Window

Creates a new `Fl_Window` widget. The window is added to the currently selected function, or to the function containing the currently selected item. The window will appear, sized to 100x100. You can resize it to whatever size you require.

The widget panel will also appear and is described later in this chapter.

New/...

All other items on the New menu are subclasses of `Fl_Widget`. Creating them will add them to the currently selected group or window, or the group or window containing the currently selected widget. The initial dimensions and position are chosen by copying the current widget, if possible.

When you create the widget you will get the widget's control panel, which is described later in this chapter.

Layout/Align/...

Align all selected widgets to the first widget in the selection.

Layout/Space Evenly/...

Space all selected widgets evenly inside the selected space. Widgets will be sorted from first to last.

Layout/Make Same Size/...

Make all selected widgets the same size as the first selected widget.

Layout/Center in Group/...

Center all selected widgets relative to their parent widget

Layout/Grid... (Ctrl+g)

Displays the grid settings panel. This panel controls the grid that all widgets snap to when you move and resize them, and for the "snap" which is how far a widget has to be dragged from its original position to actually change.

Shell/Execute Command... (Alt+x)

Displays the shell command panel. The shell command is commonly used to run a 'make' script to compile the FLTK output.

Shell/Execute Again (Alt+g)

Run the shell command again.

Help/About FLUID

Pops up a panel showing the version of FLUID.

Help/On FLUID

Shows this chapter of the manual.

Help/Manual

Shows the contents page of the manual

11.6.3 The Widget Panel

When you double-click on a widget or a set of widgets you will get the "widget attribute panel".

When you change attributes using this panel, the changes are reflected immediately in the window. It is useful to hit the "no overlay" button (or type Ctrl+Shift+O) to hide the red overlay so you can see the widgets more accurately, especially when setting the box type.

If you have several widgets selected, they may have different values for the fields. In this case the value for *one* of the widgets is shown. But if you change this value, *all* of the selected widgets are changed to the new value.

Hitting "OK" makes the changes permanent. Selecting a different widget also makes the changes permanent. FLUID checks for simple syntax errors such as mismatched parenthesis in any code before saving any text.

"Revert" or "Cancel" put everything back to when you last brought up the panel or hit OK. However in the current version of FLUID, changes to "visible" attributes (such as the color, label, box) are not undone by revert or cancel. Changes to code like the callbacks are undone, however.

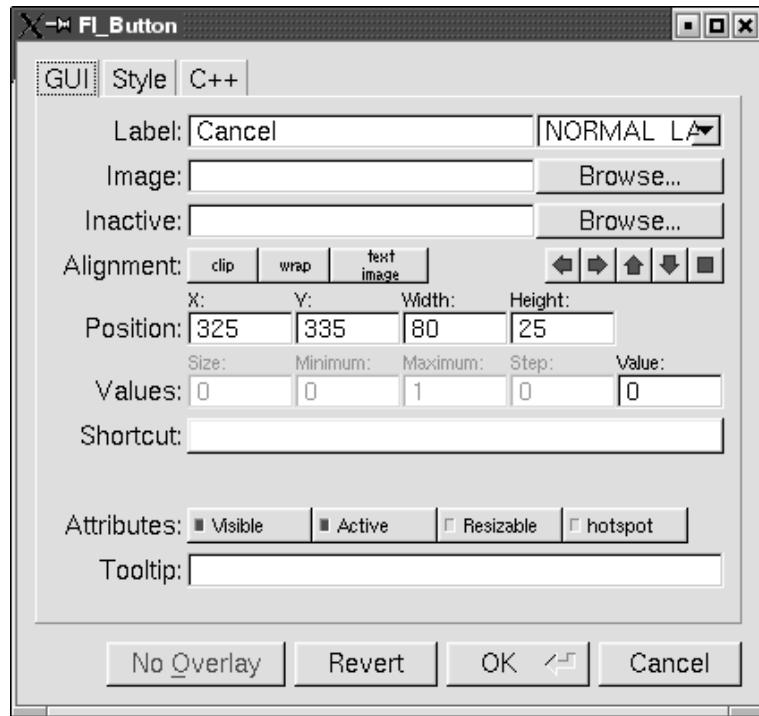


Figure 11.7: The FLUID widget GUI attributes

11.7 GUI Attributes

Label (text field)

String to print next to or inside the button. You can put newlines into the string to make multiple lines. The easiest way is by typing Ctrl+j.

Symbols can be added to the label using the at sign ("@").

Label (pull down menu)

How to draw the label. Normal, shadowed, engraved, and embossed change the appearance of the text.

Image

The active image for the widget. Click on the **Browse...** button to pick an image file using the file chooser.

Inactive

The inactive image for the widget. Click on the **Browse...** button to pick an image file using the file chooser.

Alignment (buttons)

Where to draw the label. The arrows put it on that side of the widget, you can combine them to put it in the corner. The "box" button puts the label inside the widget, rather than outside.

The **clip** button clips the label to the widget box, the **wrap** button wraps any text in the label, and the **text image** button puts the text over the image instead of under the image.

Position (text fields)

The position fields show the current position and size of the widget box. Enter new values to move and/or resize a widget.

Values (text fields)

The values and limits of the current widget. Depending on the type of widget, some or all of these fields may be inactive.

Shortcut

The shortcut key to activate the widget. Click on the shortcut button and press any key sequence to set the shortcut.

Attributes (buttons)

The **Visible** button controls whether the widget is visible (on) or hidden (off) initially. Don't change this for windows or for the immediate children of a Tabs group.

The **Active** button controls whether the widget is activated (on) or deactivated (off) initially. Most widgets appear greyed out when deactivated.

The **Resizable** button controls whether the window is resizable. In addition all the size changes of a window or group will go "into" the resizable child. If you have a large data display surrounded by buttons, you probably want that data area to be resizable. You can get more complex behavior by making invisible boxes the resizable widget, or by using hierarchies of groups. Unfortunately the only way to test it is to compile the program. Resizing the FLUID window is *not* the same as what will happen in the user program.

The **Hotspot** button causes the parent window to be positioned with that widget centered on the mouse. This position is determined *when the FLUID function is called*, so you should call it immediately before showing the window. If you want the window to hide and then reappear at a new position, you should have your program set the hotspot itself just before `show()`.

The **Border** button turns the window manager border on or off. On most window managers you will have to close the window and reopen it to see the effect.

X Class (text field)

The string typed into here is passed to the X window manager as the class. This can change the icon or window decorations. On most (all?) window managers you will have to close the window and reopen it to see the effect.

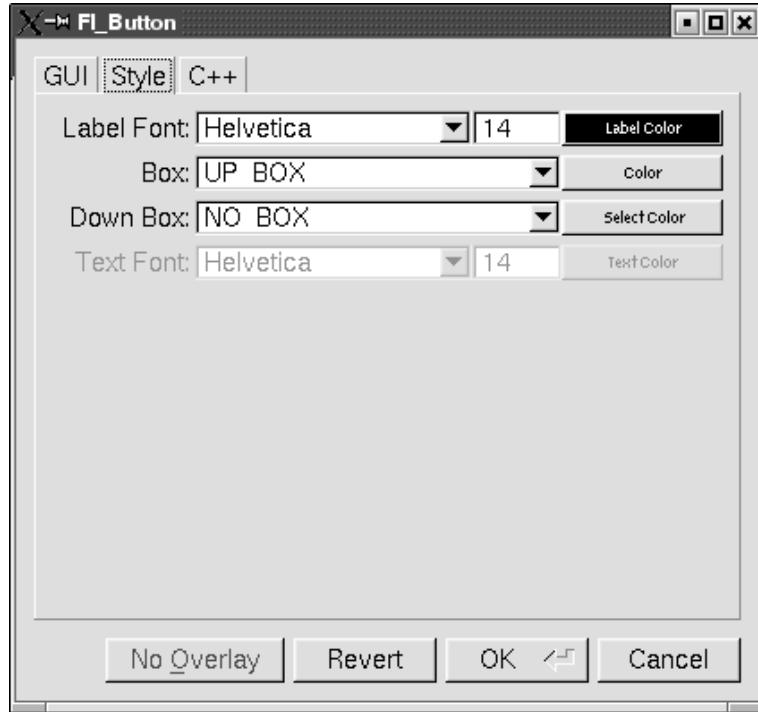


Figure 11.8: The FLUID widget Style attributes

11.7.1 Style Attributes

Label Font (pulldown menu)

Font to draw the label in. Ignored by symbols, bitmaps, and pixmaps. Your program can change the actual font used by these "slots" in case you want some font other than the 16 provided.

Label Size (pulldown menu)

Pixel size (height) for the font to draw the label in. Ignored by symbols, bitmaps, and pixmaps. To see the result without dismissing the panel, type the new number and then Tab.

Label Color (button)

Color to draw the label. Ignored by pixmaps (bitmaps, however, do use this color as the foreground color).

Box (pulldown menu)

The boxtyle to draw as a background for the widget.

Many widgets will work, and draw faster, with a "frame" instead of a "box". A frame does not draw the colored interior, leaving whatever was already there visible. Be careful, as FLUID may draw this ok but the real program may leave unwanted stuff inside the widget.

If a window is filled with child widgets, you can speed up redrawing by changing the window's box type to "NO_BOX". FLUID will display a checkerboard for any areas that are not colored in by boxes. Note that this checkerboard is not drawn by the resulting program. Instead random garbage will be displayed.

Down Box (pulldown menu)

The boxtyle to draw when a button is pressed or for some parts of other widgets like scrollbars and valiators.

Color (button)

The color to draw the box with.

Select Color (button)

Some widgets will use this color for certain parts. FLUID does not always show the result of this: this is the color buttons draw in when pushed down, and the color of input fields when they have the focus.

Text Font, Size, and Color

Some widgets display text, such as input fields, pull-down menus, and browsers.

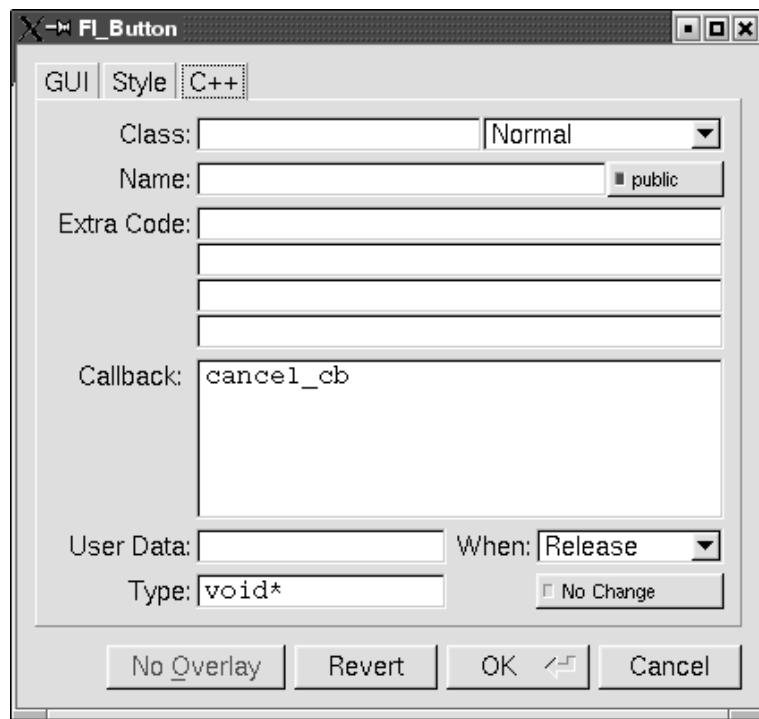


Figure 11.9: The FLUID widget C++ attributes

11.7.2 C++ Attributes

Class

This is how you use your own subclasses of `Fl_Widget`. Whatever identifier you type in here will be the class that is instantiated.

In addition, no `#include` header file is put in the `.h` file. You must provide a `#include` line as the first line of the "Extra Code" which declares your subclass.

The class must be similar to the class you are spoofing. It does not have to be a subclass. It is sometimes useful to change this to another FLTK class. Currently the only way to get a double-buffered window is to change this field for the window to "Fl_Double_Window" and to add

```
"#include <FL/Fl_Double_Window.h>
```

to the extra code.

Type (upper-right pulldown menu)

Some classes have subtypes that modify their appearance or behavior. You pick the subtype off of this menu.

Name (text field)

Name of a variable to declare, and to store a pointer to this widget into. This variable will be of type "<class>*". If the name is blank then no variable is created.

You can name several widgets with "name[0]", "name[1]", "name[2]", etc. This will cause FLUID to declare an array of pointers. The array is big enough that the highest number found can be stored. All widgets that in the array must be the same type.

Public (button)

Controls whether the widget is publicly accessible. When embedding widgets in a C++ class, this controls whether the widget is `public` or `private` in the class. Otherwise it controls whether the widget is declared `static` or `global` (`extern`).

Extra Code (text fields)

These four fields let you type in literal lines of code to dump into the `.h` or `.cxx` files.

If the text starts with a `#` or the word `extern` then FLUID thinks this is an "include" line, and it is written to the `.h` file. If the same include line occurs several times then only one copy is written.

All other lines are "code" lines. The current widget is pointed to by the local variable `o`. The window being constructed is pointed to by the local variable `w`. You can also access any arguments passed to the function here, and any named widgets that are before this one.

FLUID will check for matching parenthesis, braces, and quotes, but does not do much other error checking. Be careful here, as it may be hard to figure out what widget is producing an error in the compiler. If you need more than four lines you probably should call a function in your own `.cxx` code.

Callback (text field)

This can either be the name of a function, or a small snippet of code. If you enter anything but letters, numbers, and the underscore then FLUID treats it as code.

A name names a function in your own code. It must be declared as `void name(<class>*, void*)`.

A code snippet is inserted into a static function in the `.cxx` output file. The function prototype is `void name(class *o, void *v)` so that you can refer to the widget as `o` and the `user_data()` as `v`. FLUID will check for matching parenthesis, braces, and quotes, but does not do much other error checking. Be careful here, as it may be hard to figure out what widget is producing an error in the compiler.

If the callback is blank then no callback is set.

User Data (text field)

This is a value for the `user_data()` of the widget. If blank the default value of zero is used. This can be any piece of C code that can be cast to a `void` pointer.

Type (text field)

The `void *` in the callback function prototypes is replaced with this. You may want to use `long` for old XForms code. Be warned that anything other than `void *` is not guaranteed to work! However on most architectures other pointer types are ok, and `long` is usually ok, too.

When (pulldown menu)

When to do the callback. This can be **Never**, **Changed**, **Release**, or **Enter Key**. The value of **Enter Key** is only useful for text input fields.

There are other rare but useful values for the `when()` field that are not in the menu. You should use the extra code fields to put these values in.

No Change (button)

The **No Change** button means the callback is done on the matching event even if the data is not changed.

11.8 Selecting and Moving Widgets

Double-clicking a window name in the browser will display it, if not displayed yet. From this display you can select widgets, sets of widgets, and move or resize them. To close a window either double-click it or type `ESC`.

To select a widget, click it. To select several widgets drag a rectangle around them. Holding down shift will toggle the selection of the widgets instead.

You cannot pick hidden widgets. You also cannot choose some widgets if they are completely overlapped by later widgets. Use the browser to select these widgets.

The selected widgets are shown with a red "overlay" line around them. You can move the widgets by dragging this box. Or you can resize them by dragging the outer edges and corners. Hold down the Alt key while dragging the mouse to defeat the snap-to-grid effect for fine positioning.

If there is a tab box displayed you can change which child is visible by clicking on the file tabs. The child you pick is selected.

The arrow, tab, and shift+tab keys "navigate" the selection. Left, right, tab, or shift+tab move to the next or previous widgets in the hierarchy. Hit the right arrow enough and you will select every widget in the window. Up/down widgets move to the previous/next widgets that overlap horizontally. If the navigation does not seem to work you probably need to "Sort" the widgets. This is important if you have input fields, as FLTK uses the same rules when using arrow keys to move between input fields.

To "open" a widget, double click it. To open several widgets select them and then type F1 or pick "Edit/Open" off the pop-up menu.

Type `Ctrl+o` to temporarily toggle the overlay off without changing the selection, so you can see the widget borders.

You can resize the window by using the window manager border controls. FLTK will attempt to round the window size to the nearest multiple of the grid size and makes it big enough to contain all the widgets (it does this using illegal X methods, so it is possible it will barf with some window managers!). Notice that the actual window in your program may not be resizable, and if it is, the effect on child widgets may be different.

The panel for the window (which you get by double-clicking it) is almost identical to the panel for any other [Fl_Widget](#). There are three extra items:

11.9 Image Labels

The *contents* of the image files in the **Image** and **Inactive** text fields are written to the `.cxx` file. If many widgets share the same image then only one copy is written. Since the image data is embedded in the generated source code, you need only distribute the C++ code and not the image files themselves.

However, the *filenames* are stored in the `.fl` file so you will need the image files as well to read the `.fl` file. Filenames are relative to the location of the `.fl` file and not necessarily the current directory. We recommend you either put the images in the same directory as the `.fl` file, or use absolute path names.

Notes for All Image Types

FLUID runs using the default visual of your X server. This may be 8 bits, which will give you dithered images. You may get better results in your actual program by adding the code "Fl::visual(FL_RGB)" to your code right before the first window is displayed.

All widgets with the same image on them share the same code and source X pixmap. Thus once you have put an image on a widget, it is nearly free to put the same image on many other widgets.

If you edit an image at the same time you are using it in FLUID, the only way to convince FLUID to read the image file again is to remove the image from all widgets that are using it or re-load the `.fl` file.

Don't rely on how FLTK crops images that are outside the widget, as this may change in future versions! The cropping of inside labels will probably be unchanged.

To more accurately place images, make a new "box" widget and put the image in that as the label.

XBM (X Bitmap) Files

FLUID reads X bitmap files which use C source code to define a bitmap. Sometimes they are stored with the ".h" or ".bm" extension rather than the standard ".xbm" extension.

FLUID writes code to construct an [Fl_Bitmap](#) image and use it to label the widget. The '1' bits in the bitmap are drawn using the label color of the widget. You can change this color in the FLUID widget attributes panel. The '0' bits are transparent.

The program "bitmap" on the X distribution does an adequate job of editing bitmaps.

XPM (X Pixmap) Files

FLUID reads X pixmap files as used by the `libxpm` library. These files use C source code to define a pixmap. The filenames usually have the ".xpm" extension.

FLUID writes code to construct an [Fl_Pixmap](#) image and use it to label the widget. The label color of the widget is ignored, even for 2-color images that could be a bitmap. XPM files can mark a single color as being transparent, and FLTK uses this information to generate a transparency mask for the image.

We have not found any good editors for small iconic pictures. For pixmaps we have used [XPaint](#) and the KDE icon editor.

BMP Files

FLUID reads Windows BMP image files which are often used in WIN32 applications for icons. FLUID converts BMP files into (modified) XPM format and uses a [Fl_BMP_Image](#) image to label the widget. Transparency is handled the same as for XPM files. All image data is uncompressed when written to the source file, so the code may be much bigger than the .bmp file.

GIF Files

FLUID reads GIF image files which are often used in HTML documents to make icons. FLUID converts GIF files into (modified) XPM format and uses a [Fl_GIF_Image](#) image to label the widget. Transparency is handled the same as for XPM files. All image data is uncompressed when written to the source file, so the code may be much bigger than the .gif file. Only the first image of an animated GIF file is used.

JPEG Files

If FLTK is compiled with JPEG support, FLUID can read JPEG image files which are often used for digital photos. FLUID uses a [Fl_JPEG_Image](#) image to label the widget, and writes uncompressed RGB or grayscale data to the source file.

PNG (Portable Network Graphics) Files

If FLTK is compiled with PNG support, FLUID can read PNG image files which are often used in HTML documents. FLUID uses a [Fl_PNG_Image](#) image to label the widget, and writes uncompressed RGB or grayscale data to the source file. PNG images can provide a full alpha channel for partial transparency, and FLTK supports this as best as possible on each platform.

11.10 Internationalization with FLUID

FLUID supports internationalization (I18N for short) of label strings used by widgets. The preferences window (**Ctrl+p**) provides access to the I18N options.

11.10.1 I18N Methods

FLUID supports three methods of I18N: use none, use GNU gettext, and use POSIX catgets. The "use none" method is the default and just passes the label strings as-is to the widget constructors.

The "GNU gettext" method uses GNU gettext (or a similar text-based I18N library) to retrieve a localized string before calling the widget constructor.

The "POSIX catgets" method uses the POSIX catgets function to retrieve a numbered message from a message catalog before calling the widget constructor.

11.10.2 Using GNU gettext for I18N

FLUID's code support for GNU gettext is limited to calling a function or macro to retrieve the localized label; you still need to call `setlocale()` and `textdomain()` or `bindtextdomain()` to select the appropriate language and message file.

To use GNU gettext for I18N, open the preferences window and choose "GNU gettext" from the "Use" chooser. Two new input fields will then appear to control the include file and function/macro name to use when retrieving the localized label strings.

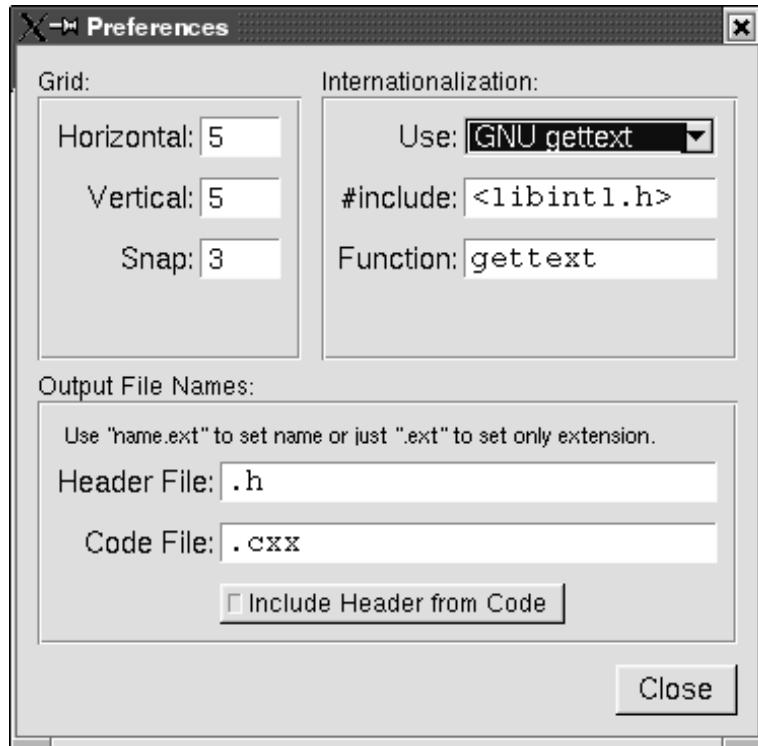


Figure 11.10: Internationalization using GNU gettext

The "\#include" field controls the header file to include for I18N; by default this is <**libintl.h**>, the standard I18N file for GNU gettext.

The "Function" field controls the function (or macro) that will retrieve the localized message; by default the `gettext` function will be called.

11.10.3 Using POSIX catgets for I18N

FLUID's code support for POSIX catgets allows you to use a global message file for all interfaces or a file specific to each .fl file; you still need to call `setlocale()` to select the appropriate language.

To use POSIX catgets for I18N, open the preferences window and choose "POSIX catgets" from the "Use" chooser. Three new input fields will then appear to control the include file, catalog file, and set number for retrieving the localized label strings.

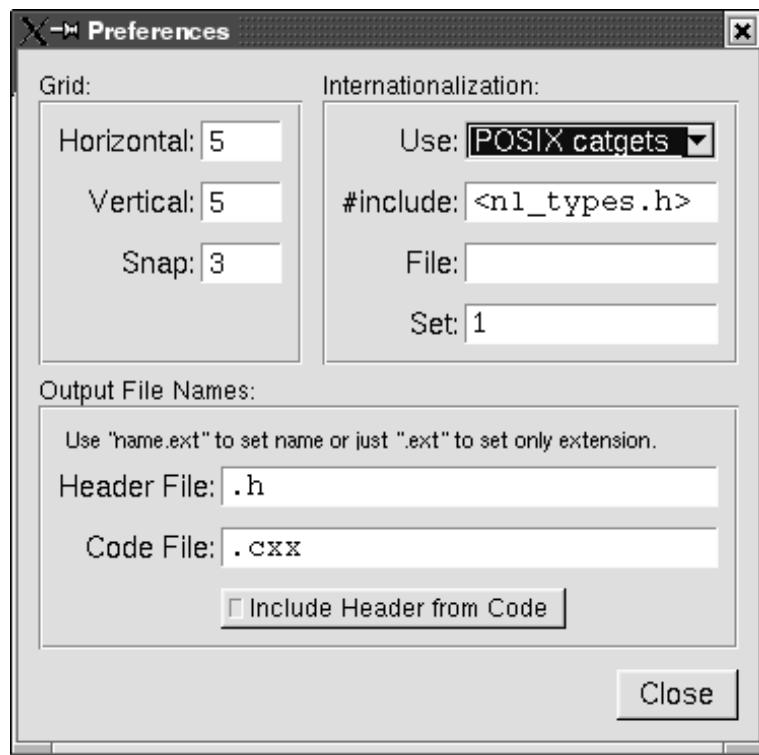


Figure 11.11: Internationalization using POSIX catgets

The "\#include" field controls the header file to include for I18N; by default this is `<nl_types.h>`, the standard I18N file for POSIX catgets.

The "File" field controls the name of the catalog file variable to use when retrieving localized messages; by default the file field is empty which forces a local (static) catalog file to be used for all of the windows defined in your `.fl` file.

The "Set" field controls the set number in the catalog file. The default set is 1 and rarely needs to be changed.

11.11 Known limitations

Declaration Blocks can be used to temporarily block out already designed code using `#if 0` and `#endif` type construction. This will effectively avoid compilation of blocks of code. However, static code and data generated by this segment (menu items, images, include statements, etc.) will still be generated and likely cause compile-time warnings.

Chapter 12

10 - Advanced FLTK

This chapter explains advanced programming and design topics that will help you to get the most out of FLTK.

12.1 Multithreading

FLTK supports multithreaded application using a locking mechanism based on "pthreads". We do not provide a threading interface as part of the library. However a simple example how threads can be implemented for all supported platforms can be found in `test/thread.h` and `test/thread.cxx`.

To use the locking mechanism, FLTK must be compiled with `-enable-threads` set during the configure process. IDE-based versions of FLTK are automatically compiled with locking enabled if possible.

In `main()`, call `Fl::lock()` before `Fl::run()` or `Fl::wait()` to start the runtime multithreading support for your program. All callbacks and derived functions like `handle()` and `draw()` will now be properly locked:

```
}
```

```
int main() {
    Fl::lock();
    /* run thread */
    while (Fl::wait() > 0) {
        if (Fl::thread_message()) {
            /* process your data */
        }
    }
}
```

You can now start as many threads as you like. From within a thread (other than the main thread) FLTK calls must be wrapped with calls to `Fl::lock()` and `Fl::unlock()`:

```
Fl::lock();      // avoid conflicting calls
...
Fl::unlock();   // allow other threads to access FLTK again
```

You can send messages from child threads to the main thread using `Fl::awake(msg)`:

```
void *msg;       // "msg" is a pointer to your message
Fl::awake(msg); // send "msg" to main thread
```

You can also tell the main thread to call a function for you as soon as possible by using `Fl::awake(callback, userdata)`:

```
void do_something(void *userdata) {
    // running with the main thread
}

// running in another thread
void *data;      // "data" is a pointer to your user data
Fl::awake(do_something, data); // call something in main thread
```

FLTK supports multiple platforms, some of them which do not allow any other but the main thread to handle system events and open or close windows. The safe thing to do is to adhere to the following rules for threads on all operating systems:

- Don't `show()` or `hide()` anything that contains widgets derived from `F1_Window`, including dialogs, file choosers, subwindows or `F1_GL_Windows`
- Don't call `F1::wait()`, `F1::flush()` or any related methods that will handle system messages
- Don't start or cancel timers
- Don't change window decorations or titles
- The `make_current()` method may or may not work well for regular windows, but should always work for `F1_GL_Windows` to allow for high speed rendering on graphics cards with multiple pipelines

See also: `void awake(void *message)`, `void lock()`, `void *thread_message()`, `void unlock()`.

Chapter 13

11 - Unicode and utf-8 Support

This chapter explains how FLTK handles international text via Unicode and utf-8.

Unicode support was only recently added to FLTK and is still incomplete. This chapter is Work in Progress, reflecting the current state of Unicode support.

13.1 About Unicode and utf-8

The Unicode Standard is a worldwide accepted character encoding standard. Unicode provides access to over 100,000 characters used in all the major languages written today.

Utf-8 encodes all Unicode characters into variable length sequences of bytes. Unicode characters in the 7-bit ASCII range map to the same value in utf-8, making the transformation to Unicode quick and easy.

Moving from ASCII encoding to Unicode will allow all new FLTK applications to be easily internationalized and used all over the world. By choosing utf-8 encoding, FLTK remains largely source-code compatible to previous iteration of the library.

13.2 Unicode in FLTK

FLTK will be entirely converted to Unicode in utf-8 encoding. If a different encoding is required by the underlying operating system, FLTK will convert string as needed.

TODO:

- more doc on unicode, add links
- write something about filename encoding on OS X...
- explain the `fl_utf8_...` commands
- explain issues with [Fl_Preferences](#)
- why FLTK has no `Fl_String` class

DONE:

- initial transfer of the Ian/O'ksi'D patch
- adapted Makefiles and IDEs for available platforms
- hacked some Unicode keyboard entry for OS X

ISSUES:

- IDEs:
 - Makefile support: tested on Fedora Core 5 and OS X, but heaven knows on which platforms this may fail
 - Xcode: tested, seems to be working (but see comments below on OS X)

- VisualC (VC6): tested, test/utf8 works, but may have had some issues during merge. Some additional work needed (imm32.lib)
 - VisualStudio2005: tested, test/utf8 works, some addtl. work needed (imm32.lib)
 - VisualCNet: sorry, I have no longer access to that IDE
 - Borland and other compiler: sorry, I can't update those
- Platforms:
 - you will encounter problems on all platforms!
 - X11: many characters are missing, but that may be related to bad fonts on my machine. I also could not do any keyboard tests yet. Rendering seems to generally work ok.
 - Win32: US and German keyboard worked ok, but no compositing was tested. Rendering looks pretty good.
 - OS X: redering looks good. Keyboard is completely messed up, even in US setting (with Alt key)
 - all: while merging I have seen plenty of places that are not entirley utf8-safe, particularly [Fl_Input](#), [Fl_Text_Editor](#), and [Fl_Help_View](#). Keycodes from the keyboard conflict with Unicode characters. Right-to-left rendered text can not be marked or edited, and probably much more.

Chapter 14

C - FLTK Enumerations

Note:

This file is not actively maintained any more, but is left here as a reference, until the doxygen documentation is completed.

See also:

[FL/Enumerations.H](#).

This appendix lists the enumerations provided in the <[FL/Enumerations.H](#)> header file, organized by section. Constants whose value is zero are marked with "(0)", this is often useful to know when programming.

14.1 Version Numbers

The FLTK version number is stored in a number of compile-time constants:

- `FL_MAJOR_VERSION` - The major release number, currently 1.
- `FL_MINOR_VERSION` - The minor release number, currently 3.
- `FL_PATCH_VERSION` - The patch release number, currently 0.
- `FL_VERSION` - A combined floating-point version number for the major, minor, and patch release numbers, currently 1.0300.

14.2 Events

Events are identified by an `Fl_Event` enumeration value. The following events are currently defined:

- `FL_NO_EVENT` - No event (or an event fltk does not understand) occurred (0).
- `FL_PUSH` - A mouse button was pushed.
- `FL_RELEASE` - A mouse button was released.
- `FL_ENTER` - The mouse pointer entered a widget.
- `FL_LEAVE` - The mouse pointer left a widget.
- `FL_DRAG` - The mouse pointer was moved with a button pressed.
- `FL_FOCUS` - A widget should receive keyboard focus.
- `FL_UNFOCUS` - A widget loses keyboard focus.
- `FL_KEYBOARD` - A key was pressed.
- `FL_CLOSE` - A window was closed.
- `FL_MOVE` - The mouse pointer was moved with no buttons pressed.
- `FL_SHORTCUT` - The user pressed a shortcut key.
- `FL_DEACTIVATE` - The widget has been deactivated.
- `FL_ACTIVATE` - The widget has been activated.

- `FL_HIDE` - The widget has been hidden.
- `FL_SHOW` - The widget has been shown.
- `FL_PASTE` - The widget should paste the contents of the clipboard.
- `FL_SELECTIONCLEAR` - The widget should clear any selections made for the clipboard.
- `FL_MOUSEWHEEL` - The horizontal or vertical mousewheel was turned.
- `FL_DND_ENTER` - The mouse pointer entered a widget dragging data.
- `FL_DND_DRAG` - The mouse pointer was moved dragging data.
- `FL_DND_LEAVE` - The mouse pointer left a widget still dragging data.
- `FL_DND_RELEASE` - Dragged data is about to be dropped.

14.3 Callback "When" Conditions

The following constants determine when a callback is performed:

- `FL_WHEN_NEVER` - Never call the callback (0).
- `FL_WHEN_CHANGED` - Do the callback only when the widget value changes.
- `FL_WHEN_NOT_CHANGED` - Do the callback whenever the user interacts with the widget.
- `FL_WHEN_RELEASE` - Do the callback when the button or key is released and the value changes.
- `FL_WHEN_ENTER_KEY` - Do the callback when the user presses the ENTER key and the value changes.
- `FL_WHEN_RELEASE_ALWAYS` - Do the callback when the button or key is released, even if the value doesn't change.
- `FL_WHEN_ENTER_KEY_ALWAYS` - Do the callback when the user presses the ENTER key, even if the value doesn't change.

14.4 Fl::event_button() Values

The following constants define the button numbers for `FL_PUSH` and `FL_RELEASE` events:

- `FL_LEFT_MOUSE` - the left mouse button
- `FL_MIDDLE_MOUSE` - the middle mouse button
- `FL_RIGHT_MOUSE` - the right mouse button

14.5 Fl::event_key() Values

The following constants define the non-ASCII keys on the keyboard for `FL_KEYBOARD` and `FL_SHORTCUT` events:

- `FL_Button` - A mouse button; use `FL_Button` + n for mouse button n.
- `FL_Backspace` - The backspace key.
- `FL_Tab` - The tab key.
- `FL_Enter` - The enter key.
- `FL_Pause` - The pause key.
- `FL_Scroll_Lock` - The scroll lock key.
- `FL_Escape` - The escape key.
- `FL_Home` - The home key.
- `FL_Left` - The left arrow key.
- `FL_Up` - The up arrow key.
- `FL_Right` - The right arrow key.
- `FL_Down` - The down arrow key.
- `FL_Page_Up` - The page-up key.
- `FL_Page_Down` - The page-down key.
- `FL_End` - The end key.
- `FL_Print` - The print (or print-screen) key.
- `FL_Insert` - The insert key.
- `FL_Menu` - The menu key.
- `FL_Num_Lock` - The num lock key.
- `FL_KP` - One of the keypad numbers; use `FL_KP` + n for number n.
- `FL_KP_Enter` - The enter key on the keypad.
- `FL_F` - One of the function keys; use `FL_F` + n for function key n.
- `FL_Shift_L` - The lefthand shift key.
- `FL_Shift_R` - The righthand shift key.
- `FL_Control_L` - The lefthand control key.
- `FL_Control_R` - The righthand control key.
- `FL_Caps_Lock` - The caps lock key.
- `FL_Meta_L` - The left meta/Windows key.
- `FL_Meta_R` - The right meta/Windows key.
- `FL_Alt_L` - The left alt key.
- `FL_Alt_R` - The right alt key.
- `FL_Delete` - The delete key.

14.6 Fl::event_state() Values

The following constants define bits in the `Fl::event_state()` value:

- `FL_SHIFT` - One of the shift keys is down.
- `FL_CAPS_LOCK` - The caps lock is on.
- `FL_CTRL` - One of the ctrl keys is down.
- `FL_ALT` - One of the alt keys is down.
- `FL_NUM_LOCK` - The num lock is on.
- `FL_META` - One of the meta/Windows keys is down.
- `FL_COMMAND` - An alias for `FL_CTRL` on WIN32 and X11, or `FL_META` on MacOS X.
- `FL_SCROLL_LOCK` - The scroll lock is on.
- `FL_BUTTON1` - Mouse button 1 is pushed.
- `FL_BUTTON2` - Mouse button 2 is pushed.
- `FL_BUTTON3` - Mouse button 3 is pushed.
- `FL_BUTTONS` - Any mouse button is pushed.
- `FL_BUTTON(n)` - Mouse button N ($N > 0$) is pushed.

14.7 Alignment Values

The following constants define bits that can be used with `Fl_Widget::align()` to control the positioning of the label:

- `FL_ALIGN_CENTER` - The label is centered (0).
- `FL_ALIGN_TOP` - The label is top-aligned.
- `FL_ALIGN_BOTTOM` - The label is bottom-aligned.
- `FL_ALIGN_LEFT` - The label is left-aligned.
- `FL_ALIGN_RIGHT` - The label is right-aligned.
- `FL_ALIGN_CLIP` - The label is clipped to the widget.
- `FL_ALIGN_WRAP` - The label text is wrapped as needed.
- `FL_ALIGN_TOP_LEFT`
- `FL_ALIGN_TOP_RIGHT`
- `FL_ALIGN_BOTTOM_LEFT`
- `FL_ALIGN_BOTTOM_RIGHT`
- `FL_ALIGN_LEFT_TOP`

- `FL_ALIGN_RIGHT_TOP`
- `FL_ALIGN_LEFT_BOTTOM`
- `FL_ALIGN_RIGHT_BOTTOM`
- `FL_ALIGN_INSIDE` - 'or' this with other values to put label inside the widget.

14.8 Fonts

The following constants define the standard FLTK fonts:

- `FL_HELVETICA` - Helvetica (or Arial) normal (0).
- `FL_HELVETICA_BOLD` - Helvetica (or Arial) bold.
- `FL_HELVETICA_ITALIC` - Helvetica (or Arial) oblique.
- `FL_HELVETICA_BOLD_ITALIC` - Helvetica (or Arial) bold-oblique.
- `FL_COURIER` - Courier normal.
- `FL_COURIER_BOLD` - Courier bold.
- `FL_COURIER_ITALIC` - Courier italic.
- `FL_COURIER_BOLD_ITALIC` - Courier bold-italic.
- `FL_TIMES` - Times roman.
- `FL_TIMES_BOLD` - Times bold.
- `FL_TIMES_ITALIC` - Times italic.
- `FL_TIMES_BOLD_ITALIC` - Times bold-italic.
- `FL_SYMBOL` - Standard symbol font.
- `FL_SCREEN` - Default monospaced screen font.
- `FL_SCREEN_BOLD` - Default monospaced bold screen font.
- `FL_ZAPF_DINGBATS` - Zapf-dingbats font.

14.9 Colors

The `Fl_Color` enumeration type holds a FLTK color value. Colors are either 8-bit indexes into a virtual colormap or 24-bit RGB color values. Color indices occupy the lower 8 bits of the value, while RGB colors occupy the upper 24 bits, for a byte organization of RGBI.

14.9.1 Color Constants

Constants are defined for the user-defined foreground and background colors, as well as specific colors and the start of the grayscale ramp and color cube in the virtual colormap. Inline functions are provided to retrieve specific grayscale, color cube, or RGB color values.

The following color constants can be used to access the user-defined colors:

- `FL_BACKGROUND_COLOR` - the default background color
- `FL_BACKGROUND2_COLOR` - the default background color for text, list, and valuator widgets
- `FL_FOREGROUND_COLOR` - the default foreground color (0) used for labels and text
- `FL_INACTIVE_COLOR` - the inactive foreground color
- `FL_SELECTION_COLOR` - the default selection/highlight color

The following color constants can be used to access the colors from the FLTK standard color cube:

- `FL_BLACK`
- `FL_BLUE`
- `FL_CYAN`
- `FL_DARK_BLUE`
- `FL_DARK_CYAN`
- `FL_DARK_GREEN`
- `FL_DARK_MAGENTA`
- `FL_DARK_RED`
- `FL_DARK_YELLOW`
- `FL_GREEN`
- `FL_MAGENTA`
- `FL_RED`
- `FL_WHITE`
- `FL_YELLOW`

The inline methods for getting a grayscale, color cube, or RGB color value are described in [Appendix B – Function Reference](#).

14.10 Cursors

The following constants define the mouse cursors that are available in FLTK. The double-headed arrows are bitmaps provided by FLTK on X, the others are provided by system-defined cursors.

- `FL_CURSOR_DEFAULT` - the default cursor, usually an arrow (0)
- `FL_CURSOR_ARROW` - an arrow pointer
- `FL_CURSOR_CROSS` - crosshair
- `FL_CURSOR_WAIT` - watch or hourglass
- `FL_CURSOR_INSERT` - I-beam
- `FL_CURSOR_HAND` - hand (uparrow on MSWindows)
- `FL_CURSOR_HELP` - question mark
- `FL_CURSOR_MOVE` - 4-pointed arrow
- `FL_CURSOR_NS` - up/down arrow
- `FL_CURSOR_WE` - left/right arrow
- `FL_CURSOR_NWSE` - diagonal arrow
- `FL_CURSOR_NESW` - diagonal arrow
- `FL_CURSOR_NONE` - invisible

14.11 FD "When" Conditions

- `FL_READ` - Call the callback when there is data to be read.
- `FL_WRITE` - Call the callback when data can be written without blocking.
- `FL_EXCEPT` - Call the callback if an exception occurs on the file.

14.12 Damage Masks

The following damage mask bits are used by the standard FLTK widgets:

- `FL_DAMAGE_CHILD` - A child needs to be redrawn.
- `FL_DAMAGE_EXPOSE` - The window was exposed.
- `FL_DAMAGE_SCROLL` - The `F1_Scroll` widget was scrolled.
- `FL_DAMAGE_OVERLAY` - The overlay planes need to be redrawn.
- `FL_DAMAGE_USER1` - First user-defined damage bit.
- `FL_DAMAGE_USER2` - Second user-defined damage bit.
- `FL_DAMAGE_ALL` - Everything needs to be redrawn.

Chapter 15

D - GLUT Compatibility

This appendix describes the GLUT compatibility header file supplied with FLTK.

FLTK's GLUT compatibility is based on the original GLUT 3.7 and the follow-on FreeGLUT 2.4.0 libraries.

15.1 Using the GLUT Compatibility Header File

You should be able to compile existing GLUT source code by including `<FL/glut.H>` instead of `<GL/glut.h>`. This can be done by editing the source, by changing the `-I` switches to the compiler, or by providing a symbolic link from `GL/glut.h` to `FL/glut.H`.

All files calling GLUT procedures must be compiled with C++. You may have to alter them slightly to get them to compile without warnings, and you may have to rename them to get make to use the C++ compiler.

You must link with the FLTK library. Most of `FL/glut.H` is inline functions. You should take a look at it (and maybe at `test/glpuzzle.cxx` in the FLTK source) if you are having trouble porting your GLUT program.

This has been tested with most of the demo programs that come with the GLUT and FreeGLUT distributions.

15.2 Known Problems

The following functions and/or arguments to functions are missing, and you will have to replace them or comment them out for your code to compile:

- `glutGet(GLUT_ELAPSED_TIME)`
- `glutGet(GLUT_SCREEN_HEIGHT_MM)`
- `glutGet(GLUT_SCREEN_WIDTH_MM)`
- `glutGet(GLUT_WINDOW_NUM_CHILDREN)`
- `glutInitDisplayMode(GLUT_LUMINANCE)`
- `glutLayerGet(GLUT_HAS_OVERLAY)`
- `glutLayerGet(GLUT_LAYER_IN_USE)`
- `glutPushWindow()`
- `glutSetColor(), glutGetColor(), glutCopyColormap()`
- `glutVideoResize() missing.`
- `glutWarpPointer()`
- `glutWindowStatusFunc()`
- Spaceball, buttonbox, dials, and tablet functions

Most of the symbols/enumerations have different values than GLUT uses. This will break code that relies on the actual values. The only symbols guaranteed to have the same values are true/false pairs like `GLUT_DOWN` and `GLUT_UP`, mouse buttons `GLUT_LEFT_BUTTON`, `GLUT_MIDDLE_BUTTON`, `GLUT_RIGHT_BUTTON`, and `GLUT_KEY_F1` thru `F12`.

The strings passed as menu labels are not copied.

`glutPostRedisplay()` does not work if called from inside a display function. You must use `glutIdleFunc()` if you want your display to update continuously.

`glutSwapBuffers()` does not work from inside a display function. This is on purpose, because FLTK swaps the buffers for you.

`glutUseLayer()` does not work well, and should only be used to initialize transformations inside a resize callback. You should redraw overlays by using `glutOverlayDisplayFunc()`.

Overlays are cleared before the overlay display function is called. `glutLayerGet(GLUT_OVERLAY_DAMAGED)` always returns true for compatibility with some GLUT overlay programs. You must rewrite your code so that `gl_color()` is used to choose colors in an overlay, or you will get random overlay colors.

`glutSetCursor(GLUT_CURSOR_FULL_CROSSHAIR)` just results in a small crosshair.

The fonts used by `glutBitmapCharacter()` and `glutBitmapWidth()` may be different.

`glutInit(argc, argv)` will consume different switches than GLUT does. It accepts the switches recognized by `F1::args()`, and will accept any abbreviation of these switches (such as "-di" for "-display").

15.3 Mixing GLUT and FLTK Code

You can make your GLUT window a child of a `F1_Window` with the following scheme. The biggest trick is that GLUT insists on `show()`'ing the window at the point it is created, which means the `F1_Window` parent window must already be shown.

- Don't call `glutInit()`.
- Create your `F1_Window`, and any FLTK widgets. Leave a blank area in the window for your GLUT window.
- `show()` the `F1_Window`. Perhaps call `show(argc, argv)`.
- Call `window->begin()` so that the GLUT window will be automatically added to it.
- Use `glutInitWindowSize()` and `glutInitWindowPosition()` to set the location in the parent window to put the GLUT window.
- Put your GLUT code next. It probably does not need many changes. Call `window->end()` immediately after the `glutCreateWindow()`!
- You can call either `glutMainLoop()`, `F1::run()`, or loop calling `F1::wait()` to run the program.

15.4 class `F1_Glut_Window`

Chapter 16

E - Forms Compatibility

This appendix describes the Forms compatibility included with FLTK.

16.1 Importing Forms Layout Files

FLUID can read the .fd files put out by all versions of Forms and XForms fdesign. However, it will mangle them a bit, but it prints a warning message about anything it does not understand. FLUID cannot write fdesign files, so you should save to a new name so you don't write over the old one.

You will need to edit your main code considerably to get it to link with the output from FLUID. If you are not interested in this you may have more immediate luck with the forms compatibility header, <FL/forms.H>.

16.2 Using the Compatibility Header File

You should be able to compile existing Forms or XForms source code by changing the include directory switch to your compiler so that the `forms.h` file supplied with FLTK is included. Take a look at `forms.h` to see how it works, but the basic trick is lots of inline functions. Most of the XForms demo programs work without changes.

You will also have to compile your Forms or XForms program using a C++ compiler. The FLTK library does not provide C bindings or header files.

Although FLTK was designed to be compatible with the GL Forms library (version 0.3 or so), XForms has bloated severely and its interface is X-specific. Therefore, XForms compatibility is no longer a goal of FLTK. Compatibility was limited to things that were free, or that would add code that would not be linked in if the feature is unused, or that was not X-specific.

To use any new features of FLTK, you should rewrite your code to not use the inline functions and instead use "pure" FLTK. This will make it a lot cleaner and make it easier to figure out how to call the FLTK functions. Unfortunately this conversion is harder than expected and even Digital Domain's inhouse code still uses `forms.H` a lot.

16.3 Problems You Will Encounter

Many parts of XForms use X-specific structures like `XEvent` in their interface. I did not emulate these! Unfortunately these features (such as the "canvas" widget) are needed by most large programs. You will need to rewrite these to use FLTK subclasses.

`F1_Free` widgets emulate the *old* Forms "free" widget. It may be useful for porting programs that change the `handle()` function on widgets, but you will still need to rewrite things.

`F1_Timer` widgets are provided to emulate the XForms timer. These work, but are quite inefficient and inaccurate compared to using `F1::add_timeout()`.

All instance variables are hidden. If you directly refer to the `x`, `y`, `w`, `h`, `label`, or other fields of your Forms widgets you will have to add empty parenthesis after each reference. The easiest way to do this is to globally replace "`→ x`" with "`→ x()`", etc. Replace "boxtyle" with "box()".

`const char *` arguments to most FLTK methods are simply stored, while Forms would `strdup()` the passed string. This is most noticeable with the label of widgets. Your program must always pass static data such as a string constant or malloc'd buffer to `label()`. If you are using labels to display program output you may want to try the `F1_Output` widget.

The default fonts and sizes are matched to the older GL version of Forms, so all labels will draw somewhat larger than an XForms program does.

fdesign outputs a setting of a "fdui" instance variable to the main window. I did not emulate this because I wanted all instance variables to be hidden. You can store the same information in the `user_data()` field of a window. To do this, search through the fdesign output for all occurrences of " → fdui" and edit to use " → user_data()" instead. This will require casts and is not trivial.

The prototype for the functions passed to `fl_add_timeout()` and `fl_set_idle_callback()` callback are different.

All the following XForms calls are missing:

- `FL_REVISION`, `fl_library_version()`
- `FL_RETURN_DBLCHECK` (use [Fl::event_clicks\(\)](#))
- `fl_add_signal_callback()`
- `fl_set_form_atactivate()` `fl_set_form_atdeactivate()`
- `fl_set_form_property()`
- `fl_set_app_mainform()`, `fl_get_app_mainform()`
- `fl_set_form_minsize()`, `fl_set_form_maxsize()`
- `fl_set_form_event_cmask()`, `fl_get_form_event_cmask()`
- `fl_set_form_dblbuffer()`, `fl_set_object_dblbuffer()` (use an [Fl_Double_Window](#) instead)
- `fl_adjust_form_size()`
- `fl_register_raw_callback()`
- `fl_set_object_bw()`, `fl_set_border_width()`
- `fl_set_object_resize()`, `fl_set_object_gravity()`
- `fl_set_object_shortcutkey()`
- `fl_set_object_automatic()`
- `fl_get_object_bbox()` (maybe FLTK should do this)
- `fl_set_object_prehandler()`, `fl_set_object_posthandler()`
- `fl_enumerate_fonts()`
- Most drawing functions
- `fl_set_coordunit()` (FLTK uses pixels all the time)
- `fl_ringbell()`
- `fl_gettime()`
- `fl_win*` () (all these functions)
- `fl_initialize(argc, argv, x, y, z)` ignores last 3 arguments
- `fl_read_bitmapfile()`, `fl_read_pixmapfile()`

- `fl_addto_browser_chars()`
- `FL_MENU_BUTTON` just draws normally
- `fl_set_bitmapbutton_file()`, `fl_set_pixmapbutton_file()`
- `FL_CANVAS` objects
- `FL_DIGITAL_CLOCK` (comes out analog)
- `fl_create_bitmap_cursor()`, `fl_set_cursor_color()`
- `fl_set_dial_angles()`
- `fl_show_oneliner()`
- `fl_set_choice_shortcut(a,b,c)`
- command log
- Only some of file selector is emulated
- `FL_DATE_INPUT`
- `fl_pup*` () (all these functions)
- textbox object (should be easy but I had no sample programs)
- xyplot object

16.4 Additional Notes

These notes were written for porting programs written with the older IRISGL version of Forms. Most of these problems are the same ones encountered when going from old Forms to XForms:

Does Not Run In Background

The IRISGL library always forked when you created the first window, unless "foreground()" was called. FLTK acts like "foreground()" is called all the time. If you really want the fork behavior do "if (fork()) exit(0)" right at the start of your program.

You Cannot Use IRISGL Windows or fl_queue

If a Forms (not XForms) program if you wanted your own window for displaying things you would create a IRISGL window and draw in it, periodically calling Forms to check if the user hit buttons on the panels. If the user did things to the IRISGL window, you would find this out by having the value `FL_EVENT` returned from the call to Forms.

None of this works with FLTK. Nor will it compile, the necessary calls are not in the interface.

You have to make a subclass of `Fl_Gl_Window` and write a `draw()` method and `handle()` method. This may require anywhere from a trivial to a major rewrite.

If you draw into the overlay planes you will have to also write a `draw_overlay()` method and call `redraw_overlay()` on the OpenGL window.

One easy way to hack your program so it works is to make the `draw()` and `handle()` methods on your window set some static variables, storing what event happened. Then in the main loop of your program, call `Fl::wait()` and then check these variables, acting on them as though they are events read from `fl_queue`.

You Must Use OpenGL to Draw Everything

The file `<FL/gl.h>` defines replacements for a lot of IRISGL calls, translating them to OpenGL. There are much better translators available that you might want to investigate.

You Cannot Make Forms Subclasses

Programs that call `fl_make_object` or directly setting the handle routine will not compile. You have to rewrite them to use a subclass of `Fl_Widget`. It is important to note that the `handle()` method is not exactly the same as the `handle()` function of Forms. Where a Forms `handle()` returned non-zero, your `handle()` must call `do_callback()`. And your `handle()` must return non-zero if it "understood" the event.

An attempt has been made to emulate the "free" widget. This appears to work quite well. It may be quicker to modify your subclass into a "free" widget, since the "handle" functions match.

If your subclass draws into the overlay you are in trouble and will have to rewrite things a lot.

You Cannot Use `<device.h>`

If you have written your own "free" widgets you will probably get a lot of errors about "getvaluator". You should substitute:

Forms	FLTK
MOUSE_X	<code>Fl::event_x_root()</code>
MOUSE_Y	<code>Fl::event_y_root()</code>
LEFTSHIFTKEY,RIGHTSHIFTKEY	<code>Fl::event_shift()</code>
CAPSLOCKKEY	<code>Fl::event_capslock()</code>
LEFTCTRLKEY,RIGHTCTRLKEY	<code>Fl::event_ctrl()</code>
LEFTALTKEY,RIGHTALTKEY	<code>Fl::event_alt()</code>
MOUSE1,RIGHTMOUSE	<code>Fl::event_state()</code>
MOUSE2,MIDDLEMOUSE	<code>Fl::event_state()</code>
MOUSE3,LEFTMOUSE	<code>Fl::event_state()</code>

Anything else in `getvaluator` and you are on your own...

Font Numbers Are Different

The "style" numbers have been changed because I wanted to insert bold-italic versions of the normal fonts. If you use Times, Courier, or Bookman to display any text you will get a different font out of FLTK. If you are really desperate to fix this use the following code:

```
fl_font_name(3, "*courier-medium-r-no*");
fl_font_name(4, "*courier-bold-r-no*");
fl_font_name(5, "*courier-medium-o-no*");
fl_font_name(6, "*times-medium-r-no*");
fl_font_name(7, "*times-bold-r-no*");
fl_font_name(8, "*times-medium-i-no*");
fl_font_name(9, "*bookman-light-r-no*");
fl_font_name(10, "*bookman-demi-r-no*");
fl_font_name(11, "*bookman-light-i-no*");
```

Chapter 17

F - Operating System Issues

This appendix describes the operating system specific interfaces in FLTK.

17.1 Accessing the OS Interfaces

All programs that need to access the operating system specific interfaces must include the following header file:

```
#include <FL/x.H>
```

Despite the name, this header file will define the appropriate interface for your environment. The pages that follow describe the functionality that is provided for each operating system.

WARNING:

The interfaces provided by this header file may change radically in new FLTK releases. Use them only when an existing generic FLTK interface is not sufficient.

17.2 The UNIX (X11) Interface

The UNIX interface provides access to the X Window System state information and data structures.

17.2.1 Handling Other X Events

```
void Fl::add_handler(int (*f)(int))
```

Installs a function to parse unrecognized events. If FLTK cannot figure out what to do with an event, it calls each of these functions (most recent first) until one of them returns non-zero. If none of them returns non-zero then the event is ignored.

FLTK calls this for any X events it does not recognize, or X events with a window ID that FLTK does not recognize. You can look at the X event in the `fl_xevent` variable.

The argument is the FLTK event type that was not handled, or zero for unrecognized X events. These handlers are also called for global shortcuts and some other events that the widget they were passed to did not handle, for example `FL_SHORTCUT`.

```
extern XEvent *fl_xevent
```

This variable contains the most recent X event.

```
extern ulong fl_event_time
```

This variable contains the time stamp from the most recent X event that reported it; not all events do. Many X calls like cut and paste need this value.

```
Window fl_xid(const Fl_Window *)
```

Returns the XID for a window, or zero if not shown().

```
Fl_Window *fl_find(ulong xid)
```

Returns the `Fl_Window` that corresponds to the given XID, or NULL if not found. This function uses a cache so it is slightly faster than iterating through the windows yourself.

```
int fl_handle(const XEvent &)
```

This call allows you to supply the X events to FLTK, which may allow FLTK to cooperate with another toolkit or library. The return value is non-zero if FLTK understood the event. If the window does not belong to FLTK and the `add_handler()` functions all return 0, this function will return false.

Besides feeding events your code should call `Fl::flush()` periodically so that FLTK redraws its windows.

This function will call the callback functions. It will not return until they complete. In particular, if a callback pops up a modal window by calling `fl_ask()`, for instance, it will not return until the modal function returns.

17.2.2 Drawing using Xlib

The following global variables are set before `Fl_Widget::draw()` is called, or by `Fl_Window::make_current()`:

```
extern Display *fl_display;
extern Window fl_window;
extern GC fl_gc;
extern int fl_screen;
extern XVisualInfo *fl_visual;
extern Colormap fl_colormap;
```

You must use them to produce Xlib calls. Don't attempt to change them. A typical X drawing call is written like this:

```
XDrawSomething(fl_display, fl_window, fl_gc, ...);
```

Other information such as the position or size of the X window can be found by looking at `Fl_Window::current()`, which returns a pointer to the `Fl_Window` being drawn.

`unsigned long fl_xpixel(Fl_Color i)`

`unsigned long fl_xpixel(uchar r, uchar g, uchar b)`

Returns the X pixel number used to draw the given FLTK color index or RGB color. This is the X pixel that `fl_color()` would use.

`int fl_parse_color(const char* p, uchar& r, uchar& g, uchar& b)`

Convert a name into the red, green, and blue values of a color by parsing the X11 color names. On other systems, `fl_parse_color` can only convert names in hexadecimal encoding, for example #ff8083.

`extern XFontStruct *fl_xfont`

Points to the font selected by the most recent `fl_font()`. This is not necessarily the current font of `fl_gc`, which is not set until `fl_draw()` is called. If FLTK was compiled with Xft support, `fl_xfont` will usually be 0 and `fl_xftfont` will contain a pointer to the XftFont structure instead.

`extern void *fl_xftfont`

If FLTK was compiled with Xft support enabled, `fl_xftfont` Points to the xft font selected by the most recent `fl_font()`. Otherwise it will be 0. `fl_xftfont` should be cast to `XftFont*`.

17.2.3 Changing the Display, Screen, or X Visual

FLTK uses only a single display, screen, X visual, and X colormap. This greatly simplifies its internal structure and makes it much smaller and faster. You can change which it uses by setting global variables

before the first `Fl_Window::show()` is called. You may also want to call `Fl::visual()`, which is a portable interface to get a full color and/or double buffered visual.

```
int Fl::display(const char *)
```

Set which X display to use. This actually does `putenv ("DISPLAY=...")` so that child programs will display on the same screen if called with `exec()`. This must be done before the display is opened. This call is provided under MacOS and WIN32 but it has no effect.

```
extern Display *fl_display
```

The open X display. This is needed as an argument to most Xlib calls. Don't attempt to change it! This is NULL before the display is opened.

```
void fl_open_display()
```

Opens the display. Does nothing if it is already open. This will make sure `fl_display` is non-zero. You should call this if you wish to do X calls and there is a chance that your code will be called before the first `show()` of a window.

This may call `Fl::abort()` if there is an error opening the display.

```
void fl_close_display()
```

This closes the X connection. You do *not* need to call this to exit, and in fact it is faster to not do so! It may be useful to call this if you want your program to continue without the X connection. You cannot open the display again, and probably cannot call any FLTK functions.

```
extern int fl_screen
```

Which screen number to use. This is set by `fl_open_display()` to the default screen. You can change it by setting this to a different value immediately afterwards. It can also be set by changing the last number in the `Fl::display()` string to "host:0.#".

```
extern XVisualInfo *fl_visual
```

```
extern Colormap fl_colormap
```

The visual and colormap that FLTK will use for all windows. These are set by `fl_open_display()` to the default visual and colormap. You can change them before calling `show()` on the first window. Typical code for changing the default visual is:

```
Fl::args(argc, argv); // do this first so $DISPLAY is set
fl_open_display();
fl_visual = find_a_good_visual(fl_display, fl_screen);
if (!fl_visual) Fl::abort("No good visual");
fl_colormap = make_a_colormap(fl_display, fl_visual->visual, fl_visual->depth);
// it is now ok to show() windows:
window->show(argc, argv);
```

17.2.4 Using a Subclass of `Fl_Window` for Special X Stuff

FLTK can manage an X window on a different screen, visual and/or colormap, you just can't use FLTK's drawing routines to draw into it. But you can write your own `draw()` method that uses Xlib (and/or OpenGL) calls only.

FLTK can also manage XID's provided by other libraries or programs, and call those libraries when the window needs to be redrawn.

To do this, you need to make a subclass of `Fl_Window` and override some of these virtual functions:

```
virtual void Fl_Window::show()
```

If the window is already `shown()` this must cause it to be raised, this can usually be done by calling

`F1_Window::show()`. If not `shown()` your implementation must call either `F1_X::set_xid()` or `F1_X::make_xid()`.

An example:

```
void MyWindow::show() {
    if (shown()) {F1_Window::show(); return;} // you must do this!
    fl_open_display(); // necessary if this is first window
    // we only calculate the necessary visual colormap once:
    static XVisualInfo *visual;
    static Colormap colormap;
    if (!visual) {
        visual = figure_out_visual();
        colormap = XCreateColormap(f1_display, RootWindow(f1_display,f1_screen),
                                   vis->visual, AllocNone);
    }
    F1_X::make_xid(this, visual, colormap);
}
```

`F1_X *F1_Xset_xid(F1_Window *, Window xid)`

Allocate a hidden structure called an `F1_X`, put the XID into it, and set a pointer to it from the `F1_Window`. This causes `F1_Window::shown()` to return true.

`void F1_X::make_xid(F1_Window *, XVisualInfo *= fl_visual, Colormap = fl_colormap)`

This static method does the most onerous parts of creating an X window, including setting the label, resize limitations, etc. It then does `F1_X::set_xid()` with this new window and maps the window.

`virtual void F1_Window::flush()`

This virtual function is called by `F1::flush()` to update the window. For FLTK's own windows it does this by setting the global variables `fl_window` and `fl_gc` and then calling the `draw()` method. For your own windows you might just want to put all the drawing code in here.

The X region that is a combination of all damage () calls done so far is in `F1_X::i(this)->region`. If NULL then you should redraw the entire window. The undocumented function `fl_clip_region(XRegion)` will initialize the FLTK clip stack with a region or NULL for no clipping. You must set region to NULL afterwards as `fl_clip_region()` will own and delete it when done.

If `damage() & FL_DAMAGE_EXPOSE` then only X expose events have happened. This may be useful if you have an undamaged image (such as a backing buffer) around.

Here is a sample where an undamaged image is kept somewhere:

```
void MyWindow::flush() {
    fl_clip_region(F1_X::i(this)->region);
    F1_X::i(this)->region = 0;
    if (damage() != 2) {... draw things into backing store ...}
    ... copy backing store to window ...
}
```

`virtual void F1_Window::hide()`

Destroy the window server copy of the window. Usually you will destroy contexts, pixmaps, or other resources used by the window, and then call `F1_Window::hide()` to get rid of the main window identified by `xid()`. If you override this, you must also override the destructor as shown:

```
void MyWindow::hide() {
    if (mypixmap) {
        XFreePixmap(f1_display,mypixmap);
        my pixmap = 0;
    }
}
```

```
    Fl_Window::hide(); // you must call this
}
```

`virtual void Fl_Window::~Fl_Window()`

Because of the way C++ works, if you override `hide()` you *must* override the destructor as well (otherwise only the base class `hide()` is called):

```
MyWindow::~MyWindow() {
    hide();
}
```

17.2.5 Setting the Icon of a Window

FLTK currently supports setting a window's icon **before** it is shown using the `Fl_Window::icon()` method.

```
void Fl_Window::icon(char *)
```

Sets the icon for the window to the passed pointer. You will need to cast the icon `Pixmap` to a `char *` when calling this method. To set a monochrome icon using a bitmap compiled with your application use:

```
#include "icon.xbm"

fl_open_display(); // needed if display has not been previously opened

Pixmap p = XCreateBitmapFromData(f1_display, DefaultRootWindow(f1_display),
                                icon_bits, icon_width, icon_height);

window->icon((char *)p);
```

To use a multi-colored icon, the XPM format and library should be used as follows:

```
#include <X11/xpm.h>
#include "icon.xpm"

fl_open_display(); // needed if display has not been previously opened

Pixmap p, mask;

XpmCreatePixmapFromData(f1_display, DefaultRootWindow(f1_display),
                       icon_xpm, &p, &mask, NULL);

window->icon((char *)p);
```

When using the Xpm library, be sure to include it in the list of libraries that are used to link the application (usually "-lXpm").

NOTE:

You must call `Fl_Window::show(argc, argv)` for the icon to be used. The `Fl_Window::show()` method does not bind the icon to the window.

17.2.6 X Resources

When the `Fl_Window::show(argc, argv)` method is called, FLTK looks for the following X resources:

- `background` - The default background color for widgets (color).
- `dndTextOps` - The default setting for drag and drop text operations (boolean).
- `foreground` - The default foreground (label) color for widgets (color).
- `scheme` - The default scheme to use (string).
- `selectBackground` - The default selection color for menus, etc. (color).
- `Text.background` - The default background color for text fields (color).
- `tooltips` - The default setting for tooltips (boolean).
- `visibleFocus` - The default setting for visible keyboard focus on non-text widgets (boolean).

Resources associated with the first window's `F1_Window::xclass()` string are queried first, or if no class has been specified then the class "fltk" is used (e.g. `fltk.background`). If no match is found, a global search is done (e.g. `*background`).

17.3 The Windows (WIN32) Interface

The Windows interface provides access to the WIN32 GDI state information and data structures.

17.3.1 Handling Other WIN32 Messages

By default a single WNDCLASSEX called "FLTK" is created. All `F1_Window`'s are of this class unless you use `F1_Window::xclass()`. The window class is created the first time `F1_Window::show()` is called.

You can probably combine FLTK with other libraries that make their own WIN32 window classes. The easiest way is to call `Fl::wait()`, as it will call `DispatchMessage` for all messages to the other windows. If necessary you can let the other library take over as long as it calls `DispatchMessage()`, but you will have to arrange for the function `Fl::flush()` to be called regularly so that widgets are updated, timeouts are handled, and the idle functions are called.

```
extern MSG fl_msg
```

This variable contains the most recent message read by `GetMessage`, which is called by `Fl::wait()`. This may not be the most recent message sent to an FLTK window, because silly WIN32 calls the handle procedures directly for some events (sigh).

```
void Fl::add_handler(int (*f)(int))
```

Installs a function to parse unrecognized messages sent to FLTK windows. If FLTK cannot figure out what to do with a message, it calls each of these functions (most recent first) until one of them returns non-zero. The argument passed to the functions is the FLTK event that was not handled or zero for unknown messages. If all the handlers return zero then FLTK calls `DefWindowProc()`.

```
HWND fl_xid(const Fl_Window *)
```

Returns the window handle for a `Fl_Window`, or zero if not shown () .

```
Fl_Window *fl_find(HWND xid)
```

Returns the `Fl_Window` that corresponds to the given window handle, or `NULL` if not found. This function uses a cache so it is slightly faster than iterating through the windows yourself.

17.3.2 Drawing Things Using the WIN32 GDI

When the virtual function `Fl_Widget::draw()` is called, FLTK stores all the silly extra arguments you need to make a proper GDI call in some global variables:

```
extern HINSTANCE fl_display;
extern HWND fl_window;
extern HDC fl_gc;
COLORREF fl_RGB();
HPEN fl_pen();
HBRUSH fl_brush();
```

These global variables are set before `draw()` is called, or by `Fl_Window::make_current()`. You can refer to them when needed to produce GDI calls, but don't attempt to change them. The functions return GDI objects for the current color set by `fl_color()` and are created as needed and cached. A typical GDI drawing call is written like this:

```
DrawSomething(fl_gc, ..., fl_brush());
```

It may also be useful to refer to `Fl_Window::current()` to get the window's size or position.

17.3.3 Setting the Icon of a Window

FLTK currently supports setting a window's icon *before* it is shown using the `Fl_Window::icon()` method.

```
void Fl_Window::icon(char *)
```

Sets the icon for the window to the passed pointer. You will need to cast the HICON handle to a `char *` when calling this method. To set the icon using an icon resource compiled with your application use:

```
window->icon((char *)LoadIcon(fl_display, MAKEINTRESOURCE(IDI_ICON)));
```

You can also use the `LoadImage()` and related functions to load specific resolutions or create the icon from bitmap data.

NOTE:

You must call `Fl_Window::show(argc, argv)` for the icon to be used. The `Fl_Window::show()` method does not bind the icon to the window.

17.3.4 How to Not Get a MSDOS Console Window

WIN32 has a really stupid mode switch stored in the executables that controls whether or not to make a console window.

To always get a console window you simply create a console application (the "/SUBSYSTEM:CONSOLE" option for the linker). For a GUI-only application create a WIN32 application (the "/SUBSYSTEM:WINDOWS" option for the linker).

FLTK includes a `WinMain()` function that calls the ANSI standard `main()` entry point for you. *This function creates a console window when you use the debug version of the library.*

WIN32 applications without a console cannot write to `stdout` or `stderr`, even if they are run from a console window. Any output is silently thrown away. Additionally, WIN32 applications are run in the background by the console, although you can use "start /wait program" to run them in the foreground.

17.3.5 Known WIN32 Bugs and Problems

The following is a list of known bugs and problems in the WIN32 version of FLTK:

- If a program is deactivated, `Fl::wait()` does not return until it is activated again, even though many events are delivered to the program. This can cause idle background processes to stop unexpectedly. This also happens while the user is dragging or resizing windows or otherwise holding the mouse down. We were forced to remove most of the efficiency FLTK uses for redrawing in order to get windows to update while being moved. This is a design error in WIN32 and probably impossible to get around.
- `Fl_Gl_Window::can_do_overlay()` returns true until the first time it attempts to draw an overlay, and then correctly returns whether or not there is overlay hardware.
- `SetCapture` (used by `Fl::grab()`) doesn't work, and the main window title bar turns gray while menus are popped up.
- Compilation with `gcc 3.4.4` and `-Os` exposes an optimisation bug in gcc. The symptom is that when drawing filled circles only the perimeter is drawn. This can for instance be seen in the symbols demo. Other optimisation options such as `-O2` and `-O3` seem to work OK. More details can be found in STR#1656

17.4 The MacOS Interface

FLTK supports MacOS X using the Apple Carbon library. Older versions of MacOS are *not* supported.

Control, Option, and Command Modifier Keys

FLTK maps the Mac 'control' key to `FL_CTRL`, the 'option' key to `FL_ALT` and the 'Apple' key to `FL_META`. Keyboard events return the key name in `Fl::event_key()` and the keystroke translation in `Fl::event_text()`. For example, typing Option-Y on a Mac keyboard will set `FL_ALT` in `Fl::event_state()`, set `Fl::event_key()` to 'y' and return the Yen symbol in `Fl::event_text()`.

`WindowRef fl_xid(const Fl_Window *)`

Returns the window reference for an `Fl_Window`, or `NULL` if the window has not been shown.

`Fl_Window *fl_find(WindowRef xid)`

Returns the `Fl_Window` that corresponds to the give window handle, or `NULL` if not found. FLTK windows that are children of top-level windows share the `WindowRef` of the top-level window.

17.4.1 Apple "Quit" Event

When the user press Cmd-Q or requests a termination of the application, OS X will send a "Quit" Apple Event. FLTK handles this event by sending an `FL_CLOSE` event to all open windows. If all windows close, the application will terminate.

17.4.2 Apple "Open" Event

Whenever the user drops a file onto an application icon, OS X generates an Apple Event of the type "Open". You can have FLTK notify you of an Open event by setting the `f1_open_callback`.

```
void f1_open_callback(void (*cb)(const char *))
```

`cb` will be called with a single iUnix-style file name and path. If multiple files were dropped, `f1_open_callback` will be called multiple times.

17.4.3 Drawing Things Using QuickDraw

When the virtual function `F1_Widget::draw()` is called, FLTK has prepared the Window and CGraf-Port for drawing. Clipping and offsets are prepared to allow correct subwindow drawing.

17.4.4 Drawing Things Using Quartz

If the FLTK library was compiled using the configuration flag `-enable-quartz`, all code inside `F1_Widget::draw()` is expected to call Quartz drawing functions instead of QuickDraw. The Quartz coordinate system is flipped to match FLTK's coordinate system. The origin for all drawing is in the top left corner of the enclosing `F1_Window`.

`F1_Double_Window`

OS X double-buffers all windows automatically. On OS X, `F1_Window` and `F1_Double_Window` are handled internally in the same way.

17.4.5 Mac File System Specifics

Resource Forks

FLTK does not access the resource fork of an application. However, a minimal resource fork must be created for OS X applications

Caution:

When using UNIX commands to copy or move executables, OS X will NOT copy any resource forks! For copying and moving use CpMac and MvMac respectively. For creating a tar archive, all executables need to be stripped from their Resource Fork before packing, e.g. "DeRez fluid > fluid.r". After unpacking the Resource Fork needs to be reattached, e.g. "Rez fluid.r -o fluid".

It is advisable to use the Finder for moving and copying and Mac archiving tools like Sit for distribution as they will handle the Resource Fork correctly.

Mac File Paths

FLTK uses UNIX-style filenames and paths.

17.4.6 Known MacOS Bugs and Problems

The following is a list of known bugs and problems in the MacOS version of FLTK:

- Line styles are not well supported. This is due to limitations in the QuickDraw interface.
- Nested subwindows are not supported, i.e. you can have a `Fl_Window` widget inside a `Fl_Window`, but not a `Fl_Window` inside a `Fl_Window` inside a `Fl_Window`.

Chapter 18

G - Migrating Code from FLTK 1.0 to 1.1

This appendix describes the differences between the FLTK 1.0.x and FLTK 1.1.x functions and classes.

18.1 Color Values

Color values are now stored in a 32-bit unsigned integer instead of the unsigned character in 1.0.x. This allows for the specification of 24-bit RGB values or 8-bit FLTK color indices.

`FL_BLACK` and `FL_WHITE` now remain black and white, even if the base color of the gray ramp is changed using `Fl::background()`. `FL_DARK3` and `FL_LIGHT3` can be used instead to draw a very dark or a very bright background hue.

Widgets use the new color symbols `FL_FOREGROUND_COLOR`, `FL_BACKGROUND_COLOR`, `FL_BACKGROUND2_COLOR`, `FL_INACTIVE_COLOR`, and `FL_SELECTION_COLOR`. More details can be found in the chapter [Enumerations](#).

18.2 Cut and Paste Support

The FLTK clipboard is now broken into two parts - a local selection value and a cut-and-paste value. This allows FLTK to support things like highlighting and replacing text that was previously cut or copied, which makes FLTK applications behave like traditional GUI applications.

18.3 File Chooser

The file chooser in FLTK 1.1.x is significantly different than the one supplied with FLTK 1.0.x. Any code that directly references the old `FCB` class or members will need to be ported to the new `Fl_File_Chooser` class.

18.4 Function Names

Some function names have changed from FLTK 1.0.x to 1.1.x in order to avoid name space collisions. You can still use the old function names by defining the `FLTK_1_0_COMPAT` symbol on the command-line when you compile (`-DFLTK_1_0_COMPAT`) or in your source, e.g.:

```
#define FLTK_1_0_COMPAT
#include <FL/Fl.h>
#include <FL/Enumerations.h>
#include <FL/filename.h>
```

The following table shows the old and new function names:

Old 1.0.x Name	New 1.1.x Name
contrast()	fl_contrast()
down()	fl_down()
filename_absolute()	fl_filename_absolute()
filename_expand()	fl_filename_expand()
filename_ext()	fl_filename_ext()
filename_isdir()	fl_filename_isdir()
filename_list()	fl_filename_list()
filename_match()	fl_filename_match()
filename_name()	fl_filename_name()
filename_relative()	fl_filename_relative()
filename_setext()	fl_filename_setext()
frame()	fl_frame()
inactive()	fl_inactive()
numericsort()	fl_numericsort()

18.5 Image Support

Image support in FLTK has been significantly revamped in 1.1.x. The `F1_Image` class is now a proper base class, with the core image drawing functionality in the `F1_Bitmap`, `F1_Pixmap`, and `F1_RGB_`-`Image` classes.

BMP, GIF, JPEG, PNG, XBM, and XPM image files can now be loaded using the appropriate image classes, and the `F1_Shared_Image` class can be used to cache images in memory.

Image labels are no longer provided as an add-on label type. If you use the old `label()` methods on an image, the widget's `image()` method is called to set the image as the label.

Image labels in menu items must still use the old labeltype mechanism to preserve source compatibility.

18.6 Keyboard Navigation

FLTK 1.1.x now supports keyboard navigation and control with all widgets. To restore the old FLTK 1.0.x behavior so that only text widgets get keyboard focus, call the `F1::visible_focus()` method to disable it:

```
F1::visible_focus(0);
```


Chapter 19

H - Migrating Code from FLTK 1.1 to 1.3

This appendix describes the differences between the FLTK 1.1.x and FLTK 1.3.x functions and classes.

If you want to migrate your code from FLTK 1.0 to FLTK 1.3, then you should also consult Appendix [G - Migrating Code from FLTK 1.0 to 1.1](#).

Chapter 20

I - Developer Information

This chapter describes FLTK development and documentation.

Note:

documentation with doxygen will be described here.

Example

Note:

In the following code example(s) "*" will be replaced by "#" as a temporary solution.

```
/** \file
  Fl_Clock, Fl_Clock_Output widgets . */

/***
 \class Fl_Clock_Output
 \brief This widget can be used to display a program-supplied time.

 The time shown on the clock is not updated. To display the current time,
 use Fl_Clock instead.

 \image html clock.gif
 \image latex clock.eps "" width=10cm
 \image html round_clock.gif
 \image latex clock.eps "" width=10cm
 \image html round_clock.eps "" width=10cm */

/***
  Returns the displayed time.
  Returns the time in seconds since the UNIX epoch (January 1, 1970).
  \see value(ulong)
 */
ulong value() const {return value_;}

/***
 Set the displayed time.
 Set the time in seconds since the UNIX epoch (January 1, 1970).
 \param[in] v seconds since epoch
 \see value()
 */
void Fl_Clock_Output::value(ulong v) {
 [...]
}

/***
 Create an Fl_Clock widget using the given position, size, and label string.
 The default boxtyle is \c FL_NO_BOX.
 \param[in] X, Y, W, H position and size of the widget
 \param[in] L widget label, default is no label
 */
Fl_Clock::Fl_Clock(int X, int Y, int W, int H, const char *L)
 : Fl_Clock_Output(X, Y, W, H, L) {}

/***
 Create an Fl_Clock widget using the given boxtyle, position, size, and
 label string.
 \param[in] t boxtyle
 \param[in] X, Y, W, H position and size of the widget
 \param[in] L widget label, default is no label
 */

```

```
Fl_Clock::Fl_Clock(uchar t, int X, int Y, int W, int H, const char #L)
: Fl_Clock_Output(X, Y, W, H, L) {
    type(t);
    box(t==FL_ROUND_CLOCK ? FL_NO_BOX : FL_UP_BOX);
}
```

Note:

From Duncan: (will be removed later, just for now as a reminder)

5. I've just added comments for the fl_color_chooser() functions, and in order to keep them and the general Function Reference information for them together, I created a new doxygen group, and used \ingroup in the three comment blocks. This creates a new Modules page (which may not be what we want) with links to it from the File Members and [Fl_Color_Chooser.H](#) pages. It needs a bit more experimentation on my part unless someone already knows how this should be handled. (Maybe we can add it to a functions.dox file that defines a functions group and do that for all of the function documentation?)

Update: the trick is not to create duplicate entries in a new group, but to move the function information into the doxygen comments for the class, and use the navigation links provided. Simply using \relatesalso as the first doxygen command in the function's comment puts it in the appropriate place. There is no need to have \defgroup and \ingroup as well, and indeed they don't work. So, to summarize:

```
Gizmo.H
/** \class Gizmo
   A gizmo that does everything
 */
class Gizmo {
    etc
};

extern int popup_gizmo(...);

Gizmo.hxx:
/** \relatesalso Gizmo
   Pops up a gizmo dialog with a Gizmo in it
 */
int popup_gizmo(...);
```

Example comment:

You can use HTML comment statements to embed comments in doxygen comment blocks. These comments will not be visible in the generated document.

The following text is a developer comment.

This will be visible again.

```
The following text is a developer comment.
<!-- *** This *** is *** invisible *** -->
This will be visible again.
```

Different Headlines:

```
<H1>Headline in big text (H1)</H1>
<H2>Headline in big text (H2)</H2>
<H3>Headline in big text (H3)</H3>
<H4>Headline in big text (H4)</H4>
```

Headline in big text (H1)

Headline in big text (H2)

Headline in big text (H3)

Headline in big text (H4)

20.1 Non-ASCII characters

if you came here from below: back to [Creating Links](#)

```
Doxxygen understands many HTML quoting characters like
"quot;, &uuml;, &ccedil;, &Ccedil;, but not all HTML quoting characters.
```

This will appear in the document:

Doxxygen understands many HTML quoting characters like ", ü, ç, Ç, but not all HTML quoting characters.

For further informations about quoting see <http://www.stack.nl/~dimitri/doxygen/htmlcmds.html>

Example with UTF-8 encoded text

```
<P>Assuming that the following source code was written on MS Windows,
this example will output the correct label on OS X and X11 as well.
Without the conversion call, the label on OS X would read
<tt>Fahrvergn_gen</tt> with a deformed umlaut u ("cedille",
html "&cedil;").
\#code
btn = new Fl_Button(10, 10, 300, 25);
btn->copy_label(fl_latin1_to_local("Fahrvergnügen"));
\endcode

\note If your application uses characters that are not part of both
encodings, or it will be used in areas that commonly use different
code pages, you might consider upgrading to FLTK 2 which supports
UTF-8 encoding.

\todo This is an example todo entry, please ignore !
```

This will appear in the document:

Assuming that the following source code was written on MS Windows, this example will output the correct label on OS X and X11 as well. Without the conversion call, the label on OS X would read Fahrvergn_gen with a deformed umlaut u ("cedille", html "¸"). #code btn = new Fl_Button(10, 10, 300, 25); btn->copy_label(fl_latin1_to_local("Fahrvergnügen")); #endcode

Note:

If your application uses characters that are not part of both encodings, or it will be used in areas that commonly use different code pages, you might consider upgrading to FLTK 2 which supports UTF-8 encoding.

[Todo](#)

This is an example todo entry, please ignore !

20.2 Document Structure

- `\page` creates a named page
- `\section` creates a named section within that page
- `\subsection` creates a named subsection within the current section
- `\subsubsection` creates a named subsubsection within the current subsection

All these statements take a "name" as their first argument, and a title as their second argument. The title can contain spaces.

The page, section, and subsection titles are formatted in blue color and a size like "<H1>", "<H2>", and "<H3>", and "<H4>", respectively.

By **FLTK documentation convention**, a file like this one with a doxygen documentation chapter has the name "<chapter>.dox". The `\page` statement at the top of the page is "`\page <chapter> This is the title`". Sections within a documentation page must be called "`<chapter>_<section>`", where "`<chapter>`" is the name part of the file, and "`<section>`" is a unique section name within the page that can be referenced in links. The same for subsections and subsubsections.

These doxygen page and section commands work only in special documentation chapters, not within normal source or header documentation blocks. However, links **from** normal (e.g. class) documentation **to** documentation sections **do work**.

This page has

```
\page development I - Developer Information
```

at its top.

This section is

```
\section development_structure Document structure
```

The following section is

```
\section development_links Creating Links
```

20.3 Creating Links

Links to other documents and external links can be embedded with

- normal HTML links
- HTML links without markup - doxygen creates "http://" links automatically
- links to other doxygen chapters with the `\ref` statements
- links to named sections within the same or other doxygen chapters, if they are defined there with a `\section` statement

see chapter \ref unicode creates a link to the named chapter unicode that has been created with a \subpage statement.

see chapter 5 creates a link to a named html anchor "character_encoding" within the same file.

For further informations about quoting see
<http://www.stack.nl/~dimitri/doxygen/htmlcmds.html>

Bold link text: you can see the \e old online documentation of FLTK 1.3 at \b <http://www.fltk.org/doc-1.3/toc.html>

see section \ref development_non-ascii

appears as:

see chapter 11 - Unicode and utf-8 Support creates a link to the named chapter unicode that has been created with a \subpage statement.

see chapter 5 creates a link to a named html anchor "character_encoding" within the same file.

For further informations about quoting see <http://www.stack.nl/~dimitri/doxygen/htmlcmds.html>

Bold link text: you can see the **old online documentation** of FLTK 1.3 at <http://www.fltk.org/doc-1.3/toc.html>

see section Non-ASCII characters

20.4 Changing Old Links

Old HTML links and anchors in text documentation pages should be changed as follows:

```
<H2><A name="event_xxx">Fl::event_*() methods</A></H2>
```

becomes :

```
<A NAME="event_xxx"></A> <!-- For old HTML links only ! -->
\section events_event_xxx Fl::event_*() methods
```

The additional HTML "" statement is temporary needed, until all links (references) are modified, then:

```
<H2><A name="event_xxx">Fl::event_*() methods</A></H2>
```

becomes :

```
\section events_event_xxx Fl::event_*() methods
```

The "\section" statement can also be a "\subsection" or "\subsubsection" statement.

The references (in this example from index.dox) are changed as follows:

```
\subpage events

<B>
  <UL>
    <LI><A HREF="events.html#event_xxx">Fl::event_*() methods</A></LI>
    <LI><A HREF="events.html#propagation">Event Propagation</A></LI>
  </UL>
</B>
```

becomes :

```
\subpage events

<b>
    \li \ref events_event_xxx
    \li \ref events_propagation
</b>
```

20.5 Paragraph Layout

There is no real need to use HTML <P> and </P> tags within the text to tell doxygen to start or stop a paragraph. In most cases, when doxygen encounters a blank line or some, but not all, \commands in the text it knows that it has reached the start or end of a paragraph. Doxygen also offers the \par command for special paragraph handling. It can be used to provide a paragraph title and also to indent a paragraph. Unfortunately \par won't do what you expect if you want to have doxygen links and sometimes html tags don't work either.

```
\par Normal Paragraph with title
```

This paragraph will have a title, but because there is a blank line between the \par and the text, it will have the normal layout.

```
\par Indented Paragraph with title
```

This paragraph will also have a title, but because there is no blank line between the \par and the text, it will be indented.

```
\par
```

It is also possible to have an indented paragraph without title.
This is how you indent subsequent paragraphs.

```
\par No link to Fl_Widget::draw()
```

Note that the paragraph title is treated as plain text.
Doxygen type links will not work.

HTML characters and tags may or may not work.

```
Fl_Widget::draw() links and "html" tags work<br>
```

```
\par
```

Use a single line ending with
 for complicated paragraph titles.

The above code produces the following paragraphs:

Normal Paragraph with title

This paragraph will have a title, but because there is a blank line between the \par and the text, it will have the normal layout.

Indented Paragraph with title

This paragraph will also have a title, but because there is no blank line between the \par and the text, it will be indented.

It is also possible to have an indented paragraph without title. This is how you indent subsequent paragraphs.

No link to Fl_Widget::draw()

Note that the paragraph title is treated as plain text. Doxygen type links will not work. HTML characters and tags may or may not work.

[Fl_Widget::draw\(\)](#) links and "html" tags work

Use a single line ending with
 for complicated paragraph titles.

20.6 Hack for missing "tiny.gif" file

[Todo](#)

HACK* : include image file for footer. Doxygen does not include the file "tiny.gif" from "html_footer" in its output html dir. Find out, how this can be done, or avoid using an image in the HTML footer.



20.7 5 Navigation Proposals

Chapter 21

J - Software License

December 11, 2001

The FLTK library and included programs are provided under the terms of the GNU Library General Public License (LGPL) with the following exceptions:

1. Modifications to the FLTK configure script, config header file, and makefiles by themselves to support a specific platform do not constitute a modified or derivative work.
The authors do request that such modifications be contributed to the FLTK project - send all contributions to "fltk-bugs@fltk.org".
2. Widgets that are subclassed from FLTK widgets do not constitute a derivative work.
3. Static linking of applications and widgets to the FLTK library does not constitute a derivative work and does not require the author to provide source code for the application or widget, use the shared FLTK libraries, or link their applications or widgets against a user-supplied version of FLTK.
If you link the application or widget to a modified version of FLTK, then the changes to FLTK must be provided under the terms of the LGPL in sections 1, 2, and 4.
4. You do not have to provide a copy of the FLTK license with programs that are linked to the FLTK library, nor do you have to identify the FLTK license in your program or documentation as required by section 6 of the LGPL.

However, programs must still identify their use of FLTK. The following example statement can be included in user documentation to satisfy this requirement:

[program/widget] is based in part on the work of the FLTK project (<http://www.fltk.org>).

GNU LIBRARY GENERAL PUBLIC LICENSE

Version 2, June 1991

Copyright (C) 1991 Free Software Foundation, Inc.

59 Temple Place - Suite 330, Boston, MA 02111-1307, USA

Everyone is permitted to copy and distribute verbatim copies of this license document, but changing it is not allowed.

[This is the first released version of the library GPL. It is numbered 2 because it goes with version 2 of the ordinary GPL.]

Preamble

The licenses for most software are designed to take away your freedom to share and change it. By contrast, the GNU General Public Licenses are intended to guarantee your freedom to share and change free software—to make sure the software is free for all its users.

This license, the Library General Public License, applies to some specially designated Free Software Foundation software, and to any other libraries whose authors decide to use it. You can use it for your libraries, too.

When we speak of free software, we are referring to freedom, not price. Our General Public Licenses are designed to make sure that you have the freedom to distribute copies of free software (and charge for this

service if you wish), that you receive source code or can get it if you want it, that you can change the software or use pieces of it in new free programs; and that you know you can do these things.

To protect your rights, we need to make restrictions that forbid anyone to deny you these rights or to ask you to surrender the rights. These restrictions translate to certain responsibilities for you if you distribute copies of the library, or if you modify it.

For example, if you distribute copies of the library, whether gratis or for a fee, you must give the recipients all the rights that we gave you. You must make sure that they, too, receive or can get the source code. If you link a program with the library, you must provide complete object files to the recipients so that they can relink them with the library, after making changes to the library and recompiling it. And you must show them these terms so they know their rights.

Our method of protecting your rights has two steps: (1) copyright the library, and (2) offer you this license which gives you legal permission to copy, distribute and/or modify the library.

Also, for each distributor's protection, we want to make certain that everyone understands that there is no warranty for this free library. If the library is modified by someone else and passed on, we want its recipients to know that what they have is not the original version, so that any problems introduced by others will not reflect on the original authors' reputations.

Finally, any free program is threatened constantly by software patents. We wish to avoid the danger that companies distributing free software will individually obtain patent licenses, thus in effect transforming the program into proprietary software. To prevent this, we have made it clear that any patent must be licensed for everyone's free use or not licensed at all.

Most GNU software, including some libraries, is covered by the ordinary GNU General Public License, which was designed for utility programs. This license, the GNU Library General Public License, applies to certain designated libraries. This license is quite different from the ordinary one; be sure to read it in full, and don't assume that anything in it is the same as in the ordinary license.

The reason we have a separate public license for some libraries is that they blur the distinction we usually make between modifying or adding to a program and simply using it. Linking a program with a library, without changing the library, is in some sense simply using the library, and is analogous to running a utility program or application program. However, in a textual and legal sense, the linked executable is a combined work, a derivative of the original library, and the ordinary General Public License treats it as such.

Because of this blurred distinction, using the ordinary General Public License for libraries did not effectively promote software sharing, because most developers did not use the libraries. We concluded that weaker conditions might promote sharing better.

However, unrestricted linking of non-free programs would deprive the users of those programs of all benefit from the free status of the libraries themselves. This Library General Public License is intended to permit developers of non-free programs to use free libraries, while preserving your freedom as a user of such programs to change the free libraries that are incorporated in them. (We have not seen how to achieve this as regards changes in header files, but we have achieved it as regards changes in the actual functions of the Library.) The hope is that this will lead to faster development of free libraries.

The precise terms and conditions for copying, distribution and modification follow. Pay close attention to the difference between a "work based on the library" and a "work that uses the library". The former contains code derived from the library, while the latter only works together with the library.

Note that it is possible for a library to be covered by the ordinary General Public License rather than by this special one.

TERMS AND CONDITIONS FOR COPYING, DISTRIBUTION AND MODIFICATION

0. This License Agreement applies to any software library which contains a notice placed by the copyright holder or other authorized party saying it may be distributed under the terms of this Library General Public License (also called "this License"). Each licensee is addressed as "you".

A "library" means a collection of software functions and/or data prepared so as to be conveniently linked with application programs (which use some of those functions and data) to form executables.

The "Library", below, refers to any such software library or work which has been distributed under these terms. A "work based on the Library" means either the Library or any derivative work under copyright law: that is to say, a work containing the Library or a portion of it, either verbatim or with modifications and/or translated straightforwardly into another language. (Hereinafter, translation is included without limitation in the term "modification".)

"Source code" for a work means the preferred form of the work for making modifications to it. For a library, complete source code means all the source code for all modules it contains, plus any associated interface definition files, plus the scripts used to control compilation and installation of the library.

Activities other than copying, distribution and modification are not covered by this License; they are outside its scope. The act of running a program using the Library is not restricted, and output from such a program is covered only if its contents constitute a work based on the Library (independent of the use of the Library in a tool for writing it). Whether that is true depends on what the Library does and what the program that uses the Library does.

1. You may copy and distribute verbatim copies of the Library's complete source code as you receive it, in any medium, provided that you conspicuously and appropriately publish on each copy an appropriate copyright notice and disclaimer of warranty; keep intact all the notices that refer to this License and to the absence of any warranty; and distribute a copy of this License along with the Library.

You may charge a fee for the physical act of transferring a copy, and you may at your option offer warranty protection in exchange for a fee.

2. You may modify your copy or copies of the Library or any portion of it, thus forming a work based on the Library, and copy and distribute such modifications or work under the terms of Section 1 above, provided that you also meet all of these conditions:

a) The modified work must itself be a software library.

b) You must cause the files modified to carry prominent notices stating that you changed the files and the date of any change.

c) You must cause the whole of the work to be licensed at no charge to all third parties under the terms of this License.

d) If a facility in the modified Library refers to a function or a table of data to be supplied by an application program that uses the facility, other than as an argument passed when the facility is invoked, then you must make a good faith effort to ensure that, in the event an application does not supply such function or table, the facility still operates, and performs whatever part of its purpose remains meaningful.

(For example, a function in a library to compute square roots has a purpose that is entirely well-defined independent of the application. Therefore, Subsection 2d requires that any application-supplied function or table used by this function must be optional: if the application does not supply it, the square root function must still compute square roots.)

These requirements apply to the modified work as a whole. If identifiable sections of that work are not derived from the Library, and can be reasonably considered independent and separate works in themselves, then this License, and its terms, do not apply to those sections when you distribute them as separate works. But when you distribute the same sections as part of a whole which is a work based on the Library, the distribution of the whole must be on the terms of this License, whose permissions for other licensees extend to the entire whole, and thus to each and every part regardless of who wrote it.

Thus, it is not the intent of this section to claim rights or contest your rights to work written entirely by you; rather, the intent is to exercise the right to control the distribution of derivative or collective works based on the Library.

In addition, mere aggregation of another work not based on the Library with the Library (or with a work based on the Library) on a volume of a storage or distribution medium does not bring the other work under the scope of this License.

3. You may opt to apply the terms of the ordinary GNU General Public License instead of this License to a given copy of the Library. To do this, you must alter all the notices that refer to this License, so that they refer to the ordinary GNU General Public License, version 2, instead of to this License. (If a newer version than version 2 of the ordinary GNU General Public License has appeared, then you can specify that version instead if you wish.) Do not make any other change in these notices.

Once this change is made in a given copy, it is irreversible for that copy, so the ordinary GNU General Public License applies to all subsequent copies and derivative works made from that copy.

This option is useful when you wish to copy part of the code of the Library into a program that is not a library.

4. You may copy and distribute the Library (or a portion or derivative of it, under Section 2) in object code or executable form under the terms of Sections 1 and 2 above provided that you accompany it with the complete corresponding machine-readable source code, which must be distributed under the terms of Sections 1 and 2 above on a medium customarily used for software interchange.

If distribution of object code is made by offering access to copy from a designated place, then offering equivalent access to copy the source code from the same place satisfies the requirement to distribute the source code, even though third parties are not compelled to copy the source along with the object code.

5. A program that contains no derivative of any portion of the Library, but is designed to work with the Library by being compiled or linked with it, is called a "work that uses the Library". Such a work, in isolation, is not a derivative work of the Library, and therefore falls outside the scope of this License.

However, linking a "work that uses the Library" with the Library creates an executable that is a derivative of the Library (because it contains portions of the Library), rather than a "work that uses the library". The executable is therefore covered by this License. Section 6 states terms for distribution of such executables.

When a "work that uses the Library" uses material from a header file that is part of the Library, the object code for the work may be a derivative work of the Library even though the source code is not. Whether this is true is especially significant if the work can be linked without the Library, or if the work is itself a library. The threshold for this to be true is not precisely defined by law.

If such an object file uses only numerical parameters, data structure layouts and accessors, and small macros and small inline functions (ten lines or less in length), then the use of the object file is unrestricted, regardless of whether it is legally a derivative work. (Executables containing this object code plus portions of the Library will still fall under Section 6.)

Otherwise, if the work is a derivative of the Library, you may distribute the object code for the work under the terms of Section 6. Any executables containing that work also fall under Section 6, whether or not they are linked directly with the Library itself.

6. As an exception to the Sections above, you may also compile or link a "work that uses the Library" with the Library to produce a work containing portions of the Library, and distribute that work under terms of your choice, provided that the terms permit modification of the work for the customer's own use and reverse engineering for debugging such modifications.

You must give prominent notice with each copy of the work that the Library is used in it and that the Library and its use are covered by this License. You must supply a copy of this License. If the work during execution displays copyright notices, you must include the copyright notice for the Library among them, as well as a reference directing the user to the copy of this License. Also, you must do one of these things:

- a) Accompany the work with the complete corresponding machine-readable source code for the Library including whatever changes were used in the work (which must be distributed under Sections 1 and 2 above); and, if the work is an executable linked with the Library, with the complete machine-readable "work that uses the Library", as object code and/or source code, so that the user can modify the Library and then relink to produce a modified executable containing the modified Library. (It is understood that the user who changes the contents of definitions files in the Library will not necessarily be able to recompile the application to use the modified definitions.)
- b) Accompany the work with a written offer, valid for at least three years, to give the same user the materials specified in Subsection 6a, above, for a charge no more than the cost of performing this distribution.
- c) If distribution of the work is made by offering access to copy from a designated place, offer equivalent access to copy the above specified materials from the same place.
- d) Verify that the user has already received a copy of these materials or that you have already sent this user a copy.

For an executable, the required form of the "work that uses the Library" must include any data and utility programs needed for reproducing the executable from it. However, as a special exception, the source code distributed need not include anything that is normally distributed (in either source or binary form) with the major components (compiler, kernel, and so on) of the operating system on which the executable runs, unless that component itself accompanies the executable.

It may happen that this requirement contradicts the license restrictions of other proprietary libraries that do not normally accompany the operating system. Such a contradiction means you cannot use both them and the Library together in an executable that you distribute.

7. You may place library facilities that are a work based on the Library side-by-side in a single library together with other library facilities not covered by this License, and distribute such a combined library, provided that the separate distribution of the work based on the Library and of the other library facilities is otherwise permitted, and provided that you do these two things:

- a) Accompany the combined library with a copy of the same work based on the Library, uncombined with any other library facilities. This must be distributed under the terms of the Sections above.
- b) Give prominent notice with the combined library of the fact that part of it is a work based on the Library, and explaining where to find the accompanying uncombined form of the same work.

8. You may not copy, modify, sublicense, link with, or distribute the Library except as expressly provided under this License. Any attempt otherwise to copy, modify, sublicense, link with, or distribute the Library is void, and will automatically terminate your rights under this License. However, parties who have received copies, or rights, from you under this License will not have their licenses terminated so long as such parties remain in full compliance.

9. You are not required to accept this License, since you have not signed it. However, nothing else grants you permission to modify or distribute the Library or its derivative works. These actions are prohibited by law if you do not accept this License. Therefore, by modifying or distributing the Library (or any work based on the Library), you indicate your acceptance of this License to do so, and all its terms and conditions for copying, distributing or modifying the Library or works based on it.

10. Each time you redistribute the Library (or any work based on the Library), the recipient automatically receives a license from the original licensor to copy, distribute, link with or modify the Library subject to these terms and conditions. You may not impose any further restrictions on the recipients' exercise of the rights granted herein. You are not responsible for enforcing compliance by third parties to this License.

11. If, as a consequence of a court judgment or allegation of patent infringement or for any other reason (not limited to patent issues), conditions are imposed on you (whether by court order, agreement or otherwise) that contradict the conditions of this License, they do not excuse you from the conditions of this License. If you cannot distribute so as to satisfy simultaneously your obligations under this License and any other pertinent obligations, then as a consequence you may not distribute the Library at all. For example, if a

patent license would not permit royalty-free redistribution of the Library by all those who receive copies directly or indirectly through you, then the only way you could satisfy both it and this License would be to refrain entirely from distribution of the Library.

If any portion of this section is held invalid or unenforceable under any particular circumstance, the balance of the section is intended to apply, and the section as a whole is intended to apply in other circumstances.

It is not the purpose of this section to induce you to infringe any patents or other property right claims or to contest validity of any such claims; this section has the sole purpose of protecting the integrity of the free software distribution system which is implemented by public license practices. Many people have made generous contributions to the wide range of software distributed through that system in reliance on consistent application of that system; it is up to the author/donor to decide if he or she is willing to distribute software through any other system and a licensee cannot impose that choice.

This section is intended to make thoroughly clear what is believed to be a consequence of the rest of this License.

12. If the distribution and/or use of the Library is restricted in certain countries either by patents or by copyrighted interfaces, the original copyright holder who places the Library under this License may add an explicit geographical distribution limitation excluding those countries, so that distribution is permitted only in or among countries not thus excluded. In such case, this License incorporates the limitation as if written in the body of this License.

13. The Free Software Foundation may publish revised and/or new versions of the Library General Public License from time to time. Such new versions will be similar in spirit to the present version, but may differ in detail to address new problems or concerns.

Each version is given a distinguishing version number. If the Library specifies a version number of this License which applies to it and "any later version", you have the option of following the terms and conditions either of that version or of any later version published by the Free Software Foundation. If the Library does not specify a license version number, you may choose any version ever published by the Free Software Foundation.

14. If you wish to incorporate parts of the Library into other free programs whose distribution conditions are incompatible with these, write to the author to ask for permission. For software which is copyrighted by the Free Software Foundation, write to the Free Software Foundation; we sometimes make exceptions for this. Our decision will be guided by the two goals of preserving the free status of all derivatives of our free software and of promoting the sharing and reuse of software generally.

NO WARRANTY

15. BECAUSE THE LIBRARY IS LICENSED FREE OF CHARGE, THERE IS NO WARRANTY FOR THE LIBRARY, TO THE EXTENT PERMITTED BY APPLICABLE LAW. EXCEPT WHEN OTHERWISE STATED IN WRITING THE COPYRIGHT HOLDERS AND/OR OTHER PARTIES PROVIDE THE LIBRARY "AS IS" WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESSED OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE. THE ENTIRE RISK AS TO THE QUALITY AND PERFORMANCE OF THE LIBRARY IS WITH YOU. SHOULD THE LIBRARY PROVE DEFECTIVE, YOU ASSUME THE COST OF ALL NECESSARY SERVICING, REPAIR OR CORRECTION.

16. IN NO EVENT UNLESS REQUIRED BY APPLICABLE LAW OR AGREED TO IN WRITING WILL ANY COPYRIGHT HOLDER, OR ANY OTHER PARTY WHO MAY MODIFY AND/OR REDISTRIBUTE THE LIBRARY AS PERMITTED ABOVE, BE LIABLE TO YOU FOR DAMAGES, INCLUDING ANY GENERAL, SPECIAL, INCIDENTAL OR CONSEQUENTIAL DAMAGES ARISING OUT OF THE USE OR INABILITY TO USE THE LIBRARY (INCLUDING BUT NOT LIMITED TO LOSS OF DATA OR DATA BEING RENDERED INACCURATE OR LOSSES SUSTAINED BY YOU

OR THIRD PARTIES OR A FAILURE OF THE LIBRARY TO OPERATE WITH ANY OTHER SOFTWARE), EVEN IF SUCH HOLDER OR OTHER PARTY HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES.

END OF TERMS AND CONDITIONS

Chapter 22

K - Example Source Code

March 19, 2005

The FLTK distribution contains over 60 sample applications written in, or ported to, FLTK. If the FLTK archive you received does not contain a 'test' directory, you can download the complete FLTK distribution from <http://fltk.org/software.php>.

Most of the example programs were created while testing a group of widgets. They are not meant to be great achievements in clean C++ programming, but merely a test platform to verify the functionality of the FLTK library.

22.1 Example Applications

adjuster	arc	ask	bitmap	blocks	boxtyle
browser	button	buttons	checkers	clock	colbrowser
color_chooser	cube	CubeView	cursor	curve	demo
doublebuffer	editor	fast_slow	file_chooser	fluid	fonts
forms	fractals	fullscreen	gl_overlay	glpuzzle	hello
help	iconize	image	inactive	input	input_choice
keyboard	label	line_style	list_visuals	mandelbrot	menubar
message	minimum	navigation	output	overlay	pack
pixmap_- browser	pixmap	preferences	radio	resizebox	resize
scroll	shape	subwindow	sudoku	symbols	tabs
threads	tile	tiled_image	valuators		

22.1.1 adjuster

`adjuster` shows a nifty little widget for quickly setting values in a great range.

22.1.2 arc

The `arc` demo explains how to derive your own widget to generate some custom drawings. The sample drawings use the matrix based arc drawing for some fun effects.

22.1.3 ask

`ask` shows some of FLTK's standard dialog boxes. Click the correct answers or you may end up in a loop, or you may end up in a loop, or you... .

22.1.4 bitmap

This simple test shows the use of a single color bitmap as a label for a box widget. Bitmaps are stored in the X11 '.bmp' file format and can be part of the source code.

22.1.5 blocks

A wonderful and addictive game that shows the usage of FLTK timers, graphics, and how to implement sound on all platforms. `blocks` is also a good example for the Mac OS X specific bundle format.

22.1.6 boxtypes

`boxtype` gives an overview of readily available boxes and frames in FLTK. More types can be added by the application programmer. When using themes, FLTK shuffles boxtypes around to give your program a new look.

22.1.7 browser

`browser` shows the capabilities of the [Fl_Browser](#) widget. Important features tested are loading of files, line formatting, and correct positioning of the browser data window.

22.1.8 button

The `button` test is a simple demo of push-buttons and callbacks.

22.1.9 buttons

`buttons` shows a sample of FLTK button types.

22.1.10 checkers

Written by Steve Poulsen in early 1979, `checkers` shows how to convert a VT100 text-terminal based program into a neat application with a graphical UI. Check out the code that drags the pieces, and how the pieces are drawn by layering. Then tell me how to beat the computer at Checkers.

22.1.11 clock

The `clock` demo shows two analog clocks. The innards of the [Fl_Clock](#) widget are pretty interesting, explaining the use of timeouts and matrix based drawing.

22.1.12 colbrowser

`colbrowser` runs only on X11 systems. It reads `/usr/lib/X11/rgb.txt` to show the color representation of every text entry in the file. This is beautiful, but only moderately useful unless your UI is written in *Motif*.

22.1.13 color_chooser

The `color_chooser` gives a short demo of FLTK's palette based color chooser and of the RGB based color wheel.

22.1.14 cube

The `cube` demo shows the speed of OpenGL. It also tests the ability to render two OpenGL buffers into a single window, and shows OpenGL text.

22.1.15 CubeView

`CubeView` shows how to create a UI containing OpenGL with Fluid.

22.1.16 cursor

The `cursor` demo shows all mouse cursor shapes that come standard with FLTK. The *fgcolor* and *bgcolor* sliders work only on few systems (some version of Irix for example).

22.1.17 curve

`curve` draws a nice Bezier curve into a custom widget. The *points* option for splines is not supported on all platforms.

22.1.18 demo

This tool allows quick access to all programs in the `test` directory. `demo` is based on the visuals of the IrixGL demo program. The menu tree can be changed by editing `test/demo.menu`.

22.1.19 doublebuffer

The `doublebuffer` demo show the difference between a single buffered window, which may flicker during a slow redraw, and a double buffered window, which never flickers, but uses twice the amount of RAM. Some modern OS's double buffer all windows automatically to allow transparency and shadows on the desktop. FLTK is smart enough to not tripble buffer a window in that case.

22.1.20 editor

FLTK has two very different text input widgets. [Fl_Input](#) and derived classes are rather light weight, however [Fl_Text_Editor](#) is a complete port of *nedit* (with permission). The `editor` test is almost a full application, showing custom syntax highlighting and dialog creation.

22.1.21 fast_slow

`fast_slow` shows how an application can use the [Fl_Widget::when\(\)](#) setting to receive different kinds of callbacks.

22.1.22 file_chooser

The standard FLTK `file_chooser` is the result of many iterations, trying to find a middle ground between a complex browser and a fast light implementation.

22.1.23 fonts

`fonts` shows all available text fonts on the host system. If your machine still has some pixmap based fonts, the supported sizes will be shown in bold face. Only the first 256 fonts will be listed.

22.1.24 forms

`forms` is an XForms program with very few changes. Search for "fltk" to find all changes necessary to port to fltk. This demo shows the different boxtypes. Note that some boxtypes are not appropriate for some objects.

22.1.25 fractals

`fractals` shows how to mix OpenGL, Glut and FLTK code. FLTK supports a rather large subset of Glut, so that many Glut applications compile just fine.

22.1.26 fullscreen

This demo shows how to do many of the window manipulations that are popular for games. You can toggle the border on/off, switch between single- and double-buffered rendering, and take over the entire screen. More information in the source code.

22.1.27 gl_overlay

`gl_overlay` shows OpenGL overlay plane rendering. If no hardware overlay plane is available, FLTK will simulate it for you.

22.1.28 glpuzzle

The `glpuzzle` test shows how most Glut source code compiles easily under FLTK.

22.1.29 hello

`hello`: Hello, World. Need I say more? Well, maybe. This tiny demo shows how little is needed to get a functioning application running with FLTK. Quite impressive, I'd say.

22.1.30 help

`help` displays the built-in FLTK help browser. The [Fl_Help_Dialog](#) understands a subset of html and renders various image formats. This widget makes it easy to provide help pages to the user without depending on the operating system's html browser.

22.1.31 iconize

`iconize` demonstrates the effect of the window functions `hide()`, `iconize()`, and `show()`.

22.1.32 image

The `image` demo shows how an image can be created on the fly. This generated image contains an alpha (transparency) channel which lets previous renderings 'shine through', either via true transparency or by using screen door transparency (pixelation).

22.1.33 inactive

`inactive` tests the correct rendering of inactive widgets. To see the inactive version of images, you can check out the pixmap or image test.

22.1.34 input

This tool shows and tests different types of text input fields based on [Fl_Input](#). The `input` program also tests various settings of [Fl_Input::when\(\)](#).

22.1.35 input_choice

`input_choice` tests the latest addition to FLTK1, a text input field with an attached pulldown menu. Windows users will recognize similarities to the 'ComboBox'. `input_choice` starts up in 'plastic' scheme, but the traditional scheme is also supported.

22.1.36 keyboard

FLTK unifies keyboard events for all platforms. The `keyboard` test can be used to check the return values of [Fl::event_key\(\)](#) and [Fl::event_text\(\)](#). It is also great to see the modifier buttons and the scroll wheel at work. Quit this application by closing the window. The ESC key will not work.

22.1.37 label

Every FLTK widget can have a label attached to it. The `label` demo shows alignment, clipping and wrapping of text labels. Labels can contain symbols at the start and end of the text, like `@FLTK` or `@circle uh-huh @square`.

22.1.38 line_style

Advanced line drawing can be tested with `line_style`. Not all platforms support all line styles.

22.1.39 list_visuals

This little app finds all available pixel formats for the current X11 screen. But since you are now an FLTK user, you don't have to worry about any of this.

22.1.40 mandelbrot

`mandelbrot` shows two advanced topics in one test. It creates grayscale images on the fly, updating them via the *idle* callback system. This is one of the few occasions where the *idle* callback is very useful by giving all available processor time to the application without blocking the UI or other apps.

22.1.41 menubar

`menubar` tests many aspects of FLTK's popup menu system. Among the features are radio buttons, menus taller than the screen, arbitrary sub menu depth, and global shortcuts.

22.1.42 message

`message` pops up a few of FLTK's standard message boxes.

22.1.43 minimum

`minimum` test program verifies that the update regions are set correctly. In a real life application, the trail would be avoided by choosing a smaller label or by setting label clipping differently.

22.1.44 navigation

`navigation` demonstrates how the text cursor moves from text field to text field when using the arrow keys, tab, and shift-tab.

22.1.45 output

`output` shows the difference between the single line and multi line mode of the [Fl_Output](#) widget. Fonts can be selected from the FLTK standard list of fonts.

22.1.46 overlay

The `overlay` test app show how easy an FLTK window can be layered to display cursor and manipulator style elements. This example derives a new class from [Fl_Overlay_Window](#) and provides a new function to draw custom overlays.

22.1.47 pack

The `pack` test program demonstrates the resizing and repositioning of children of the [Fl_Pack](#) group. Putting an [Fl_Pack](#) into an [Fl_Scroll](#) is a useful way to create a browser for large sets of data.

22.1.48 pixmap_browser

`pixmap_browser` tests the shared-image interface. When using the same image multiple times, [Fl_Shared_Image](#) will keep it only once in memory.

22.1.49 pixmap

This simple test shows the use of a LUT based pixmap as a label for a box widget. Pixmaps are stored in the X11 '.xpm' file format and can be part of the source code. Pixmaps support one transparent color.

22.1.50 preferences

I do have my `preferences` in the morning, but sometimes I just can't remember a thing. This is where the [Fl_Preferences](#) come in handy. They remember any kind of data between program launches.

22.1.51 radio

The `radio` tool was created entirely with *fluid*. It shows some of the available button types and tests radio button behavior.

22.1.52 resizebox

`resizebox` shows some possible ways of FLTK's automatic resize behavior..

22.1.53 resize

The `resize` demo tests size and position functions with the given window manager.

22.1.54 scroll

`scroll` shows how to scroll an area of widgets, one of them being a slow custom drawing. [Fl_Scroll](#) uses clipping and smart window area copying to improve redraw speed. The buttons at the bottom of the window control decoration rendering and updates.

22.1.55 shape

`shape` is a very minimal demo that shows how to create your own OpenGL rendering widget. Now that you know that, go ahead and write that flight simulator you always dreamt of.

22.1.56 subwindow

The `subwindow` demo tests messaging and drawing between the main window and 'true' sub windows. A sub window is different to a group by resetting the FLTK coordinate system to 0, 0 in the top left corner. On Win32 and X11, subwindows have their own operating system specific handle.

22.1.57 sudoku

Another highly addictive game - don't play it, I warned you. The implementation shows how to create application icons, how to deal with OS specifics, and how to generate sound.

22.1.58 symbols

`symbols` are a speciality of FLTK. These little vector drawings can be integrated into labels. They scale and rotate, and with a little patience, you can define your own. The rotation number refers to 45 degree rotations if you were looking at a numeric keypad (2 is down, 6 is right, etc.).

22.1.59 tabs

The `tabs` tool was created with *fluid*. It tests correct hiding and redisplaying of tabs, navigation across tabs, resize behavior, and no unneeded redrawing of invisible widgets.

The `tabs` application shows the [Fl_Tabs](#) widget on the left and the [Fl_Wizard](#) widget on the right side for direct comparison of these two panel management widgets.

22.1.60 threads

FLTK can be used in a multithreading environment. There are some limitations, mostly due to the underlying operating system. `threads` shows how to use [Fl::lock\(\)](#), [Fl::unlock\(\)](#), and [Fl::awake\(\)](#) in secondary threads to keep FLTK happy. Although locking works on all platforms, this demo is not available on every machine.

22.1.61 tile

The `tile` tool shows a nice way of using [Fl_Tile](#). To test correct resizing of subwindows, the widget for region 1 is created from an [Fl_Window](#) class.

22.1.62 tiled_image

The `tiled_image` demo uses an image as the background for a window by repeating it over the full size of the widget. The window is resizable and shows how the image gets repeated.

22.1.63 valuators

`valuators` shows all of FLTK's nifty widgets to change numeric values.

22.1.64 fluid

`fluid` is not only a big test program, but also a very useful visual UI designer. Many parts of `fluid` were created using `fluid`. See the [Fluid Tutorial](#) for more details.

Chapter 23

Todo List

Member `Fl_Browser_::draw(int, int, int, int)` Find the implementation, if any, and document it there!

Class `Fl_Button` Refactor the doxygen comments for `Fl_Button` type() documentation.

Class `Fl_Button` Refactor the doxygen comments for `Fl_Button` when() documentation.

Class `Fl_Chart` Refactor `Fl_Chart::type()` information.

Class `Fl_Check_Button` Refactor `Fl_Check_Button` doxygen comments (add color() info etc?)

Class `Fl_Check_Button` Generate Fl_Check_Button.gif with visible checkmark.

Class `Fl_Choice` Refactor the doxygen comments for `Fl_Choice` changed() documentation.

Member `Fl_Clock::update()` Find `Fl_Clock::update()` implementation, if any, and document it.

Class `Fl_Counter` Refactor the doxygen comments for `Fl_Counter` type() documentation.

Member `Fl_File_Input::errorcolor() const` Better docs for `Fl_File_Input::errorcolor()` - is it even used?

Member `Fl_Group::sizes()` should the internal representation of the sizes() array be documented?

Class `Fl_Label` For FLTK1.3, the `Fl_Label` type will become a widget by itself. That way we will be avoiding a lot of code duplication by handling labels in a similar fashion to widgets containing text. We also provide an easy interface for very complex labels, containing html or vector graphics.

Member `Fl_Preferences::get(const char *entry, void *value, const void *defaultValue, int defaultSize, int maxSize)` maxSize should receive the number of bytes that were read.

Member `Fl_Text_Display::shortcut(int s)` FIXME : get set methods pointing on shortcut_ have no effects as shortcut_ is unused in this class and derived!

Member `Fl_Text_Display::shortcut() const` FIXME : get set methods pointing on shortcut_ have no effects as shortcut_ is unused in this class and derived!

Class `Fl_Text_Selection` members must be documented

Member `Fl_Widget::align()` const This function should not take uchar as an argument. Apart from the fact that uchar is too short with only 8 bits, it does not provide type safety (in which case we don't need to declare `Fl_Type` an enum to begin with).

Member `Fl_Widget::argument(long v)` The user data value must be implemented using a *union* to avoid 64 bit machine incompatibilities.

Member `Fl_Color` enum `Fl_Color` needs some more comments for values, see `Fl/Enumerations.H`

Member `Fl_When` doxygen comments for values are incomplete and maybe wrong or unclear

Member `Fl_Labeltype` The doxygen comments are incomplete, and some labeltypes are starting with an underscore. Also, there are three external functions undocumented (yet):

- `fl_define_FL_SHADOW_LABEL()`
- `fl_define_FL_ENGRAVED_LABEL()`
- `fl_define_FL_EMBOSSSED_LABEL()`

Member `Fl_String` FIXME: temporary (?) typedef to mark UTF8 and Unicode conversions

Member `Fl::watch_widget_pointer(Fl_Widget *&w)` explain the role of the watch list, it may be related to invalid widget deletion crash fixes...

Page 5 - Drawing Things in FLTK drawing.dox: I fixed the above encoding problem of these ć and umlaut characters, but this text is obsoleted by FLTK 1.3 with utf-8 encoding, or must be rewritten accordingly: How to use native (e.g. Windows "ANSI", or ISO-8859-x) encoding in embedded strings for labels, error messages and more. Please check this (utf-8) encoding on different OS'es and with different language and font environments.

Page I - Developer Information This is an example todo entry, please ignore !

Page I - Developer Information HACK* : include image file for footer. Doxygen does not include the file "tiny.gif" from "html_footer" in its output html dir. Find out, how this can be done, or avoid using an image in the HTML footer.

Chapter 24

Deprecated List

Member `Fl_Group::focus(Fl_Widget *W)` This is for backwards compatibility only. You should use `W->take_focus()` instead.

Member `Fl_Menu_Item::check()` .

Member `Fl_Menu_Item::checked() const` .

Member `Fl_Menu_Item::uncheck()` .

Member `Fl_Spinner::maximum() const`

Member `Fl_Spinner::mininum() const`

Chapter 25

Module Index

25.1 Modules

Here is a list of all modules:

Windows handling functions	213
Events handling functions	216
Selection & Clipboard functions	228
Screen functions	231
Color & Font functions	234
Multithreading support functions	237
Safe widget deletion support functions	239
Cairo support functions and classes	241
Common Dialogs classes and functions	243

Chapter 26

Class Index

26.1 Class Hierarchy

This inheritance list is sorted roughly, but not completely, alphabetically:

Fl	251
Fl_Cairo_State	311
FL_CHART_ENTRY	320
Fl_End	354
Fl_File_Chooser	358
Fl_File_Icon	369
Fl_Font_Descriptor	381
Fl_Glut_Bitmap_Font	398
Fl_Help_Dialog	414
Fl_Help_Link	418
Fl_Help_Target	419
Fl_Image	427
Fl_Bitmap	277
Fl_XBM_Image	717
Fl_Pixmap	500
Fl_GIF_Image	389
Fl_XPM_Image	718
Fl_RGB_Image	535
Fl_BMP_Image	281
Fl_JPEG_Image	453
Fl_PNG_Image	504
Fl_PNM_Image	505
Fl_Shared_Image	556
Fl_Tiled_Image	634
Fl_Label	454
Fl_Menu_Item	474
Fl_Preferences	510
Fl_Preferences::Entry	524
Fl_Preferences::Name	525
Fl_Text_Buffer	578
Fl_Text_Display::Style_Table_Entry	619
Fl_Text_Editor::Key_Binding	628
Fl_Text_Selection	629

Fl_Tooltip	641
Fl_Widget	665
Fl_Box	282
Fl_Button	306
Fl_Light_Button	456
Fl_Check_Button	325
Fl_Round_Button	542
Fl_Repeat_Button	530
Fl_Return_Button	532
Fl_Toggle_Button	640
Fl_Chart	314
Fl_Clock_Output	335
Fl_Clock	332
Fl_Round_Clock	544
Fl_FormsBitmap	382
Fl_FormsPixmap	384
Fl_Free	386
Fl_Group	403
Fl_Browser	296
Fl_Browser	284
Fl_File_Browser	355
Fl_Hold_Browser	426
Fl_Multi_Browser	490
Fl_Select_Browser	555
Fl_Check_Browser	321
Fl_Color_Chooser	339
Fl_Help_View	420
Fl_Input_Choice	447
Fl_Pack	498
Fl_Scroll	545
Fl_Spinner	568
Fl_Tabs	574
Fl_Text_Display	599
Fl_Text_Editor	620
Fl_Tile	631
Fl_Window	703
Fl_Double_Window	351
Fl_Cairo_Window	312
Fl_Overlay_Window	495
Fl_Gl_Window	390
Fl_Glut_Window	399
Fl_Single_Window	562
Fl_Menu_Window	487
Fl_Wizard	715
Fl_Input_	437
Fl_Input	433
Fl_File_Input	375
Fl_Float_Input	380
Fl_Int_Input	452
Fl_Multiline_Input	491
Fl_Output	493
Fl_Multiline_Output	492

Fl_Secret_Input	554
Fl_Menu_	459
Fl_Choice	327
Fl_Menu_Bar	468
Fl_Menu_Button	471
Fl_Positioner	506
Fl_Progress	527
Fl_Timer	637
Fl_Valuator	645
Fl_Adjuster	274
Fl_Counter	344
Fl_Simple_Counter	561
Fl_Dial	348
Fl_Fill_Dial	378
Fl_Roller	539
Fl_Slider	564
Fl_Fill_Slider	379
Fl_Scrollbar	550
Fl_Value_Slider	661
Fl_Value_Input	651
Fl_Value_Output	657

Chapter 27

Class Index

27.1 Class List

Here are the classes, structs, unions and interfaces with brief descriptions:

Fl (The Fl is the FLTK global (static) containing state information and global methods for the current application)	251
Fl_Adjuster (Was stolen from Prisms, and has proven to be very useful for values that need a large dynamic range)	274
Fl_Bitmap (Supports caching and drawing of mono-color (bitmap) images)	277
Fl_BMP_Image (Supports loading, caching, and drawing of Windows Bitmap (BMP) image files)	281
Fl_Box (This widget simply draws its box, and possibly it's label)	282
Fl_Browser (Displays a scrolling list of text lines, and manages all the storage for the text)	284
Fl_Browser_ (This is the base for browsers)	296
Fl_Button (Buttons generate callbacks when they are clicked by the user)	306
Fl_Cairo_State (Contains all the necessary info on the current cairo context)	311
Fl_Cairo_Window (This defines a pre-configured cairo fltk window)	312
Fl_Chart (Fl_Chart displays simple charts)	314
FL_CHART_ENTRY (For internal use only)	320
Fl_Check_Browser (Displays a scrolling list of text lines that may be selected and/or checked by the user)	321
Fl_Check_Button (A button with an "checkmark" to show its status)	325
Fl_Choice (A button that is used to pop up a menu)	327
Fl_Clock (This widget provides a round analog clock display)	332
Fl_Clock_Output (This widget can be used to display a program-supplied time)	335
Fl_Color_Chooser (Standard RGB color chooser)	339
Fl_Counter (Controls a single floating point value with button (or keyboard) arrows)	344
Fl_Dial (Circular dial to control a single floating point value)	348
Fl_Double_Window (The Fl_Double_Window provides a double-buffered window)	351
Fl_End (This is a dummy class that allows you to end a Fl_Group in a constructor list of a class:)	354
Fl_File_Browser (Displays a list of filenames, optionally with file-specific icons)	355
Fl_File_Chooser (Displays a standard file selection dialog that supports various selection modes)	358
Fl_File_Icon (Manages icon images that can be used as labels in other widgets and as icons in the FileBrowser widget)	369
Fl_File_Input (This widget displays a pathname in a text input field)	375
Fl_Fill_Dial (Draws a dial with a filled arc)	378
Fl_Fill_Slider (Widget that draws a filled horizontal slider, useful as a progress or value meter) .	379

Fl_Float_Input (Subclass of Fl_Input that only allows the user to type floating point numbers (sign, digits, decimal point, more digits, 'E' or 'e', sign, digits))	380
Fl_Font_Descriptor (This a structure for an actual system font, with junk to help choose it and info on character sizes)	381
Fl_FormsBitmap (Forms compatibility Bitmap Image Widget)	382
Fl_FormsPixmap (Forms pixmap drawing routines)	384
Fl_Free (Emulation of the Forms "free" widget)	386
Fl_GIF_Image (Supports loading, caching, and drawing of Compuserve GIF SM images)	389
Fl_GL_Window (Sets things up so OpenGL works, and also keeps an OpenGL "context" for that window, so that changes to the lighting and projection may be reused between redraws)	390
Fl_Glut_Bitmap_Font (Fltk glut font/size attributes used in the glutXXX functions)	398
Fl_Glut_Window (GLUT is emulated using this window class and these static variables (plus several more static variables hidden in glut_compatibility.cxx):)	399
Fl_Group (FLTK container widget)	403
Fl_Help_Dialog (Displays a standard help dialog window using the Fl_Help_View widget)	414
Fl_Help_Link (Definition of a link for the html viewer)	418
Fl_Help_Target (Fl_Help_Target structure)	419
Fl_Help_View (Displays HTML text)	420
Fl_Hold_Browser (The Fl_Hold_Browser is a subclass of Fl_Browser which lets the user select a single item, or no items by clicking on the empty space)	426
Fl_Image (Fl_Image is the base class used for caching and drawing all kinds of images in FLTK)	427
Fl_Input (This is the FLTK text input widget)	433
Fl_Input_ (This is a virtual base class below Fl_Input)	437
Fl_Input_Choice (A combination of the input widget and a menu button)	447
Fl_Int_Input (Subclass of Fl_Input that only allows the user to type decimal digits (or hex num- bers of the form 0xaef))	452
Fl_JPEG_Image (Supports loading, caching, and drawing of Joint Photographic Experts Group (JPEG) File Interchange Format (JFIF) images)	453
Fl_Label (This struct stores all information for a text or mixed graphics label)	454
Fl_Light_Button	456
Fl_Menu_ (Base class of all widgets that have a menu in FLTK)	459
Fl_Menu_Bar (This widget provides a standard menubar interface)	468
Fl_Menu_Button (This is a button that when pushed pops up a menu (or hierarchy of menus) defined by an array of Fl_Menu_Item objects)	471
Fl_Menu_Item (The Fl_Menu_Item structure defines a single menu item that is used by the Fl_- Menu_class)	474
Fl_Menu_Window (Window type used for menus)	487
Fl_Multi_Browser (Subclass of Fl_Browser which lets the user select any set of the lines)	490
' characters as new lines rather than ^J, and accepts the Return, Tab, and up and down arrow keys)	491
Fl_Multiline_Output (This widget is a subclass of Fl_Output that displays multiple lines of text)	492
Fl_Output (This widget displays a piece of text)	493
Fl_Overlay_Window (This window provides double buffering and also the ability to draw the "overlay" which is another picture placed on top of the main image)	495
Fl_Pack (This widget was designed to add the functionality of compressing and aligning widgets)	498
Fl_Pixmap (Supports caching and drawing of colormap (pixmap) images, including transparency)	500
Fl_PNG_Image (Supports loading, caching, and drawing of Portable Network Graphics (PNG) image files)	504
Fl_PNM_Image (Supports loading, caching, and drawing of Portable Anymap (PNM, PBM, PGM, PPM) image files)	505
Fl_Positioner (This class is provided for Forms compatibility)	506
Fl_Preferences (Fl_Preferences provides methods to store user settings between application starts)	510
Fl_Preferences::Entry (An entry associates a preference name to its corresponding value)	524

Fl_Preferences::Name ('Name' provides a simple method to create numerical or more complex procedural names for entries and groups on the fly)	525
Fl_Progress (Displays a progress bar for the user)	527
Fl_Repeat_Button (The Fl_Repeat_Button is a subclass of Fl_Button that generates a callback when it is pressed and then repeatedly generates callbacks as long as it is held down)	530
Fl_Return_Button (The Fl_Return_Button is a subclass of Fl_Button that generates a callback when it is pressed or when the user presses the Enter key)	532
Fl_RGB_Image (Supports caching and drawing of full-color images with 1 to 4 channels of color information)	535
Fl_Roller ("dolly" control commonly used to move 3D objects)	539
Fl_Round_Button (Buttons generate callbacks when they are clicked by the user)	542
Fl_Round_Clock (A clock widget of type FL_ROUND_CLOCK)	544
Fl_Scroll (This container widget lets you maneuver around a set of widgets much larger than your window)	545
Fl_Scrollbar (Displays a slider with arrow buttons at the ends of the scrollbar)	550
Fl_Secret_Input (Subclass of Fl_Input that displays its input as a string of asterisks)	554
Fl_Select_Browser (The class is a subclass of Fl_Browser which lets the user select a single item, or no items by clicking on the empty space)	555
Fl_Shared_Image (This class supports caching, loading, and drawing of image files)	556
Fl_Simple_Counter (This widget creates a counter with only 2 arrow buttons)	561
Fl_Single_Window (This is the same as Fl_Window)	562
Fl_Slider (Sliding knob inside a box)	564
Fl_Spinner (This widget is a combination of the input widget and repeat buttons)	568
Fl_Tabs ("file card tabs" interface that allows you to put lots and lots of buttons and switches in a panel, as popularized by many toolkits)	574
Fl_Text_Buffer (Used by the Fl_Text_Display and Fl_Text_Editor to manage complex text data and is based upon the excellent NEdit text editor engine - see http://www.nedit.org/)	578
Fl_Text_Display (This is the FLTK text display widget)	599
Fl_Text_Display::Style_Table_Entry (This structure associates the color,font,size of a string to draw with an attribute mask matching attr)	619
Fl_Text_Editor (This is the FLTK text editor widget)	620
Fl_Text_Editor::Key_Binding (Simple linked list associating a key/state to a function)	628
Fl_Text_Selection (This is an internal class for Fl_Text_Buffer to manage text selections)	629
Fl_Tile (Lets you resize the children by dragging the border between them:)	631
Fl_Tiled_Image (This class supports tiling of images over a specified area)	634
Fl_Timer (This is provided only to emulate the Forms Timer widget)	637
Fl_Toggle_Button (The toggle button is a push button that needs to be clicked once to toggle on, and one more time to toggle off)	640
Fl_Tooltip (Tooltip support for all FLTK widgets)	641
Fl_Valuator (Controls a single floating-point value and provides a consistent interface to set the value, range, and step, and insures that callbacks are done the same for every object)	645
Fl_Value_Input (Displays a numeric value)	651
Fl_Value_Output (Displays a floating point value)	657
Fl_Value_Slider (Fl_Slider widget with a box displaying the current value)	661
Fl_Widget (Fl_Widget is the base class for all widgets in FLTK)	665
Fl_Window (This widget produces an actual window)	703
Fl_Wizard (This widget is based off the Fl_Tabs widget, but instead of displaying tabs it only changes "tabs" under program control)	715
Fl_XBM_Image (Supports loading, caching, and drawing of X Bitmap (XBM) bitmap files)	717
Fl_XPM_Image (Supports loading, caching, and drawing of X Pixmap (XPM) images, including transparency)	718

Chapter 28

File Index

28.1 File List

Here is a list of all documented files with brief descriptions:

aimm.h	??
armscii_8.h	??
ascii.h	??
big5.h	??
big5_emacs.h	??
case.h	??
cgdebug.h	??
cp1133.h	??
cp1251.h	??
cp1255.h	??
cp1256.h	??
dingbats_.h	??
dirent.h	??
Enumerations.H (This file contains type definitions and general enumerations)	719
fastarrow.h	??
filename.H	??
Fl.H (<i>Fl</i> static class)	733
Fl_Adjuster.H (<i>Fl_Adjuster</i> widget)	734
fl_arc.cxx (Utility functions for drawing arcs and circles)	735
fl_arci.cxx (Utility functions for drawing circles using integers)	736
fl_ask.H	??
Fl_Bitmap.H (<i>Fl_Bitmap</i> widget)	738
Fl_BMP_Image.H (<i>Fl_BMP_Image</i> widget)	739
Fl_Box.H (<i>Fl_Box</i> widget)	740
fl_boxtype.cxx (Drawing code for common box types)	741
Fl_Browser.H (<i>Fl_Browser</i> widget)	744
Fl_Browser_.H (<i>Fl_Browser_</i> widget)	745
Fl_Button.H (<i>Fl_Button</i> widget)	746
Fl_Cairo.H (Handling transparently platform dependent cairo include files)	747
Fl_Cairo_Window.H (<i>Fl_Cairo_Window</i> Handling transparently a fltk window incorporte a cairo draw callback)	748
Fl_Chart.H (<i>Fl_Chart</i> widget)	749
Fl_Check_Browser.H (<i>Fl_Check_Browser</i> widget)	751

Fl_Check_Button.H (Fl_Check_Button widget)	752
Fl_Choice.H (Fl_Choice widget)	753
Fl_Clock.H (Fl_Clock , Fl_Clock_Output widgets)	754
fl_cmap.h	??
fl_color.cxx (Color handling)	755
Fl_Color_Chooser.H (Fl_Color_Chooser widget)	757
Fl_Counter.H (Fl_Counter widget)	758
fl_curve.cxx (Utility for drawing Bezier curves, adding the points to the current fl_begin/fl_end vertex/fl_end path)	759
Fl_Dial.H (Fl_Dial widget)	760
Fl_Double_Window.H (Fl_Double_Window widget)	761
fl_draw.H (Utility header to pull drawing functions together)	762
Fl_Export.H	??
Fl_File_Browser.H (Fl_File_Browser widget)	775
Fl_File_Chooser.H	??
Fl_File_Icon.H (Fl_File_Icon widget)	776
Fl_File_Input.H (Fl_File_Input widget)	777
Fl_Fill_Dial.H (Fl_Fill_Dial widget)	778
Fl_Fill_Slider.H (Fl_Fill_Slider widget)	779
Fl_Float_Input.H (Fl_Float_Input widget)	780
Fl_Font.H	??
Fl_FormsBitmap.H (Fl_FormsBitmap widget)	781
Fl_FormsPixmap.H (Fl_FormsPixmap widget)	782
Fl_Free.H (Fl_Free widget)	783
Fl_GIF_Image.H (Fl_GIF_Image widget)	785
Fl_Gl_Choice.H	??
Fl_Gl_Window.H (Fl_Gl_Window widget)	786
Fl_Group.H (Fl_Group , Fl_End classes)	787
Fl_Help_Dialog.H (Fl_Help_Dialog widget)	788
Fl_Help_View.H (Fl_Help_View widget)	789
Fl_Hold_Browser.H (Fl_Hold_Browser widget)	790
Fl_Hor_Fill_Slider.H (Fl_Hor_Fill_Slider widget)	791
Fl_Hor_Nice_Slider.H (Fl_Hor_Nice_Slider widget)	792
Fl_Hor_Slider.H (Fl_Hor_Slider widget)	793
Fl_Hor_Value_Slider.H (Fl_Hor_Value_Slider widget)	794
Fl_Image.H (Fl_Image , Fl_RGB_Image classes)	795
Fl_Input.H (Fl_Input widget)	796
Fl_Input_.H (Fl_Input_ widget)	797
Fl_Input_Choice.H (Fl_Input_Choice widget)	798
Fl_Int_Input.H (Fl_Int_Input widget)	799
Fl_JPEG_Image.H (Fl_JPEG_Image class)	800
Fl_Light_Button.H (Fl_Light_Button widget)	801
Fl_Line_Dial.H (Fl_Line_Dial widget)	802
Fl_Menu.H	??
Fl_Menu_.H (Fl_Menu_ widget)	803
Fl_Menu_Bar.H (Fl_Menu_Bar widget)	804
Fl_Menu_Button.H (Fl_Menu_Button widget)	805
Fl_Menu_Item.H	??
Fl_Menu_Window.H (Fl_Menu_Window widget)	806
fl_message.H	??
Fl_Multi_Browser.H (Fl_Multi_Browser widget)	807
Fl_Multi_Label.H	??
Fl_Multiline_Input.H (Fl_Multiline_Input widget)	808
Fl_Multiline_Output.H (Fl_Multiline_Output widget)	809

Fl_Nice_Slider.H (Fl_Nice_Slider widget)	810
Fl_Object.H	??
Fl_Output.H (Fl_Output widget)	811
Fl_Overlay_Window.H (Fl_Overlay_Window class)	812
Fl_Pack.H (Fl_Pack widget)	813
Fl_Pixmap.H (Fl_Pixmap widget)	814
Fl_PNG_Image.H (Fl_PNG_Image class)	815
Fl_PNM_Image.H (Fl_PNM_Image class)	816
Fl_Positioner.H (Fl_Positioner widget)	817
Fl_Preferences.H (Fl_Preferences class)	818
Fl_Progress.H (Fl_Progress widget)	819
Fl_Radio_Button.H (Fl_Radio_Button widget)	820
Fl_Radio_Light_Button.H (Fl_Radio_Light_Button widget)	821
Fl_Radio_Round_Button.H (Fl_Radio_Round_Button widget)	822
fl_rect.cxx (Drawing and clipping routines for rectangles)	823
Fl_Repeat_Button.H (Fl_Repeat_Button widget)	827
Fl_Return_Button.H (Fl_Return_Button widget)	828
Fl_RGB_Image.H	??
Fl_Roller.H (Fl_Roller widget)	829
Fl_Round_Button.H (Fl_Round_Button widget)	830
Fl_Round_Clock.H (Fl_Round_Clock widget)	831
Fl_Scroll.H (Fl_Scroll widget)	832
Fl_Scrollbar.H (Fl_Scrollbar widget)	833
Fl_Secret_Input.H (Fl_Secret_Input widget)	834
Fl_Select_Browser.H (Fl_Select_Browser widget)	835
Fl_Shared_Image.H (Fl_Shared_Image class)	836
fl_show_colormap.H	??
fl_show_input.H	??
Fl_Simple_Counter.H (Fl_Simple_Counter widget)	837
Fl_Single_Window.H (Fl_Single_Window class)	838
Fl_Slider.H (Fl_Slider widget)	839
Fl_Spinner.H (Fl_Spinner widget)	840
Fl_Sys_Menu_Bar.H	??
Fl_Tabs.H (Fl_Tabs widget)	841
Fl_Text_Buffer.H (Fl_Text_Buffer, Fl_Text_Selection widget)	842
Fl_Text_Display.H (Fl_Text_Display widget)	843
Fl_Text_Editor.H (Fl_Text_Editor widget)	844
Fl_Tile.H (Fl_Tile widget)	845
Fl_Tiled_Image.H (Fl_Tiled_Image widget)	846
Fl_Timer.H (Fl_Timer widget)	847
Fl_Toggle_Button.H (Fl_Toggle_Button widget)	848
Fl_Toggle_Light_Button.H	??
Fl_Toggle_Round_Button.H	??
Fl_Tooltip.H (Fl_Tooltip widget)	849
fl_types.h (This file contains simple "C"-style type definitions)	850
fl_utf8.h	??
Fl_Valuator.H (Fl_Valuator widget)	851
Fl_Value_Input.H (Fl_Value_Input widget)	852
Fl_Value_Output.H (Fl_Value_Output widget)	853
Fl_Value_Slider.H (Fl_Value_Slider widget)	854
fl_vertex.cxx (Portable drawing code for drawing arbitrary shapes with simple 2D transformations)	855
Fl_Widget.H (Fl_Widget, Fl_Label classes)	861
Fl_Window.H (Fl_Window widget)	862

Fl_Wizard.H (Fl_Wizard widget)	863
Fl_XBM_Image.H (Fl_XBM_Image class)	864
Fl_XColor.H	??
Fl_XPM_Image.H (Fl_XPM_Image class)	865
flstring.h	??
forms.H	??
freeglut_teapot_data.h	??
gb2312.h	??
georgian_academy.h	??
georgian_ps.h	??
gl.h	??
gl2opengl.h	??
gl_draw.H	??
glu.h	??
glut.H	??
iso8859_1.h	??
iso8859_10.h	??
iso8859_11.h	??
iso8859_13.h	??
iso8859_14.h	??
iso8859_15.h	??
iso8859_16.h	??
iso8859_2.h	??
iso8859_3.h	??
iso8859_4.h	??
iso8859_5.h	??
iso8859_6.h	??
iso8859_7.h	??
iso8859_8.h	??
iso8859_9.h	??
iso8859_9e.h	??
jisx0201.h	??
jisx0208.h	??
jisx0212.h	??
koi8_c.h	??
koi8_r.h	??
koi8_u.h	??
ksc5601.h	??
mac.H	??
math.h	??
mediumarrow.h	??
mulelao.h	??
names.h	??
slowarrow.h	??
spacing.h	??
symbol_h	??
tatar_cyr.h	??
tcvn.h	??
tis620.h	??
ucs2be.h	??
utf8.h	??
viscii.h	??
win32.H	??
x.H	??

Ximint.h	??
Xlibint.h	??
Xutf8.h	??

Chapter 29

Module Documentation

29.1 Windows handling functions

Windows and standard dialogs handling.

Functions

- static `Fl_Window * Fl::first_window ()`
Returns the first top-level window in the list of shown() windows.
- static void `Fl::first_window (Fl_Window *)`
See `Fl_Window first_window()`.*
- static `Fl_Window * Fl::next_window (const Fl_Window *)`
Returns the next top-level window in the list of shown() windows.
- static `Fl_Window * Fl::modal ()`
Returns the top-most `modal()` window currently shown.
- static `Fl_Window * Fl::grab ()`
This is used when pop-up menu systems are active.
- static void `Fl::grab (Fl_Window *)`
Selects the window to grab.
- static void `Fl::set_abort (void(*f)(const char *,...))`
For back compatibility, sets the void `Fl::fatal` handler callback.
- static void `Fl::default_atclose (Fl_Window *, void *)`
Default callback for window widgets.
- static void `Fl::set_atclose (void(*f)(Fl_Window *, void *))`
For back compatibility, sets the `Fl::atclose` handler callback.

Variables

- static void(* Fl::atclose)(Fl_Window *, void *) = default_atclose

Back compatibility: default window callback handler.

29.1.1 Detailed Description

Windows and standard dialogs handling.

29.1.2 Function Documentation

29.1.2.1 void Fl::default_atclose (Fl_Window * *window*, void * *v*) [static, inherited]

Default callback for window widgets.

It hides the window and then calls the default widget callback.

References Fl_Widget::default_callback(), and Fl_Window::hide().

29.1.2.2 Fl_Window * Fl::first_window () [static, inherited]

Returns the first top-level window in the list of shown() windows.

If a [modal\(\)](#) window is shown this is the top-most modal window, otherwise it is the most recent window to get an event.

The second form sets the window that is returned by first_window. The window is removed from wherever it is in the list and inserted at the top. This is not done if [Fl::modal\(\)](#) is on or if the window is not shown(). Because the first window is used to set the "parent" of modal windows, this is often useful.

References Fl_Widget::w().

Referenced by Fl::get_system_colors(), Fl::grab(), Fl::handle(), Fl_Window::hide(), Fl::reload_scheme(), Fl::scheme(), and Fl_Window::show().

29.1.2.3 void Fl::grab (Fl_Window * *win*) [static, inherited]

Selects the window to grab.

See Fl_Window* [Fl::grab\(\)](#)

References Fl::first_window().

29.1.2.4 static Fl_Window* Fl::grab () [inline, static, inherited]

This is used when pop-up menu systems are active.

Send all events to the passed window no matter where the pointer or focus is (including in other programs). The window *does not have to be shown()*, this lets the [handle\(\)](#) method of a "dummy" window override all event handling and allows you to map and unmap a complex set of windows (under both X and WIN32 *some* window must be mapped because the system interface needs a window id).

If [grab\(\)](#) is on it will also affect show() of windows by doing system-specific operations (on X it turns on override-redirect). These are designed to make menus popup reliably and faster on the system.

To turn off grabbing do Fl::grab(0).

Be careful that your program does not enter an infinite loop while [grab\(\)](#) is on. On X this will lock up your screen! To avoid this potential lockup, all newer operating systems seem to limit mouse pointer grabbing to the time during which a mouse button is held down. Some OS's may not support grabbing at all.

Referenced by Fl::belowmouse(), Fl::focus(), Fl::handle(), and Fl_Menu_Item::popupdown().

29.1.2.5 static Fl_Window* Fl::modal () [inline, static, inherited]

Returns the top-most [modal\(\)](#) window currently shown.

This is the most recently shown() window with [modal\(\)](#) true, or NULL if there are no [modal\(\)](#) windows shown(). The [modal\(\)](#) window has its [handle\(\)](#) method called for all events, and no other windows will have [handle\(\)](#) called ([grab\(\)](#) overrides this).

Referenced by Fl::handle().

29.1.2.6 Fl_Window * Fl::next_window (const Fl_Window * *window*) [static, inherited]

Returns the next top-level window in the list of shown() windows.

You can use this call to iterate through all the windows that are shown().

References Fl_Widget::w().

Referenced by Fl_Window::hide(), and Fl::reload_scheme().

29.1.2.7 static void Fl::set_atclose (void(*)(Fl_Window *, void *)*f*) [inline, static, inherited]

For back compatibility, sets the [Fl::atclose](#) handler callback.

You can now simply change the callback for the window instead

See also:

[Fl_Window::callback\(Fl_Callback*\)](#)

29.1.3 Variable Documentation

29.1.3.1 void(* Fl::atclose)(Fl_Window *, void *) (Fl_Window *, void *) = default_atclose [static, inherited]

Back compatibility: default window callback handler.

See also:

[Fl::set_atclose\(\)](#)

Referenced by Fl_Window::default_callback().

29.2 Events handling functions

[Fl](#) class events handling API.

Functions

- static int [Fl::event\(\)](#)
Returns the last event that was processed.
- static int [Fl::event_x\(\)](#)
Returns the mouse position of the event relative to the [Fl_Window](#) it was passed to.
- static int [Fl::event_y\(\)](#)
Returns the mouse position of the event relative to the [Fl_Window](#) it was passed to.
- static int [Fl::event_x_root\(\)](#)
Returns the mouse position on the screen of the event.
- static int [Fl::event_y_root\(\)](#)
Returns the mouse position on the screen of the event.
- static int [Fl::event_dx\(\)](#)
Returns the current horizontal mouse scrolling associated with the [FL_MOUSEWHEEL](#) event.
- static int [Fl::event_dy\(\)](#)
Returns the current vertical mouse scrolling assoiated with the [FL_MOUSEWHEEL](#) event.
- static void [Fl::get_mouse\(int &, int &\)](#)
Return where the mouse is on the screen by doing a round-trip query to the server.
- static int [Fl::event_clicks\(\)](#)
Returns non zero if we had a double click event.
- static void [Fl::event_clicks\(int i\)](#)
Manually sets the number returned by [Fl::event_clicks\(\)](#).
- static int [Fl::event_is_click\(\)](#)
The first form returns non-zero if the mouse has not moved far enough and not enough time has passed since the last [FL_PUSH](#) or [FL_KEYBOARD](#) event for it to be considered a "drag" rather than a "click".
- static void [Fl::event_is_click\(int i\)](#)
Only i=0 works! See int [event_is_click\(\)](#).
- static int [Fl::event_button\(\)](#)
Gets which particular mouse button caused the current event.
- static int [Fl::event_state\(\)](#)
This is a bitfield of what shift states were on and what mouse buttons were held down during the most recent event.

- static int [Fl::event_state](#) (int i)
See int [event_state\(\)](#).
- static int [Fl::event_key](#) ()
Gets which key on the keyboard was last pushed.
- static int [Fl::event_original_key](#) ()
If NumLock is deactivated, FLTK translates events from the numeric keypad into the corresponding arrow key events.
- static int [Fl::event_key](#) (int key)
Returns true if the given key was held down (or pressed) during the last event.
- static int [Fl::get_key](#) (int key)
Returns true if the given key is held down now.
- static const char * [Fl::event_text](#) ()
Returns the text associated with the current FL_PASTE or FL_DND_RELEASE event.
- static int [Fl::event_length](#) ()
Returns the length of the text in [Fl::event_text\(\)](#).
- static int [Fl::compose](#) (int &del)
Any text editing widget should call this for each FL_KEYBOARD event.
- static void [Fl::compose_reset](#) ()
If the user moves the cursor, be sure to call [Fl::compose_reset\(\)](#).
- static int [Fl::event_inside](#) (int, int, int, int)
Returns whether or not the mouse event is inside the given rectangle.
- static int [Fl::event_inside](#) (const [Fl_Widget](#) *)
Returns whether or not the mouse event is inside the given widget.
- static int [Fl::test_shortcut](#) (int)
Test the current event, which must be an FL_KEYBOARD or FL_SHORTCUT, against a shortcut value (described in [Fl_Button](#)).
- static int [Fl::handle](#) (int, [Fl_Window](#) *)
Sends the event to a window for processing.
- static [Fl_Widget](#) * [Fl::belowmouse](#) ()
Gets the widget that is below the mouse.
- static void [Fl::belowmouse](#) ([Fl_Widget](#) *)
Sets the widget that is below the mouse.
- static [Fl_Widget](#) * [Fl::pushed](#) ()
Sets the widget that is being pushed.

- static void `Fl::pushed (Fl_Widget *)`
Sets the widget that is being pushed.
- static `Fl_Widget * Fl::focus ()`
Gets the current `Fl::focus()` widget.
- static void `Fl::focus (Fl_Widget *)`
Sets the widget that will receive `FL_KEYBOARD` events.
- static void `Fl::add_handler (int(*h)(int))`
Install a function to parse unrecognized events.
- static void `Fl::remove_handler (int(*h)(int))`
Removes a previously added event handler.
- static int `Fl::event_shift ()`
Returns non-zero if the Shift key is pressed.
- static int `Fl::event_ctrl ()`
Returns non-zero if the Control key is pressed.
- static int `Fl::event_alt ()`
Returns non-zero if the Alt key is pressed.
- static int `Fl::event_buttons ()`
Returns the mouse buttons state bits; if non-zero, then at least one button is pressed now.
- static int `Fl::event_button1 ()`
Returns non-zero if mouse button 1 is currently held down.
- static int `Fl::event_button2 ()`
Returns non-zero if button 2 is currently held down.
- static int `Fl::event_button3 ()`
Returns non-zero if button 3 is currently held down.

29.2.1 Detailed Description

`Fl` class events handling API.

29.2.2 Function Documentation

29.2.2.1 void `Fl::add_handler (int(*)(int) ha)` [static, inherited]

Install a function to parse unrecognized events.

If FLTK cannot figure out what to do with an event, it calls each of these functions (most recent first) until one of them returns non-zero. If none of them returns non zero then the event is ignored. Events that cause this to be called are:

- FL_SHORTCUT events that are not recognized by any widget. This lets you provide global shortcut keys.
- System events that FLTK does not recognize. See [fl_xevent](#).
- *Some* other events when the widget FLTK selected returns zero from its [handle\(\)](#) method. Exactly which ones may change in future versions, however.

Referenced by [Fl_Menu_::global\(\)](#).

29.2.2.2 void Fl::belowmouse (Fl_Widget * o) [static, inherited]

Sets the widget that is below the mouse.

This is for highlighting buttons. It is not used to send FL_PUSH or FL_MOVE directly, for several obscure reasons, but those events typically go to this widget. This is also the first widget tried for FL_SHORTCUT events.

If you change the belowmouse widget, the previous one and all parents (that don't contain the new widget) are sent FL_LEAVE events. Changing this does *not* send FL_ENTER to this or any widget, because sending FL_ENTER is supposed to *test* if the widget wants the mouse (by it returning non-zero from [handle\(\)](#)).

References [Fl_Widget::contains\(\)](#), [FL_DND_LEAVE](#), [FL_LEAVE](#), [Fl::grab\(\)](#), [Fl_Widget::handle\(\)](#), and [Fl_Widget::parent\(\)](#).

29.2.2.3 static Fl_Widget* Fl::belowmouse () [inline, static, inherited]

Gets the widget that is below the mouse.

See also:

[belowmouse\(Fl_Widget*\)](#)

Referenced by [Fl_Text_Editor::handle\(\)](#), [Fl_Input::handle\(\)](#), [Fl_Group::handle\(\)](#), and [Fl::handle\(\)](#).

29.2.2.4 int Fl::compose (int & del) [static, inherited]

Any text editing widget should call this for each FL_KEYBOARD event.

Use of this function is very simple.

If *true* is returned, then it has modified the [Fl::event_text\(\)](#) and [Fl::event_length\(\)](#) to a set of *bytes* to insert (it may be of zero length!). It will also set the "del" parameter to the number of *bytes* to the left of the cursor to delete, this is used to delete the results of the previous call to [Fl::compose\(\)](#).

If *false* is returned, the keys should be treated as function keys, and del is set to zero. You could insert the text anyways, if you don't know what else to do.

Though the current implementation returns immediately, future versions may take quite awhile, as they may pop up a window or do other user-interface things to allow characters to be selected.

References [FL_ALT](#), [FL_Alt_L](#), [FL_Alt_R](#), [FL_Control_L](#), [FL_Control_R](#), [FL_Menu](#), [FL_META](#), [FL_Meta_L](#), [FL_Meta_R](#), [FL_Shift_L](#), and [FL_Shift_R](#).

Referenced by [Fl_Text_Editor::handle_key\(\)](#).

29.2.2.5 static void Fl::compose_reset () [inline, static, inherited]

If the user moves the cursor, be sure to call [Fl::compose_reset\(\)](#).

The next call to [Fl::compose\(\)](#) will start out in an initial state. In particular it will not set "del" to non-zero. This call is very fast so it is ok to call it many times and in many places.

Referenced by [Fl::focus\(\)](#).

29.2.2.6 static int Fl::event () [inline, static, inherited]

Returns the last event that was processed.

This can be used to determine if a callback is being done in response to a keypress, mouse click, etc.

Referenced by [Fl::dnd\(\)](#), and [Fl_Tabs::handle\(\)](#).

29.2.2.7 static int Fl::event_alt () [inline, static, inherited]

Returns non-zero if the Alt key is pressed.

References [FL_ALT](#).

29.2.2.8 static int Fl::event_button () [inline, static, inherited]

Gets which particular mouse button caused the current event.

This returns garbage if the most recent event was not a [FL_PUSH](#) or [FL_RELEASE](#) event.

Return values:

[*FL_LEFT_MOUSE*](#)

[*FL_MIDDLE_MOUSE*](#)

[*FL_RIGHT_MOUSE*](#).

See also:

[Fl::event_buttons\(\)](#)

References [FL_Button](#).

Referenced by [Fl_Glut_Window::handle\(\)](#), [Fl_Free::handle\(\)](#), [Fl_Value_Output::handle\(\)](#), [Fl_Value_Input::handle\(\)](#), [Fl_Text_Editor::handle\(\)](#), [Fl_Scrollbar::handle\(\)](#), [Fl_Menu_Button::handle\(\)](#), and [Fl_Input::handle\(\)](#).

29.2.2.9 static int Fl::event_button1 () [inline, static, inherited]

Returns non-zero if mouse button 1 is currently held down.

For more details, see [Fl::event_buttons\(\)](#).

References [FL_BUTTON1](#).

29.2.2.10 static int Fl::event_button2 () [inline, static, inherited]

Returns non-zero if button 2 is currently held down.

For more details, see [Fl::event_buttons\(\)](#).

References FL_BUTTON2.

29.2.2.11 static int Fl::event_button3 () [inline, static, inherited]

Returns non-zero if button 3 is currently held down.

For more details, see [Fl::event_buttons\(\)](#).

References FL_BUTTON3.

29.2.2.12 static int Fl::event_buttons () [inline, static, inherited]

Returns the mouse buttons state bits; if non-zero, then at least one button is pressed now.

This function returns the button state at the time of the event. During an FL_RELEASE event, the state of the released button will be 0. To find out, which button caused an FL_RELEASE event, you can use [Fl::event_button\(\)](#) instead.

Returns:

a bit mask value like { [FL_BUTTON1] | [FL_BUTTON2] | [FL_BUTTON3] }

29.2.2.13 static void Fl::event_clicks (int i) [inline, static, inherited]

Manually sets the number returned by [Fl::event_clicks\(\)](#).

This can be used to set it to zero so that later code does not think an item was double-clicked.

Parameters:

← *i* correspond to no double-click if 0, *i*+1 mouse clicks otherwise

See also:

int [event_clicks\(\)](#)

29.2.2.14 static int Fl::event_clicks () [inline, static, inherited]

Returns non zero if we had a double click event.

Return values:

Non-zero if the most recent FL_PUSH or FL_KEYBOARD was a "double click".

N-1 for N clicks. A double click is counted if the same button is pressed again while [event_is_click\(\)](#) is true.

Referenced by [Fl_Text_Display::handle\(\)](#), [Fl_Input::handle\(\)](#), and [Fl_Browser_::handle\(\)](#).

29.2.2.15 static int Fl::event_ctrl () [inline, static, inherited]

Returns non-zero if the Control key is pressed.

References FL_CTRL.

29.2.2.16 static int Fl::event_dx () [inline, static, inherited]

Returns the current horizontal mouse scrolling associated with the FL_MOUSEWHEEL event.

Right is positive.

29.2.2.17 static int Fl::event_dy () [inline, static, inherited]

Returns the current vertical mouse scrolling assoaciated with the FL_MOUSEWHEEL event.

Down is positive.

Referenced by Fl_Glut_Window::handle(), and Fl_Text_Display::handle().

29.2.2.18 int Fl::event_inside (const Fl_Widget * o) [static, inherited]

Returns whether or not the mouse event is inside the given widget.

Returns non-zero if the current event_x and event_y put it inside the widget or inside an arbitrary bounding box. You should always call this rather than doing your own comparison so you are consistent about edge effects.

References Fl::h(), Fl::w(), Fl_Widget::x(), and Fl_Widget::y().

29.2.2.19 int Fl::event_inside (int xx, int yy, int ww, int hh) [static, inherited]

Returns whether or not the mouse event is inside the given rectangle.

Returns non-zero if the current event_x and event_y put it inside the widget or inside an arbitrary bounding box. You should always call this rather than doing your own comparison so you are consistent about edge effects.

Referenced by Fl_Text_Display::handle(), Fl_Repeat_Button::handle(), Fl_Group::handle(), Fl_Button::handle(), and Fl_Browser_::handle().

29.2.2.20 static int Fl::event_is_click () [inline, static, inherited]

The first form returns non-zero if the mouse has not moved far enough and not enough time has passed since the last FL_PUSH or FL_KEYBOARD event for it to be considered a "drag" rather than a "click".

You can test this on FL_DRAG, FL_RELEASE, and FL_MOVE events. The second form clears the value returned by [Fl::event_is_click\(\)](#). Useful to prevent the *next* click from being counted as a double-click or to make a popup menu pick an item with a single click. Don't pass non-zero to this.

Referenced by Fl_Value_Input::handle(), Fl_Input::handle(), and Fl_Adjuster::handle().

29.2.2.21 int Fl::event_key (int key) [static, inherited]

Returns true if the given *key* was held down (or pressed) *during* the last event.

This is constant until the next event is read from the server.

`Fl::get_key(int)` returns true if the given key is held down *now*. Under X this requires a round-trip to the server and is *much* slower than `Fl::event_key(int)`.

Keys are identified by the *unshifted* values. FLTK defines a set of symbols that should work on most modern machines for every key on the keyboard:

- All keys on the main keyboard producing a printable ASCII character use the value of that ASCII character (as though shift, ctrl, and caps lock were not on). The space bar is 32.
- All keys on the numeric keypad producing a printable ASCII character use the value of that ASCII character plus `FL_KP`. The highest possible value is `FL_KP_Last` so you can range-check to see if something is on the keypad.
- All numbered function keys use the number on the function key plus `FL_F`. The highest possible number is `FL_F_Last`, so you can range-check a value.
- Buttons on the mouse are considered keys, and use the button number (where the left button is 1) plus `FL_Button`.
- All other keys on the keypad have a symbol: `FL_Escape`, `FL_BackSpace`, `FL_Tab`, `FL_Enter`, `FL_Print`, `FL_Scroll_Lock`, `FL_Pause`, `FL_Insert`, `FL_Home`, `FL_Page_Up`, `FL_Delete`, `FL_End`, `FL_Page_Down`, `FL_Left`, `FL_Up`, `FL_Right`, `FL_Down`, `FL_Shift_L`, `FL_Shift_R`, `FL_Control_L`, `FL_Control_R`, `FL_Caps_Lock`, `FL_Alt_L`, `FL_Alt_R`, `FL_Meta_L`, `FL_Meta_R`, `FL_Menu`, `FL_Num_Lock`, `FL_KP_Enter`. Be careful not to confuse these with the very similar, but all-caps, symbols used by `Fl::event_state()`.

On X `Fl::get_key(FL_Button+n)` does not work.

On WIN32 `Fl::get_key(FL_KP_Enter)` and `Fl::event_key(FL_KP_Enter)` do not work.

References `Fl::event_state()`, `FL_Button`, `FL_Menu`, `FL_Meta_L`, and `FL_Meta_R`.

29.2.2.22 static int Fl::event_key () [inline, static, inherited]

Gets which key on the keyboard was last pushed.

Return values:

`0` if the last event was not a key press or release.

See also:

`int event_key(int)`

Referenced by `Fl::get_key()`, `Fl_Glut_Window::handle()`, `Fl_Free::handle()`, `Fl_Text_Display::handle()`, `Fl_Tabs::handle()`, `Fl_Spinner::handle()`, `Fl_Scrollbar::handle()`, `Fl_Roller::handle()`, `Fl_Return_Button::handle()`, `Fl_Menu_Button::handle()`, `Fl_Input::handle()`, `Fl_Group::handle()`, `Fl_Counter::handle()`, `Fl_Choice::handle()`, `Fl_Button::handle()`, `Fl_Browser_::handle()`, `Fl_Adjuster::handle()`, `Fl::handle()`, `Fl_Text_Editor::handle_key()`, and `Fl::test_shortcut()`.

29.2.2.23 static int Fl::event_length () [inline, static, inherited]

Returns the length of the text in `Fl::event_text()`.

There will always be a nul at this position in the text. However there may be a nul before that if the keystroke translates to a nul character or you paste a nul character.

Referenced by `Fl_Text_Editor::handle_key()`.

29.2.2.24 static int Fl::event_original_key () [inline, static, inherited]

If NumLock is deactivated, FLTK translates events from the numeric keypad into the corresponding arrow key events.

`event_key()` returns the translated key code, whereas `event_original_key()` returns the keycode before NumLock translation.

29.2.2.25 static int Fl::event_shift () [inline, static, inherited]

Returns non-zero if the Shift key is pressed.

References `FL_SHIFT`.

29.2.2.26 static int Fl::event_state () [inline, static, inherited]

This is a bitfield of what shift states were on and what mouse buttons were held down during the most recent event.

The second version returns non-zero if any of the passed bits are turned on. The legal bits are:

- `FL_SHIFT`
- `FL_CAPS_LOCK`
- `FL_CTRL`
- `FL_ALT`
- `FL_NUM_LOCK`
- `FL_META`
- `FL_SCROLL_LOCK`
- `FL_BUTTON1`
- `FL_BUTTON2`
- `FL_BUTTON3`

X servers do not agree on shift states, and `FL_NUM_LOCK`, `FL_META`, and `FL_SCROLL_LOCK` may not work. The values were selected to match the XFree86 server on Linux. In addition there is a bug in the way X works so that the shift state is not correctly reported until the first event *after* the shift key is pressed or released.

Referenced by `Fl::event_key()`, `Fl_Text_Display::handle()`, `Fl_Menu_Button::handle()`, `Fl_Input::handle()`, `Fl_Choice::handle()`, `Fl_Button::handle()`, `Fl_Browser_::handle()`, `Fl_Adjuster::handle()`, `Fl_Text_Editor::handle_key()`, and `Fl::test_shortcut()`.

29.2.2.27 static const char* Fl::event_text () [inline, static, inherited]

Returns the text associated with the current FL_PASTE or FL_DND_RELEASE event.

Referenced by Fl_Glut_Window::handle(), Fl_Text_Editor::handle(), Fl::handle(), Fl_Text_Editor::handle_key(), Fl_Widget::test_shortcut(), and Fl::test_shortcut().

29.2.2.28 static int Fl::event_x_root () [inline, static, inherited]

Returns the mouse position on the screen of the event.

To find the absolute position of an [Fl_Window](#) on the screen, use the difference between [event_x_root\(\)](#), [event_y_root\(\)](#) and [event_x\(\)](#), [event_y\(\)](#).

Referenced by Fl_Value_Input::handle(), and Fl_Menu_Item::pulldown().

29.2.2.29 static int Fl::event_y_root () [inline, static, inherited]

Returns the mouse position on the screen of the event.

To find the absolute position of an [Fl_Window](#) on the screen, use the difference between [event_x_root\(\)](#), [event_y_root\(\)](#) and [event_x\(\)](#), [event_y\(\)](#).

Referenced by Fl_Menu_Item::pulldown().

29.2.2.30 void Fl::focus (Fl_Widget * o) [static, inherited]

Sets the widget that will receive FL_KEYBOARD events.

If you change [Fl::focus\(\)](#), the previous widget and all parents (that don't contain the new widget) are sent FL_UNFOCUS events. Changing the focus does *not* send FL_FOCUS to this or any widget, because sending FL_FOCUS is supposed to *test* if the widget wants the focus (by it returning non-zero from [handle\(\)](#)).

See also:

[Fl_Widget::take_focus\(\)](#)

References Fl::compose_reset(), FL_UNFOCUS, Fl::grab(), Fl_Widget::handle(), Fl_Widget::parent(), Fl_Widget::visible_focus(), and Fl_Widget::window().

29.2.2.31 static Fl_Widget* Fl::focus () [inline, static, inherited]

Gets the current [Fl::focus\(\)](#) widget.

See also:

[Fl::focus\(Fl_Widget*\)](#)

Referenced by Fl_Widget::activate(), Fl_Text_Display::clear_rect(), Fl_Text_Display::draw(), Fl_Roller::draw(), Fl_Return_Button::draw(), Fl_Menu_Button::draw(), Fl_Light_Button::draw(), Fl_File_Input::draw(), Fl_Counter::draw(), Fl_Choice::draw(), Fl_Button::draw(), Fl_Browser_::draw(), Fl_Adjuster::draw(), Fl_Text_Display::draw_string(), Fl_Input_::drawtext(), Fl_Value_Slider::handle(), Fl_Text_Display::handle(), Fl_Tabs::handle(), Fl_Slider::handle(), Fl_Roller::handle(), Fl_Repeat_Button::handle(), Fl_Menu_Button::handle(), Fl_Input::handle(), Fl_Group::handle(), Fl_Counter::handle(), Fl_Choice::handle(), Fl_Button::handle(), Fl_Adjuster::handle(), Fl::handle(), Fl_Input_::position(), Fl_Widget::show(), and Fl_Widget::take_focus().

29.2.2.32 int Fl::get_key (int key) [static, inherited]

Returns true if the given *key* is held down *now*.

Under X this requires a round-trip to the server and is *much* slower than [Fl::event_key\(int\)](#).

See also:

[event_key\(int\)](#)

References [Fl::event_key\(\)](#).

29.2.2.33 static void Fl::get_mouse (int &, int &) [static, inherited]

Return where the mouse is on the screen by doing a round-trip query to the server.

You should use [Fl::event_x_root\(\)](#) and [Fl::event_y_root\(\)](#) if possible, but this is necessary if you are not sure if a mouse event has been processed recently (such as to position your first window). If the display is not open, this will open it.

Referenced by [Fl_Window::hotspot\(\)](#).

29.2.2.34 int Fl::handle (int e, Fl_Widget *window) [static, inherited]

Sends the event to a window for processing.

Returns non-zero if any widget uses the event.

References [Fl::belowmouse\(\)](#), [Fl_Tooltip::current\(\)](#), [Fl_Widget::do_callback\(\)](#), [Fl::event_key\(\)](#), [Fl::event_text\(\)](#), [Fl::first_window\(\)](#), [FL_CLOSE](#), [FL_DND_DRAG](#), [FL_DND_ENTER](#), [FL_DND_LEAVE](#), [FL_DND_RELEASE](#), [FL_DRAG](#), [FL_ENTER](#), [FL_Escape](#), [FL_FOCUS](#), [FL_HIDE](#), [FL_KEYBOARD](#), [FL_KEYUP](#), [FL_LEAVE](#), [FL_MOUSEWHEEL](#), [FL_MOVE](#), [FL_PUSH](#), [FL_RELEASE](#), [FL_SHORTCUT](#), [FL_SHOW](#), [FL_UNFOCUS](#), [Fl::focus\(\)](#), [Fl::grab\(\)](#), [Fl_Widget::hide\(\)](#), [Fl::modal\(\)](#), [Fl_Widget::parent\(\)](#), [Fl::pushed\(\)](#), [Fl_Window::show\(\)](#), [Fl_Widget::show\(\)](#), and [Fl_Widget::window\(\)](#).

29.2.2.35 void Fl::pushed (Fl_Widget *o) [static, inherited]

Sets the widget that is being pushed.

[FL_DRAG](#) or [FL_RELEASE](#) (and any more [FL_PUSH](#)) events will be sent to this widget.

If you change the pushed widget, the previous one and all parents (that don't contain the new widget) are sent [FL_RELEASE](#) events. Changing this does *not* send [FL_PUSH](#) to this or any widget, because sending [FL_PUSH](#) is supposed to *test* if the widget wants the mouse (by it returning non-zero from [handle\(\)](#)).

29.2.2.36 static Fl_Widget* Fl::pushed () [inline, static, inherited]

Sets the widget that is being pushed.

See also:

[Fl_Widget* pushed\(Fl_Widget*\)](#)

Referenced by [Fl::dnd\(\)](#), [Fl_Light_Button::draw\(\)](#), [Fl_Input_::drawtext\(\)](#), [Fl_Group::handle\(\)](#), and [Fl::handle\(\)](#).

29.2.2.37 int Fl::test_shortcut (int *shortcut*) [static, inherited]

Test the current event, which must be an FL_KEYBOARD or FL_SHORTCUT, against a shortcut value (described in [Fl_Button](#)).

Returns non-zero if there is a match. Not to be confused with [Fl_Widget::test_shortcut\(\)](#).

References Fl::event_key(), Fl::event_state(), Fl::event_text(), FL_ALT, FL_Alt_L, FL_Alt_R, FL_Backspace, FL_Caps_Lock, FL_Control_L, FL_Control_R, FL_CTRL, FL_Delete, FL_Down, FL_End, FL_Enter, FL_Escape, FL_F, FL_F_Last, FL_Home, FL_Insert, FL_KP, FL_KP_Enter, FL_KP_Last, FL_Left, FL_Menu, FL_META, FL_Meta_L, FL_Meta_R, FL_Num_Lock, FL_Page_Down, FL_Page_Up, FL_Pause, FL_Print, FL_Right, FL_Scroll_Lock, FL_SHIFT, FL_Shift_L, FL_Shift_R, FL_Tab, and FL_Up.

Referenced by [Fl_Menu_Item::find_shortcut\(\)](#), [Fl_Text_Editor::handle\(\)](#), [Fl_Text_Display::handle\(\)](#), [Fl_Button::handle\(\)](#), and [Fl_Menu_Item::test_shortcut\(\)](#).

29.3 Selection & Clipboard functions

fl global copy/cut/paste functions

Functions

- static void [Fl::copy](#) (const char *stuff, int len, int clipboard=0)
Copies the data pointed to by stuff to the selection (0) or primary (1) clipboard.
- static void [Fl::paste](#) ([Fl_Widget](#) &receiver, int clipboard)
Pastes the data from the selection (0) or primary (1) clipboard into receiver.
- static int [Fl::dnd](#) ()
Initiate a Drag And Drop operation.
- static [Fl_Widget](#) * [Fl::selection_owner](#) ()
back-compatibility only: Gets the widget owning the current selection
- static void [Fl::selection_owner](#) ([Fl_Widget](#) *)
Back-compatibility only: The single-argument call can be used to move the selection to another widget or to set the owner to NULL, without changing the actual text of the selection.
- static void [Fl::selection](#) ([Fl_Widget](#) &owner, const char *, int len)
Changes the current selection.
- static void [Fl::paste](#) ([Fl_Widget](#) &receiver)
Backward compatibility only: Set things up so the receiver widget will be called with an FL_PASTE event some time in the future for the specified clipboard.

29.3.1 Detailed Description

fl global copy/cut/paste functions

29.3.2 Function Documentation

29.3.2.1 static void [Fl::copy](#) (const char * *stuff*, int *len*, int *clipboard* = 0) [static, inherited]

Copies the data pointed to by stuff to the selection (0) or primary (1) clipboard.

The selection clipboard is used for middle-mouse pastes and for drag-and-drop selections. The primary clipboard is used for traditional copy/cut/paste operations.

Referenced by [Fl_Text_Display::handle\(\)](#), [Fl_Text_Editor::kf_copy\(\)](#), and [Fl::selection\(\)](#).

29.3.2.2 int [Fl::dnd](#) () [static, inherited]

Initiate a Drag And Drop operation.

drag and drop whatever is in the cut-copy-paste buffer

- create a selection first using: Fl::copy(const char *stuff, int len, 0)

drag and drop whatever is in the cut-copy-paste buffer

- create a selection first using: Fl::copy(const char *stuff, int len, 0)

The clipboard should be filled with relevant data before calling this method. FLTK will then initiate the system wide drag and drop handling. Dropped data will be marked as *text*.

References Fl::event(), FL_RELEASE, Fl_Widget::handle(), Fl::pushed(), and Fl::w().

Referenced by Fl_Input::handle().

29.3.2.3 void Fl::paste (Fl_Widget & receiver) [static, inherited]

Backward compatibility only: Set things up so the receiver widget will be called with an FL_PASTE event some time in the future for the specified clipboard.

The receiver should be prepared to be called *directly* by this, or for it to happen *later*, or possibly *not at all*. This allows the window system to take as long as necessary to retrieve the paste buffer (or even to screw up completely) without complex and error-prone synchronization code in FLTK.

See also:

[Fl::paste\(Fl_Widget &receiver, int clipboard\)](#)

References Fl::paste().

29.3.2.4 static void Fl::paste (Fl_Widget & receiver, int clipboard) [static, inherited]

Pastes the data from the selection (0) or primary (1) clipboard into receiver.

The selection clipboard is used for middle-mouse pastes and for drag-and-drop selections. The primary clipboard is used for traditional copy/cut/paste operations.

Referenced by Fl_Text_Editor::handle(), Fl_Input::handle(), Fl_Text_Editor::kf_paste(), and Fl::paste().

29.3.2.5 void Fl::selection (Fl_Widget & owner, const char * text, int len) [static, inherited]

Changes the current selection.

The block of text is copied to an internal buffer by FLTK (be careful if doing this in response to an FL_PASTE as this *may* be the same buffer returned by [event_text\(\)](#)). The [selection_owner\(\)](#) widget is set to the passed owner.

References Fl::copy().

29.3.2.6 void Fl::selection_owner (Fl_Widget * owner) [static, inherited]

Back-compatibility only: The single-argument call can be used to move the selection to another widget or to set the owner to NULL, without changing the actual text of the selection.

FL_SELECTIONCLEAR is sent to the previous selection owner, if any.

Copying the buffer every time the selection is changed is obviously wasteful, especially for large selections. An interface will probably be added in a future version to allow the selection to be made by a callback function. The current interface will be emulated on top of this.

29.3.2.7 static Fl_Widget* Fl::selection_owner () [inline, static, inherited]

back-compatibility only: Gets the widget owning the current selection

See also:

[Fl_Widget* selection_owner\(Fl_Widget*\)](#)

29.4 Screen functions

fl global screen functions

Functions

- static int [Fl::x\(\)](#)
Returns the origin of the current screen, where 0 indicates the left side of the screen.
- static int [Fl::y\(\)](#)
Returns the origin of the current screen, where 0 indicates the top edge of the screen.
- static int [Fl::w\(\)](#)
Returns the width of the screen in pixels.
- static int [Fl::h\(\)](#)
Returns the height of the screen in pixels.
- static int [Fl::screen_count\(\)](#)
Gets the number of available screens.
- static void [Fl::screen_xywh\(int &X, int &Y, int &W, int &H\)](#)
Gets the bounding box of a screen that contains the mouse pointer in.
- static void [Fl::screen_xywh\(int &X, int &Y, int &W, int &H, int mx, int my\)](#)
Gets the bounding box of a screen that contains the specified screen position mx, my.
- static void [Fl::screen_xywh\(int &X, int &Y, int &W, int &H, int n\)](#)
Gets the screen bounding rect for the given screen.

29.4.1 Detailed Description

fl global screen functions

29.4.2 Function Documentation

29.4.2.1 static int [Fl::h\(\)](#) [static, inherited]

Returns the height of the screen in pixels.

Referenced by [Fl::event_inside\(\)](#), [Fl_File_Chooser::Fl_File_Chooser\(\)](#), [Fl_Tiled_Image::Fl_Tiled_Image\(\)](#), [Fl_Window::fullscreen\(\)](#), [Fl::reload_scheme\(\)](#), and [Fl::screen_xywh\(\)](#).

29.4.2.2 void [Fl::screen_xywh\(int & X, int & Y, int & W, int & H, int n\)](#) [static, inherited]

Gets the screen bounding rect for the given screen.

Parameters:

- X, Y, W, H the corresponding screen bounding box
- ← n the screen number (0 to [Fl::screen_count\(\)](#) - 1)

See also:

[void screen_xywh\(int &x, int &y, int &w, int &h, int mx, int my\)](#)

References [Fl::h\(\)](#), [Fl::w\(\)](#), [Fl::x\(\)](#), and [Fl::y\(\)](#).

29.4.2.3 void Fl::screen_xywh (int & X, int & Y, int & W, int & H, int mx, int my) [static, inherited]

Gets the bounding box of a screen that contains the specified screen position mx, my .

Parameters:

- X, Y, W, H the corresponding screen bounding box
- ← mx, my the absolute screen position

References [Fl::h\(\)](#), [Fl::w\(\)](#), [Fl::x\(\)](#), and [Fl::y\(\)](#).

29.4.2.4 static void Fl::screen_xywh (int & X, int & Y, int & W, int & H) [inline, static, inherited]

Gets the bounding box of a screen that contains the mouse pointer in.

Parameters:

- X, Y, W, H the corresponding screen bounding box

See also:

[void screen_xywh\(int &x, int &y, int &w, int &h, int mx, int my\)](#)

Referenced by [Fl_Window::fullscreen\(\)](#), and [Fl_Window::hotspot\(\)](#).

29.4.2.5 static int Fl::w () [static, inherited]

Returns the width of the screen in pixels.

Referenced by [Fl::dnd\(\)](#), [Fl::event_inside\(\)](#), [Fl_File_Chooser::Fl_File_Chooser\(\)](#), [Fl_Tiled_Image::Fl_Tiled_Image\(\)](#), [Fl_Window::fullscreen\(\)](#), [Fl::reload_scheme\(\)](#), and [Fl::screen_xywh\(\)](#).

29.4.2.6 static int Fl::x () [static, inherited]

Returns the origin of the current screen, where 0 indicates the left side of the screen.

Referenced by [Fl_Window::fullscreen\(\)](#), and [Fl::screen_xywh\(\)](#).

29.4.2.7 static int Fl::y () [static, inherited]

Returns the origin of the current screen, where 0 indicates the top edge of the screen.

Referenced by Fl_Window::fullscreen(), and Fl::screen_xywh().

29.5 Color & Font functions

fl global color, font functions

Functions

- static void [Fl::set_color \(Fl_Color, uchar, uchar, uchar\)](#)
Sets an entry in the fl_color index table.
- static void [Fl::set_color \(Fl_Color, unsigned\)](#)
Sets an entry in the fl_color index table.
- static unsigned [Fl::get_color \(Fl_Color\)](#)
Returns the RGB value(s) for the given FLTK color index.
- static void [Fl::get_color \(Fl_Color, uchar &, uchar &, uchar &\)](#)
See [unsigned get_color\(Fl_Color c\)](#).
- static void [Fl::free_color \(Fl_Color, int overlay=0\)](#)
Frees the specified color from the colormap, if applicable.
- static const char * [Fl::get_font \(Fl_Font\)](#)
Get the string for this face.
- static const char * [Fl::get_font_name \(Fl_Font, int *attributes=0\)](#)
Get a human-readable string describing the family of this face.
- static int [Fl::get_font_sizes \(Fl_Font, int *&sizep\)](#)
Return an array of sizes in sizep.
- static void [Fl::set_font \(Fl_Font, const char *\)](#)
Changes a face.
- static void [Fl::set_font \(Fl_Font, Fl_Font\)](#)
Copies one face to another.
- static [Fl_Font Fl::set_fonts \(const char *=0\)](#)
FLTK will open the display, and add every fonts on the server to the face table.

29.5.1 Detailed Description

fl global color, font functions

29.5.2 Function Documentation

29.5.2.1 void Fl::free_color (Fl_Color *i*, int *overlay* = 0) [static, inherited]

Frees the specified color from the colormap, if applicable.

If overlay is non-zero then the color is freed from the overlay colormap.

Referenced by Fl::set_color().

29.5.2.2 unsigned Fl::get_color (Fl_Color *i*) [static, inherited]

Returns the RGB value(s) for the given FLTK color index.

The first form returns the RGB values packed in a 32-bit unsigned integer with the red value in the upper 8 bits, the green value in the next 8 bits, and the blue value in bits 8-15. The lower 8 bits will always be 0.

The second form returns the red, green, and blue values separately in referenced variables.

Referenced by Fl::background2(), Fl_Pixmap::color_average(), Fl_RGB_Image::color_average(), Fl_Window::cursor(), and Fl::reload_scheme().

29.5.2.3 const char * Fl::get_font (Fl_Font *fnum*) [static, inherited]

Get the string for this face.

This string is different for each face. Under X this value is passed to XListFonts to get all the sizes of this face.

Referenced by Fl::set_font().

29.5.2.4 const char * Fl::get_font_name (Fl_Font *fnum*, int * *attributes* = 0) [static, inherited]

Get a human-readable string describing the family of this face.

This is useful if you are presenting a choice to the user. There is no guarantee that each face has a different name. The return value points to a static buffer that is overwritten each call.

The integer pointed to by attributes (if the pointer is not zero) is set to zero, FL_BOLD or FL_ITALIC or FL_BOLD | FL_ITALIC. To locate a "family" of fonts, search forward and back for a set with non-zero attributes, these faces along with the face with a zero attribute before them constitute a family.

References FL_BOLD, and FL_ITALIC.

Referenced by Fl::set_fonts().

29.5.2.5 int Fl::get_font_sizes (Fl_Font *fnum*, int **& sizep*) [static, inherited]

Return an array of sizes in sizep.

The return value is the length of this array. The sizes are sorted from smallest to largest and indicate what sizes can be given to fl_font() that will be matched exactly (fl_font() will pick the closest size for other sizes). A zero in the first location of the array indicates a scalable font, where any size works, although the array may list sizes that work "better" than others. Warning: the returned array points at a static buffer that is overwritten each call. Under X this will open the display.

29.5.2.6 void Fl::set_color (Fl_Color *i*, unsigned *c*) [static, inherited]

Sets an entry in the fl_color index table.

You can set it to any 8-bit RGB color. The color is not allocated until fl_color(*i*) is used.

References Fl::free_color().

29.5.2.7 void Fl::set_color (Fl_Color *i*, uchar *red*, uchar *green*, uchar *blue*) [static, inherited]

Sets an entry in the fl_color index table.

You can set it to any 8-bit RGB color. The color is not allocated until fl_color(*i*) is used.

Referenced by Fl::background(), Fl::background2(), and Fl::foreground().

29.5.2.8 void Fl::set_font (Fl_Font *fnum*, Fl_Font *from*) [static, inherited]

Copies one face to another.

References Fl::get_font(), and Fl::set_font().

29.5.2.9 void Fl::set_font (Fl_Font *fnum*, const char * *name*) [static, inherited]

Changes a face.

The string pointer is simply stored, the string is not copied, so the string must be in static memory.

References FL_FREE_FONT.

Referenced by Fl::set_font(), and Fl::set_fonts().

29.5.2.10 Fl_Font Fl::set_fonts (const char * *xstarname* = 0) [static, inherited]

FLTK will open the display, and add every fonts on the server to the face table.

It will attempt to put "families" of faces together, so that the normal one is first, followed by bold, italic, and bold italic.

The optional argument is a string to describe the set of fonts to add. Passing NULL will select only fonts that have the ISO8859-1 character set (and are thus usable by normal text). Passing "-*" will select all fonts with any encoding as long as they have normal X font names with dashes in them. Passing "*" will list every font that exists (on X this may produce some strange output). Other values may be useful but are system dependent. With WIN32 NULL selects fonts with ISO8859-1 encoding and non-NUL selects all fonts.

The return value is how many faces are in the table after this is done.

References FL_FREE_FONT, Fl::get_font_name(), and Fl::set_font().

29.6 Multithreading support functions

fl multithreading support functions

Functions

- static void [Fl::lock \(\)](#)

The [lock\(\)](#) method blocks the current thread until it can safely access FLTK widgets and data.

- static void [Fl::unlock \(\)](#)

The [unlock\(\)](#) method releases the lock that was set using the [lock\(\)](#) method.

- static void [Fl::awake \(void *message=0\)](#)

The [awake\(\)](#) method sends a message pointer to the main thread, causing any pending [Fl::wait\(\)](#) call to terminate so that the main thread can retrieve the message and any pending redraws can be processed.

- static int [Fl::awake \(Fl_Awake_Handler cb, void *message=0\)](#)

See [void awake\(void message=0\)](#).*

- static void * [Fl::thread_message \(\)](#)

The [thread_message\(\)](#) method returns the last message that was sent from a child by the [awake\(\)](#) method.

29.6.1 Detailed Description

fl multithreading support functions

29.6.2 Function Documentation

29.6.2.1 int [Fl::awake \(Fl_Awake_Handler cb, void * message = 0\)](#) [static, inherited]

See [void awake\(void* message=0\)](#).

Let the main thread know an update is pending and have it call a specific function See [void awake\(void* message=0\)](#).

References [Fl::add_awake_handler_\(\)](#), and [Fl::awake\(\)](#).

29.6.2.2 void [Fl::awake \(void * msg = 0\)](#) [static, inherited]

The [awake\(\)](#) method sends a message pointer to the main thread, causing any pending [Fl::wait\(\)](#) call to terminate so that the main thread can retrieve the message and any pending redraws can be processed.

Multiple calls to [Fl::awake\(\)](#) will queue multiple pointers for the main thread to process, up to a system-defined (typically several thousand) depth. The default message handler saves the last message which can be accessed using the [Fl::thread_message\(\)](#) function.

The second form of [awake\(\)](#) registers a function that will be called by the main thread during the next message handling cycle. [awake\(\)](#) will return 0 if the callback function was registered, and -1 if registration failed. Over a thousand awake callbacks can be registered simultaneously.

See also: multithreading.

Referenced by Fl::awake().

29.6.2.3 void Fl::lock () [static, inherited]

The [lock\(\)](#) method blocks the current thread until it can safely access FLTK widgets and data.

Child threads should call this method prior to updating any widgets or accessing data. The main thread must call [lock\(\)](#) to initialize the threading support in FLTK.

Child threads must call [unlock\(\)](#) when they are done accessing FLTK.

When the [wait\(\)](#) method is waiting for input or timeouts, child threads are given access to FLTK. Similarly, when the main thread needs to do processing, it will wait until all child threads have called [unlock\(\)](#) before processing additional data.

See also: multithreading

29.6.2.4 static void* Fl::thread_message () [static, inherited]

The [thread_message\(\)](#) method returns the last message that was sent from a child by the [awake\(\)](#) method.

See also: multithreading

29.6.2.5 void Fl::unlock () [static, inherited]

The [unlock\(\)](#) method releases the lock that was set using the [lock\(\)](#) method.

Child threads should call this method as soon as they are finished accessing FLTK.

See also: multithreading

29.7 Safe widget deletion support functions

fl multithreading support functions

Functions

- static void [Fl::delete_widget\(Fl_Widget *w\)](#)
Schedules a widget for deletion at the next call to the event loop.
- static void [Fl::do_widget_deletion\(\)](#)
Deletes widgets previously scheduled for deletion.
- static void [Fl::watch_widget_pointer\(Fl_Widget *&&w\)](#)
Adds a widget pointer to the watch list.
- static void [Fl::release_widget_pointer\(Fl_Widget *&&w\)](#)
Releases a widget pointer to the watch list.
- static void [Fl::clear_widget_pointer\(Fl_Widget const *w\)](#)
Clears a widget pointer in the watch list.

29.7.1 Detailed Description

fl multithreading support functions

29.7.2 Function Documentation

29.7.2.1 void [Fl::delete_widget\(Fl_Widget * wi\)](#) [static, inherited]

Schedules a widget for deletion at the next call to the event loop.

Use this method to delete a widget inside a callback function. To avoid early deletion of widgets, this function should be called toward the end of a callback and only after any call to the event loop ([Fl::wait\(\)](#), [Fl::flush\(\)](#), [fl_ask\(\)](#), etc.).

When deleting groups or windows, you must only delete the group or window widget and not the individual child widgets.

29.7.2.2 void [Fl::do_widget_deletion\(\)](#) [static, inherited]

Deletes widgets previously scheduled for deletion.

See [void Fl::delete_widget\(Fl_Widget *wi\)](#)

Referenced by [Fl::wait\(\)](#).

29.7.2.3 void [Fl::watch_widget_pointer\(Fl_Widget *& w\)](#) [static, inherited]

Adds a widget pointer to the watch list.

Todo

explain the role of the watch list, it may be related to invalid widget deletion crash fixes...

Referenced by Fl_Menu_Button::popup().

29.8 Cairo support functions and classes

Classes

- class [Fl_Cairo_State](#)
Contains all the necessary info on the current cairo context.
- class [Fl_Cairo_Window](#)
This defines a pre-configured cairo fltk window.

Functions

- static cairo_t * [Fl::cairo_make_current\(Fl_Window *w\)](#)
Provides a corresponding cairo context for window wi.
- static void [Fl::cairo_autolink_context\(bool alink\)](#)
when HAVE_CAIRO is defined and [cairo_autolink_context\(\)](#) is true, any current window dc is linked to a current context.
- static bool [Fl::cairo_autolink_context\(\)](#)
Gets the current autolink mode for cairo support.,
- static cairo_t * [Fl::cairo_cc\(\)](#)
Gets the current cairo context linked with a fltk window.
- static void [Fl::cairo_cc\(cairo_t *c, bool own=false\)](#)
Sets the cairo current context to c, set own to true if you want fltk to handle this cc deletion.

29.8.1 Function Documentation

29.8.1.1 static bool [Fl::cairo_autolink_context\(\)](#) [inline, static, inherited]

Gets the current autolink mode for cairo support.,

Return values:

- false* if no cairo context autolink is made for each window.
true if any fltk window is attached a cairo context when it is current.

See also:

[void cairo_autolink_context\(bool alink\)](#)

Note:

Only available when configure has the –enable-cairo option

Referenced by [Fl_Cairo_Window::draw\(\)](#), and [Fl_Window::hide\(\)](#).

29.8.1.2 static void Fl::cairo_autolink_context (bool *alink*) [inline, static, inherited]

when HAVE_CAIRO is defined and [cairo_autolink_context\(\)](#) is true, any current window dc is linked to a current context.

this is not the default because, it may not be necessary to add cairo support to all fltk supported windows. When you wish to associate a cairo context in this mode, you need to call explicitly in your draw() overridden method, [FL::cairo_make_current\(Fl_Window*\)](#). This will create a cairo context but only for this Window. Still in custom cairo application it is possible to handle completely this process automatically by setting *alink* to true. In this last case, you don't need anymore to call [Fl::cairo_make_current\(\)](#) you can use [Fl::cairo_cc\(\)](#) to get the current cairo context anytime.

Note:

Only available when configure has the –enable-cairo option

29.8.1.3 static void Fl::cairo_cc (cairo_t * *c*, bool *own* = false) [inline, static, inherited]

Sets the cairo current context to *c*, set *own* to true if you want fltk to handle this cc deletion.

Note:

Only available when configure has the –enable-cairo option

29.8.1.4 static cairo_t* Fl::cairo_cc () [inline, static, inherited]

Gets the current cairo context linked with a fltk window.

Referenced by [Fl::cairo_make_current\(\)](#), and [Fl_Cairo_Window::draw\(\)](#).

29.8.1.5 cairo_t * Fl::cairo_make_current (Fl_Window * *wi*) [static, inherited]

Provides a corresponding cairo context for window *wi*.

This is needed in a draw() override if [Fl::cairo_autolink_context\(\)](#) returns false, which is the default. The [cairo_context\(\)](#) does not need to be freed as it is freed every time a new cairo context is created. When the program terminates, a call to [Fl::cairo_make_current\(0\)](#) will destroy any residual context.

Note:

A new cairo context is not always re-created when this method is used. In particular, if the current graphical context and the current window didn't change between two calls, the previous gc is internally kept, thus optimizing the drawing performances. Also, after this call, [Fl::cairo_gc\(\)](#) is adequately updated with this cairo context.

Only available when configure has the –enable-cairo option

Returns:

the valid cairo_t* cairo context associated to this window.

References [Fl::cairo_cc\(\)](#), [Fl_Widget::h\(\)](#), [Fl_Widget::w\(\)](#), and [Fl_Cairo_State::window\(\)](#).

Referenced by [Fl_Window::draw\(\)](#), [Fl_Cairo_Window::draw\(\)](#), [Fl_Menu_Window::flush\(\)](#), and [Fl_Window::hide\(\)](#).

29.9 Common Dialogs classes and functions

Classes

- class [Fl_Color_Chooser](#)

The [Fl_Color_Chooser](#) widget provides a standard RGB color chooser.

- class [Fl_File_Chooser](#)

The [Fl_File_Chooser](#) widget displays a standard file selection dialog that supports various selection modes.

Functions

- void [fl_beep](#) (int type)

Emits a system beep message.

- void [fl_message](#) (const char *fmt,...)

Shows an information message dialog box.

- void [fl_alert](#) (const char *fmt,...)

Shows an alert message dialog box.

- int [fl_ask](#) (const char *fmt,...)

Shows a dialog displaying the fmt message, this dialog features 2 yes/no buttons.

- int [fl_choice](#) (const char *fmt, const char *b0, const char *b1, const char *b2,...)

Shows a dialog displaying the fmt message, this dialog features up to 3 customizable choice buttons.

- [Fl_Widget](#) * [fl_message_icon](#) ()

Gets the [Fl_Box](#) icon container of the current default dialog used in many common dialogs like [fl_message\(\)](#), [fl_alert\(\)](#), [fl_ask\(\)](#), [fl_choice\(\)](#), [fl_input\(\)](#), [fl_password\(\)](#).

- const char * [fl_input](#) (const char *fmt, const char *defstr,...)

Shows an input dialog displaying the fmt message.

- const char * [fl_password](#) (const char *fmt, const char *defstr,...)

Shows an input dialog displaying the fmt message, like [fl_input](#) except the input text is not shown, '' characters are displayed instead.*

- void [fl_file_chooser_callback](#) (void(*cb)(const char *))

- void [fl_file_chooser_ok_label](#) (const char *l)

- int [Fl_Color_Chooser::fl_color_chooser](#) (const char *name, double &r, double &g, double &b)

Pops up a window to let the user pick an arbitrary RGB color.

- int [Fl_Color_Chooser::fl_color_chooser](#) (const char *name, uchar &r, uchar &g, uchar &b)

Pops up a window to let the user pick an arbitrary RGB color.

- void [Fl_File_Chooser::fl_file_chooser_callback](#) (void(*cb)(const char *))

- void [Fl_File_Chooser::fl_file_chooser_ok_label](#) (const char *l)

- char * [Fl_File_Chooser::fl_file_chooser](#) (const char *message, const char *pat, const char *fname, int relative)

- char * [Fl_File_Chooser::fl_dir_chooser](#) (const char *message, const char *fname, int relative)

Variables

- static void(* **Fl::warning**)(const char *,...) = ::warning
FLTK calls this to print a warning message.
- static void(* **Fl::error**)(const char *,...) = ::error
FLTK calls this to print a normal error message.
- static void(* **Fl::fatal**)(const char *,...) = ::fatal
FLTK calls this to print a fatal error message.
- const char * **fl_no** = "No"
string pointer used in common dialogs, you can change it to a foreign language
- const char * **fl_yes** = "Yes"
string pointer used in common dialogs, you can change it to a foreign language
- const char * **fl_ok** = "OK"
string pointer used in common dialogs, you can change it to a foreign language
- const char * **fl_cancel** = "Cancel"
string pointer used in common dialogs, you can change it to a foreign language
- const char * **fl_close** = "Close"
string pointer used in common dialogs, you can change it to a foreign language

29.9.1 Function Documentation

29.9.1.1 void fl_alert (const char **fmt*, ...)

Shows an alert message dialog box.

Parameters:

← *fmt* can be used as an sprintf-like format and variables for the message text

References fl_beep().

29.9.1.2 int fl_ask (const char **fmt*, ...)

Shows a dialog displaying the *fmt* message, this dialog features 2 yes/no buttons.

Parameters:

← *fmt* can be used as an sprintf-like format and variables for the message text

Return values:

0 if the no button is selected

1 if yes is selected

References fl_beep().

29.9.1.3 int fl_choice (const char **fmt*, const char **b0*, const char **b1*, const char **b2*, ...)

Shows a dialog displaying the *fmt* message, this dialog features up to 3 customizable choice buttons.

Parameters:

- ← *fmt* can be used as an sprintf-like format and variables for the message text
- ← *b0* text label of button 0
- ← *b1* text label of button 1
- ← *b2* text label of button 2

Return values:

- 0** if the first button with *b0* text is selected
- 1** if the second button with *b1* text is selected
- 2** if the third button with *b2* text is selected

References fl_beep().

29.9.1.4 int fl_color_chooser (const char **name*, uchar &*r*, uchar &*g*, uchar &*b*) [related, inherited]

Pops up a window to let the user pick an arbitrary RGB color.

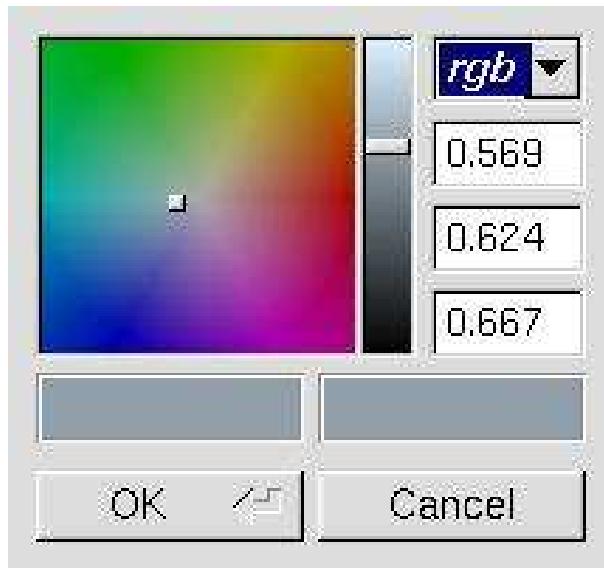


Figure 29.1: fl_color_chooser

Parameters:

- ← *name* title label for the window
- ↔ *r,g,b* color components in the range 0 to 255.

Return values:

- 1** if user confirms the selection

0 if user cancels the dialog

References Fl_Color_Chooser::fl_color_chooser().

29.9.1.5 int fl_color_chooser (const char * *name*, double & *r*, double & *g*, double & *b*) [related, inherited]

Pops up a window to let the user pick an arbitrary RGB color.

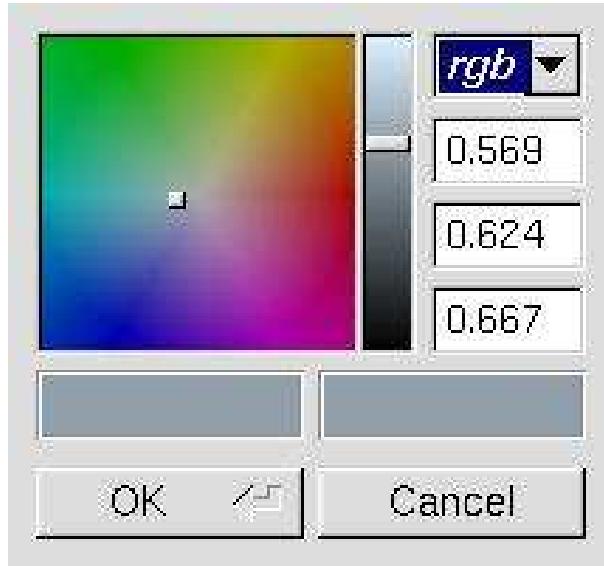


Figure 29.2: fl_color_chooser

Parameters:

← *name* title label for the window
↔ *r,g,b* color components in the range 0.0 to 1.0.

Return values:

1 if user confirms the selection
0 if user cancels the dialog

References Fl_Color_Chooser::b(), Fl_Widget::callback(), Fl_Group::end(), Fl_Color_Chooser::g(), Fl_Window::hotspot(), Fl_Color_Chooser::r(), Fl::readqueue(), Fl_Group::resizable(), Fl_Color_Chooser::rgb(), Fl_Window::set_modal(), Fl_Window::show(), Fl_Window::shown(), and Fl::wait().

Referenced by Fl_Color_Chooser::fl_color_chooser().

29.9.1.6 char * fl_dir_chooser (const char * *message*, const char * *fname*, int *relative*) [related, inherited]

Shows a file chooser dialog and get a directory.

Parameters:

← *message* title bar text

$\leftarrow \text{fname}$ initial/default directory name
 $\leftarrow \text{relative}$ 0 for absolute path return, relative otherwise

Returns:

the directory path string chosen by the user or NULL if user cancels

References Fl_File_Chooser::callback(), Fl_File_Chooser::filter(), Fl_File_Chooser::label(), Fl_File_Chooser::show(), Fl_File_Chooser::shown(), Fl_File_Chooser::type(), Fl_File_Chooser::value(), and Fl::wait().

29.9.1.7 `char * fl_file_chooser (const char * message, const char * pat, const char * fname, int relative)` [related, inherited]

Shows a file chooser dialog and get a filename.

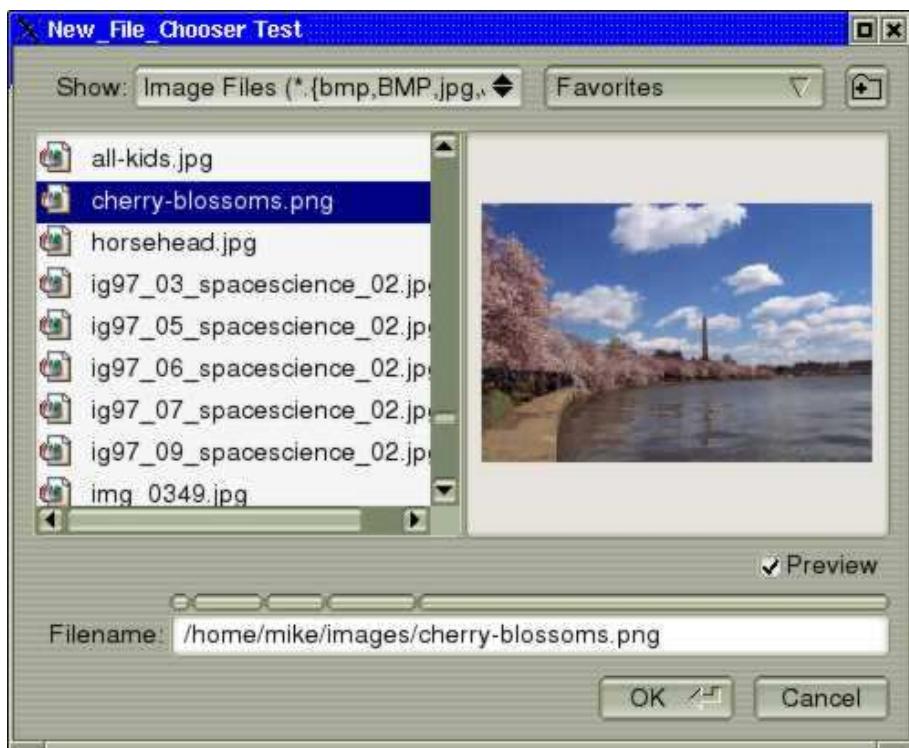


Figure 29.3: Fl_File_Chooser

Parameters:

$\leftarrow \text{message}$ text in title bar
 $\leftarrow \text{pat}$ filename pattern filter
 $\leftarrow \text{fname}$ initial/default filename selection
 $\leftarrow \text{relative}$ 0 for absolute path name, relative path name otherwise

Returns:

the user selected filename, in absolute or relative format or NULL if user cancels

References Fl_File_Chooser::callback(), Fl_File_Chooser::directory(), Fl_File_Chooser::filter(), Fl_File_Chooser::label(), Fl_File_Chooser::ok_label(), Fl_File_Chooser::show(), Fl_File_Chooser::shown(), Fl_File_Chooser::type(), Fl_File_Chooser::value(), and Fl::wait().

29.9.1.8 void fl_file_chooser_callback (void(*)(const char *) *cb*) [related, inherited]

Set the file chooser callback

29.9.1.9 void fl_file_chooser_callback (void(*)(const char *) *cb*)

Set the file chooser callback

29.9.1.10 void fl_file_chooser_ok_label (const char * *l*) [related, inherited]

Set the "OK" button label

29.9.1.11 void fl_file_chooser_ok_label (const char * *l*)

Set the "OK" button label

References fl_ok.

29.9.1.12 const char* fl_input (const char * *fmt*, const char * *defstr*, ...)

Shows an input dialog displaying the *fmt* message.

Parameters:

← *fmt* can be used as an sprintf-like format and variables for the message text

← *defstr* defines the default returned string if no text is entered

Returns:

the user string input if OK was pushed, NULL if Cancel was pushed

References fl_beep().

Referenced by Fl_File_Chooser::rescan_keep_filename().

29.9.1.13 void fl_message (const char * *fmt*, ...)

Shows an information message dialog box.

Parameters:

← *fmt* can be used as an sprintf-like format and variables for the message text

References fl_beep().

29.9.1.14 const char* fl_password (const char *fmt, const char *defstr, ...)

Shows an input dialog displaying the *fmt* message, like fl_input except the input text is not shown, '*' characters are displayed instead.

Parameters:

- ← *fmt* can be used as an sprintf-like format and variables for the message text
- ← *defstr* defines the default returned string if no text is entered

Returns:

the user string input if OK was pushed, NULL if Cancel was pushed

References fl_beep().

29.9.2 Variable Documentation**29.9.2.1 void(* Fl::error)(const char *format,...) (const char *, ...) = ::error [static, inherited]**

FLTK calls this to print a normal error message.

You can override the behavior by setting the function pointer to your own routine.

Fl::error means there is a recoverable error such as the inability to read an image file. The default implementation shows an error dialog to stderr and returns.

Referenced by Fl::args(), Fl_Text_Display::draw_vline(), Fl_GIF_Image::Fl_GIF_Image(), Fl_PNM_Image::Fl_PNM_Image(), fl_pop_matrix(), fl_push_matrix(), Fl_Text_Buffer::insert_column(), Fl_File_Icon::load_fti(), Fl_Text_Buffer::overlay_rectangular(), Fl_Text_Display::position_to_line(), Fl_Text_Buffer::remove_modify_callback(), Fl_Text_Buffer::remove_predelete_callback(), Fl_Text_Buffer::replace_rectangular(), and Fl_Gl_Window::show().

29.9.2.2 void(* Fl::fatal)(const char *format,...) (const char *, ...) = ::fatal [static, inherited]

FLTK calls this to print a fatal error message.

You can override the behavior by setting the function pointer to your own routine.

Fl::fatal must not return, as FLTK is in an unusable state, however your version may be able to use longjmp or an exception to continue, as long as it does not call FLTK again. The default implementation shows a fatal dialog box and exits with status 1.

Referenced by Fl_Gl_Window::draw().

29.9.2.3 void(* Fl::warning)(const char *format,...) (const char *, ...) = ::warning [static, inherited]

FLTK calls this to print a warning message.

You can override the behavior by setting the function pointer to your own routine.

Fl::warning means that there was a recoverable problem, the display may be messed up but the user can probably keep working - all X protocol errors call this, for example.

Referenced by Fl_GIF_Image::Fl_GIF_Image(), Fl_PNG_Image::Fl_PNG_Image(), fl_pop_clip(), fl_push_clip(), fl_push_no_clip(), and Fl_File_Icon::load().

Chapter 30

Class Documentation

30.1 Fl Class Reference

The `Fl` is the FLTK global (static) containing state information and global methods for the current application.

```
#include <Fl.h>
```

Static Public Member Functions

- static void `damage` (int d)
If true then `flush()` will do something.
- static int `add_awake_handler_` (Fl_Awake_Handler, void *)
Adds an awake handler for use in `awake()`.
- static int `get_awake_handler_` (Fl_Awake_Handler &, void * &)
Gets the last stored awake handler for use in `awake()`.
- static double `version` ()
Returns the compiled-in value of the `FL_VERSION` constant.
- static int `arg` (int, char **, int &)
Consume a single switch from argv, starting at word i.
- static int `args` (int, char **, int &, int(*)(int, char **, int &)=0)
Consume all switches from argv.
- static void `args` (int, char **)
*See `Fl::args(int argc, char **argv, int& i, int (*cb)(int,char**,int&))`.*
- static void `display` (const char *)
Sets the X display to use for all windows.
- static int `visual` (int)

Selects a visual so that your graphics are drawn correctly.

- static int [gl_visual](#) (int, int *alist=0)

This does the same thing as [Fl::visual\(int\)](#) but also requires OpenGL drawing to work.

- static void [own_colormap](#) ()

Makes FLTK use its own colormap.

- static void [get_system_colors](#) ()

Read the user preference colors from the system and use them to call [Fl::foreground\(\)](#), [Fl::background\(\)](#), and [Fl::background2\(\)](#).

- static void [foreground](#) (uchar, uchar, uchar)

Changes fl_color(FL_FOREGROUND_COLOR).

- static void [background](#) (uchar, uchar, uchar)

Changes fl_color(FL_BACKGROUND_COLOR) to the given color, and changes the gray ramp from 32 to 56 to black to white.

- static void [background2](#) (uchar, uchar, uchar)

Changes the alternative background color.

- static int [scheme](#) (const char *)

Gets or sets the current widget scheme.

- static const char * [scheme](#) ()

*See void [scheme\(const char *name\)](#).*

- static int [reload_scheme](#) ()

Called by scheme according to scheme name.

- static int [scrollbar_size](#) ()

Gets the default scrollbar size that is used by the [Fl_Browser_](#), [Fl_Help_View](#), [Fl_Scroll](#), and [Fl_Text_Display](#) widgets.

- static void [scrollbar_size](#) (int W)

Sets the default scrollbar size that is used by the [Fl_Browser_](#), [Fl_Help_View](#), [Fl_Scroll](#), and [Fl_Text_Display](#) widgets.

- static int [wait](#) ()

Waits until "something happens" and then returns.

- static double [wait](#) (double time)

See int [wait\(\)](#).

- static int [check](#) ()

Same as [Fl::wait\(0\)](#).

- static int [ready](#) ()

This is similar to [Fl::check\(\)](#) except this does not call [Fl::flush\(\)](#) or any callbacks, which is useful if your program is in a state where such callbacks are illegal.

- static int **run** ()

As long as any windows are displayed this calls [Fl::wait\(\)](#) repeatedly.

- static **Fl_Widget * readqueue** ()

All Fl_Widgets that don't have a callback defined use a default callback that puts a pointer to the widget in this queue, and this method reads the oldest widget out of this queue.

- static void **add_timeout** (double t, **Fl_Timeout_Handler**, void *=0)

Adds a one-shot timeout callback.

- static void **repeat_timeout** (double t, **Fl_Timeout_Handler**, void *=0)

This method repeats a timeout callback from the expiration of the previous timeout, allowing for more accurate timing.

- static int **has_timeout** (**Fl_Timeout_Handler**, void *=0)

Returns true if the timeout exists and has not been called yet.

- static void **remove_timeout** (**Fl_Timeout_Handler**, void *=0)

Removes a timeout callback.

- static void **add_check** (**Fl_Timeout_Handler**, void *=0)

FLTK will call this callback just before it flushes the display and waits for events.

- static int **has_check** (**Fl_Timeout_Handler**, void *=0)

Returns 1 if the check exists and has not been called yet, 0 otherwise.

- static void **remove_check** (**Fl_Timeout_Handler**, void *=0)

Removes a check callback.

- static void **add_fd** (int fd, int when, void(*cb)(int, void *), void *=0)

Add file descriptor fd to listen to.

- static void **add_fd** (int fd, void(*cb)(int, void *), void *=0)

*See void add_fd(int fd, int when, void (*cb)(int, void *), void* =0).*

- static void **remove_fd** (int, int when)

Removes a file descriptor handler.

- static void **remove_fd** (int)

Removes a file descriptor handler.

- static void **add_idle** (void(*cb)(void *), void *data=0)

Adds a callback function that is called every time by [Fl::wait\(\)](#) and also makes it act as though the timeout is zero (this makes [Fl::wait\(\)](#) return immediately, so if it is in a loop it is called repeatedly, and thus the idle function is called repeatedly).

- static int **has_idle** (void(*cb)(void *), void *data=0)

Returns true if the specified idle callback is currently installed.

- static void `remove_idle` (void(*cb)(void *), void *data=0)
Removes the specified idle callback, if it is installed.
- static int `damage` ()
If true then `flush()` will do something.
- static void `redraw` ()
Redraws all widgets.
- static void `flush` ()
Causes all the windows that need it to be redrawn and graphics forced out through the pipes.
- static `Fl_Window` * `first_window` ()
Returns the first top-level window in the list of `shown()` windows.
- static void `first_window` (`Fl_Window` *)
See `Fl_Window` `first_window()`.*
- static `Fl_Window` * `next_window` (const `Fl_Window` *)
Returns the next top-level window in the list of `shown()` windows.
- static `Fl_Window` * `modal` ()
Returns the top-most `modal()` window currently shown.
- static `Fl_Window` * `grab` ()
This is used when pop-up menu systems are active.
- static void `grab` (`Fl_Window` *)
Selects the window to grab.
- static int `event` ()
Returns the last event that was processed.
- static int `event_x` ()
Returns the mouse position of the event relative to the `Fl_Window` it was passed to.
- static int `event_y` ()
Returns the mouse position of the event relative to the `Fl_Window` it was passed to.
- static int `event_x_root` ()
Returns the mouse position on the screen of the event.
- static int `event_y_root` ()
Returns the mouse position on the screen of the event.
- static int `event_dx` ()
Returns the current horizontal mouse scrolling associated with the `FL_MOUSEWHEEL` event.
- static int `event_dy` ()
Returns the current vertical mouse scrolling assoiated with the `FL_MOUSEWHEEL` event.

- static void [get_mouse](#) (int &, int &)
Return where the mouse is on the screen by doing a round-trip query to the server.
- static int [event_clicks](#) ()
Returns non zero if we had a double click event.
- static void [event_clicks](#) (int i)
Manually sets the number returned by [Fl::event_clicks\(\)](#).
- static int [event_is_click](#) ()
The first form returns non-zero if the mouse has not moved far enough and not enough time has passed since the last FL_PUSH or FL_KEYBOARD event for it to be considered a "drag" rather than a "click".
- static void [event_is_click](#) (int i)
Only i=0 works! See int [event_is_click\(\)](#).
- static int [event_button](#) ()
Gets which particular mouse button caused the current event.
- static int [event_state](#) ()
This is a bitfield of what shift states were on and what mouse buttons were held down during the most recent event.
- static int [event_state](#) (int i)
See int [event_state\(\)](#).
- static int [event_key](#) ()
Gets which key on the keyboard was last pushed.
- static int [event_original_key](#) ()
If NumLock is deactivated, FLTK translates events from the numeric keypad into the corresponding arrow key events.
- static int [event_key](#) (int key)
Returns true if the given key was held down (or pressed) during the last event.
- static int [get_key](#) (int key)
Returns true if the given key is held down now.
- static const char * [event_text](#) ()
Returns the text associated with the current FL_PASTE or FL_DND_RELEASE event.
- static int [event_length](#) ()
Returns the length of the text in [Fl::event_text\(\)](#).
- static int [compose](#) (int &del)
Any text editing widget should call this for each FL_KEYBOARD event.
- static void [compose_reset](#) ()

If the user moves the cursor, be sure to call [Fl::compose_reset\(\)](#).

- static int [event_inside](#) (int, int, int, int)
Returns whether or not the mouse event is inside the given rectangle.
- static int [event_inside](#) (const [Fl_Widget](#) *)
Returns whether or not the mouse event is inside the given widget.
- static int [test_shortcut](#) (int)
Test the current event, which must be an [FL_KEYBOARD](#) or [FL_SHORTCUT](#), against a shortcut value (described in [Fl_Button](#)).
- static int [handle](#) (int, [Fl_Window](#) *)
Sends the event to a window for processing.
- static [Fl_Widget](#) * [belowmouse](#) ()
Gets the widget that is below the mouse.
- static void [belowmouse](#) ([Fl_Widget](#) *)
Sets the widget that is below the mouse.
- static [Fl_Widget](#) * [pushed](#) ()
Sets the widget that is being pushed.
- static void [pushed](#) ([Fl_Widget](#) *)
Sets the widget that is being pushed.
- static [Fl_Widget](#) * [focus](#) ()
Gets the current [Fl::focus\(\)](#) widget.
- static void [focus](#) ([Fl_Widget](#) *)
Sets the widget that will receive [FL_KEYBOARD](#) events.
- static void [add_handler](#) (int(*h)(int))
Install a function to parse unrecognized events.
- static void [remove_handler](#) (int(*h)(int))
Removes a previously added event handler.
- static void [copy](#) (const char *stuff, int len, int clipboard=0)
Copies the data pointed to by stuff to the selection (0) or primary (1) clipboard.
- static void [paste](#) ([Fl_Widget](#) &receiver, int clipboard)
Pastes the data from the selection (0) or primary (1) clipboard into receiver.
- static int [dnd](#) ()
Initiate a Drag And Drop operation.
- static [Fl_Widget](#) * [selection_owner](#) ()
back-compatibility only: Gets the widget owning the current selection

- static void [selection_owner \(Fl_Widget *\)](#)
Back-compatibility only: The single-argument call can be used to move the selection to another widget or to set the owner to NULL, without changing the actual text of the selection.
- static void [selection \(Fl_Widget &owner, const char *, int len\)](#)
Changes the current selection.
- static void [paste \(Fl_Widget &receiver\)](#)
Backward compatibility only: Set things up so the receiver widget will be called with an FL_PASTE event some time in the future for the specified clipboard.
- static int [x \(\)](#)
Returns the origin of the current screen, where 0 indicates the left side of the screen.
- static int [y \(\)](#)
Returns the origin of the current screen, where 0 indicates the top edge of the screen.
- static int [w \(\)](#)
Returns the width of the screen in pixels.
- static int [h \(\)](#)
Returns the height of the screen in pixels.
- static int [screen_count \(\)](#)
Gets the number of available screens.
- static void [screen_xywh \(int &X, int &Y, int &W, int &H\)](#)
Gets the bounding box of a screen that contains the mouse pointer in.
- static void [screen_xywh \(int &X, int &Y, int &W, int &H, int mx, int my\)](#)
Gets the bounding box of a screen that contains the specified screen position mx, my.
- static void [screen_xywh \(int &X, int &Y, int &W, int &H, int n\)](#)
Gets the screen bounding rect for the given screen.
- static void [set_color \(Fl_Color, uchar, uchar, uchar\)](#)
Sets an entry in the fl_color index table.
- static void [set_color \(Fl_Color, unsigned\)](#)
Sets an entry in the fl_color index table.
- static unsigned [get_color \(Fl_Color\)](#)
Returns the RGB value(s) for the given FLTK color index.
- static void [get_color \(Fl_Color, uchar &, uchar &, uchar &\)](#)
See [unsigned get_color\(Fl_Color c\)](#).
- static void [free_color \(Fl_Color, int overlay=0\)](#)
Frees the specified color from the colormap, if applicable.

- static const char * [get_font \(Fl_Font\)](#)
Get the string for this face.
- static const char * [get_font_name \(Fl_Font, int *attributes=0\)](#)
Get a human-readable string describing the family of this face.
- static int [get_font_sizes \(Fl_Font, int *&sizep\)](#)
Return an array of sizes in sizep.
- static void [set_font \(Fl_Font, const char *\)](#)
Changes a face.
- static void [set_font \(Fl_Font, Fl_Font\)](#)
Copies one face to another.
- static Fl_Font [set_fonts \(const char *=0\)](#)
FLTK will open the display, and add every fonts on the server to the face table.
- static void [set_labeltype \(Fl_Labeltype, Fl_Label_Draw_F *, Fl_Label_Measure_F *\)](#)
Sets the functions to call to draw and measure a specific labeltype.
- static void [set_labeltype \(Fl_Labeltype, Fl_Labeltype from\)](#)
Sets the functions to call to draw and measure a specific labeltype.
- static Fl_Box_Draw_F * [get_boxtype \(Fl_Boxtype\)](#)
Gets the current box drawing function for the specified box type.
- static void [set_boxtype \(Fl_Boxtype, Fl_Box_Draw_F *, uchar, uchar, uchar, uchar\)](#)
Sets the function to call to draw a specific boxtype.
- static void [set_boxtype \(Fl_Boxtype, Fl_Boxtype from\)](#)
Copies the from boxtype.
- static int [box_dx \(Fl_Boxtype\)](#)
Returns the X offset for the given boxtype.
- static int [box_dy \(Fl_Boxtype\)](#)
Returns the Y offset for the given boxtype.
- static int [box_dw \(Fl_Boxtype\)](#)
Returns the width offset for the given boxtype.
- static int [box_dh \(Fl_Boxtype\)](#)
Returns the height offset for the given boxtype.
- static int [draw_box_active \(\)](#)
Determines if the current draw box is active or inactive.
- static void [set_abort \(void\(*f\)\(const char *,...\)\)](#)

For back compatibility, sets the void [Fl::fatal](#) handler callback.

- static void [default_atclose](#) ([Fl_Window](#) *, void *)
Default callback for window widgets.
- static void [set_atclose](#) (void(*f)([Fl_Window](#) *, void *))
For back compatibility, sets the [Fl::atclose](#) handler callback.
- static int [event_shift](#) ()
Returns non-zero if the Shift key is pressed.
- static int [event_ctrl](#) ()
Returns non-zero if the Control key is pressed.
- static int [event_alt](#) ()
Returns non-zero if the Alt key is pressed.
- static int [event_buttons](#) ()
Returns the mouse buttons state bits; if non-zero, then at least one button is pressed now.
- static int [event_button1](#) ()
Returns non-zero if mouse button 1 is currently held down.
- static int [event_button2](#) ()
Returns non-zero if button 2 is currently held down.
- static int [event_button3](#) ()
Returns non-zero if button 3 is currently held down.
- static void [set_idle](#) (void(*cb)())
Sets an idle callback.
- static void [grab](#) ([Fl_Window](#) &win)
See [Fl_Window](#) [grab\(\)](#).*
- static void [release](#) ()
Releases the current grabbed window, equals grab(0).
- static void [visible_focus](#) (int v)
Gets or sets the visible keyboard focus on buttons and other non-text widgets.
- static int [visible_focus](#) ()
Gets or sets the visible keyboard focus on buttons and other non-text widgets.
- static void [dnd_text_ops](#) (int v)
Gets or sets whether drag and drop text operations are supported.
- static int [dnd_text_ops](#) ()
Gets or sets whether drag and drop text operations are supported.

- static void `lock ()`

The `lock()` method blocks the current thread until it can safely access FLTK widgets and data.

- static void `unlock ()`

The `unlock()` method releases the lock that was set using the `lock()` method.

- static void `awake (void *message=0)`

The `awake()` method sends a message pointer to the main thread, causing any pending `Fl::wait()` call to terminate so that the main thread can retrieve the message and any pending redraws can be processed.

- static int `awake (Fl_Awake_Handler cb, void *message=0)`

See void `awake(void message=0)`.*

- static void * `thread_message ()`

The `thread_message()` method returns the last message that was sent from a child by the `awake()` method.

- static void `delete_widget (Fl_Widget *w)`

Schedules a widget for deletion at the next call to the event loop.

- static void `do_widget_deletion ()`

Deletes widgets previously scheduled for deletion.

- static void `watch_widget_pointer (Fl_Widget *&w)`

Adds a widget pointer to the watch list.

- static void `release_widget_pointer (Fl_Widget *&w)`

Releases a widget pointer to the watch list.

- static void `clear_widget_pointer (Fl_Widget const *w)`

Clears a widget pointer in the watch list.

- static cairo_t * `cairo_make_current (Fl_Window *w)`

Provides a corresponding cairo context for window wi.

- static void `cairo_autolink_context (bool alink)`

when HAVE_CAIRO is defined and `cairo_autolink_context()` is true, any current window dc is linked to a current context.

- static bool `cairo_autolink_context ()`

Gets the current autolink mode for cairo support.,

- static cairo_t * `cairo_cc ()`

Gets the current cairo context linked with a fltk window.

- static void `cairo_cc (cairo_t *c, bool own=false)`

Sets the cairo current context to c, set own to true if you want fltk to handle this cc deletion.

Static Public Attributes

- static void(* **idle**)()

The currently executing idle callback function: DO NOT USE THIS DIRECTLY!
- static const char *const **help** = helpmsg+13

Usage string displayed if [Fl::args\(\)](#) detects an invalid argument.
- static void(* **warning**)(const char *,...) = ::[warning](#)

FLTK calls this to print a warning message.
- static void(* **error**)(const char *,...) = ::[error](#)

FLTK calls this to print a normal error message.
- static void(* **fatal**)(const char *,...) = ::[fatal](#)

FLTK calls this to print a fatal error message.
- static void(* **atclose**)(Fl_Window *, void *) = default_atclose

Back compatibility: default window callback handler.

30.1.1 Detailed Description

The [Fl](#) is the FLTK global (static) containing state information and global methods for the current application.

30.1.2 Member Function Documentation

30.1.2.1 int Fl::add_awake_handler_ (Fl_Awake_Handler *func*, void * *data*) [static]

Adds an awake handler for use in [awake\(\)](#).

Referenced by [awake\(\)](#).

30.1.2.2 void Fl::add_check (Fl_Timeout_Handler *cb*, void * *argp* = 0) [static]

FLTK will call this callback just before it flushes the display and waits for events.

This is different than an idle callback because it is only called once, then FLTK calls the system and tells it not to return until an event happens.

This can be used by code that wants to monitor the application's state, such as to keep a display up to date. The advantage of using a check callback is that it is called only when no events are pending. If events are coming in quickly, whole blocks of them will be processed before this is called once. This can save significant time and avoid the application falling behind the events.

Sample code:

```
bool state_changed; // anything that changes the display turns this on
void callback(void*)
{
    if (!state_changed) return;
    state_changed = false;
```

```

do_expensive_calculation();
widget->redraw();
}

main() {
    Fl::add_check(callback);
    return Fl::run();
}

```

30.1.2.3 static void Fl::add_fd (int fd, int when, void(*)(int, void *) cb, void * = 0) [static]

Add file descriptor fd to listen to.

When the fd becomes ready for reading [Fl::wait\(\)](#) will call the callback and then return. The callback is passed the fd and the arbitrary void* argument.

The second version takes a when bitfield, with the bits FL_READ, FL_WRITE, and FL_EXCEPT defined, to indicate when the callback should be done.

There can only be one callback of each type for a file descriptor. [Fl::remove_fd\(\)](#) gets rid of *all* the callbacks for a given file descriptor.

Under UNIX *any* file descriptor can be monitored (files, devices, pipes, sockets, etc.) Due to limitations in Microsoft Windows, WIN32 applications can only monitor sockets.

30.1.2.4 void Fl::add_idle (void(*)(void *) cb, void * data = 0) [static]

Adds a callback function that is called every time by [Fl::wait\(\)](#) and also makes it act as though the timeout is zero (this makes [Fl::wait\(\)](#) return immediately, so if it is in a loop it is called repeatedly, and thus the idle function is called repeatedly).

The idle function can be used to get background processing done.

You can have multiple idle callbacks. To remove an idle callback use [Fl::remove_idle\(\)](#).

[Fl::wait\(\)](#) and [Fl::check\(\)](#) call idle callbacks, but [Fl::ready\(\)](#) does not.

The idle callback can call any FLTK functions, including [Fl::wait\(\)](#), [Fl::check\(\)](#), and [Fl::ready\(\)](#).

FLTK will not recursively call the idle callback.

References [set_idle\(\)](#).

30.1.2.5 void Fl::add_timeout (double t, Fl_Timeout_Handler cb, void * argp = 0) [static]

Adds a one-shot timeout callback.

The function will be called by [Fl::wait\(\)](#) at *t* seconds after this function is called. The optional void* argument is passed to the callback.

You can have multiple timeout callbacks. To remove an timeout callback use [Fl::remove_timeout\(\)](#).

If you need more accurate, repeated timeouts, use [Fl::repeat_timeout\(\)](#) to reschedule the subsequent timeouts.

The following code will print "TICK" each second on stdout with a fair degree of accuracy:

```

void callback(void*) {
    puts("TICK");
    Fl::repeat_timeout(1.0, callback);
}

```

```

}

int main() {
    Fl::add_timeout(1.0, callback);
    return Fl::run();
}

```

References `repeat_timeout()`.

Referenced by `Fl_Tooltip::enter_area()`, `Fl_Free::Fl_Free()`, `Fl_Text_Display::handle()`, `Fl_Scrollbar::handle()`, `Fl_Repeat_Button::handle()`, `Fl_Counter::handle()`, `Fl_Timer::suspended()`, and `Fl_Timer::value()`.

30.1.2.6 int Fl::arg (int argc, char **argv, int & i) [static]

Consume a single switch from argv, starting at word i.

Returns the number of words eaten (1 or 2, or 0 if it is not recognized) and adds the same value to i. You can use this function if you prefer to control the incrementing through the arguments yourself.

References `Fl_Tooltip::disable()`, `display()`, `dnd_text_ops()`, `Fl_Tooltip::enable()`, `scheme()`, and `visible_focus()`.

Referenced by `args()`.

30.1.2.7 int Fl::args (int argc, char **argv, int & i, int(*)(int, char **, int &) cb = 0) [static]

Consume all switches from argv.

Returns number of words eaten Returns zero on error. 'i' will either point at first word that does not start with '-' , at the error word, or after a '-' , or at argc. If your program does not take any word arguments you can report an error if $i < argc$.

FLTK provides an *entirely optional* command-line switch parser. You don't have to call it if you don't like them! Everything it can do can be done with other calls to FLTK.

To use the switch parser, call `Fl::args(...)` near the start of your program. This does *not* open the display, instead switches that need the display open are stashed into static variables. Then you *must* display your first window by calling `window->show(argc,argv)`, which will do anything stored in the static variables.

callback lets you define your own switches. It is called with the same argc and argv, and with i the index of each word. The callback should return zero if the switch is unrecognized, and not change i. It should return non-zero if the switch is recognized, and add at least 1 to i (it can add more to consume words after the switch). This function is called *before* any other tests, so you *can override any FLTK switch* (this is why FLTK can use very short switches instead of the long ones all other toolkits force you to use).

On return i is set to the index of the first non-switch. This is either:

- The first word that does not start with '-' .
- The word '-' (used by many programs to name stdin as a file)
- The first unrecognized switch (return value is 0).
- argc

The return value is i unless an unrecognized switch is found, in which case it is zero. If your program takes no arguments other than switches you should produce an error if the return value is less than argc.

All switches except -bg2 may be abbreviated one letter and case is ignored:

- -bg color or -background color
Sets the background color using [Fl::background\(\)](#).
- -bg2 color or -background2 color
Sets the secondary background color using [Fl::background2\(\)](#).
- -display host:n.n
Sets the X display to use; this option is silently ignored under WIN32 and MacOS.
- -dnd and -nodnd
Enables or disables drag and drop text operations using [Fl::dnd_text_ops\(\)](#).
- -fg color or -foreground color
Sets the foreground color using [Fl::foreground\(\)](#).
- -geometry WxH+X+Y
Sets the initial window position and size according the the standard X geometry string.
- -iconic
Iconifies the window using [Fl_Window::iconize\(\)](#).
- -kbd and -nokbd
Enables or disables visible keyboard focus for non-text widgets using [Fl::visible_focus\(\)](#).
- -name string
Sets the window class using [Fl_Window::xclass\(\)](#).
- -scheme string
Sets the widget scheme using [Fl::scheme\(\)](#).
- -title string
Sets the window title using [Fl_Window::label\(\)](#).
- -tooltips and -notooltips
Enables or disables tooltips using [Fl_Tooltip::enable\(\)](#).

The second form of [Fl::args\(\)](#) is useful if your program does not have command line switches of its own. It parses all the switches, and if any are not recognized it calls [Fl::abort\(Fl::help\)](#).

A usage string is displayed if [Fl::args\(\)](#) detects an invalid argument on the command-line. You can change the message by setting the [Fl::help](#) pointer.

References [arg\(\)](#).

Referenced by [args\(\)](#), and [Fl_Window::show\(\)](#).

30.1.2.8 void Fl::background (uchar r, uchar g, uchar b) [static]

Changes [fl_color\(FL_BACKGROUND_COLOR\)](#) to the given color, and changes the gray ramp from 32 to 56 to black to white.

These are the colors used as backgrounds by almost all widgets and used to draw the edges of all the boxtypes.

References [set_color\(\)](#).

Referenced by [get_system_colors\(\)](#).

30.1.2.9 void Fl::background2 (uchar r, uchar g, uchar b) [static]

Changes the alternative background color.

This color is used as a background by [Fl_Input](#) and other text widgets.

This call may change fl_color(FL_FOREGROUND_COLOR) if it does not provide sufficient contrast to FL_BACKGROUND2_COLOR.

References FL_BACKGROUND2_COLOR, FL_FOREGROUND_COLOR, get_color(), and set_color().

Referenced by get_system_colors().

30.1.2.10 int Fl::box_dh (Fl_Boxtype t) [static]

Returns the height offset for the given boxtyle.

See also:

[box_dy\(\)](#).

Referenced by Fl_Browser_::bbox(), Fl_Window::draw(), Fl_Value_Slider::draw(), Fl_Value_Output::draw(), Fl_Slider::draw(), Fl_Scrollbar::draw(), Fl_Scroll::draw(), Fl_Roller::draw(), Fl_Progress::draw(), Fl_Pack::draw(), Fl_Menu_Bar::draw(), Fl_Input::draw(), Fl_File_Input::draw(), Fl_Dial::draw(), Fl_Chart::draw(), Fl_Group::draw_children(), Fl_Widget::draw_focus(), Fl_Widget::draw_label(), Fl_Input_::drawtext(), Fl_Value_Slider::handle(), Fl_Slider::handle(), Fl_Input::handle(), Fl_Text_Display::resize(), and Fl_Help_View::resize().

30.1.2.11 int Fl::box_dw (Fl_Boxtype t) [static]

Returns the width offset for the given boxtyle.

See also:

[box_dy\(\)](#).

Referenced by Fl_Browser_::bbox(), Fl_Window::draw(), Fl_Value_Slider::draw(), Fl_Value_Output::draw(), Fl_Slider::draw(), Fl_Scrollbar::draw(), Fl_Scroll::draw(), Fl_Roller::draw(), Fl_Progress::draw(), Fl_Pack::draw(), Fl_Menu_Item::draw(), Fl_Light_Button::draw(), Fl_Input::draw(), Fl_File_Input::draw(), Fl_Dial::draw(), Fl_Chart::draw(), Fl_Group::draw_children(), Fl_Widget::draw_focus(), Fl_Widget::draw_label(), Fl_Input_::drawtext(), Fl_Value_Slider::handle(), Fl_Slider::handle(), Fl_Input::handle(), Fl_Text_Display::resize(), and Fl_Help_View::resize().

30.1.2.12 int Fl::box_dx (Fl_Boxtype t) [static]

Returns the X offset for the given boxtyle.

See also:

[box_dy\(\)](#)

Referenced by Fl_Browser_::bbox(), Fl_Window::draw(), Fl_Value_Slider::draw(), Fl_Value_Output::draw(), Fl_Slider::draw(), Fl_Scrollbar::draw(), Fl_Scroll::draw(), Fl_Roller::draw(), Fl_Progress::draw(), Fl_Pack::draw(), Fl_Menu_Item::draw(), Fl_Light_Button::draw(), Fl_Input::draw(),

`Fl_File_Input::draw()`, `Fl_Dial::draw()`, `Fl_Choice::draw()`, `Fl_Chart::draw()`, `Fl_Group::draw_children()`, `Fl_Widget::draw_focus()`, `Fl_Widget::draw_label()`, `Fl_Input::drawtext()`, `Fl_Value_Slider::handle()`, `Fl_Slider::handle()`, `Fl_Input::handle()`, `Fl_Text_Display::resize()`, and `Fl_Help_View::resize()`.

30.1.2.13 int Fl::box_dy (Fl_Boxtype t) [static]

Returns the Y offset for the given boxtyle.

These functions return the offset values necessary for a given boxtyle, useful for computing the area inside a box's borders, to prevent overrawing the borders.

For instance, in the case of a boxtyle like `FL_DOWN_BOX` where the border width might be 2 pixels all around, the above functions would return 2, 2, 4, and 4 for `box_dx`, `box_dy`, `box_dw`, and `box_dh` respectively.

An example to compute the area inside a widget's box():

```
int X = yourwidget->x() + Fl::box_dx(yourwidget->box());
int Y = yourwidget->y() + Fl::box_dy(yourwidget->box());
int W = yourwidget->w() - Fl::box_dw(yourwidget->box());
int H = yourwidget->h() - Fl::box_dh(yourwidget->box());
```

These functions are mainly useful in the draw() code for deriving custom widgets, where one wants to avoid drawing over the widget's own border box().

Referenced by `Fl_Browser::bbox()`, `Fl_Window::draw()`, `Fl_Value_Slider::draw()`, `Fl_Value_Output::draw()`, `Fl_Slider::draw()`, `Fl_Scrollbar::draw()`, `Fl_Scroll::draw()`, `Fl_Roller::draw()`, `Fl_Progress::draw()`, `Fl_Pack::draw()`, `Fl_Menu_Bar::draw()`, `Fl_Input::draw()`, `Fl_File_Input::draw()`, `Fl_Dial::draw()`, `Fl_Choice::draw()`, `Fl_Chart::draw()`, `Fl_Group::draw_children()`, `Fl_Widget::draw_focus()`, `Fl_Widget::draw_label()`, `Fl_Input::drawtext()`, `Fl_Value_Slider::handle()`, `Fl_Slider::handle()`, `Fl_Input::handle()`, `Fl_Text_Display::resize()`, and `Fl_Help_View::resize()`.

30.1.2.14 int Fl::check () [static]

Same as `Fl::wait(0)`.

Calling this during a big calculation will keep the screen up to date and the interface responsive:

```
while (!calculation_done()) {
    calculate();
    Fl::check();
    if (user_hit_abort_button()) break;
}
```

The returns non-zero if any windows are displayed, and 0 if no windows are displayed (this is likely to change in future versions of FLTK).

References `wait()`.

Referenced by `Fl_File_Chooser::rescan_keep_filename()`.

30.1.2.15 static int Fl::damage () [inline, static]

If true then `flush()` will do something.

Referenced by `flush()`.

30.1.2.16 void Fl::display (const char * *d*) [static]

Sets the X display to use for all windows.

Actually this just sets the environment variable \$DISPLAY to the passed string, so this only works before you show() the first window or otherwise open the display, and does nothing useful under WIN32.

Referenced by arg().

30.1.2.17 static int Fl::dnd_text_ops () [inline, static]

Gets or sets whether drag and drop text operations are supported.

This specifically affects whether selected text can be dragged from text fields or dragged within a text field as a cut/paste shortcut.

Referenced by arg(), Fl_Input::handle(), and Fl_Window::show().

30.1.2.18 static void Fl::dnd_text_ops (int *v*) [inline, static]

Gets or sets whether drag and drop text operations are supported.

This specifically affects whether selected text can be dragged from text fields or dragged within a text field as a cut/paste shortcut.

30.1.2.19 int Fl::draw_box_active () [static]

Determines if the current draw box is active or inactive.

If inactive, the box color is changed by the inactive color.

30.1.2.20 void Fl::flush () [static]

Causes all the windows that need it to be redrawn and graphics forced out through the pipes.

This is what [wait\(\)](#) does before looking for events.

References Fl_Widget::clear_damage(), Fl_Widget::damage(), damage(), and Fl_Widget::visible_r().

Referenced by Fl_File_Chooser::show(), and wait().

30.1.2.21 void Fl::foreground (uchar *r*, uchar *g*, uchar *b*) [static]

Changes fl_color(FL_FOREGROUND_COLOR).

References FL_FOREGROUND_COLOR, and set_color().

Referenced by get_system_colors().

30.1.2.22 int Fl::get_awake_handler_ (Fl_Awake_Handler & *func*, void *& *data*) [static]

Gets the last stored awake handler for use in [awake\(\)](#).

30.1.2.23 Fl_Box_Draw_F * Fl::get_boxtype (Fl_Boxtype t) [static]

Gets the current box drawing function for the specified box type.

30.1.2.24 void Fl::get_system_colors () [static]

Read the user preference colors from the system and use them to call [Fl::foreground\(\)](#), [Fl::background\(\)](#), and [Fl::background2\(\)](#).

This is done by [Fl_Window::show\(argc,argv\)](#) before applying the -fg and -bg switches.

On X this reads some common values from the Xdefaults database. KDE users can set these values by running the "krdb" program, and newer versions of KDE set this automatically if you check the "apply style to other X programs" switch in their control panel.

References [background\(\)](#), [background2\(\)](#), [first_window\(\)](#), [foreground\(\)](#), and [Fl_Window::xclass\(\)](#).

Referenced by [Fl_Window::show\(\)](#).

30.1.2.25 int Fl::gl_visual (int mode, int * alist = 0) [static]

This does the same thing as [Fl::visual\(int\)](#) but also requires OpenGL drawing to work.

This *must* be done if you want to draw in normal windows with OpenGL with [gl_start\(\)](#) and [gl_end\(\)](#). It may be useful to call this so your X windows use the same visual as an [Fl_GL_Window](#), which on some servers will reduce colormap flashing.

See [Fl_GL_Window](#) for a list of additional values for the argument.

30.1.2.26 void Fl::own_colormap () [static]

Makes FLTK use its own colormap.

This may make FLTK display better and will reduce conflicts with other programs that want lots of colors. However the colors may flash as you move the cursor between windows.

This does nothing if the current visual is not colormapped.

30.1.2.27 int Fl::ready () [static]

This is similar to [Fl::check\(\)](#) except this does *not* call [Fl::flush\(\)](#) or any callbacks, which is useful if your program is in a state where such callbacks are illegal.

This returns true if [Fl::check\(\)](#) would do anything (it will continue to return true until you call [Fl::check\(\)](#) or [Fl::wait\(\)](#)).

```
while (!calculation_done()) {
    calculate();
    if (Fl::ready()) {
        do_expensive_cleanup();
        Fl::check();
        if (user_hit_abort_button()) break;
    }
}
```

30.1.2.28 static void Fl::release () [inline, static]

Releases the current grabbed window, equals grab(0).

See [Fl_Window* grab\(\)](#)

Referenced by [Fl_Menu_Item::pulldown\(\)](#).

30.1.2.29 int Fl::reload_scheme () [static]

Called by scheme according to scheme name.

Loads or reloads the current scheme selection. See [void scheme\(const char *name\)](#)

References [_FL_ROUND_DOWN_BOX](#), [_FL_ROUND_UP_BOX](#), [Fl_Widget::align\(\)](#), [first_window\(\)](#), [FL_ALIGN_CENTER](#), [FL_ALIGN_CLIP](#), [FL_ALIGN_INSIDE](#), [fl_down_box\(\)](#), [FL_DOWN_BOX](#), [fl_down_frame\(\)](#), [FL_DOWN_FRAME](#), [FL_NO_LABEL](#), [FL_NORMAL_LABEL](#), [fl_thin_down_box\(\)](#), [FL_THIN_DOWN_BOX](#), [fl_thin_down_frame\(\)](#), [FL_THIN_DOWN_FRAME](#), [fl_thin_up_box\(\)](#), [FL_THIN_UP_BOX](#), [fl_thin_up_frame\(\)](#), [FL_THIN_UP_FRAME](#), [fl_up_box\(\)](#), [FL_UP_BOX](#), [fl_up_frame\(\)](#), [FL_UP_FRAME](#), [get_color\(\)](#), [h\(\)](#), [Fl_Widget::image\(\)](#), [Fl_Widget::labeltype\(\)](#), [next_window\(\)](#), [Fl_Widget::redraw\(\)](#), [scrollbar_size\(\)](#), [set_boxtyle\(\)](#), [Fl_Pixmap::uncache\(\)](#), and [w\(\)](#).

Referenced by [scheme\(\)](#).

30.1.2.30 void Fl::remove_check (Fl_Timeout_Handler cb, void *argp = 0) [static]

Removes a check callback.

It is harmless to remove a check callback that no longer exists.

30.1.2.31 static void Fl::remove_fd (int) [static]

Removes a file descriptor handler.

30.1.2.32 static void Fl::remove_fd (int, int when) [static]

Removes a file descriptor handler.

30.1.2.33 void Fl::remove_timeout (Fl_Timeout_Handler cb, void *argp = 0) [static]

Removes a timeout callback.

It is harmless to remove a timeout callback that no longer exists.

Referenced by [Fl_Repeat_Button::deactivate\(\)](#), [Fl_Tooltip::enter_area\(\)](#), [Fl_Text_Display::handle\(\)](#), [Fl_Scrollbar::handle\(\)](#), [Fl_Repeat_Button::handle\(\)](#), [Fl_Counter::handle\(\)](#), [Fl_Clock::handle\(\)](#), [Fl_Timer::suspended\(\)](#), [Fl_Timer::value\(\)](#), [Fl_Clock::~Fl_Clock\(\)](#), [Fl_Counter::~Fl_Counter\(\)](#), [Fl_File_Chooser::~Fl_File_Chooser\(\)](#), [Fl_Free::~Fl_Free\(\)](#), [Fl_Scrollbar::~Fl_Scrollbar\(\)](#), [Fl_Text_Display::~Fl_Text_Display\(\)](#), and [Fl_Timer::~Fl_Timer\(\)](#).

30.1.2.34 void Fl::repeat_timeout (double *t*, Fl_Timeout_Handler *cb*, void * *argp* = 0) [static]

This method repeats a timeout callback from the expiration of the previous timeout, allowing for more accurate timing.

You may only call this method inside a timeout callback.

The following code will print "TICK" each second on stdout with a fair degree of accuracy:

```
void callback(void*) {
    puts("TICK");
    Fl::repeat_timeout(1.0, callback);
}

int main() {
    Fl::add_timeout(1.0, callback);
    return Fl::run();
}
```

Referenced by add_timeout().

30.1.2.35 int Fl::run () [static]

As long as any windows are displayed this calls [Fl::wait\(\)](#) repeatedly.

When all the windows are closed it returns zero (supposedly it would return non-zero on any errors, but FLTK calls exit directly for these). A normal program will end main() with return [Fl::run\(\)](#);

References wait().

30.1.2.36 int Fl::scheme (const char * *s*) [static]

Gets or sets the current widget scheme.

NULL will use the scheme defined in the FLTK_SCHEME environment variable or the scheme resource under X11. Otherwise, any of the following schemes can be used:

- "none" - This is the default look-n-feel which resembles old Windows (95/98/Me/NT/2000) and old GTK/KDE
- "plastic" - This scheme is inspired by the Aqua user interface on Mac OS X
- "gtk+" - This scheme is inspired by the Red Hat Bluecurve theme

References first_window(), reload_scheme(), and Fl_Window::xclass().

30.1.2.37 void Fl::set_boxtype (Fl_Boxtype *to*, Fl_Boxtype *from*) [static]

Copies the from boxtyle.

30.1.2.38 void Fl::set_boxtype (Fl_Boxtype *t*, Fl_Box_Draw_F **f*, uchar *a*, uchar *b*, uchar *c*, uchar *d*) [static]

Sets the function to call to draw a specific boxtyle.

Referenced by reload_scheme().

30.1.2.39 static void Fl::set_idle (void(*)() cb) [inline, static]

Sets an idle callback.

This method is obsolete - use the [add_idle\(\)](#) method instead.

Referenced by [add_idle\(\)](#), and [remove_idle\(\)](#).

30.1.2.40 static void Fl::set_labeltype (Fl_Labeltype, Fl_Labeltype from) [static]

Sets the functions to call to draw and measure a specific labeltype.

30.1.2.41 void Fl::set_labeltype (Fl_Labeltype t, Fl_Label_Draw_F *f, Fl_Label_Measure_F *m) [static]

Sets the functions to call to draw and measure a specific labeltype.

Referenced by [Fl_Pixmap::label\(\)](#), [Fl_RGB_Image::label\(\)](#), [Fl_Image::label\(\)](#), [Fl_File_Icon::label\(\)](#), and [Fl_Bitmap::label\(\)](#).

30.1.2.42 double Fl::version () [static]

Returns the compiled-in value of the FL_VERSION constant.

This is useful for checking the version of a shared library.

References FL_VERSION.

30.1.2.43 static int Fl::visible_focus () [inline, static]

Gets or sets the visible keyboard focus on buttons and other non-text widgets.

The default mode is to enable keyboard focus for all widgets.

Referenced by [arg\(\)](#), [Fl_Widget::draw_focus\(\)](#), [Fl_Value_Slider::handle\(\)](#), [Fl_Text_Editor::handle\(\)](#), [Fl_Text_Display::handle\(\)](#), [Fl_Tabs::handle\(\)](#), [Fl_Slider::handle\(\)](#), [Fl_Roller::handle\(\)](#), [Fl_Repeat_Button::handle\(\)](#), [Fl_Menu_Button::handle\(\)](#), [Fl_Counter::handle\(\)](#), [Fl_Choice::handle\(\)](#), [Fl_Button::handle\(\)](#), [Fl_Browser_::handle\(\)](#), and [Fl_Adjuster::handle\(\)](#).

30.1.2.44 static void Fl::visible_focus (int v) [inline, static]

Gets or sets the visible keyboard focus on buttons and other non-text widgets.

The default mode is to enable keyboard focus for all widgets.

30.1.2.45 int Fl::visual (int flags) [static]

Selects a visual so that your graphics are drawn correctly.

This is only allowed before you call [show\(\)](#) on any windows. This does nothing if the default visual satisfies the capabilities, or if no visual satisfies the capabilities, or on systems that don't have such brain-dead notions.

Only the following combinations do anything useful:

- `Fl::visual(FL_RGB)`

Full/true color (if there are several depths FLTK chooses the largest). Do this if you use `fl_draw_`-image for much better (non-dithered) output.

- `Fl::visual(FL_RGB8)`

Full color with at least 24 bits of color. `FL_RGB` will always pick this if available, but if not it will happily return a less-than-24 bit deep visual. This call fails if 24 bits are not available.

- `Fl::visual(FL_DOUBLE|FL_INDEX)`

Hardware double buffering. Call this if you are going to use [Fl_Double_Window](#).

- `Fl::visual(FL_DOUBLE|FL_RGB)`

- `Fl::visual(FL_DOUBLE|FL_RGB8)`

Hardware double buffering and full color.

This returns true if the system has the capabilities by default or FLTK succeeded in turning them on. Your program will still work even if this returns false (it just won't look as good).

30.1.2.46 int Fl::wait () [static]

Waits until "something happens" and then returns.

Call this repeatedly to "run" your program. You can also check what happened each time after this returns, which is quite useful for managing program state.

What this really does is call all idle callbacks, all elapsed timeouts, call `Fl::flush()` to get the screen to update, and then wait some time (zero if there are idle callbacks, the shortest of all pending timeouts, or infinity), for any events from the user or any `Fl::add_fd()` callbacks. It then handles the events and calls the callbacks and then returns.

The return value of the first form is non-zero if there are any visible windows - this may change in future versions of FLTK.

The second form waits a maximum of *time* seconds. *It can return much sooner if something happens.*

The return value is positive if an event or fd happens before the time elapsed. It is zero if nothing happens (on Win32 this will only return zero if *time* is zero). It is negative if an error occurs (this will happen on UNIX if a signal happens).

Referenced by `check()`, `Fl_Color_Chooser::fl_color_chooser()`, `Fl_File_Chooser::fl_dir_chooser()`, `Fl_File_Chooser::fl_file_chooser()`, `Fl_Menu_Item::popup()`, and `run()`.

30.1.3 Member Data Documentation

30.1.3.1 const char *const Fl::help = helpmsg+13 [static]

Usage string displayed if `Fl::args()` detects an invalid argument.

This may be changed to point to customized text at run-time.

30.1.3.2 void(* Fl::idle)() () [static]

The currently executing idle callback function: DO NOT USE THIS DIRECTLY!

This is now used as part of a higher level system allowing multiple idle callback functions to be called.

See also:

[add_idle\(\)](#), [remove_idle\(\)](#)

Referenced by [wait\(\)](#).

The documentation for this class was generated from the following files:


- [Fl.H](#)
- [Fl.cxx](#)
- [Fl_abort.cxx](#)
- [Fl_add_idle.cxx](#)
- [Fl_arg.cxx](#)
- [fl_boxtype.cxx](#)
- [Fl_Browser_.cxx](#)
- [Fl_Cairo.cxx](#)
- [fl_color.cxx](#)
- [fl_color_mac.cxx](#)
- [fl_color_win32.cxx](#)
- [Fl_compose.cxx](#)
- [Fl_display.cxx](#)
- [fl_dnd_mac.cxx](#)
- [fl_dnd_win32.cxx](#)
- [fl_dnd_x.cxx](#)
- [Fl_get_key.cxx](#)
- [Fl_get_key_mac.cxx](#)
- [Fl_get_key_win32.cxx](#)
- [Fl_get_system_colors.cxx](#)
- [Fl_grab.cxx](#)
- [fl_labeltype.cxx](#)
- [Fl_lock.cxx](#)
- [Fl_own_colormap.cxx](#)
- [fl_set_font.cxx](#)
- [fl_set_fonts_mac.cxx](#)
- [fl_set_fonts_win32.cxx](#)
- [fl_set_fonts_x.cxx](#)
- [fl_set_fonts_xft.cxx](#)
- [fl_shortcut.cxx](#)
- [Fl_visual.cxx](#)
- [Fl_Widget.cxx](#)
- [Fl_Window.cxx](#)
- [gl_start.cxx](#)
- [screen_xywh.cxx](#)

30.2 Fl_Adjuster Class Reference

The [Fl_Adjuster](#) widget was stolen from Prisms, and has proven to be very useful for values that need a large dynamic range.

```
#include <Fl_Adjuster.H>
```

Inheritance diagram for Fl_Adjuster::



Public Member Functions

- [Fl_Adjuster](#) (int X, int Y, int W, int H, const char *l=0)
Creates a new [Fl_Adjuster](#) widget using the given position, size, and label string.
- void [soft](#) (int s)
If "soft" is turned on, the user is allowed to drag the value outside the range.
- int [soft](#) () const
If "soft" is turned on, the user is allowed to drag the value outside the range.

Protected Member Functions

- void [draw](#) ()
Draw the widget.
- int [handle](#) (int)
Handles the specified event.
- void [value_damage](#) ()
Asks for partial redraw.

30.2.1 Detailed Description

The [Fl_Adjuster](#) widget was stolen from Prisms, and has proven to be very useful for values that need a large dynamic range.




Figure 30.1: Fl_Adjuster

When you press a button and drag to the right the value increases. When you drag to the left it decreases. The largest button adjusts by `100 * step()`, the next by `10 * step()` and that smallest button by `step()`. Clicking on the buttons increments by 10 times the amount dragging by a pixel does. Shift + click decrements by 10 times the amount.

30.2.2 Constructor & Destructor Documentation

30.2.2.1 `Fl_Adjuster::Fl_Adjuster (int X, int Y, int W, int H, const char *l = 0)`

Creates a new `Fl_Adjuster` widget using the given position, size, and label string.

It looks best if one of the dimensions is 3 times the other.

Inherited destructor destroys the Valuator.

References `Fl_Widget::box()`, `FL_SELECTION_COLOR`, `FL_UP_BOX`, `Fl_Widget::selection_color()`, and `Fl_Valuator::step()`.

30.2.3 Member Function Documentation

30.2.3.1 `void Fl_Adjuster::draw () [protected, virtual]`

Draw the widget.

Never call this function directly. FLTK will schedule redrawing whenever needed. If your widget must be redrawn as soon as possible, call `redraw()` instead.

Override this function to draw your own widgets.

Implements `Fl_Widget`.

References `Fl_Widget::active_r()`, `Fl_Widget::box()`, `Fl_Widget::color()`, `Fl_Bitmap::draw()`, `Fl_Widget::draw_box()`, `Fl_Widget::draw_focus()`, `fl_color()`, `FL_DOWN_BOX`, `Fl::focus()`, `Fl_Widget::h()`, `Fl_Widget::selection_color()`, `Fl_Widget::w()`, `Fl_Widget::x()`, and `Fl_Widget::y()`.

30.2.3.2 `int Fl_Adjuster::handle (int event) [protected, virtual]`

Handles the specified event.

You normally don't call this method directly, but instead let FLTK do it when the user interacts with the widget.

When implemented in a new widget, this function must return 0 if the widget does not use the event or 1 otherwise.

Most of the time, you want to call the inherited [handle\(\)](#) method in your overriden method so that you don't short-circuit events that you don't handle. In this last case you should return the callee retval.

Parameters:

← *event* the kind of event received

Return values:

0 if the event was not used or understood

1 if the event was used and can be deleted

See also:

[Fl_Event](#)

Reimplemented from [Fl_Widget](#).

References [Fl_Valuator::clamp\(\)](#), [Fl::event_is_click\(\)](#), [Fl::event_key\(\)](#), [Fl::event_state\(\)](#), [Fl::event_x\(\)](#), [Fl::event_y\(\)](#), [FL_Down](#), [FL_DRAG](#), [FL_ENTER](#), [FL_FOCUS](#), [FL_KEYBOARD](#), [FL_LEAVE](#), [FL_Left](#), [FL_PUSH](#), [FL_RELEASE](#), [FL_Right](#), [FL_UNFOCUS](#), [FL_Up](#), [Fl::focus\(\)](#), [Fl_Widget::h\(\)](#), [Fl_Valuator::handle_drag\(\)](#), [Fl_Valuator::handle_push\(\)](#), [Fl_Valuator::handle_release\(\)](#), [Fl_Valuator::increment\(\)](#), [Fl_Valuator::previous_value\(\)](#), [Fl_Widget::redraw\(\)](#), [soft\(\)](#), [Fl_Valuator::softclamp\(\)](#), [Fl_Valuator::value\(\)](#), [Fl::visible_focus\(\)](#), [Fl_Widget::w\(\)](#), [Fl_Widget::x\(\)](#), and [Fl_Widget::y\(\)](#).

30.2.3.3 int Fl_Adjuster::soft () const [inline]

If "soft" is turned on, the user is allowed to drag the value outside the range.

If they drag the value to one of the ends, let go, then grab again and continue to drag, they can get to any value. Default is one.

Referenced by [handle\(\)](#).

30.2.3.4 void Fl_Adjuster::soft (int s) [inline]

If "soft" is turned on, the user is allowed to drag the value outside the range.

If they drag the value to one of the ends, let go, then grab again and continue to drag, they can get to any value. Default is one.

The documentation for this class was generated from the following files:


- [Fl_Adjuster.H](#)
- [Fl_Adjuster.cxx](#)

30.3 Fl_Bitmap Class Reference

The [Fl_Bitmap](#) class supports caching and drawing of mono-color (bitmap) images.

```
#include <Fl_Bitmap.h>
```

Inheritance diagram for Fl_Bitmap::



Public Member Functions

- [Fl_Bitmap](#) (const uchar *bits, int W, int H)

The constructors create a new bitmap from the specified bitmap data.
- [Fl_Bitmap](#) (const char *bits, int W, int H)

The constructors create a new bitmap from the specified bitmap data.
- virtual [~Fl_Bitmap](#) ()

The destructor free all memory and server resources that are used by the bitmap.
- virtual [Fl_Image * copy](#) (int W, int H)

The [copy\(\)](#) method creates a copy of the specified image.
- [Fl_Image * copy](#) ()

The [copy\(\)](#) method creates a copy of the specified image.
- virtual void [draw](#) (int X, int Y, int W, int H, int cx=0, int cy=0)

The [draw\(\)](#) methods draw the image.
- void [draw](#) (int X, int Y)

The [draw\(\)](#) methods draw the image.
- virtual void [label](#) ([Fl_Widget](#) *w)

The [label\(\)](#) methods are an obsolete way to set the image attribute of a widget or menu item.
- virtual void [label](#) ([Fl_Menu_Item](#) *m)

The [label\(\)](#) methods are an obsolete way to set the image attribute of a widget or menu item.
- virtual void [uncache](#) ()

If the image has been cached for display, delete the cache data.

Public Attributes

- `const uchar * array`
pointer to raw bitmap data
- `int alloc_array`
Non-zero if array points to bitmap data allocated internally.
- `unsigned id`
for internal use

30.3.1 Detailed Description

The `Fl_Bitmap` class supports caching and drawing of mono-color (bitmap) images.

Images are drawn using the current color.

30.3.2 Constructor & Destructor Documentation

30.3.2.1 `Fl_Bitmap::Fl_Bitmap (const uchar * bits, int W, int H)` [inline]

The constructors create a new bitmap from the specified bitmap data.

References `Fl_Image::data()`.

Referenced by `copy()`.

30.3.2.2 `Fl_Bitmap::Fl_Bitmap (const char * array, int W, int H)` [inline]

The constructors create a new bitmap from the specified bitmap data.

References `Fl_Image::data()`.

30.3.3 Member Function Documentation

30.3.3.1 `Fl_Image* Fl_Bitmap::copy ()` [inline]

The `copy()` method creates a copy of the specified image.

If the width and height are provided, the image is resized to the specified size. The image should be deleted (or in the case of `Fl_Shared_Image`, released) when you are done with it.

Reimplemented from `Fl_Image`.

References `copy()`, `Fl_Image::h()`, and `Fl_Image::w()`.

Referenced by `copy()`.

30.3.3.2 `Fl_Image * Fl_Bitmap::copy (int W, int H)` [virtual]

The `copy()` method creates a copy of the specified image.

If the width and height are provided, the image is resized to the specified size. The image should be deleted (or in the case of [Fl_Shared_Image](#), released) when you are done with it.

Reimplemented from [Fl_Image](#).

References `alloc_array`, `Fl_Bitmap()`, `Fl_Image::h()`, and `Fl_Image::w()`.

30.3.3.3 void Fl_Bitmap::draw (int X, int Y) [inline]

The [draw\(\)](#) methods draw the image.

This form specifies the upper-lefthand corner of the image

Reimplemented from [Fl_Image](#).

References `draw()`, `Fl_Image::h()`, and `Fl_Image::w()`.

Referenced by `draw()`.

30.3.3.4 void Fl_Bitmap::draw (int X, int Y, int W, int H, int cx = 0, int cy = 0) [virtual]

The [draw\(\)](#) methods draw the image.

This form specifies a bounding box for the image, with the origin (upper-lefthand corner) of the image offset by the cx and cy arguments.

Reimplemented from [Fl_Image](#).

References `Fl_Image::draw_empty()`, `fl_clip_box()`, `Fl_Image::h()`, and `Fl_Image::w()`.

Referenced by `Fl_FormsBitmap::draw()`, and `Fl_Adjuster::draw()`.

30.3.3.5 void Fl_Bitmap::label (Fl_Menu_Item * m) [virtual]

The [label\(\)](#) methods are an obsolete way to set the image attribute of a widget or menu item.

Use the `image()` or `deimage()` methods of the [Fl_Widget](#) and [Fl_Menu_Item](#) classes instead.

Reimplemented from [Fl_Image](#).

References `_FL_IMAGE_LABEL`, `Fl_Menu_Item::label()`, `Fl_Widget::labeltype()`, and `Fl::set_labeltype()`.

30.3.3.6 void Fl_Bitmap::label (Fl_Widget * widget) [virtual]

The [label\(\)](#) methods are an obsolete way to set the image attribute of a widget or menu item.

Use the `image()` or `deimage()` methods of the [Fl_Widget](#) and [Fl_Menu_Item](#) classes instead.

Reimplemented from [Fl_Image](#).

References `Fl_Widget::image()`.

30.3.3.7 void Fl_Bitmap::uncache () [virtual]

If the image has been cached for display, delete the cache data.

This allows you to change the data used for the image and then redraw it without recreating an image object.

Reimplemented from [Fl_Image](#).

Referenced by [~Fl_Bitmap\(\)](#).

The documentation for this class was generated from the following files:


- [Fl_Bitmap.H](#)
- [Fl_Bitmap.cxx](#)

30.4 Fl_BMP_Image Class Reference

The [Fl_BMP_Image](#) class supports loading, caching, and drawing of Windows Bitmap (BMP) image files.

```
#include <Fl_BMP_Image.h>
```

Inheritance diagram for Fl_BMP_Image::



Public Member Functions

- [Fl_BMP_Image](#) (const char *filename)

The constructor loads the named BMP image from the given bmp filename.

30.4.1 Detailed Description

The [Fl_BMP_Image](#) class supports loading, caching, and drawing of Windows Bitmap (BMP) image files.

30.4.2 Constructor & Destructor Documentation

30.4.2.1 Fl_BMP_Image::Fl_BMP_Image (const char * bmp)

The constructor loads the named BMP image from the given bmp filename.

The inherited destructor free all memory and server resources that are used by the image.

The destructor free all memory and server resources that are used by the image

References [Fl_Image::d\(\)](#), [Fl_Image::h\(\)](#), and [Fl_Image::w\(\)](#).

The documentation for this class was generated from the following files:


- [Fl_BMP_Image.H](#)
- [Fl_BMP_Image.cxx](#)

30.5 Fl_Box Class Reference

This widget simply draws its box, and possibly it's label.

```
#include <Fl_Box.H>
```

Inheritance diagram for Fl_Box::



Public Member Functions

- [Fl_Box \(int X, int Y, int W, int H, const char *l=0\)](#)
 - *The first constructor sets `box()` to `FL_NO_BOX`, which means it is invisible.*
- [Fl_Box \(Fl_Boxtype b, int X, int Y, int W, int H, const char *l\)](#)
 - See `Fl_Box::Fl_Box(int x, int y, int w, int h, const char * = 0)`.*
- virtual int [handle \(int\)](#)
 - Handles the specified event.*

Protected Member Functions

- void [draw \(\)](#)
 - Draw the widget.*

30.5.1 Detailed Description

This widget simply draws its box, and possibly it's label.

Putting it before some other widgets and making it big enough to surround them will let you draw a frame around them.

30.5.2 Constructor & Destructor Documentation

30.5.2.1 [Fl_Box::Fl_Box \(int X, int Y, int W, int H, const char *l = 0\) \[inline\]](#)

- The first constructor sets `box()` to `FL_NO_BOX`, which means it is invisible.

However such widgets are useful as placeholders or [Fl_Group::resizable\(\)](#) values. To change the box to something visible, use `box(n)`.

- The second form of the constructor sets the box to the specified box type.

The destructor removes the box.

30.5.3 Member Function Documentation

30.5.3.1 void Fl_Box::draw () [protected, virtual]

Draw the widget.

Never call this function directly. FLTK will schedule redrawing whenever needed. If your widget must be redrawn as soon as possible, call [redraw\(\)](#) instead.

Override this function to draw your own widgets.

Implements [Fl_Widget](#).

References [Fl_Widget::draw_box\(\)](#), and [Fl_Widget::draw_label\(\)](#).

30.5.3.2 int Fl_Box::handle (int *event*) [virtual]

Handles the specified event.

You normally don't call this method directly, but instead let FLTK do it when the user interacts with the widget.

When implemented in a new widget, this function must return 0 if the widget does not use the event or 1 otherwise.

Most of the time, you want to call the inherited [handle\(\)](#) method in your overridden method so that you don't short-circuit events that you don't handle. In this last case you should return the callee retval.

Parameters:

← *event* the kind of event received

Return values:

0 if the event was not used or understood

1 if the event was used and can be deleted

See also:

[Fl_Event](#)

Reimplemented from [Fl_Widget](#).

References [FL_ENTER](#), and [FL_LEAVE](#).

The documentation for this class was generated from the following files:


- [Fl_Box.H](#)
- [Fl_Box.cxx](#)

30.6 Fl_Browser Class Reference

The [Fl_Browser](#) widget displays a scrolling list of text lines, and manages all the storage for the text.

```
#include <Fl_Browser.h>
```

Inheritance diagram for Fl_Browser::

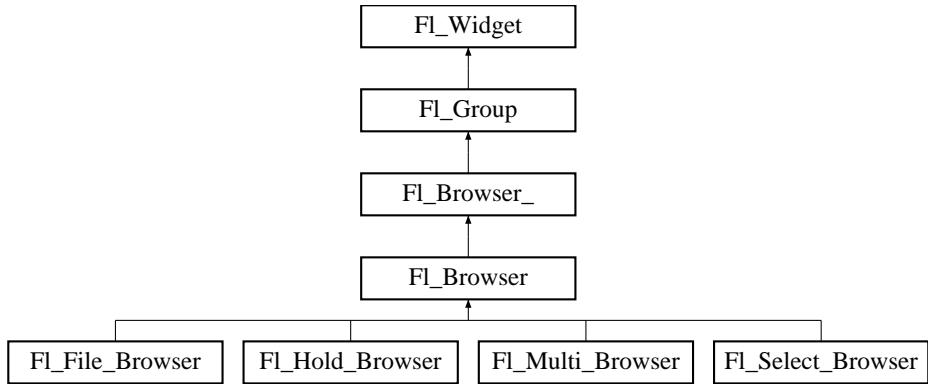

Public Types

- enum [Fl_Line_Position](#) { **TOP**, **BOTTOM**, **MIDDLE** }
- For internal use only?*

Public Member Functions

- void [remove](#) (int)
Remove line n and make the browser one line shorter.
- void [add](#) (const char *, void *=0)
Add a new line to the end of the browser.
- void [insert](#) (int, const char *, void *=0)
Insert a new entry before given line.
- void [move](#) (int to, int from)
Line from is removed and reinserted at to; to is calculated after the line is removed.
- int [load](#) (const char *filename)
Clears the browser and reads the file, adding each line from the file to the browser.
- void [swap](#) (int a, int b)
Swaps two lines in the browser.
- void [clear](#) ()
Remove all the lines in the browser.

- int **size** () const
Returns how many lines are in the browser.
- void **size** (int W, int H)
Change the size of the widget.
- int **topline** () const
Returns the current top line in the browser.
- void **lineposition** (int, **Fl_Line_Position**)
Update browser so that line is shown at given position.
- void **topline** (int l)
Scrolls the browser so the top line in the browser is n.
- void **bottomline** (int l)
Scrolls the browser so the bottom line in the browser is n.
- void **middleline** (int l)
Scrolls the browser so the middle line in the browser is n.
- int **select** (int, int=1)
Sets the selection state of entry.
- int **selected** (int) const
Return 1 if line n is selected, 0 if it not selected.
- void **show** (int n)
Makes line n visible for selection.
- void **show** ()
Makes a widget visible.
- void **hide** (int n)
Makes line n invisible, preventing selection by the user.
- void **hide** ()
Makes a widget invisible.
- int **visible** (int n) const
Returns a non-zero value if line is visible.
- int **value** () const
Gets browser value.
- void **value** (int v)
Sets the browser's value, i.e.
- const char * **text** (int) const
Returns data entry for line line, or NULL if out of range.

- void **text** (int, const char *)
Sets the text for line n to text newtext.
- void * **data** (int) const
Returns the data for line n, or NULL is n is out of range.
- void **data** (int, void *v)
Sets the data for line n to d.
- **Fl_Browser** (int, int, int, int, const char *=0)
The constructor makes an empty browser.
- **~Fl_Browser** ()
The destructor deletes all list items and destroys the browser.
- char **format_char** () const
Gets the current format code prefix character, which by default is '@'.
- void **format_char** (char c)
Sets the current format code prefix character to c.
- char **column_char** () const
Gets the current column separator character.
- void **column_char** (char c)
Sets the column separator to c.
- const int * **column_widths** () const
Gets the current column width array.
- void **column_widths** (const int *l)
Sets the current array to w.
- int **displayed** (int n) const
Returns non-zero if line n is visible.
- void **make_visible** (int n)
Redisplays so that line n is visible.
- void **replace** (int a, const char *b)
For back compatibility only.
- void **display** (int, int=1)
For back compatibility.

Protected Member Functions

- `void * item_first () const`

This method must be provided by the subclass to return the first item in the list.

- `void * item_next (void *) const`

This method must be provided by the subclass to return the item in the list after p.

- `void * item_prev (void *) const`

This method must be provided by the subclass to return the item in the list before p.

- `int item_selected (void *) const`

This method must be implemented by the subclass if it supports multiple selections in the browser.

- `void item_select (void *, int)`

This method must be implemented by the subclass if it supports multiple selections in the browser.

- `int item_height (void *) const`

Returns height of line lv.

- `int item_width (void *) const`

This method must be provided by the subclass to return the width of the item p in pixels.

- `void item_draw (void *, int, int, int, int) const`

This method must be provided by the subclass to draw the item p in the area indicated by x, y, w, and h.

- `int full_height () const`

This method may be provided by the subclass to indicate the full height of the item list in pixels.

- `int incr_height () const`

This method may be provided to return the average height of all items, to be used for scrolling.

- `FL_BLINE * find_line (int) const`

Return entry for line number line.

- `FL_BLINE * _remove (int)`

Remove entry for given line number.

- `void insert (int, FL_BLINE *)`

Insert a new line t before line n.

- `int lineno (void *) const`

Returns line number corresponding to data v, zero if not found.

- `void swap (FL_BLINE *a, FL_BLINE *b)`

Swap two lines, a and b.

30.6.1 Detailed Description

The [Fl_Browser](#) widget displays a scrolling list of text lines, and manages all the storage for the text.

This is not a text editor or spreadsheet! But it is useful for showing a vertical list of named objects to the user.

Each line in the browser is identified by number. *The numbers start at one* (this is so that zero can be reserved for "no line" in the selective browsers). *Unless otherwise noted, the methods do not check to see if the passed line number is in range and legal. It must always be greater than zero and <= size()*.

Each line contains a null-terminated string of text and a void * data pointer. The text string is displayed, the void * pointer can be used by the callbacks to reference the object the text describes.

The base does nothing when the user clicks on it. The subclasses [Fl_Select_Browser](#), [Fl_Hold_Browser](#), and [Fl_Multi_Browser](#) react to user clicks to select lines in the browser and do callbacks.

The base called [Fl_Browser](#) provides the scrolling and selection mechanisms of this and all the subclasses, but the dimensions and appearance of each item are determined by the subclass. You can use [Fl_Browser](#) to display information other than text, or text that is dynamically produced from your own data structures. If you find that loading the browser is a lot of work or is inefficient, you may want to make a subof [Fl_Browser](#).

30.6.2 Constructor & Destructor Documentation

30.6.2.1 [Fl_Browser::Fl_Browser \(int X, int Y, int W, int H, const char * L = 0\)](#)

The constructor makes an empty browser.

Parameters:

- ← *X,Y,W,H* position and size.
- ← *L* label string, may be NULL.

30.6.2.2 [Fl_Browser::~Fl_Browser \(\) \[inline\]](#)

The destructor deletes all list items and destroys the browser.

References [Fl_Group::clear\(\)](#).

30.6.3 Member Function Documentation

30.6.3.1 [FL_BLINE * Fl_Browser::_remove \(int line\) \[protected\]](#)

Remove entry for given line number.

Parameters:

- ← *line* line number. Must be in range!

Returns:

pointer to browser entry.

References [Fl_Browser::deleting\(\)](#), [find_line\(\)](#), and [item_height\(\)](#).

Referenced by [move\(\)](#), and [remove\(\)](#).

30.6.3.2 void Fl_Browser::add (const char * newtext, void * d = 0)

Add a new line to the end of the browser.

The text is copied using the strdup() function. It may also be NULL to make a blank line. The void * argument is returned as the [data\(\)](#) of the new item.

References [insert\(\)](#).

30.6.3.3 void Fl_Browser::bottomline (int l) [inline]

Scrolls the browser so the bottom line in the browser is n.

30.6.3.4 void Fl_Browser::column_char (char c) [inline]

Sets the column separator to c.

This will only have an effect if you also set [column_widths\(\)](#).

30.6.3.5 char Fl_Browser::column_char () const [inline]

Gets the current column separator character.

By default this is '\t' (tab).

Referenced by [item_draw\(\)](#), [item_height\(\)](#), and [item_width\(\)](#).

30.6.3.6 void Fl_Browser::column_widths (const int * l) [inline]

Sets the current array to w.

Make sure the last entry is zero.

See also:

`const int *Fl_Browser::column_widths() const`

30.6.3.7 const int* Fl_Browser::column_widths () const [inline]

Gets the current column width array.

This array is zero-terminated and specifies the widths in pixels of each column. The text is split at each [column_char\(\)](#) and each part is formatted into it's own column. After the last column any remaining text is formatted into the space between the last column and the right edge of the browser, even if the text contains instances of [column_char\(\)](#). The default value is a one-element array of just a zero, which means there are no columns.

Referenced by [item_draw\(\)](#), [item_height\(\)](#), and [item_width\(\)](#).

30.6.3.8 void Fl_Browser::data (int line, void * d)

Sets the data for line n to d.

Does nothing if

is out of range.

References `find_line()`.

30.6.3.9 void Fl_Browser::format_char (char c) [inline]

Sets the current format code prefix character to `c`.

The default prefix is '@'. Set the prefix to 0 to disable formatting.

See also:

[uchar Fl_Browser::format_char\(\) const](#)

30.6.3.10 char Fl_Browser::format_char () const [inline]

Gets the current format code prefix character, which by default is '@'.

A string of formatting codes at the start of each column are stripped off and used to modify how the rest of the line is printed:

- '@.' Print rest of line, don't look for more '@' signs
- '@@' Print rest of line starting with '@'
- '@l' Use a LARGE (24 point) font
- '@m' Use a medium large (18 point) font
- '@s' Use a small (11 point) font
- '@b' Use a **bold** font (adds FL_BOLD to font)
- '@i' Use an *italic* font (adds FL_ITALIC to font)
- '@f' or '@t' Use a fixed-pitch font (sets font to FL_COURIER)
- '@c' Center the line horizontally
- '@r' Right-justify the text
- '@B0', '@B1', ... '@B255' Fill the background with `fl_color(n)`
- '@C0', '@C1', ... '@C255' Use `fl_color(n)` to draw the text
- '@F0', '@F1', ... Use `fl_font(n)` to draw the text
- '@S1', '@S2', ... Use point size `n` to draw the text
- '@u' or '@_' Underline the text.
- '@-' draw an engraved line through the middle.

Notice that the '@.' command can be used to reliably terminate the parsing. To print a random string in a random color, use `sprintf("\@C%d\@.%s", color, string)` and it will work even if the string starts with a digit or has the format character in it.

Referenced by `item_draw()`, and `item_height()`.

30.6.3.11 int Fl_Browser::full_height () const [protected, virtual]

This method may be provided by the subclass to indicate the full height of the item list in pixels.

The default implementation computes the full height from the item heights.

Reimplemented from [Fl_Browser_](#).

Referenced by [lineposition\(\)](#).

30.6.3.12 void Fl_Browser::hide () [inline]

Makes a widget invisible.

See also:

[show\(\)](#), [visible\(\)](#), [visible_r\(\)](#)

Reimplemented from [Fl_Widget](#).

References [Fl_Widget::hide\(\)](#).

Referenced by [display\(\)](#).

30.6.3.13 void Fl_Browser::hide (int *line*)

Makes line n invisible, preventing selection by the user.

The line can still be selected under program control.

References [Fl_Browser_::displayed\(\)](#), [find_line\(\)](#), [item_height\(\)](#), and [Fl_Widget::redraw\(\)](#).

30.6.3.14 int Fl_Browser::incr_height () const [protected, virtual]

This method may be provided to return the average height of all items, to be used for scrolling.

The default implementation uses the height of the first item.

Reimplemented from [Fl_Browser_](#).

References [Fl_Browser_::textsize\(\)](#).

30.6.3.15 void Fl_Browser::insert (int *line*, const char * *newtext*, void * *d* = 0)

Insert a new entry *before* given line.

Parameters:

← *line* if *line* > [size\(\)](#), the entry will be added at the end.

← *newtext* text entry for the new line.

← *d* pointer to data associated with the new line.

References [insert\(\)](#).

30.6.3.16 void Fl_Browser::insert (int *line*, FL_BLINE **t*) [protected]

Insert a new line *t* before line *n*.

If *n* > [size\(\)](#) then the line is added to the end.

References [find_line\(\)](#), [Fl_Browser_::inserting\(\)](#), [item_height\(\)](#), and [Fl_Browser_::redraw_line\(\)](#).

Referenced by [add\(\)](#), [insert\(\)](#), [Fl_File_Browser::load\(\)](#), and [move\(\)](#).

30.6.3.17 void * Fl_Browser::item_first () const [protected, virtual]

This method must be provided by the subclass to return the first item in the list.

Implements [Fl_Browser_](#).

30.6.3.18 void * Fl_Browser::item_next (void **p*) const [protected, virtual]

This method must be provided by the subclass to return the item in the list after *p*.

Implements [Fl_Browser_](#).

30.6.3.19 void * Fl_Browser::item_prev (void **p*) const [protected, virtual]

This method must be provided by the subclass to return the item in the list before *p*.

Implements [Fl_Browser_](#).

30.6.3.20 void Fl_Browser::item_select (void **s*, int *p*) [protected, virtual]

This method must be implemented by the subclass if it supports multiple selections in the browser.

The *s* argument specifies the selection state for item *p*: 0 = off, 1 = on.

Reimplemented from [Fl_Browser_](#).

References [Fl_Widget::flags\(\)](#).

30.6.3.21 int Fl_Browser::item_selected (void **p*) const [protected, virtual]

This method must be implemented by the subclass if it supports multiple selections in the browser.

The method should return 1 if *p* is selected and 0 otherwise.

Reimplemented from [Fl_Browser_](#).

30.6.3.22 int Fl_Browser::item_width (void **p*) const [protected, virtual]

This method must be provided by the subclass to return the width of the item *p* in pixels.

Allow for two additional pixels for the list selection box.

Implements [Fl_Browser_](#).

References [column_char\(\)](#), [column_widths\(\)](#), [FL_BOLD](#), [FL_COURIER](#), [FL_ITALIC](#), [Fl_Browser_::textfont\(\)](#), and [Fl_Browser_::textsize\(\)](#).

30.6.3.23 void Fl_Browser::lineposition (int *line*, Fl_Line_Position *pos*)

Update browser so that line is shown at given position.

Parameters:

- ← *line* line number.
- ← *pos* position.

References Fl_Browser_::bbox(), full_height(), item_height(), and Fl_Browser_::position().

30.6.3.24 int Fl_Browser::load (const char **filename*)

Clears the browser and reads the file, adding each line from the file to the browser.

If the filename is NULL or a zero-length string then this just clears the browser. This returns zero if there was any error in opening or reading the file, in which case errno is set to the system error. The [data\(\)](#) of each line is set to NULL.

References clear().

30.6.3.25 void Fl_Browser::make_visible (int *n*) [inline]

Redisplays so that line n is visible.

If n is out of range, redisplay top or bottom of list as appropriate.

References Fl_Browser_::display().

30.6.3.26 void Fl_Browser::middleline (int *l*) [inline]

Scrolls the browser so the middle line in the browser is n.

30.6.3.27 void Fl_Browser::replace (int *a*, const char **b*) [inline]

For back compatibility only.

30.6.3.28 int Fl_Browser::select (int *line*, int *v* = 1)

Sets the selection state of entry.

Parameters:

- ← *line* line number.
- ← *v* new selection state.

Returns:

1 if the state changed, 0 if not.

References find_line().

Referenced by Fl_File_Chooser::rescan_keep_filename(), and Fl_File_Chooser::value().

30.6.3.29 int Fl_Browser::selected (int *line*) const

Return 1 if line n is selected, 0 if it not selected.

References [find_line\(\)](#).

Referenced by [Fl_File_Chooser::count\(\)](#), and [Fl_File_Chooser::value\(\)](#).

30.6.3.30 void Fl_Browser::show () [inline]

Makes a widget visible.

An invisible widget never gets redrawn and does not get events. The [visible\(\)](#) method returns true if the widget is set to be visible. The [visible_r\(\)](#) method returns true if the widget and all of its parents are visible. A widget is only visible if [visible\(\)](#) is true on it *and all of its parents*.

Changing it will send FL_SHOW or FL_HIDE events to the widget. *Do not change it if the parent is not visible, as this will send false FL_SHOW or FL_HIDE events to the widget.* [redraw\(\)](#) is called if necessary on this or the parent.

See also:

[hide\(\)](#), [visible\(\)](#), [visible_r\(\)](#)

Reimplemented from [Fl_Widget](#).

References [Fl_Widget::show\(\)](#).

Referenced by [display\(\)](#).

30.6.3.31 void Fl_Browser::show (int *line*)

Makes line n visible for selection.

References [Fl_Browser::displayed\(\)](#), [find_line\(\)](#), [item_height\(\)](#), and [Fl_Widget::redraw\(\)](#).

30.6.3.32 void Fl_Browser::size (int *W*, int *H*) [inline]

Change the size of the widget.

[size\(w,h\)](#) is a shortcut for [resize\(x\(\),y\(\),w,h\)](#).

Parameters:

← *W,H* new size

See also:

[position\(int, int\)](#), [resize\(int, int, int, int\)](#)

Reimplemented from [Fl_Widget](#).

References [Fl_Widget::size\(\)](#).

30.6.3.33 int Fl_Browser::size () const [inline]

Returns how many lines are in the browser.

The last line number is equal to this.

Referenced by `Fl_File_Chooser::count()`, `Fl_File_Chooser::rescan_keep_filename()`, and `Fl_File_Chooser::value()`.

30.6.3.34 void Fl_Browser::swap (int *ai*, int *bi*)

Swaps two lines in the browser.

References `find_line()`, and `swap()`.

30.6.3.35 void Fl_Browser::text (int *line*, const char * *newtext*)

Sets the text for line *line* to text *newtext*.

Does nothing if *line* is out of range.

References `find_line()`, `Fl_Browser_::redraw_line()`, and `Fl_Browser_::replacing()`.

30.6.3.36 void Fl_Browser::topline (int *l*) [inline]

Scrolls the browser so the top line in the browser is *n*.

30.6.3.37 int Fl_Browser::topline () const

Returns the current top line in the browser.

If there is no vertical scrollbar then this will always return 1.

References `lineno()`, and `Fl_Browser_::top()`.

Referenced by `Fl_File_Chooser::rescan_keep_filename()`, and `Fl_File_Chooser::value()`.

30.6.3.38 void Fl_Browser::value (int *v*) [inline]

Sets the browser's value, i.e.

selected line, to *v*

References `Fl_Browser_::select()`.

30.6.3.39 int Fl_Browser::value () const

Gets browser value.

Returns:

line number of current selection, or 0 if no selection.

References `lineno()`, and `Fl_Browser_::selection()`.

The documentation for this class was generated from the following files:


- [Fl_Browser.H](#)
- [Fl_Browser.cxx](#)
- [Fl_Browser_load.cxx](#)

30.7 Fl_Browser_ Class Reference

This is the base for browsers.

```
#include <Fl_Browser_.h>
```

Inheritance diagram for Fl_Browser_::

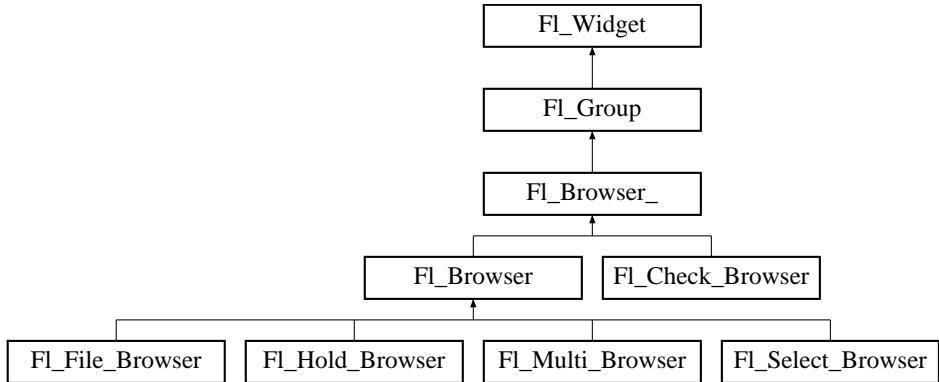

Public Types

- enum {
HORIZONTAL = 1, **VERTICAL** = 2, **BOTH** = 3, **ALWAYS_ON** = 4,
HORIZONTAL_ALWAYS = 5, **VERTICAL_ALWAYS** = 6, **BOTH_ALWAYS** = 7 }

Public Member Functions

- int **handle** (int)
Handles an event within the normal widget bounding box.
- void **resize** (int, int, int, int)
Repositions and/or resizes the browser.
- int **select** (void *, int=1, int docallbacks=0)
Sets the selection state of item p to s and returns 1 if the state changed or 0 if it did not.
- int **select_only** (void *, int docallbacks=0)
Selects item p and returns 1 if the state changed or 0 if it did not.
- int **deselect** (int docallbacks=0)
Deselects all items in the list and returns 1 if the state changed or 0 if it did not.
- int **position** () const
Gets or sets the vertical scrolling position of the list, which is the pixel offset of the list items within the list area.
- int **hposition** () const

Gets or sets the horizontal scrolling position of the list, which is the pixel offset of the list items within the list area.

- void **position** (int)

Gets or sets the vertical scrolling position of the list, which is the pixel offset of the list items within the list area.

- void **hposition** (int)

Gets or sets the horizontal scrolling position of the list, which is the pixel offset of the list items within the list area.

- void **display** (void *)

Displays item p, scrolling the list as necessary.

- uchar **has_scrollbar** () const

See [Fl_Browser_::has_scrollbar\(uchar\)](#).

- void **has_scrollbar** (uchar i)

By default you can scroll in both directions, and the scrollbars disappear if the data will fit in the widget.

- **Fl_Font textfont** () const

Gets the default text font for the lines in the browser.

- void **textfont** (Fl_Font s)

Sets the default text font to font s.

- **Fl_Fontsize textsize** () const

Gets the default text size for the lines in the browser.

- void **textsize** (Fl_Fontsize s)

Sets the default text size to size s.

- **Fl_Color textcolor** () const

Gets the default text color for the lines in the browser.

- void **textcolor** (unsigned n)

Sets the default text color to color n.

- void **scrollbar_right** ()

Moves the vertical scrollbar to the righthand side of the list.

- void **scrollbar_left** ()

Moves the vertical scrollbar to the lefthand side of the list.

Static Public Member Functions

- static int **scrollbar_width** ()

Gets the width of any scrollbars that are used.

- static void [scrollbar_width](#) (int b)
Sets the width of any scrollbars that are used to b.

Public Attributes

- [Fl_Scrollbar scrollbar](#)
Vertical scrollbar.
- [Fl_Scrollbar h-scrollbar](#)
Horizontal scrollbar.

Protected Member Functions

- virtual void * [item_first](#) () const =0
This method must be provided by the subclass to return the first item in the list.
- virtual void * [item_next](#) (void *) const =0
This method must be provided by the subclass to return the item in the list after p.
- virtual void * [item_prev](#) (void *) const =0
This method must be provided by the subclass to return the item in the list before p.
- virtual int [item_height](#) (void *) const =0
This method must be provided by the subclass to return the height of the item p in pixels.
- virtual int [item_width](#) (void *) const =0
This method must be provided by the subclass to return the width of the item p in pixels.
- virtual int [item_quick_height](#) (void *) const
This method may be provided by the subclass to return the height of the item p in pixels.
- virtual void [item_draw](#) (void *, int, int, int, int) const =0
This method must be provided by the subclass to draw the item p in the area indicated by x, y, w, and h.
- virtual int [full_width](#) () const
This method may be provided by the subclass to indicate the full width of the item list in pixels.
- virtual int [full_height](#) () const
This method may be provided by the subclass to indicate the full height of the item list in pixels.
- virtual int [incr_height](#) () const
This method may be provided to return the average height of all items, to be used for scrolling.
- virtual void [item_select](#) (void *, int=1)
This method must be implemented by the subclass if it supports multiple selections in the browser.
- virtual int [item_selected](#) (void *) const

This method must be implemented by the subclass if it supports multiple selections in the browser.

- `void * top () const`
Returns the item the appears at the top of the list.
- `void * selection () const`
Returns the item currently selected, or NULL if there is no selection.
- `void new_list ()`
This method should be called when the list data is completely replaced or cleared.
- `void deleting (void *a)`
This method should be used when an item is deleted from the list.
- `void replacing (void *a, void *b)`
This method should be used when an item is replaced in the list.
- `void swapping (void *a, void *b)`
Exchange pointers a and b.
- `void inserting (void *a, void *b)`
This method should be used when an item is added to the list.
- `int displayed (void *) const`
This method returns non-zero if item p is currently visible in the list.
- `void redraw_line (void *)`
This method should be called when the contents of an item have changed but not changed the height of the item.
- `void redraw_lines ()`
This method will cause the entire list to be redrawn.
- `void bbox (int &, int &, int &, int &) const`
This method returns the bounding box for the interior of the list, inside the scrollbars.
- `int leftedge () const`
This method returns the X position of the left edge of the list area after adjusting for the scrollbar and border, if any.
- `void * find_item (int my)`
This method returns the item under mouse at my.
- `void draw (int, int, int, int)`
Draws the contents of the browser within the specified bounding box.
- `void draw ()`
Draws the list within the normal widget bounding box.
- `Fl_Browser_ (int, int, int, int, const char *=0)`
The constructor makes an empty browser.

30.7.1 Detailed Description

This is the base for browsers.

To be useful it must be subclassed and several virtual functions defined. The Forms-compatible browser and the file chooser's browser are subclassed off of this.

This has been designed so that the subclass has complete control over the storage of the data, although because next() and prev() functions are used to index, it works best as a linked list or as a large block of characters in which the line breaks must be searched for.

A great deal of work has been done so that the "height" of a data object does not need to be determined until it is drawn. This is useful if actually figuring out the size of an object requires accessing image data or doing stat() on a file or doing some other slow operation.

30.7.2 Constructor & Destructor Documentation

30.7.2.1 **Fl_Browser_::Fl_Browser_ (int X, int Y, int W, int H, const char * l = 0)** [protected]

The constructor makes an empty browser.

References Fl_Widget::align(), Fl_Widget::bbox(), Fl_Widget::callback(), Fl_Widget::color(), Fl_Group::end(), FL_ALIGN_BOTTOM, FL_BACKGROUND2_COLOR, FL_FOREGROUND_COLOR, FL_HELVETICA, FL_HORIZONTAL, FL_NO_BOX, FL_NORMAL_SIZE, FL_SELECTION_COLOR, FL_WHEN_RELEASE_ALWAYS, hscrollbar, scrollbar, Fl_Widget::type(), and Fl_Widget::when().

30.7.3 Member Function Documentation

30.7.3.1 **void Fl_Browser_::deleting (void * l)** [protected]

This method should be used when an item is deleted from the list.

It allows the [Fl_Browser_](#) to discard any cached data it has on the item.

References displayed(), item_next(), item_prev(), and redraw_lines().

Referenced by Fl_Browser::_remove(), and Fl_Check_Browser::remove().

30.7.3.2 **int Fl_Browser_::deselect (int docallbacks = 0)**

Deselects all items in the list and returns 1 if the state changed or 0 if it did not.

If docb is non-zero, deselect tries to call the callback function for the widget.

References FL_MULTI_BROWSER, item_first(), item_next(), item_select(), redraw_line(), select(), and Fl_Widget::type().

Referenced by Fl_Check_Browser::handle(), handle(), select_only(), and Fl_File_Chooser::value().

30.7.3.3 **void Fl_Browser_::display (void * p)**

Displays item p, scrolling the list as necessary.

References bbox(), item_first(), item_next(), item_prev(), item_quick_height(), and position().

Referenced by handle(), Fl_Browser::make_visible(), select(), and select_only().

30.7.3.4 void Fl_Browser_::draw (int, int, int, int) [protected]

Draws the contents of the browser within the specified bounding box.

Todo

Find the implementation, if any, and document it there!

30.7.3.5 void * Fl_Browser_::find_item (int my) [protected]

This method returns the item under mouse at my.

If no item is displayed at that position then NULL is returned.

References bbox(), item_height(), and item_next().

Referenced by handle().

30.7.3.6 int Fl_Browser_::full_height () const [protected, virtual]

This method may be provided by the subclass to indicate the full height of the item list in pixels.

The default implementation computes the full height from the item heights.

Reimplemented in [Fl_Browser](#).

References item_first(), item_next(), and item_quick_height().

Referenced by draw(), and handle().

30.7.3.7 int Fl_Browser_::full_width () const [protected, virtual]

This method may be provided by the subclass to indicate the full width of the item list in pixels.

The default implementation computes the full width from the item widths.

Referenced by draw().

30.7.3.8 int Fl_Browser_::handle (int event) [virtual]

Handles an event within the normal widget bounding box.

Reimplemented from [Fl_Group](#).

Reimplemented in [Fl_Check_Browser](#).

References bbox(), deselect(), display(), Fl_Widget::do_callback(), Fl::event_clicks(), Fl::event_inside(), Fl::event_key(), Fl::event_state(), Fl::event_x(), Fl::event_y(), find_item(), FL_CTRL, FL_Down, FL_DRAG, FL_Enter, FL_ENTER, FL_FOCUS, FL_HOLD_BROWSER, FL_KEYBOARD, FL_KP_Enter, FL_LEAVE, FL_MULTI_BROWSER, FL_NORMAL_BROWSER, FL_PUSH, FL_RELEASE, FL_SELECT_BROWSER, FL_SHIFT, FL_UNFOCUS, FL_Up, FL_WHEN_CHANGED, FL_WHEN_ENTER_KEY, FL_WHEN_NOT_CHANGED, FL_WHEN_RELEASE, Fl_Group::focus(), full_height(), Fl_Group::handle(), item_first(), item_height(), item_next(), item_prev(), item_selected(), position(), Fl_Widget::redraw(), redraw_line(), select(), select_only(), Fl_Widget::set_changed(), Fl_Widget::type(), Fl::visible_focus(), Fl_Widget::w(), Fl_Widget::when(), and Fl_Widget::x().

30.7.3.9 void Fl_Browser_::has_scrollbar (uchar *i*) [inline]

By default you can scroll in both directions, and the scrollbars disappear if the data will fit in the widget.
[has_scrollbar\(\)](#) changes this based on the value of *h*:

- 0 - No scrollbars.
- Fl_Browser_::HORIZONTAL - Only a horizontal scrollbar.
- Fl_Browser_::VERTICAL - Only a vertical scrollbar.
- Fl_Browser_::BOTH - The default is both scrollbars.
- Fl_Browser_::HORIZONTAL_ALWAYS - Horizontal scrollbar always on, vertical always off.
- Fl_Browser_::VERTICAL_ALWAYS - Vertical scrollbar always on, horizontal always off.
- Fl_Browser_::BOTH_ALWAYS - Both always on.

30.7.3.10 int Fl_Browser_::incr_height () const [protected, virtual]

This method may be provided to return the average height of all items, to be used for scrolling.

The default implementation uses the height of the first item.

Reimplemented in [Fl_Browser](#).

References [item_first\(\)](#), and [item_quick_height\(\)](#).

30.7.3.11 void Fl_Browser_::inserting (void * *a*, void * *b*) [protected]

This method should be used when an item is added to the list.

It allows the [Fl_Browser](#) to update its cache data as needed.

References [displayed\(\)](#), and [redraw_lines\(\)](#).

Referenced by [Fl_Browser::insert\(\)](#).

30.7.3.12 virtual void* Fl_Browser_::item_first () const [protected, pure virtual]

This method must be provided by the subclass to return the first item in the list.

Implemented in [Fl_Browser](#).

Referenced by [deselect\(\)](#), [display\(\)](#), [draw\(\)](#), [full_height\(\)](#), [handle\(\)](#), [incr_height\(\)](#), and [select_only\(\)](#).

30.7.3.13 virtual int Fl_Browser_::item_height (void *) const [protected, pure virtual]

This method must be provided by the subclass to return the height of the item *p* in pixels.

Allow for two additional pixels for the list selection box.

Implemented in [Fl_Browser](#).

Referenced by [displayed\(\)](#), [draw\(\)](#), [find_item\(\)](#), [handle\(\)](#), and [item_quick_height\(\)](#).

30.7.3.14 virtual void* Fl_Browser_::item_next (void *) const [protected, pure virtual]

This method must be provided by the subclass to return the item in the list after p.

Implemented in [Fl_Browser](#).

Referenced by [deleting\(\)](#), [deselect\(\)](#), [display\(\)](#), [displayed\(\)](#), [draw\(\)](#), [find_item\(\)](#), [full_height\(\)](#), [handle\(\)](#), and [select_only\(\)](#).

30.7.3.15 virtual void* Fl_Browser_::item_prev (void *) const [protected, pure virtual]

This method must be provided by the subclass to return the item in the list before p.

Implemented in [Fl_Browser](#).

Referenced by [deleting\(\)](#), [display\(\)](#), and [handle\(\)](#).

30.7.3.16 int Fl_Browser_::item_quick_height (void * l) const [protected, virtual]

This method may be provided by the subclass to return the height of the item p in pixels.

Allow for two additional pixels for the list selection box. This method differs from [item_height](#) in that it is only called for selection and scrolling operations. The default implementation calls [item_height](#).

References [item_height\(\)](#).

Referenced by [display\(\)](#), [draw\(\)](#), [full_height\(\)](#), and [incr_height\(\)](#).

30.7.3.17 void Fl_Browser_::item_select (void *, int = 1) [protected, virtual]

This method must be implemented by the subclass if it supports multiple selections in the browser.

The s argument specifies the selection state for item p: 0 = off, 1 = on.

Reimplemented in [Fl_Browser](#).

Referenced by [deselect\(\)](#), and [select\(\)](#).

30.7.3.18 int Fl_Browser_::item_selected (void * l) const [protected, virtual]

This method must be implemented by the subclass if it supports multiple selections in the browser.

The method should return 1 if p is selected and 0 otherwise.

Reimplemented in [Fl_Browser](#).

Referenced by [draw\(\)](#), [handle\(\)](#), and [select\(\)](#).

30.7.3.19 virtual int Fl_Browser_::item_width (void *) const [protected, pure virtual]

This method must be provided by the subclass to return the width of the item p in pixels.

Allow for two additional pixels for the list selection box.

Implemented in [Fl_Browser](#).

Referenced by [draw\(\)](#).

30.7.3.20 void Fl_Browser_::new_list () [protected]

This method should be called when the list data is completely replaced or cleared.

It informs the [Fl_Browser_](#) widget that any cached information it has concerning the items is invalid.

References [redraw_lines\(\)](#).

Referenced by [Fl_Check_Browser::clear\(\)](#), and [Fl_Browser::clear\(\)](#).

30.7.3.21 void Fl_Browser_::redraw_lines () [inline, protected]

This method will cause the entire list to be redrawn.

Referenced by [deleting\(\)](#), [hposition\(\)](#), [inserting\(\)](#), [new_list\(\)](#), and [position\(\)](#).

30.7.3.22 void Fl_Browser_::replacing (void * a, void * b) [protected]

This method should be used when an item is replaced in the list.

It allows the [Fl_Browser_](#) to update its cache data as needed.

References [redraw_line\(\)](#).

Referenced by [Fl_Browser::text\(\)](#).

30.7.3.23 void Fl_Browser_::resize (int X, int Y, int W, int H) [virtual]

Repositions and/or resizes the browser.

Reimplemented from [Fl_Group](#).

References [Fl_Widget::align\(\)](#), [bbox\(\)](#), [FL_ALIGN_LEFT](#), [FL_ALIGN_TOP](#), [hscrollbar](#), [Fl_Widget::resize\(\)](#), and [scrollbar](#).

Referenced by [Fl_File_Chooser::preview\(\)](#).

30.7.3.24 void Fl_Browser_::scrollbar_left () [inline]

Moves the vertical scrollbar to the lefthand side of the list.

For back compatibility.

References [Fl_Widget::align\(\)](#), and [FL_ALIGN_LEFT](#).

30.7.3.25 void Fl_Browser_::scrollbar_right () [inline]

Moves the vertical scrollbar to the righthand side of the list.

For back compatibility.

References [Fl_Widget::align\(\)](#), and [FL_ALIGN_RIGHT](#).

30.7.3.26 int Fl_Browser_::select (void * l, int i = 1, int docallbacks = 0)

Sets the selection state of item p to s and returns 1 if the state changed or 0 if it did not.

If docb is non-zero, select tries to call the callback function for the widget.

References display(), Fl_Widget::do_callback(), FL_MULTI_BROWSER, item_select(), item_selected(), redraw_line(), Fl_Widget::set_changed(), and Fl_Widget::type().

Referenced by deselect(), handle(), select_only(), and Fl_Browser::value().

30.7.3.27 int Fl_Browser_::select_only (void * l, int docallbacks = 0)

Selects item p and returns 1 if the state changed or 0 if it did not.

Any other items in the list are deselected.

If docb is non-zero, select_only tries to call the callback function for the widget.

References deselect(), display(), FL_MULTI_BROWSER, item_first(), item_next(), select(), and Fl_Widget::type().

Referenced by handle().

30.7.3.28 void* Fl_Browser_::selection () const [inline, protected]

Returns the item currently selected, or NULL if there is no selection.

For multiple selection browsers this call returns the currently focused item, even if it is not selected. To find all selected items, call

[Fl_Multi_Browser::selected\(\)](#) for every item in question.

Referenced by Fl_Check_Browser::value(), and Fl_Browser::value().

30.7.3.29 void* Fl_Browser_::top () const [inline, protected]

Returns the item that appears at the top of the list.

Referenced by draw(), and Fl_Browser::topline().

30.7.4 Member Data Documentation

30.7.4.1 Fl_Scrollbar Fl_Browser_::scrollbar

Vertical scrollbar.

Referenced by bbox(), draw(), Fl_Browser_(), and resize().

The documentation for this class was generated from the following files:


- [Fl_Browser_.H](#)
- [Fl_Browser_.cxx](#)

30.8 Fl_Button Class Reference

Buttons generate callbacks when they are clicked by the user.

```
#include <Fl_Button.h>
```

Inheritance diagram for Fl_Button::

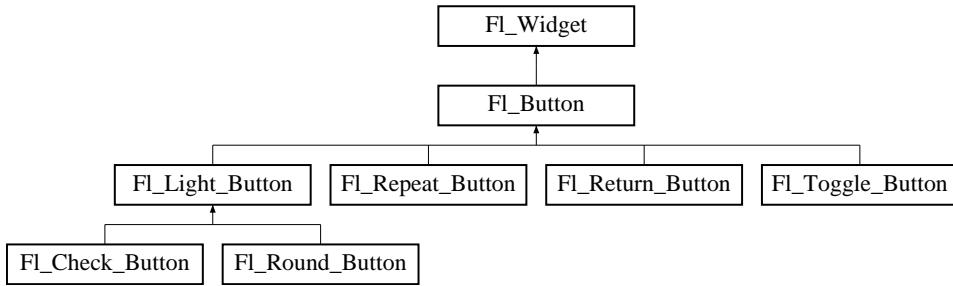

Public Member Functions

- virtual int **handle** (int)

Handles the specified event.
- **Fl_Button** (int X, int Y, int W, int H, const char *L=0)

The constructor creates the button using the given position, size and label.
- int **value** (int v)

Sets the current value of the button.
- char **value** () const

Returns the current value of the button (0 or 1).
- int **set** ()

Same as value(1).
- int **clear** ()

Same as value(0).
- void **setonly** ()

Turns on this button and turns off all other radio buttons in the group (calling value(1) or set() does not do this).
- int **shortcut** () const

Returns the current shortcut key for the button.
- void **shortcut** (int s)

Sets the shortcut key to s.
- **Fl_Boxtype** **down_box** () const

Returns the current down box type, which is drawn when value() is non-zero.

- void [down_box \(Fl_Boxtype b\)](#)

Sets the down box type.

- void [shortcut \(const char *s\)](#)

(for backwards compatibility)

- [Fl_Color down_color \(\) const](#)

(for backwards compatibility)

- void [down_color \(unsigned c\)](#)

(for backwards compatibility)

Protected Member Functions

- virtual void [draw \(\)](#)

Draw the widget.

30.8.1 Detailed Description

Buttons generate callbacks when they are clicked by the user.

You control exactly when and how by changing the values for [type\(\)](#) and [when\(\)](#). Buttons can also generate callbacks in response to [FL_SHORTCUT](#) events. The button can either have an explicit [shortcut\(int s\)](#) value or a letter shortcut can be indicated in the [label\(\)](#) with an '&' character before it. For the label shortcut it does not matter if [Alt](#) is held down, but if you have an input field in the same window, the user will have to hold down the [Alt](#) key so that the input field does not eat the event first as an [FL_KEYBOARD](#) event.

[Todo](#)

Refactor the doxygen comments for [Fl_Button type\(\)](#) documentation.

For an [Fl_Button](#) object, the [type\(\)](#) call returns one of:

- [FL_NORMAL_BUTTON](#) (0): [value\(\)](#) remains unchanged after button press.
- [FL_TOGGLE_BUTTON](#): [value\(\)](#) is inverted after button press.
- [FL_RADIO_BUTTON](#): [value\(\)](#) is set to 1 after button press, and all other buttons in the current group with [type \(\) == FL_RADIO_BUTTON](#) are set to zero.

[Todo](#)

Refactor the doxygen comments for [Fl_Button when\(\)](#) documentation.

For an [Fl_Button](#) object, the following [when\(\)](#) values are useful, the default being [FL_WHEN_RELEASE](#):

- 0: The callback is not done, instead [changed\(\)](#) is turned on.
- [FL_WHEN_RELEASE](#) : The callback is done after the user successfully clicks the button, or when a shortcut is typed.
- [FL_WHEN_CHANGED](#) : The callback is done each time the [value\(\)](#) changes (when the user pushes and releases the button, and as the mouse is dragged around in and out of the button).

30.8.2 Constructor & Destructor Documentation

30.8.2.1 `Fl_Button::Fl_Button (int X, int Y, int W, int H, const char * L = 0)`

The constructor creates the button using the given position, size and label.

Parameters:

- ← X, Y, W, H position and size of the widget
- ← L widget label, default is no label

References `Fl_Widget::box()`, `down_box()`, `FL_NO_BOX`, `FL_UP_BOX`, `Fl_Widget::set_flag()`, and `Fl_Widget::SHORTCUT_LABEL`.

30.8.3 Member Function Documentation

30.8.3.1 `int Fl_Button::clear () [inline]`

Same as `value(0)`.

See also:

[value\(int v\)](#)

30.8.3.2 `void Fl_Button::down_box (Fl_Boxtype b) [inline]`

Sets the down box type.

The default value of 0 causes FLTK to figure out the correct matching down version of `box()`.

Parameters:

- ← b down box type

30.8.3.3 `Fl_Boxtype Fl_Button::down_box () const [inline]`

Returns the current down box type, which is drawn when [value\(\)](#) is non-zero.

Return values:

Fl_Boxtype

Referenced by `Fl_Return_Button::draw()`, `Fl_Light_Button::draw()`, `draw()`, `Fl_Button()`, `Fl_Check_Button::Fl_Check_Button()`, `Fl_File_Chooser::Fl_File_Chooser()`, and `Fl_Round_Button::Fl_Round_Button()`.

30.8.3.4 `void Fl_Button::draw () [protected, virtual]`

Draw the widget.

Never call this function directly. FLTK will schedule redrawing whenever needed. If your widget must be redrawn as soon as possible, call [redraw\(\)](#) instead.

Override this function to draw your own widgets.

Implements [Fl_Widget](#).

Reimplemented in [Fl_Light_Button](#), and [Fl_Return_Button](#).

References [Fl_Widget::box\(\)](#), [Fl_Widget::color\(\)](#), [down_box\(\)](#), [Fl_Widget::draw_box\(\)](#), [Fl_Widget::draw_focus\(\)](#), [Fl_Widget::draw_label\(\)](#), [FL_HIDDEN_BUTTON](#), [FL_NORMAL_LABEL](#), [Fl::focus\(\)](#), [Fl_Widget::labelcolor\(\)](#), [Fl_Widget::labeltype\(\)](#), [Fl_Widget::selection_color\(\)](#), [Fl_Widget::type\(\)](#), and [value\(\)](#).

30.8.3.5 int Fl_Button::handle (int *event*) [virtual]

Handles the specified event.

You normally don't call this method directly, but instead let FLTK do it when the user interacts with the widget.

When implemented in a new widget, this function must return 0 if the widget does not use the event or 1 otherwise.

Most of the time, you want to call the inherited [handle\(\)](#) method in your overriden method so that you don't short-circuit events that you don't handle. In this last case you should return the callee retval.

Parameters:

← *event* the kind of event received

Return values:

0 if the event was not used or understood
1 if the event was used and can be deleted

See also:

[Fl_Event](#)

Reimplemented from [Fl_Widget](#).

Reimplemented in [Fl_Light_Button](#), [Fl_Repeat_Button](#), and [Fl_Return_Button](#).

References [Fl_Widget::box\(\)](#), [Fl_Widget::clear_changed\(\)](#), [Fl_Widget::damage\(\)](#), [Fl_Widget::do_callback\(\)](#), [Fl::event_inside\(\)](#), [Fl::event_key\(\)](#), [Fl::event_state\(\)](#), [FL_ALT](#), [FL_CTRL](#), [FL_DRAG](#), [FL_ENTER](#), [FL_FOCUS](#), [FL_KEYBOARD](#), [FL_LEAVE](#), [FL_META](#), [FL_NO_BOX](#), [FL_PUSH](#), [FL_RADIO_BUTTON](#), [FL_RELEASE](#), [FL_SHIFT](#), [FL_SHORTCUT](#), [FL_TOGGLE_BUTTON](#), [FL_UNFOCUS](#), [FL_WHEN_CHANGED](#), [FL_WHEN_NOT_CHANGED](#), [FL_WHEN_RELEASE](#), [Fl::focus\(\)](#), [Fl_Widget::h\(\)](#), [Fl_Widget::redraw\(\)](#), [Fl_Widget::set_changed\(\)](#), [setonly\(\)](#), [shortcut\(\)](#), [Fl_Widget::test_shortcut\(\)](#), [Fl::test_shortcut\(\)](#), [Fl_Widget::type\(\)](#), [value\(\)](#), [Fl::visible_focus\(\)](#), [Fl_Widget::w\(\)](#), [Fl_Widget::when\(\)](#), [Fl_Widget::window\(\)](#), [Fl_Widget::x\(\)](#), and [Fl_Widget::y\(\)](#).

30.8.3.6 int Fl_Button::set () [inline]

Same as `value(1)`.

See also:

[value\(int v\)](#)

30.8.3.7 void Fl_Button::shortcut (int s) [inline]

Sets the shortcut key to *s*.

Setting this overrides the use of '&' in the [label\(\)](#). The value is a bitwise OR of a key and a set of shift flags, for example: `FL_ALT | 'a'`, or `FL_ALT | (FL_F + 10)`, or just `'a'`. A value of 0 disables the shortcut.

The key can be any value returned by [Fl::event_key\(\)](#), but will usually be an ASCII letter. Use a lower-case letter unless you require the shift key to be held down.

The shift flags can be any set of values accepted by [Fl::event_state\(\)](#). If the bit is on, that shift key must be pushed. Meta, Alt, Ctrl, and Shift must be off if they are not in the shift flags (zero for the other bits indicates a "don't care" setting).

Parameters:

$\leftarrow s$ bitwise OR of key and shift flags

30.8.3.8 int Fl_Button::shortcut () const [inline]

Returns the current shortcut key for the button.

Return values:

int

Referenced by `Fl_File_Chooser::Fl_File_Chooser()`, `Fl_Help_Dialog::Fl_Help_Dialog()`, and `handle()`.

30.8.3.9 int Fl_Button::value (int v)

Sets the current value of the button.

A non-zero value sets the button to 1 (ON), and zero sets it to 0 (OFF).

Parameters:

$\leftarrow v$ button value.

See also:

[set\(\)](#), [clear\(\)](#)

References `Fl_Widget::box()`, `Fl_Widget::clear_changed()`, `Fl_Widget::redraw()`, and `Fl_Widget::redraw_label()`.

Referenced by `Fl_File_Chooser::Fl_File_Chooser()`, `Fl_File_Chooser::preview()`, and `Fl_File_Chooser::rescan_keep_filename()`.

The documentation for this class was generated from the following files:

- [Fl_Button.H](#)
- [Fl_Button.cxx](#)

30.9 Fl_Cairo_State Class Reference

Contains all the necessary info on the current cairo context.

```
#include <Fl_Cairo.H>
```

Public Member Functions

- `cairo_t * cc () const`
Gets the current cairo context.
- `bool autolink () const`
Sets the autolink option. See [Fl::cairo_autolink_context\(bool\)](#).
- `void cc (cairo_t *c, bool own=true)`
Sets the current cairo context, own indicates cc deletion is handle externally by user.
- `void autolink (bool b)`
Gets the autolink option.
- `void window (void *w)`
Sets the window w to keep track on.
- `void * window () const`
Gets the last window attached to a cc.
- `void * gc (void *c)`
Sets the gc c to keep track on.
- `void * gc () const`
Gets the last gc attached to a cc.

30.9.1 Detailed Description

Contains all the necessary info on the current cairo context.

A private internal & unique corresponding object is created to permit cairo context state handling while keeping it opaque. For internal use only.

Note:

Only available when configure has the –enable-cairo option

The documentation for this class was generated from the following file:


- [Fl_Cairo.H](#)

30.10 Fl_Cairo_Window Class Reference

This defines a pre-configured cairo fltk window.

```
#include <Fl_Cairo_Window.H>
```

Inheritance diagram for Fl_Cairo_Window::

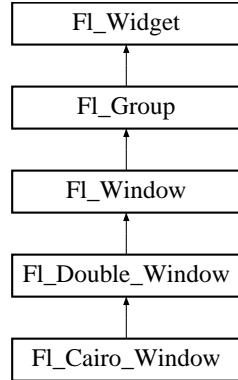

Public Types

- `typedef void(* cairo_draw_cb)(Fl_Cairo_Window *self, cairo_t *def)`

This defines the cairo draw callback prototype that you must further.

Public Member Functions

- `Fl_Cairo_Window (int w, int h)`
- `void draw ()`

Overloaded to provide cairo callback support.

- `void set_draw_cb (cairo_draw_cb cb)`

You must provide a draw callback which will implement your cairo rendering, This method will permit you to set your cb cairo callback.

30.10.1 Detailed Description

This defines a pre-configured cairo fltk window.

This class overloads for you the virtual `draw()` method, so that the only thing you have to do is to provide your cairo code. All cairo context handling is achieved transparently.

Note:

You can alternatively define your custom cairo fltk window, and thus at least override the `draw()` method to provide custom cairo support. In this case you will probably use `Fl::cairo_make_current(Fl_Window*)` to attach a context to your window. You should do it only when your window is the current window.

See also:

[Fl_Window::current\(\)](#)

The documentation for this class was generated from the following file:


- [Fl_Cairo_Window.H](#)

30.11 Fl_Chart Class Reference

[Fl_Chart](#) displays simple charts.

```
#include <Fl_Chart.H>
```

Inheritance diagram for Fl_Chart::



Public Member Functions

- [Fl_Chart](#) (int X, int Y, int W, int H, const char *L=0)
Create a new [Fl_Chart](#) widget using the given position, size and label string.
- [~Fl_Chart](#) ()
Destroys the [Fl_Chart](#) widget and all of its data.
- void [clear](#) ()
Removes all values from the chart.
- void [add](#) (double val, const char *str=0, unsigned col=0)
Add the data value val with optional label str and color col to the chart.
- void [insert](#) (int ind, double val, const char *str=0, unsigned col=0)
Inserts a data value val at the given position ind.
- void [replace](#) (int ind, double val, const char *str=0, unsigned col=0)
Replace a data value val at the given position ind.
- void [bounds](#) (double *a, double *b) const
Gets the lower and upper bounds of the chart values.
- void [bounds](#) (double a, double b)
Sets the lower and upper bounds of the chart values.
- int [size](#) () const
Returns the number of data values in the chart.
- void [size](#) (int W, int H)
Change the size of the widget.
- int [maxsize](#) () const
Gets the maximum number of data values for a chart.
- void [maxsize](#) (int m)

Set the maximum number of data values for a chart.

- **Fl_Font textfont () const**
Gets the chart's text font.
- **void textfont (Fl_Font s)**
Sets the chart's text font to s.
- **Fl_Fontsize textSize () const**
Gets the chart's text size.
- **void textSize (Fl_Fontsize s)**
gets the chart's text size to s.
- **Fl_Color textColor () const**
Gets the chart's text color.
- **void textColor (unsigned n)**
gets the chart's text color to n.
- **uchar autosize () const**
Get whether the chart will automatically adjust the bounds of the chart.
- **void autosize (uchar n)**
Set whether the chart will automatically adjust the bounds of the chart.

Protected Member Functions

- **void draw ()**
Draw the widget.

30.11.1 Detailed Description

Fl_Chart displays simple charts.

It is provided for Forms compatibility.

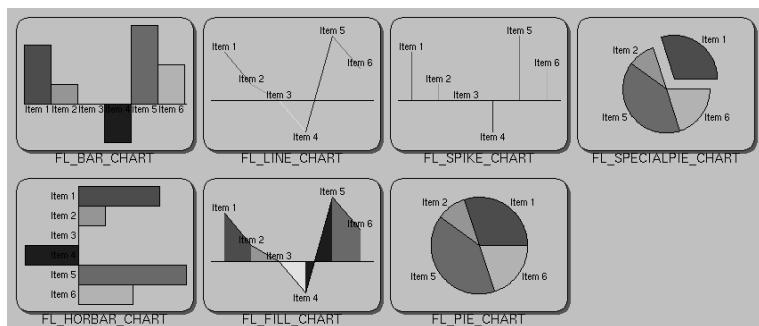


Figure 30.2: Fl_Chart

Todo

Refactor `Fl_Chart::type()` information.

The type of an `Fl_Chart` object can be set using `type(uchar t)` to:

- `FL_BAR_CHART`: Each sample value is drawn as a vertical bar.
- `FL_FILLED_CHART`: The chart is filled from the bottom of the graph to the sample values.
- `FL_HORBAR_CHART`: Each sample value is drawn as a horizontal bar.
- `FL_LINE_CHART`: The chart is drawn as a polyline with vertices at each sample value.
- `FL_PIE_CHART`: A pie chart is drawn with each sample value being drawn as a proportionate slice in the circle.
- `FL_SPECIALPIE_CHART`: Like `FL_PIE_CHART`, but the first slice is separated from the pie.
- `FL_SPIKE_CHART`: Each sample value is drawn as a vertical line.

30.11.2 Constructor & Destructor Documentation

30.11.2.1 `Fl_Chart::Fl_Chart (int X, int Y, int W, int H, const char *L = 0)`

Create a new `Fl_Chart` widget using the given position, size and label string.

The default boxstyle is `FL_NO_BOX`.

Parameters:

- ← `X,Y,W,H` position and size of the widget
- ← `L` widget label, default is no label

References `Fl_Widget::align()`, `Fl_Widget::box()`, `FL_ALIGN_BOTTOM`, `FL_BORDER_BOX`, `FL_CHART_MAX`, `FL_FOREGROUND_COLOR`, and `FL_HELVETICA`.

30.11.3 Member Function Documentation

30.11.3.1 `void Fl_Chart::add (double val, const char *str = 0, unsigned col = 0)`

Add the data value `val` with optional label `str` and color `col` to the chart.

Parameters:

- ← `val` data value
- ← `str` optional data label
- ← `col` optional data color

References `FL_CHART_ENTRY::col`, `FL_CHART_LABEL_MAX`, `FL_CHART_MAX`, `Fl_Widget::redraw()`, `FL_CHART_ENTRY::str`, and `FL_CHART_ENTRY::val`.

30.11.3.2 void Fl_Chart::autosize (uchar *n*) [inline]

Set whether the chart will automatically adjust the bounds of the chart.

Parameters:

← *n* non-zero to enable automatic resizing, zero to disable.

30.11.3.3 uchar Fl_Chart::autosize () const [inline]

Get whether the chart will automatically adjust the bounds of the chart.

Returns:

non-zero if auto-sizing is enabled and zero if disabled.

Referenced by draw().

30.11.3.4 void Fl_Chart::bounds (double *a*, double *b*)

Sets the lower and upper bounds of the chart values.

Parameters:

← *a,b* are used to set lower, upper

References Fl_Widget::redraw().

30.11.3.5 void Fl_Chart::bounds (double **a*, double **b*) const [inline]

Gets the lower and upper bounds of the chart values.

Parameters:

→ *a,b* are set to lower, upper

30.11.3.6 void Fl_Chart::draw () [protected, virtual]

Draw the widget.

Never call this function directly. FLTK will schedule redrawing whenever needed. If your widget must be redrawn as soon as possible, call [redraw\(\)](#) instead.

Override this function to draw your own widgets.

Implements [Fl_Widget](#).

References autosize(), Fl_Widget::box(), Fl::box_dh(), Fl::box_dw(), Fl::box_dx(), Fl::box_dy(), Fl_Widget::draw_box(), Fl_Widget::draw_label(), FL_BAR_CHART, FL_HORBAR_CHART, FL_PIE_CHART, fl_pop_clip(), fl_push_clip(), FL_SPECIALPIE_CHART, Fl_Widget::h(), textcolor(), textfont(), textSize(), Fl_Widget::type(), FL_CHART_ENTRY::val, Fl_Widget::w(), Fl_Widget::x(), and Fl_Widget::y().

30.11.3.7 void Fl_Chart::insert (int *ind*, double *val*, const char * *str* = 0, unsigned *col* = 0)

Inserts a data value *val* at the given position *ind*.

Position 1 is the first data value.

Parameters:

- ← *ind* insertion position
- ← *val* data value
- ← *str* optional data label
- ← *col* optional data color

References FL_CHART_ENTRY::col, FL_CHART_LABEL_MAX, FL_CHART_MAX, Fl_Widget::redraw(), FL_CHART_ENTRY::str, and FL_CHART_ENTRY::val.

30.11.3.8 void Fl_Chart::maxsize (int *m*)

Set the maximum number of data values for a chart.

If you do not call this method then the chart will be allowed to grow to any size depending on available memory.

Parameters:

- ← *m* maximum number of data values allowed.

References Fl_Widget::redraw().

30.11.3.9 void Fl_Chart::replace (int *ind*, double *val*, const char * *str* = 0, unsigned *col* = 0)

Replace a data value *val* at the given position *ind*.

Position 1 is the first data value.

Parameters:

- ← *ind* insertion position
- ← *val* data value
- ← *str* optional data label
- ← *col* optional data color

References FL_CHART_ENTRY::col, FL_CHART_LABEL_MAX, Fl_Widget::redraw(), FL_CHART_ENTRY::str, and FL_CHART_ENTRY::val.

30.11.3.10 void Fl_Chart::size (int *W*, int *H*) [inline]

Change the size of the widget.

size(w,h) is a shortcut for *resize(x0,y0,w,h)*.

Parameters:

- ← *W,H* new size

See also:

[position\(int, int\)](#), [resize\(int, int, int, int\)](#)

Reimplemented from [Fl_Widget](#).

References [Fl_Widget::size\(\)](#).

30.11.3.11 void Fl_Chart::textcolor (unsigned *n*) [inline]

gets the chart's text color to *n*.

30.11.3.12 void Fl_Chart::textfont (Fl_Font *s*) [inline]

Sets the chart's text font to *s*.

30.11.3.13 void Fl_Chart::textsize (Fl_Fontsize *s*) [inline]

gets the chart's text size to *s*.

The documentation for this class was generated from the following files:

- [Fl_Chart.H](#)
- [Fl_Chart.cxx](#)

30.12 FL_CHART_ENTRY Struct Reference

For internal use only.

```
#include <Fl_Chart.H>
```

Public Attributes

- float `val`
For internal use only.
- unsigned `col`
For internal use only.
- char `str` [FL_CHART_LABEL_MAX+1]
For internal use only.

30.12.1 Detailed Description

For internal use only.

30.12.2 Member Data Documentation

30.12.2.1 unsigned FL_CHART_ENTRY::col

For internal use only.

Referenced by Fl_Chart::add(), Fl_Chart::insert(), and Fl_Chart::replace().

30.12.2.2 char FL_CHART_ENTRY::str[FL_CHART_LABEL_MAX+1]

For internal use only.

Referenced by Fl_Chart::add(), Fl_Chart::insert(), and Fl_Chart::replace().

30.12.2.3 float FL_CHART_ENTRY::val

For internal use only.

Referenced by Fl_Chart::add(), Fl_Chart::draw(), Fl_Chart::insert(), and Fl_Chart::replace().

The documentation for this struct was generated from the following file:


- [Fl_Chart.H](#)

30.13 Fl_Check_Browser Class Reference

The [Fl_Check_Browser](#) widget displays a scrolling list of text lines that may be selected and/or checked by the user.

```
#include <Fl_Check_Browser.h>
```

Inheritance diagram for Fl_Check_Browser::



Public Member Functions

- [Fl_Check_Browser](#) (int x, int y, int w, int h, const char *l=0)
The constructor makes an empty browser.
- [~Fl_Check_Browser](#) ()
The destructor deletes all list items and destroys the browser.
- int [add](#) (char *s)
Add a new unchecked line to the end of the browser.
- int [add](#) (char *s, int b)
*See int [Fl_Check_Browser::add\(char *s\)](#).*
- int [remove](#) (int item)
Remove line n and make the browser one line shorter.
- int [add](#) (const char *s)
*See int [Fl_Check_Browser::add\(char *s\)](#).*
- int [add](#) (const char *s, int b)
*See int [Fl_Check_Browser::add\(char *s\)](#).*
- void [clear](#) ()
Remove every item from the browser.
- int [nitems](#) () const
Returns how many lines are in the browser.
- int [nchecked](#) () const
Returns how many items are currently checked.

- int **checked** (int item) const
Gets the current status of item item.
- void **checked** (int item, int b)
Sets the check status of item item to b.
- void **set_checked** (int item)
Equivalent to Fl_Check_Browser::checked(item, 1).
- void **check_all** ()
Sets all the items checked.
- void **check_none** ()
Sets all the items unchecked.
- int **value** () const
Returns the index of the currently selected item.
- char * **text** (int item) const
Return a pointer to an internal buffer holding item item's text.

Protected Member Functions

- int **handle** (int)
Handles an event within the normal widget bounding box.

30.13.1 Detailed Description

The [Fl_Check_Browser](#) widget displays a scrolling list of text lines that may be selected and/or checked by the user.

30.13.2 Constructor & Destructor Documentation

30.13.2.1 [Fl_Check_Browser::Fl_Check_Browser](#) (int X, int Y, int W, int H, const char * l = 0)

The constructor makes an empty browser.

References [FL_SELECT_BROWSER](#), [FL_WHEN_NEVER](#), [Fl_Widget::type\(\)](#), and [Fl_Widget::when\(\)](#).

30.13.2.2 [Fl_Check_Browser::~Fl_Check_Browser](#) () [inline]

The destructor deletes all list items and destroys the browser.

References [Fl_Group::clear\(\)](#).

30.13.3 Member Function Documentation

30.13.3.1 int Fl_Check_Browser::add (char * s)

Add a new unchecked line to the end of the browser.

The text is copied using the strdup() function. It may also be NULL to make a blank line. The second form can set the item checked.

30.13.3.2 void Fl_Check_Browser::check_all ()

Sets all the items checked.

References Fl_Widget::redraw().

30.13.3.3 void Fl_Check_Browser::check_none ()

Sets all the items unchecked.

References Fl_Widget::redraw().

30.13.3.4 void Fl_Check_Browser::checked (int i, int b)

Sets the check status of item item to b.

References Fl_Widget::redraw().

30.13.3.5 int Fl_Check_Browser::checked (int i) const

Gets the current status of item item.

30.13.3.6 void Fl_Check_Browser::clear ()

Remove every item from the browser.

Reimplemented from [Fl_Group](#).

References Fl_Browser_::new_list().

30.13.3.7 int Fl_Check_Browser::handle (int event) [protected, virtual]

Handles an event within the normal widget bounding box.

Reimplemented from [Fl_Browser_](#).

References Fl_Browser_::deselect(), and FL_PUSH.

30.13.3.8 int Fl_Check_Browser::nchecked () const [inline]

Returns how many items are currently checked.

30.13.3.9 int Fl_Check_Browser::nitems () const [inline]

Returns how many lines are in the browser.

The last line number is equal to this.

30.13.3.10 int Fl_Check_Browser::remove (int *item*)

Remove line n and make the browser one line shorter.

Returns the number of lines left in the browser.

References Fl_Browser_::deleting().

30.13.3.11 void Fl_Check_Browser::set_checked (int *item*) [inline]

Equivalent to Fl_Check_Browser::checked(item, 1).

30.13.3.12 char * Fl_Check_Browser::text (int *i*) const

Return a pointer to an internal buffer holding item item's text.

30.13.3.13 int Fl_Check_Browser::value () const

Returns the index of the currently selected item.

References Fl_Browser_::selection().

The documentation for this class was generated from the following files:


- [Fl_Check_Browser.H](#)
- [Fl_Check_Browser.cxx](#)

30.14 Fl_Check_Button Class Reference

A button with an "checkmark" to show its status.

```
#include <Fl_Check_Button.H>
```

Inheritance diagram for Fl_Check_Button::



Public Member Functions

- [Fl_Check_Button](#) (int X, int Y, int W, int H, const char *L=0)

Creates a new [Fl_Check_Button](#) widget using the given position, size and label string.

30.14.1 Detailed Description

A button with an "checkmark" to show its status.

Figure 30.3: Fl_Check_Button

Buttons generate callbacks when they are clicked by the user. You control exactly when and how by changing the values for [type\(\)](#) and [when\(\)](#).

The [Fl_Check_Button](#) subclass displays its "ON" state by showing a "checkmark" rather than drawing itself pushed in.

Todo

Refactor [Fl_Check_Button](#) doxygen comments (add `color()` info etc?)

Todo

Generate Fl_Check_Button.gif with visible checkmark.

30.14.2 Constructor & Destructor Documentation

30.14.2.1 [Fl_Check_Button::Fl_Check_Button \(int X, int Y, int W, int H, const char *L = 0\)](#)

Creates a new [Fl_Check_Button](#) widget using the given position, size and label string.

Parameters:

- ← *X,Y,W,H* position and size of the widget
- ← *L* widget label, default is no label

References `Fl_Widget::box()`, `Fl_Button::down_box()`, `FL_DOWN_BOX`, `FL_FOREGROUND_COLOR`, `FL_NO_BOX`, and `Fl_Widget::selection_color()`.

The documentation for this class was generated from the following files:


- [Fl_Check_Button.H](#)
- [Fl_Check_Button.cxx](#)

30.15 Fl_Choice Class Reference

A button that is used to pop up a menu.

```
#include <Fl_Choice.h>
```

Inheritance diagram for Fl_Choice::



Public Member Functions

- int [handle](#) (int)
Handles the specified event.
- [Fl_Choice](#) (int X, int Y, int W, int H, const char *L=0)
Create a new [Fl_Choice](#) widget using the given position, size and label string.
- int [value](#) () const
Gets the index of the last item chosen by the user.
- int [value](#) (int v)
Sets the currently selected value using the index into the menu item array.
- int [value](#) (const [Fl_Menu_Item](#) *v)
Sets the currently selected value using a pointer to menu item.

Protected Member Functions

- void [draw](#) ()
Draw the widget.

30.15.1 Detailed Description

A button that is used to pop up a menu.

This is a button that, when pushed, pops up a menu (or hierarchy of menus) defined by an array of [Fl_Menu_Item](#) objects. Motif calls this an OptionButton.

The only difference between this and a [Fl_Menu_Button](#) is that the name of the most recent chosen menu item is displayed inside the box, while the label is displayed outside the box. However, since the use of this is most often to control a single variable rather than do individual callbacks, some of the [Fl_Menu_Button](#) methods are redescribed here in those terms.

When the user picks an item off the menu the `value()` is set to that item and then the item's callback is done with the `menu_button` as the `Fl_Widget*` argument. If the item does not have a callback the `menu_button`'s callback is done instead.

All three mouse buttons pop up the menu. The Forms behavior of the first two buttons to increment/decrement the choice is not implemented. This could be added with a subclass, however.

The menu will also pop up in response to shortcuts indicated by putting a '&' character in the `label()`. See `Fl_Button::shortcut(int s)` for a description of this.

Typing the `shortcut()` of any of the items will do exactly the same as when you pick the item with the mouse. The '&' character in item names are only looked at when the menu is popped up, however.

Figure 30.4: Fl_Choice

Todo

Refactor the doxygen comments for `Fl_Choice changed()` documentation.

- `int Fl_Widget::changed() const` This value is true the user picks a different value. *It is turned off by `value()` and just before doing a callback (the callback can turn it back on if desired).*
- `void Fl_Widget::set_changed()` This method sets the `changed()` flag.
- `void Fl_Widget::clear_changed()` This method clears the `changed()` flag.
- `Fl_Boxtype Fl_Choice::down_box() const` Gets the current down box, which is used when the menu is popped up. The default down box type is `FL_DOWN_BOX`.
- `void Fl_Choice::down_box(Fl_Boxtype b)` Sets the current down box type to `b`.

30.15.2 Constructor & Destructor Documentation

30.15.2.1 Fl_Choice::Fl_Choice (int X, int Y, int W, int H, const char * L = 0)

Create a new `Fl_Choice` widget using the given position, size and label string.

The default boxtyle is `FL_UP_BOX`.

The constructor sets `menu()` to NULL. See `Fl_Menu_` for the methods to set or change the menu.

Parameters:

$\leftarrow X, Y, W, H$ position and size of the widget

← *L* widget label, default is no label

References `Fl_Widget::align()`, `Fl_Widget::box()`, `Fl_Menu_::down_box()`, `FL_ALIGN_LEFT`, `FL_BORDER_BOX`, `FL_FLAT_BOX`, `FL_HELVETICA`, `FL_WHEN_RELEASE`, `Fl_Menu_::textfont()`, and `Fl_Widget::when()`.

30.15.3 Member Function Documentation

30.15.3.1 void Fl_Choice::draw () [protected, virtual]

Draw the widget.

Never call this function directly. FLTK will schedule redrawing whenever needed. If your widget must be redrawn as soon as possible, call `redraw()` instead.

Override this function to draw your own widgets.

Implements [Fl_Widget](#).

References `Fl_Menu_Item::activate()`, `Fl_Menu_Item::active()`, `Fl_Widget::active_r()`, `Fl_Widget::box()`, `Fl::box_dx()`, `Fl::box_dy()`, `Fl_Label::color`, `Fl_Widget::color()`, `Fl_Menu_Item::deactivate()`, `Fl_Label::deimage`, `Fl_Menu_Item::draw()`, `Fl_Label::draw()`, `Fl_Widget::draw_box()`, `Fl_Widget::draw_focus()`, `Fl_Widget::draw_label()`, `FL_ALIGN_LEFT`, `FL_BACKGROUND2_COLOR`, `fl_clip`, `fl_color()`, `FL_DOWN_BOX`, `fl_polygon()`, `fl_pop_clip()`, `FL_UP_BOX`, `fl_yxline()`, `Fl::focus()`, `Fl_Label::font`, `Fl_Widget::h()`, `Fl_Label::image`, `Fl_Widget::labelcolor()`, `Fl_Menu_Item::labelcolor_`, `Fl_Menu_Item::labelfont_`, `Fl_Menu_Item::labelsize_`, `Fl_Menu_Item::labeltype_`, `Fl_Menu_::mvalue()`, `Fl::scheme()`, `Fl_Label::size`, `Fl_Menu_Item::text`, `Fl_Menu_::textcolor()`, `Fl_Menu_::textfont()`, `Fl_Menu_::textsize()`, `Fl_Label::type`, `Fl_Label::value`, `Fl_Widget::w()`, `Fl_Widget::x()`, and `Fl_Widget::y()`.

30.15.3.2 int Fl_Choice::handle (int *event*) [virtual]

Handles the specified event.

You normally don't call this method directly, but instead let FLTK do it when the user interacts with the widget.

When implemented in a new widget, this function must return 0 if the widget does not use the event or 1 otherwise.

Most of the time, you want to call the inherited `handle()` method in your overridden method so that you don't short-circuit events that you don't handle. In this last case you should return the callee retval.

Parameters:

← *event* the kind of event received

Return values:

0 if the event was not used or understood

1 if the event was used and can be deleted

See also:

[Fl_Event](#)

Reimplemented from [Fl_Widget](#).

References `Fl_Widget::color()`, `Fl::event_key()`, `Fl::event_state()`, `FL_ALT`, `FL_BACKGROUND2_COLOR`, `FL_CTRL`, `FL_ENTER`, `FL_FOCUS`, `FL_KEYBOARD`, `FL_LEAVE`, `FL_META`, `FL_PUSH`, `FL_SHIFT`, `FL_SHORTCUT`, `FL_UNFOCUS`, `Fl::focus()`, `Fl_Widget::h()`, `Fl_Menu_::menu()`, `Fl_Menu_::mvalue()`, `Fl_Menu_::picked()`, `Fl_Menu_Item::pulldown()`, `Fl_Widget::redraw()`, `Fl::scheme()`, `Fl_Menu_Item::submenu()`, `Fl_Menu_Item::test_shortcut()`, `Fl_Widget::test_shortcut()`, `Fl_Menu_::text()`, `Fl::visible_focus()`, `Fl_Widget::w()`, `Fl_Widget::x()`, and `Fl_Widget::y()`.

30.15.3.3 int Fl_Choice::value (const Fl_Menu_Item * v)

Sets the currently selected value using a pointer to menu item.

Changing the selected value causes a [redraw\(\)](#).

Parameters:

← `v` pointer to menu item in the menu item array.

Returns:

non-zero if the new value is different to the old one.

Reimplemented from [Fl_Menu_](#).

References `Fl_Widget::redraw()`, and `Fl_Menu_::value()`.

30.15.3.4 int Fl_Choice::value (int v)

Sets the currently selected value using the index into the menu item array.

Changing the selected value causes a [redraw\(\)](#).

Parameters:

← `v` index of value in the menu item array.

Returns:

non-zero if the new value is different to the old one.

Reimplemented from [Fl_Menu_](#).

References `Fl_Widget::redraw()`, `Fl_Menu_::size()`, `Fl_Menu_::value()`, and `value()`.

30.15.3.5 int Fl_Choice::value () const [inline]

Gets the index of the last item chosen by the user.

The index is zero initially.

Reimplemented from [Fl_Menu_](#).

References `Fl_Menu_::value()`.

Referenced by `Fl_File_Chooser::filter()`, `Fl_File_Chooser::filter_value()`, `Fl_File_Chooser::rescan_keep_filename()`, and `value()`.

The documentation for this class was generated from the following files:


- [Fl_Choice.H](#)
- [Fl_Choice.cxx](#)

30.16 Fl_Clock Class Reference

This widget provides a round analog clock display.

```
#include <Fl_Clock.H>
```

Inheritance diagram for Fl_Clock::



Public Member Functions

- int [handle](#) (int)

Handles the specified event.

- void [update](#) ()

Undefined.

- [Fl_Clock](#) (int X, int Y, int W, int H, const char *L=0)

Create an [Fl_Clock](#) widget using the given position, size, and label string.

- [Fl_Clock](#) (uchar t, int X, int Y, int W, int H, const char *L)

Create an [Fl_Clock](#) widget using the given boxtyle, position, size, and label string.

- [~Fl_Clock](#) ()

The destructor removes the clock.

30.16.1 Detailed Description

This widget provides a round analog clock display.

[Fl_Clock](#) is provided for Forms compatibility. It installs a 1-second timeout callback using [Fl::add_timeout\(\)](#). You can choose the rounded or square type of the the clock with [type\(\)](#), see below.




Figure 30.5: FL_SQUARE_CLOCK type




Figure 30.6: FL_ROUND_CLOCK type

30.16.2 Constructor & Destructor Documentation

30.16.2.1 `Fl_Clock::Fl_Clock (int X, int Y, int W, int H, const char *L = 0)`

Create an [Fl_Clock](#) widget using the given position, size, and label string.

The default boxtyle is `FL_NO_BOX`.

Parameters:

- ← `X,Y,W,H` position and size of the widget
- ← `L` widget label, default is no label

30.16.2.2 `Fl_Clock::Fl_Clock (uchar t, int X, int Y, int W, int H, const char *L)`

Create an [Fl_Clock](#) widget using the given boxtyle, position, size, and label string.

Parameters:

- ← `t` boxtyle
- ← `X,Y,W,H` position and size of the widget
- ← `L` widget label, default is no label

References `Fl_Widget::box()`, `FL_NO_BOX`, `FL_ROUND_CLOCK`, `FL_UP_BOX`, and `Fl_Widget::type()`.

30.16.3 Member Function Documentation

30.16.3.1 int Fl_Clock::handle (int *event*) [virtual]

Handles the specified event.

You normally don't call this method directly, but instead let FLTK do it when the user interacts with the widget.

When implemented in a new widget, this function must return 0 if the widget does not use the event or 1 otherwise.

Most of the time, you want to call the inherited [handle\(\)](#) method in your overriden method so that you don't short-circuit events that you don't handle. In this last case you should return the callee retval.

Parameters:

← *event* the kind of event received

Return values:

0 if the event was not used or understood

1 if the event was used and can be deleted

See also:

[Fl_Event](#)

Reimplemented from [Fl_Widget](#).

References [FL_HIDE](#), [FL_SHOW](#), and [Fl::remove_timeout\(\)](#).

30.16.3.2 void Fl_Clock::update ()

Undefined.

Todo

Find [Fl_Clock::update\(\)](#) implementation, if any, and document it.

The documentation for this class was generated from the following files:


- [Fl_Clock.H](#)
- [Fl_Clock.cxx](#)

30.17 Fl_Clock_Output Class Reference

This widget can be used to display a program-supplied time.

```
#include <Fl_Clock.H>
```

Inheritance diagram for Fl_Clock_Output::



Public Member Functions

- **Fl_Clock_Output** (int X, int Y, int W, int H, const char *L=0)
*Create a new **Fl_Clock_Output** widget with the given position, size and label.*
- void **value** (ulong v)
Set the displayed time.
- void **value** (int H, int m, int s)
Set the displayed time.
- ulong **value** () const
Returns the displayed time.
- int **hour** () const
Returns the displayed hour (0 to 23).
- int **minute** () const
Returns the displayed minute (0 to 59).
- int **second** () const
Returns the displayed second (0 to 60, 60=leap second).

Protected Member Functions

- void **draw** ()
Draw clock with current position and size.
- void **draw** (int X, int Y, int W, int H)
Draw clock with the given position and size.

30.17.1 Detailed Description

This widget can be used to display a program-supplied time.

The time shown on the clock is not updated. To display the current time, use [Fl_Clock](#) instead.




Figure 30.7: FL_SQUARE_CLOCK type




Figure 30.8: FL_ROUND_CLOCK type

30.17.2 Constructor & Destructor Documentation

30.17.2.1 [Fl_Clock_Output::Fl_Clock_Output](#) (int *X*, int *Y*, int *W*, int *H*, const char * *L* = 0)

Create a new [Fl_Clock_Output](#) widget with the given position, size and label.

The default boxtyle is [FL_NO_BOX](#).

Parameters:

$\leftarrow X, Y, W, H$ position and size of the widget

$\leftarrow L$ widget label, default is no label

References [Fl_Widget::align\(\)](#), [Fl_Widget::box\(\)](#), [FL_ALIGN_BOTTOM](#), [FL_UP_BOX](#), and [Fl_Widget::selection_color\(\)](#).

30.17.3 Member Function Documentation

30.17.3.1 void Fl_Clock_Output::draw (int *X*, int *Y*, int *W*, int *H*) [protected]

Draw clock with the given position and size.

Parameters:

$\leftarrow X, Y, W, H$ position and size

References Fl_Widget::active_r(), Fl_Widget::box(), Fl_Widget::color(), Fl_Widget::draw_box(), fl_begin_loop(), fl_begin_polygon(), fl_circle(), fl_color(), fl_end_loop(), fl_end_polygon(), FL_FOREGROUND_COLOR, fl_pop_matrix(), fl_push_matrix(), fl_rotate(), FL_ROUND_CLOCK, fl_scale(), fl_translate(), Fl_Widget::selection_color(), and Fl_Widget::type().

30.17.3.2 int Fl_Clock_Output::hour () const [inline]

Returns the displayed hour (0 to 23).

See also:

[value\(\)](#), [minute\(\)](#), [second\(\)](#)

30.17.3.3 int Fl_Clock_Output::minute () const [inline]

Returns the displayed minute (0 to 59).

See also:

[value\(\)](#), [hour\(\)](#), [second\(\)](#)

30.17.3.4 int Fl_Clock_Output::second () const [inline]

Returns the displayed second (0 to 60, 60=leap second).

See also:

[value\(\)](#), [hour\(\)](#), [minute\(\)](#)

30.17.3.5 ulong Fl_Clock_Output::value () const [inline]

Returns the displayed time.

Returns the time in seconds since the UNIX epoch (January 1, 1970).

See also:

[value\(ulong\)](#)

Referenced by [value\(\)](#).

30.17.3.6 void Fl_Clock_Output::value (int *H*, int *m*, int *s*)

Set the displayed time.

Set the time in hours, minutes, and seconds.

Parameters:

$\leftarrow H, m, s$ displayed time

See also:

[hour\(\)](#), [minute\(\)](#), [second\(\)](#)

References [Fl_Widget::damage\(\)](#).

30.17.3.7 void Fl_Clock_Output::value (ulong *v*)

Set the displayed time.

Set the time in seconds since the UNIX epoch (January 1, 1970).

Parameters:

$\leftarrow v$ seconds since epoch

See also:

[value\(\)](#)

References [value\(\)](#).

The documentation for this class was generated from the following files:


- [Fl_Clock.H](#)
- [Fl_Clock.cxx](#)

30.18 Fl_Color_Chooser Class Reference

The [Fl_Color_Chooser](#) widget provides a standard RGB color chooser.

```
#include <Fl_Color_Chooser.h>
```

Inheritance diagram for Fl_Color_Chooser::



Public Member Functions

- int **mode** ()

Returns which [Fl_Color_Chooser](#) variant is currently active.
- double **hue** () const

Returns the current hue.
- double **saturation** () const

Returns the saturation.
- double **value** () const

Returns the value/brightness.
- double **r** () const

Returns the current red value.
- double **g** () const

Returns the current green value.
- double **b** () const

Returns the current blue value.
- int **hsv** (double H, double S, double V)

Set the hsv values.
- int **rgb** (double R, double G, double B)

Sets the current rgb color values.
- **Fl_Color_Chooser** (int X, int Y, int W, int H, const char *L=0)

Creates a new [Fl_Color_Chooser](#) widget using the given position, size, and label string.

Static Public Member Functions

- static void [hsv2rgb](#) (double H, double S, double V, double &R, double &G, double &B)

This static method converts HSV colors to RGB colorspace.

- static void [rgb2hsv](#) (double R, double G, double B, double &H, double &S, double &V)

This static method converts RGB colors to HSV colorspace.

Related Functions

(Note that these are not member functions.)

- int [fl_color_chooser](#) (const char *name, double &r, double &g, double &b)

Pops up a window to let the user pick an arbitrary RGB color.

- int [fl_color_chooser](#) (const char *name, uchar &r, uchar &g, uchar &b)

Pops up a window to let the user pick an arbitrary RGB color.

30.18.1 Detailed Description

The [Fl_Color_Chooser](#) widget provides a standard RGB color chooser.

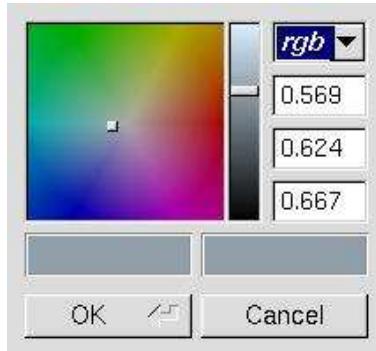


Figure 30.9: `fl_color_chooser()`

You can place any number of the widgets into a panel of your own design. The diagram shows the widget as part of a color chooser dialog created by the `fl_color_chooser()` function. The [Fl_Color_Chooser](#) widget contains the hue box, value slider, and rgb input fields from the above diagram (it does not have the color chips or the Cancel or OK buttons). The callback is done every time the user changes the rgb value. It is not done if they move the hue control in a way that produces the *same* rgb value, such as when saturation or value is zero.

The `fl_color_chooser()` function pops up a window to let the user pick an arbitrary RGB color. They can pick the hue and saturation in the "hue box" on the left (hold down CTRL to just change the saturation), and the brightness using the vertical slider. Or they can type the 8-bit numbers into the RGB [Fl_Value_Input](#) fields, or drag the mouse across them to adjust them. The pull-down menu lets the user set the input fields to show RGB, HSV, or 8-bit RGB (0 to 255).

`fl_color_chooser()` returns non-zero if the user picks ok, and updates the RGB values. If the user picks cancel or closes the window this returns zero and leaves RGB unchanged.

If you use the color chooser on an 8-bit screen, it will allocate all the available colors, leaving you no space to exactly represent the color the user picks! You can however use `fl_rectf()` to fill a region with a simulated color using dithering.

30.18.2 Constructor & Destructor Documentation

30.18.2.1 Fl_Color_Chooser::Fl_Color_Chooser (int *X*, int *Y*, int *W*, int *H*, const char * *L* = 0)

Creates a new `Fl_Color_Chooser` widget using the given position, size, and label string.

The recommended dimensions are 200x95. The color is initialized to black.

Parameters:

← *X,Y,W,H* position and size of the widget

← *L* widget label, default is no label

References `Fl_Widget::box()`, `Fl_Widget::callback()`, `Fl_Group::end()`, `FL_DOWN_FRAME`, `FL_HELVETICA_BOLD_ITALIC`, `FL_THIN_UP_BOX`, `Fl_Menu_::menu()`, `Fl_Group::resizable()`, `Fl_Group::resize()`, and `Fl_Menu_::textfont()`.

30.18.3 Member Function Documentation

30.18.3.1 double Fl_Color_Chooser::b () const [inline]

Returns the current blue value.

$0 \leq b \leq 1$.

Referenced by `fl_color_chooser()`.

30.18.3.2 double Fl_Color_Chooser::g () const [inline]

Returns the current green value.

$0 \leq g \leq 1$.

Referenced by `fl_color_chooser()`.

30.18.3.3 int Fl_Color_Chooser::hsv (double *H*, double *S*, double *V*)

Set the hsv values.

The passed values are clamped (or for hue, modulus 6 is used) to get legal values. Does not do the callback.

Parameters:

← *H,S,V* color components.

Returns:

1 if a new hsv value was set, 0 if the hsv value was the previous one.

References `hsv2rgb()`, and `Fl_Widget::set_changed()`.

30.18.3.4 void Fl_Color_Chooser::hsv2rgb (double *H*, double *S*, double *V*, double & *R*, double & *G*, double & *B*) [static]

This *static* method converts HSV colors to RGB colorspace.

Parameters:

← *H,S,V* color components
 → *R,G,B* color components

Referenced by `hsv()`.

30.18.3.5 double Fl_Color_Chooser::hue () const [inline]

Returns the current hue.

$0 \leq \text{hue} < 6$. Zero is red, one is yellow, two is green, etc. *This value is convenient for the internal calculations - some other systems consider hue to run from zero to one, or from 0 to 360.*

30.18.3.6 double Fl_Color_Chooser::r () const [inline]

Returns the current red value.

$0 \leq r \leq 1$.

Referenced by `fl_color_chooser()`.

30.18.3.7 int Fl_Color_Chooser::rgb (double *R*, double *G*, double *B*)

Sets the current rgb color values.

Does not do the callback. Does not clamp (but out of range values will produce psychedelic effects in the hue selector).

Parameters:

← *R,G,B* color components.

Returns:

1 if a new rgb value was set, 0 if the rgb value was the previous one.

References `rgb2hsv()`, and `Fl_Widget::set_changed()`.

Referenced by `fl_color_chooser()`.

30.18.3.8 void Fl_Color_Chooser::rgb2hsv (double *R*, double *G*, double *B*, double & *H*, double & *S*, double & *V*) [static]

This *static* method converts RGB colors to HSV colorspace.

Parameters:

← R, G, B color components
→ H, S, V color components

Referenced by `rgb()`.

30.18.3.9 double Fl_Color_Chooser::saturation () const [inline]

Returns the saturation.

$0 \leq \text{saturation} \leq 1$.

30.18.3.10 double Fl_Color_Chooser::value () const [inline]

Returns the value/brightness.

$0 \leq \text{value} \leq 1$.

The documentation for this class was generated from the following files:


- [Fl_Color_Chooser.H](#)
- [Fl_Color_Chooser.cxx](#)

30.19 Fl_Counter Class Reference

Controls a single floating point value with button (or keyboard) arrows.

```
#include <Fl_Counter.H>
```

Inheritance diagram for Fl_Counter::



Public Member Functions

- int [handle](#) (int)
Handles the specified event.
- [Fl_Counter](#) (int X, int Y, int W, int H, const char *L=0)
Creates a new [Fl_Counter](#) widget using the given position, size, and label string.
- [~Fl_Counter](#) ()
Destroys the evaluator.
- void [lstep](#) (double a)
Sets the increment for the large step buttons.
- void [step](#) (double a, double b)
Sets the increments for the normal and large step buttons.
- void [step](#) (double a)
Sets the increment for the normal step buttons.
- [Fl_Font textfont](#) () const
Gets the text font.
- void [textfont](#) ([Fl_Font](#) s)
Sets the text font to s.
- [Fl_Fontsize textsize](#) () const
Gets the font size.
- void [textsize](#) ([Fl_Fontsize](#) s)
Sets the font size to s.

- [Fl_Color textcolor \(\) const](#)

Gets the font color.

- [void textcolor \(unsigned s\)](#)

Sets the font color to s.

Protected Member Functions

- [void draw \(\)](#)

Draw the widget.

30.19.1 Detailed Description

Controls a single floating point value with button (or keyboard) arrows.

Double arrows buttons achieve larger steps than simple arrows.

See also:

[Fl_Spinner](#) for [value](#) input with vertical [step](#) arrows.

Figure 30.10: Fl_Counter

Todo

Refactor the doxygen comments for [Fl_Counter type\(\)](#) documentation.

The type of an [Fl_Counter](#) object can be set using [type\(uchar t\)](#) to:

- [FL_NORMAL_COUNTER](#): Displays a counter with 4 arrow buttons.
- [FL_SIMPLE_COUNTER](#): Displays a counter with only 2 arrow buttons.

30.19.2 Constructor & Destructor Documentation

30.19.2.1 `Fl_Counter::Fl_Counter (int X, int Y, int W, int H, const char * L = 0)`

Creates a new `Fl_Counter` widget using the given position, size, and label string.

The default type is `FL_NORMAL_COUNTER`.

Parameters:

- ← `X, Y, W, H` position and size of the widget
- ← `L` widget label, default is no label

References `Fl_Widget::align()`, `Fl_Valuator::bounds()`, `Fl_Widget::box()`, `FL_ALIGN_BOTTOM`, `FL_FOREGROUND_COLOR`, `FL_HELVETICA`, `FL_INACTIVE_COLOR`, `FL_NORMAL_SIZE`, `FL_UP_BOX`, `Fl_Widget::selection_color()`, and `Fl_Valuator::step()`.

30.19.3 Member Function Documentation

30.19.3.1 `void Fl_Counter::draw () [protected, virtual]`

Draw the widget.

Never call this function directly. FLTK will schedule redrawing whenever needed. If your widget must be redrawn as soon as possible, call `redraw()` instead.

Override this function to draw your own widgets.

Implements `Fl_Widget`.

References `Fl_Widget::active_r()`, `Fl_Widget::box()`, `Fl_Widget::color()`, `Fl_Widget::damage()`, `Fl_Widget::draw_box()`, `Fl_Widget::draw_focus()`, `FL_ALIGN_CENTER`, `FL_BACKGROUND2_COLOR`, `fl_color()`, `FL_DOWN_BOX`, `FL_NORMAL_COUNTER`, `FL_THIN_DOWN_BOX`, `FL_THIN_UP_BOX`, `FL_UP_BOX`, `Fl::focus()`, `Fl_Valuator::format()`, `Fl_Widget::h()`, `Fl_Widget::labelcolor()`, `text-color()`, `textfont()`, `textsize()`, `Fl_Widget::type()`, `Fl_Widget::w()`, `Fl_Widget::x()`, and `Fl_Widget::y()`.

30.19.3.2 `int Fl_Counter::handle (int event) [virtual]`

Handles the specified event.

You normally don't call this method directly, but instead let FLTK do it when the user interacts with the widget.

When implemented in a new widget, this function must return 0 if the widget does not use the event or 1 otherwise.

Most of the time, you want to call the inherited `handle()` method in your overridden method so that you don't short-circuit events that you don't handle. In this last case you should return the callee retval.

Parameters:

- ← `event` the kind of event received

Return values:

- 0** if the event was not used or understood
- 1** if the event was used and can be deleted

See also:

[Fl_Event](#)

Reimplemented from [Fl_Widget](#).

References Fl::add_timeout(), Fl_Valuator::clamp(), Fl::event_key(), FL_DRAG, FL_ENTER, FL_FOCUS, FL_KEYBOARD, FL_LEAVE, FL_Left, FL_PUSH, FL_RELEASE, FL_Right, FL_UNFOCUS, Fl::focus(), Fl_Valuator::handle_drag(), Fl_Valuator::handle_push(), Fl_Valuator::handle_release(), Fl_Valuator::increment(), Fl_Widget::redraw(), Fl::remove_timeout(), Fl_Valuator::value(), and Fl::visible_focus().

30.19.3.3 void Fl_Counter::lstep (double *a*) [inline]

Sets the increment for the large step buttons.

The default value is 1.0.

Parameters:

← *a* large step increment.

30.19.3.4 void Fl_Counter::step (double *a*) [inline]

Sets the increment for the normal step buttons.

Parameters:

← *a* normal step increment.

Reimplemented from [Fl_Valuator](#).

References Fl_Valuator::step().

30.19.3.5 void Fl_Counter::step (double *a*, double *b*) [inline]

Sets the increments for the normal and large step buttons.

Parameters:

← *a,b* normal and large step increments.

References Fl_Valuator::step().

The documentation for this class was generated from the following files:


- [Fl_Counter.H](#)
- [Fl_Counter.cxx](#)

30.20 Fl_Dial Class Reference

The [Fl_Dial](#) widget provides a circular dial to control a single floating point value.

```
#include <Fl_Dial.H>
```

Inheritance diagram for [Fl_Dial](#)::



Public Member Functions

- int [handle](#) (int)
Allow subclasses to handle event based on current position and size.
- [Fl_Dial](#) (int x, int y, int w, int h, const char *l=0)
Creates a new [Fl_Dial](#) widget using the given position, size, and label string.
- short [angle1](#) () const
Sets Or gets the angles used for the minimum and maximum values.
- void [angle1](#) (short a)
See short [angle1\(\)](#) const.
- short [angle2](#) () const
See short [angle1\(\)](#) const.
- void [angle2](#) (short a)
See short [angle1\(\)](#) const.
- void [angles](#) (short a, short b)
See short [angle1\(\)](#) const.

Protected Member Functions

- void [draw](#) (int X, int Y, int W, int H)
Draws dial at given position and size.
- int [handle](#) (int event, int X, int Y, int W, int H)
Allows subclasses to handle event based on given position and size.

- void [draw\(\)](#)
Draws dial at current position and size.

30.20.1 Detailed Description

The [Fl_Dial](#) widget provides a circular dial to control a single floating point value.

Figure 30.11: Fl_Dial

Use [type\(\)](#) to set the type of the dial to:

- FL_NORMAL_DIAL - Draws a normal dial with a knob.
- FL_LINE_DIAL - Draws a dial with a line.
- FL_FILL_DIAL - Draws a dial with a filled arc.

30.20.2 Constructor & Destructor Documentation

30.20.2.1 [Fl_Dial::Fl_Dial \(int X, int Y, int W, int H, const char * l = 0\)](#)

Creates a new [Fl_Dial](#) widget using the given position, size, and label string.

Creates a new [Fl_Dial](#) widget using the given position, size, and label string.

The default type is FL_NORMAL_DIAL.

References [Fl_Widget::box\(\)](#), [FL_INACTIVE_COLOR](#), and [Fl_Widget::selection_color\(\)](#).

30.20.3 Member Function Documentation

30.20.3.1 [short Fl_Dial::angle1 \(\) const \[inline\]](#)

Sets Or gets the angles used for the minimum and maximum values.

The default values are 45 and 315 (0 degrees is straight down and the angles progress clockwise). Normally angle1 is less than angle2, but if you reverse them the dial moves counter-clockwise.

30.20.3.2 void Fl_Dial::draw (int *X*, int *Y*, int *W*, int *H*) [protected]

Draws dial at given position and size.

Parameters:

← *X,Y,W,H* position and size

References _FL_ROUND_UP_BOX, Fl_Widget::active_r(), Fl_Widget::box(), Fl::box_dh(), Fl::box_dw(), Fl::box_dx(), Fl::box_dy(), Fl_Widget::color(), Fl_Widget::damage(), Fl_Widget::draw_box(), fl_arc(), fl_begin_loop(), fl_begin_polygon(), fl_circle(), fl_color(), fl_end_loop(), fl_end_polygon(), FL_FILL_DIAL, FL_FOREGROUND_COLOR, fl_pie(), fl_pop_matrix(), fl_push_matrix(), fl_rotate(), fl_scale(), fl_translate(), fl_vertex(), Fl_Valuator::maximum(), Fl_Valuator::minimum(), Fl_Widget::selection_color(), Fl_Widget::type(), and Fl_Valuator::value().

30.20.3.3 int Fl_Dial::handle (int *event*, int *X*, int *Y*, int *W*, int *H*) [protected]

Allows subclasses to handle event based on given position and size.

Parameters:

← *event,X,Y,W,H* event to handle, related position and size.

References Fl_Valuator::clamp(), Fl::event_x(), Fl::event_y(), FL_DRAG, FL_ENTER, FL_LEAVE, FL_PUSH, FL_RELEASE, Fl_Valuator::handle_drag(), Fl_Valuator::handle_push(), Fl_Valuator::handle_release(), Fl_Valuator::maximum(), Fl_Valuator::minimum(), Fl_Valuator::round(), and Fl_Valuator::value().

Referenced by handle().

The documentation for this class was generated from the following files:


- [Fl_Dial.H](#)
- [Fl_Dial.cxx](#)

30.21 Fl_Double_Window Class Reference

The [Fl_Double_Window](#) provides a double-buffered window.

```
#include <Fl_Double_Window.h>
```

Inheritance diagram for Fl_Double_Window::

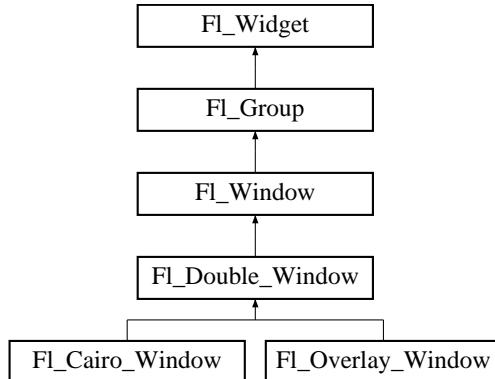

Public Member Functions

- void [show \(\)](#)

Put the window on the screen.

- void [show \(int a, char **b\)](#)

See virtual void [Fl_Window::show\(\)](#).

- void [flush \(\)](#)

Forces the window to be redrawn.

- void [resize \(int, int, int, int\)](#)

Changes the size and position of the window.

- void [hide \(\)](#)

Remove the window from the screen.

- [~Fl_Double_Window \(\)](#)

The destructor also deletes all the children.

- [Fl_Double_Window \(int W, int H, const char *l=0\)](#)

Creates a new [Fl_Double_Window](#) widget using the given position, size, and label (title) string.

- [Fl_Double_Window \(int X, int Y, int W, int H, const char *l=0\)](#)

*See [Fl_Double_Window::Fl_Double_Window\(int w, int h, const char *label = 0\)](#).*

Protected Member Functions

- void [flush \(int eraseoverlay\)](#)
Forces the window to be redrawn.

Protected Attributes

- char [force_doublebuffering_](#)
Force double buffering, even if the OS already buffers windows (overlays need that on MacOS and Windows2000).

30.21.1 Detailed Description

The [Fl_Double_Window](#) provides a double-buffered window.

If possible this will use the X double buffering extension (Xdbe). If not, it will draw the window data into an off-screen pixmap, and then copy it to the on-screen window.

It is highly recommended that you put the following code before the first [show\(\)](#) of *any* window in your program:

```
Fl::visual(Fl_DOUBLE | Fl_INDEX)
```

This makes sure you can use Xdbe on servers where double buffering does not exist for every visual.

30.21.2 Constructor & Destructor Documentation

30.21.2.1 [Fl_Double_Window::~Fl_Double_Window \(\)](#)

The destructor *also deletes all the children.*

This allows a whole tree to be deleted at once, without having to keep a pointer to all the children in the user code.

References [hide\(\)](#).

30.21.3 Member Function Documentation

30.21.3.1 [void Fl_Double_Window::flush \(int eraseoverlay\) \[protected\]](#)

Forces the window to be redrawn.

Parameters:

← *eraseoverlay* non-zero to erase overlay, zero to ignore

[Fl_Overlay_Window](#) relies on flush(1) copying the back buffer to the front everywhere, even if [damage\(\) == 0](#), thus erasing the overlay, and leaving the clip region set to the entire window.

References [Fl_Widget::clear_damage\(\)](#), [Fl_Widget::damage\(\)](#), [Fl_Window::draw\(\)](#), [fl_clip_box\(\)](#), [fl_clip_region\(\)](#), [fl_restore_clip\(\)](#), [force_doublebuffering_](#), [Fl_Widget::h\(\)](#), [Fl_Window::make_current\(\)](#), and [Fl_Widget::w\(\)](#).

30.21.3.2 void Fl_Double_Window::hide () [virtual]

Remove the window from the screen.

If the window is already hidden or has not been shown then this does nothing and is harmless.

Reimplemented from [Fl_Widget](#).

Reimplemented in [Fl_Overlay_Window](#).

Referenced by [Fl_Help_Dialog::hide\(\)](#), [Fl_File_Chooser::hide\(\)](#), and [~Fl_Double_Window\(\)](#).

30.21.3.3 void Fl_Double_Window::resize (int, int, int, int) [virtual]

Changes the size and position of the window.

If [shown\(\)](#) is true, these changes are communicated to the window server (which may refuse that size and cause a further resize). If [shown\(\)](#) is false, the size and position are used when [show\(\)](#) is called. See [Fl_Group](#) for the effect of resizing on the child widgets.

You can also call the [Fl_Widget](#) methods [size\(x,y\)](#) and [position\(w,h\)](#), which are inline wrappers for this virtual function.

A top-level window can not force, but merely suggest a position and size to the operating system. The window manager may not be willing or able to display a window at the desired position or with the given dimensions. It is up to the application developer to verify window parameters after the resize request.

Reimplemented from [Fl_Widget](#).

Reimplemented in [Fl_Overlay_Window](#).

References [Fl_Widget::h\(\)](#), and [Fl_Widget::w\(\)](#).

Referenced by [Fl_Help_Dialog::resize\(\)](#).

30.21.3.4 void Fl_Double_Window::show () [virtual]

Put the window on the screen.

Usually this has the side effect of opening the display. The second form is used for top-level windows and allow standard arguments to be parsed from the command-line.

If the window is already shown then it is restored and raised to the top. This is really convenient because your program can call [show\(\)](#) at any time, even if the window is already up. It also means that [show\(\)](#) serves the purpose of [raise\(\)](#) in other toolkits.

Reimplemented from [Fl_Widget](#).

Reimplemented in [Fl_Overlay_Window](#).

Referenced by [Fl_Overlay_Window::show\(\)](#), [Fl_Help_Dialog::show\(\)](#), and [Fl_File_Chooser::show\(\)](#).

The documentation for this class was generated from the following files:

- [Fl_Double_Window.H](#)
- [Fl_Double_Window.cxx](#)

30.22 Fl_End Class Reference

This is a dummy class that allows you to end a [Fl_Group](#) in a constructor list of a class::

```
#include <Fl_Group.H>
```

Public Member Functions

- [Fl_End \(\)](#)
All it does is calling [Fl_Group::current\(\)](#)->[end\(\)](#).

30.22.1 Detailed Description

This is a dummy class that allows you to end a [Fl_Group](#) in a constructor list of a class::

```
class MyClass {
    Fl_Group group;
    Fl_Button button_in_group;
    Fl_End end;
    Fl_Button button_outside_group;
    MyClass();
};

MyClass::MyClass() :
    group(10,10,100,100),
    button_in_group(20,20,60,30),
    end(),
    button_outside_group(10,120,60,30)
{ }
```

The documentation for this class was generated from the following file:


- [Fl_Group.H](#)

30.23 Fl_File_Browser Class Reference

The [Fl_File_Browser](#) widget displays a list of filenames, optionally with file-specific icons.

```
#include <Fl_File_Browser.H>
```

Inheritance diagram for Fl_File_Browser::

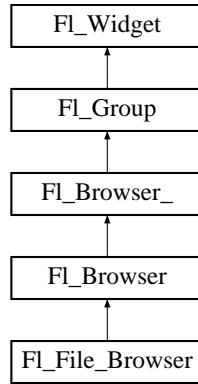

Public Types

- enum { **FILES**, **DIRECTORIES** }

Public Member Functions

- [Fl_File_Browser](#) (int, int, int, int, const char *==0)
The constructor creates the [Fl_File_Browser](#) widget at the specified position and size.
- [uchar iconsize \(\) const](#)
Sets or gets the size of the icons.
- [void iconsize \(uchar s\)](#)
Sets or gets the size of the icons.
- [void filter \(const char *pattern\)](#)
Sets or gets the filename filter.
- [const char * filter \(\) const](#)
Sets or gets the filename filter.
- [int load \(const char *directory, Fl_File_Sort_F *sort=fl_numericsort\)](#)
Loads the specified directory into the browser.
- [Fl_Fontsize fontsize \(\) const](#)
Gets the default text size for the lines in the browser.
- [void fontsize \(Fl_Fontsize s\)](#)
Sets the default text size to size s.

- int **filetype** () const
Sets or gets the file browser type, FILES or DIRECTORIES.
- void **filetype** (int t)
Sets or gets the file browser type, FILES or DIRECTORIES.

30.23.1 Detailed Description

The [Fl_File_Browser](#) widget displays a list of filenames, optionally with file-specific icons.

30.23.2 Constructor & Destructor Documentation

30.23.2.1 **Fl_File_Browser::Fl_File_Browser (int X, int Y, int W, int H, const char * l = 0)**

The constructor creates the [Fl_File_Browser](#) widget at the specified position and size.

The destructor destroys the widget and frees all memory that has been allocated.

References [textsize\(\)](#).

30.23.3 Member Function Documentation

30.23.3.1 **void Fl_File_Browser::filetype (int t) [inline]**

Sets or gets the file browser type, FILES or DIRECTORIES.

When set to FILES, both files and directories are shown. Otherwise only directories are shown.

30.23.3.2 **int Fl_File_Browser::filetype () const [inline]**

Sets or gets the file browser type, FILES or DIRECTORIES.

When set to FILES, both files and directories are shown. Otherwise only directories are shown.

Referenced by [Fl_File_Chooser::type\(\)](#).

30.23.3.3 **const char* Fl_File_Browser::filter () const [inline]**

Sets or gets the filename filter.

The pattern matching uses the [fl_filename_match\(\)](#) function in FLTK.

30.23.3.4 **void Fl_File_Browser::filter (const char * pattern)**

Sets or gets the filename filter.

The pattern matching uses the [fl_filename_match\(\)](#) function in FLTK.

Referenced by [Fl_File_Chooser::filter\(\)](#), and [Fl_File_Chooser::rescan_keep_filename\(\)](#).

30.23.3.5 void Fl_File_Browser::iconsize (uchar s) [inline]

Sets or gets the size of the icons.

The default size is 20 pixels.

References Fl_Widget::redraw().

30.23.3.6 uchar Fl_File_Browser::iconsize () const [inline]

Sets or gets the size of the icons.

The default size is 20 pixels.

Referenced by Fl_File_Chooser::iconsize().

30.23.3.7 int Fl_File_Browser::load (const char * *directory*, Fl_File_Sort_F * *sort* = fl_numericsort)

Loads the specified directory into the browser.

If icons have been loaded then the correct icon is associated with each file in the list.

The sort argument specifies a sort function to be used with fl_filename_list().

References Fl_Browser::clear(), Fl_Group::find(), Fl_File_Icon::find(), Fl_Browser::insert(), and Fl_File_Icon::type().

Referenced by Fl_File_Chooser::rescan(), and Fl_File_Chooser::rescan_keep_filename().

The documentation for this class was generated from the following files:

- [Fl_File_Browser.H](#)
- [Fl_File_Browser.cxx](#)

30.24 Fl_File_Chooser Class Reference

The [Fl_File_Chooser](#) widget displays a standard file selection dialog that supports various selection modes.

Public Types

- enum { **SINGLE** = 0, **MULTI** = 1, **CREATE** = 2, **DIRECTORY** = 4 }

Public Member Functions

- [**Fl_File_Chooser**](#) (const char *d, const char *p, int t, const char *title)
The constructor creates the [Fl_File_Chooser](#) dialog shown.
- [**~Fl_File_Chooser**](#) ()
Destroys the widget and frees all memory used by it.
- void [**callback**](#) (void(*cb)([Fl_File_Chooser](#) *, void *), void *d=0)
Sets the file chooser callback cb and associated data d.
- void [**color**](#) ([Fl_Color](#) c)
Sets or gets the background color of the [Fl_File_Browser](#) list.
- [**Fl_Color color**](#) ()
Sets or gets the background color of the [Fl_File_Browser](#) list.
- int [**count**](#) ()
Returns the number of selected files.
- void [**directory**](#) (const char *d)
Sets or gets the current directory.
- char * [**directory**](#) ()
Sets or gets the current directory.
- void [**filter**](#) (const char *p)
Sets or gets the current filename filter patterns.
- const char * [**filter**](#) ()
*See void [`filter\(const char *pattern\)`](#).*
- int [**filter_value**](#) ()
Sets or gets the current filename filter selection.
- void [**filter_value**](#) (int f)
Sets or gets the current filename filter selection.
- void [**hide**](#) ()
Hides the [Fl_File_Chooser](#) window.

- **void iconszie (uchar s)**
Sets or gets the size of the icons in the Fl_File_Browser.
- **uchar iconszie ()**
Sets or gets the size of the icons in the Fl_File_Browser.
- **void label (const char *l)**
Sets or gets the title bar text for the Fl_File_Chooser.
- **const char * label ()**
Sets or gets the title bar text for the Fl_File_Chooser.
- **void ok_label (const char *l)**
Sets or gets the label for the "ok" button in the Fl_File_Chooser.
- **const char * ok_label ()**
Sets or gets the label for the "ok" button in the Fl_File_Chooser.
- **void preview (int e)**
Enable or disable the preview tile.
- **int preview () const**
Returns the current state of the preview box.
- **void rescan ()**
Reloads the current directory in the Fl_File_Browser.
- **void rescan_keep_filename ()**
Rescan the current directory without clearing the filename, then select the file if it is in the list.
- **void show ()**
Shows the Fl_File_Chooser window.
- **int shown ()**
Returns non-zero if the file chooser main window `show()` has been called (but not `hide()`) see Fl_Window::shown().
- **void textcolor (Fl_Color c)**
Sets or gets the current Fl_File_Browser text color.
- **Fl_Color textcolor ()**
Sets or gets the current Fl_File_Browser text color.
- **void textfont (Fl_Font f)**
Sets or gets the current Fl_File_Browser text font.
- **Fl_Font textfont ()**
Sets or gets the current Fl_File_Browser text font.
- **void textsize (Fl_Fontsize s)**

Sets or gets the current [Fl_File_Browser](#) text size.

- [Fl_Fontsize](#) `textsize ()`

Sets or gets the current [Fl_File_Browser](#) text size.

- `void type (int t)`

Sets or gets the current type of [Fl_File_Chooser](#).

- `int type ()`

Sets or gets the current type of [Fl_File_Chooser](#).

- `void * user_data () const`

Gets the file chooser user data d.

- `void user_data (void *d)`

Sets the file chooser user data d.

- `const char * value (int f=1)`

*See `const char *value(const char *pathname)`.*

- `void value (const char *filename)`

Sets or gets the current value of the selected file.

- `int visible ()`

Returns 1 if the [Fl_File_Chooser](#) window is visible.

- [Fl_Widget](#) * `add_extra (Fl_Widget *gr)`

Adds extra widget at the bottom of [Fl_File_Chooser](#) window.

Public Attributes

- [Fl_Button](#) * `newButton`

The "new directory" button is exported so that application developers can control the appearance and use.

- [Fl_Check_Button](#) * `previewButton`

The "preview" button is exported so that application developers can control the appearance and use.

Static Public Attributes

- `static const char * add_favorites_label = "Add to Favorites"`

[standard text may be customized at run-time]

- `static const char * all_files_label = "All Files (*)"`

[standard text may be customized at run-time]

- `static const char * custom_filter_label = "Custom Filter"`

[standard text may be customized at run-time]

- static const char * **existing_file_label** = "Please choose an existing file!"
[standard text may be customized at run-time]
- static const char * **favorites_label** = "Favorites"
[standard text may be customized at run-time]
- static const char * **filename_label** = "Filename:"
[standard text may be customized at run-time]
- static const char * **filesystems_label** = "File Systems"
[standard text may be customized at run-time]
- static const char * **manage_favorites_label** = "Manage Favorites"
[standard text may be customized at run-time]
- static const char * **new_directory_label** = "New Directory?"
[standard text may be customized at run-time]
- static const char * **new_directory_tooltip** = "Create a new directory."
[standard text may be customized at run-time]
- static const char * **preview_label** = "Preview"
[standard text may be customized at run-time]
- static const char * **save_label** = "Save"
[standard text may be customized at run-time]
- static const char * **show_label** = "Show:"
[standard text may be customized at run-time]
- static Fl_File_Sort_F * **sort** = fl_numericsort
the sort function that is used when loading the contents of a directory.

Related Functions

(Note that these are not member functions.)

- void **fl_file_chooser_callback** (void(*cb)(const char *))
- void **fl_file_chooser_ok_label** (const char *l)
- char * **fl_file_chooser** (const char *message, const char *pat, const char *fname, int relative)
- char * **fl_dir_chooser** (const char *message, const char *fname, int relative)

30.24.1 Detailed Description

The [Fl_File_Chooser](#) widget displays a standard file selection dialog that supports various selection modes.



Figure 30.12: `Fl_File_Chooser`

The [Fl_File_Chooser](#) class also exports several static values that may be used to localize or customize the appearance of all file chooser dialogs:

Member	Default value
<code>addFavorites_label</code>	"Add to Favorites"
<code>allFiles_label</code>	"All Files (*)"
<code>customFilter_label</code>	"Custom Filter"
<code>existingFile_label</code>	"Please choose an existing file!"
<code>favorites_label</code>	"Favorites"
<code>filename_label</code>	"Filename:"
<code>filesystems_label</code>	"My Computer" (WIN32) "File Systems" (all others)
<code>manageFavorites_label</code>	"Manage Favorites"
<code>newDirectory_label</code>	"New Directory?"
<code>newDirectory_tooltip</code>	"Create a new directory."
<code>preview_label</code>	"Preview"
<code>save_label</code>	"Save"
<code>show_label</code>	"Show:"
<code>sort</code>	<code>fl_numericsort</code>

The [Fl_File_Chooser::sort](#) member specifies the sort function that is used when loading the contents of a directory and can be customized at run-time.

The [Fl_File_Chooser](#) class also exports the [Fl_File_Chooser::newButton](#) and [Fl_File_Chooser::previewButton](#) widgets so that application developers can control their appearance and use. For more complex customization, consider copying the FLTK file chooser code and changing it accordingly.

30.24.2 Constructor & Destructor Documentation

30.24.2.1 [Fl_File_Chooser::Fl_File_Chooser \(const char * pathname, const char * pattern, int type, const char * title\)](#)

The constructor creates the [Fl_File_Chooser](#) dialog shown.

The pathname argument can be a directory name or a complete file name (in which case the corresponding file is highlighted in the list and in the filename input field.)

The pattern argument can be a NULL string or "*" to list all files, or it can be a series of descriptions and filter strings separated by tab characters (\t). The format of filters is either "Description text (patterns)" or just "patterns". A file chooser that provides filters for HTML and image files might look like:

```
"HTML Files (*.html) \tImage Files (*.{bmp,gif,jpg,png})"
```

The file chooser will automatically add the "All Files (*)" pattern to the end of the string you pass if you do not provide one. The first filter in the string is the default filter.

See the FLTK documentation on [fl_filename_match\(\)](#) for the kinds of pattern strings that are supported.

The type argument can be one of the following:

- SINGLE - allows the user to select a single, existing file.
- MULTI - allows the user to select one or more existing files.
- CREATE - allows the user to select a single, existing file or specify a new filename.
- DIRECTORY - allows the user to select a single, existing directory.

The title argument is used to set the title bar text for the [Fl_File_Chooser](#) window.

References [Fl_Widget::align\(\)](#), [Fl_Widget::box\(\)](#), [Fl_Widget::callback\(\)](#), [Fl_Group::current\(\)](#), [Fl_Button::down_box\(\)](#), [Fl_Menu_::down_box\(\)](#), [Fl_Group::end\(\)](#), [favorites_label](#), [filename_label](#), [filter\(\)](#), [FL_ALIGN_CLIP](#), [FL_ALIGN_INSIDE](#), [FL_ALIGN_LEFT](#), [FL_ALIGN_RIGHT](#), [FL_BORDER_BOX](#), [fl_cancel](#), [FL_DOWN_BOX](#), [fl_ok](#), [FL_WHEN_CHANGED](#), [FL_WHEN_ENTER_KEY](#), [Fl_Preferences::get\(\)](#), [Fl::h\(\)](#), [Fl_Widget::h\(\)](#), [Fl_Window::hotspot\(\)](#), [Fl_Widget::image\(\)](#), [Fl_Window::label\(\)](#), [Fl_Widget::label\(\)](#), [Fl_Widget::labelfont\(\)](#), [Fl_Widget::labelsize\(\)](#), [manage_favorites_label](#), [new_directory_tooltip](#), [newButton](#), [preview\(\)](#), [preview_label](#), [previewButton](#), [Fl_Group::resizable\(\)](#), [save_label](#), [Fl_Window::set_modal\(\)](#), [Fl_Button::shortcut\(\)](#), [show_label](#), [Fl_Window::size_range\(\)](#), [Fl_Widget::tooltip\(\)](#), [type\(\)](#), [Fl_Widget::type\(\)](#), [Fl_Widget::user_data\(\)](#), [value\(\)](#), [Fl_Button::value\(\)](#), [Fl::w\(\)](#), [Fl_Widget::w\(\)](#), [Fl_Widget::when\(\)](#), and [Fl_Widget::window\(\)](#).

30.24.2.2 [Fl_File_Chooser::~Fl_File_Chooser \(\)](#)

Destroys the widget and frees all memory used by it.

References [Fl_Group::remove\(\)](#), and [Fl::remove_timeout\(\)](#).

30.24.3 Member Function Documentation

30.24.3.1 `Fl_Widget * Fl_File_Chooser::add_extra (Fl_Widget * gr)`

Adds extra widget at the bottom of `Fl_File_Chooser` window.

Returns pointer for previous extra widget or NULL if not set previously. If argument is NULL only remove previous extra widget.

Note:

`Fl_File_Chooser` does **not** delete extra widget in destructor! To prevent memory leakage, don't forget to delete unused extra widgets

References `Fl_Group::add()`, `Fl_Widget::h()`, `Fl_Widget::position()`, `Fl_Group::remove()`, `Fl_Group::resizable()`, `Fl_Widget::size()`, `Fl_Widget::w()`, and `Fl_Widget::y()`.

30.24.3.2 `Fl_Color Fl_File_Chooser::color ()`

Sets or gets the background color of the `Fl_File_Browser` list.

References `Fl_Widget::color()`.

30.24.3.3 `void Fl_File_Chooser::color (Fl_Color c)`

Sets or gets the background color of the `Fl_File_Browser` list.

References `Fl_Widget::color()`.

30.24.3.4 `int Fl_File_Chooser::count ()`

Returns the number of selected files.

References `Fl_Browser::selected()`, `Fl_Browser::size()`, and `Fl_File_Input::value()`.

30.24.3.5 `const char * Fl_File_Chooser::directory ()`

Sets or gets the current directory.

Referenced by `value()`.

30.24.3.6 `void Fl_File_Chooser::directory (const char * pathname)`

Sets or gets the current directory.

References `rescan()`, and `shown()`.

Referenced by `fl_file_chooser()`.

30.24.3.7 `void Fl_File_Chooser::filter (const char * pattern)`

Sets or gets the current filename filter patterns.

The filter patterns use fl_filename_match(). Multiple patterns can be used by separating them with tabs, like "`*.jpg\t*.png\t*.gif\t*`". In addition, you can provide human-readable labels with the patterns inside parenthesis, like "`JPEG Files (*.jpg)\tPNG Files (*.png)\tGIF Files (*.gif)\tAll Files (*)`" .

Use filter(NULL) to show all files.

References Fl_Menu_::add(), all_files_label, Fl_Menu_::clear(), custom_filter_label, and Fl_Choice::value().

Referenced by fl_dir_chooser(), and fl_file_chooser().

30.24.3.8 void Fl_File_Chooser::filter_value (int *f*)

Sets or gets the current filename filter selection.

References Fl_Choice::value().

30.24.3.9 int Fl_File_Chooser::filter_value ()

Sets or gets the current filename filter selection.

References Fl_Choice::value().

30.24.3.10 void Fl_File_Chooser::hide ()

Hides the [Fl_File_Chooser](#) window.

References Fl_Double_Window::hide().

30.24.3.11 uchar Fl_File_Chooser::iconsize ()

Sets or gets the size of the icons in the [Fl_File_Browser](#).

By default the icon size is set to 1.5 times the [textsize\(\)](#).

References Fl_File_Browser::iconsize().

30.24.3.12 void Fl_File_Chooser::iconsize (uchar *s*)

Sets or gets the size of the icons in the [Fl_File_Browser](#).

By default the icon size is set to 1.5 times the [textsize\(\)](#).

References Fl_File_Browser::iconsize().

30.24.3.13 const char * Fl_File_Chooser::label ()

Sets or gets the title bar text for the [Fl_File_Chooser](#).

References Fl_Window::label().

30.24.3.14 void Fl_File_Chooser::label (const char * *l*)

Sets or gets the title bar text for the [Fl_File_Chooser](#).

References [Fl_Window::label\(\)](#).

Referenced by [fl_dir_chooser\(\)](#), and [fl_file_chooser\(\)](#).

30.24.3.15 int Fl_File_Chooser::preview () const [inline]

Returns the current state of the preview box.

Referenced by [Fl_File_Chooser\(\)](#).

30.24.3.16 void Fl_File_Chooser::preview (int e)

Enable or disable the preview tile.

1 = enable preview, 0 = disable preview.

References [Fl_Preferences::flush\(\)](#), [Fl_Widget::h\(\)](#), [Fl_Widget::hide\(\)](#), [Fl_Group::init_sizes\(\)](#), [Fl_Widget::parent\(\)](#), [previewButton](#), [Fl_Widget::redraw\(\)](#), [Fl_Widget::resize\(\)](#), [Fl_Browser::resize\(\)](#), [Fl_Preferences::set\(\)](#), [Fl_Widget::show\(\)](#), [Fl_Button::value\(\)](#), [Fl_Widget::w\(\)](#), [Fl_Widget::x\(\)](#), and [Fl_Widget::y\(\)](#).

30.24.3.17 void Fl_File_Chooser::rescan ()

Reloads the current directory in the [Fl_File_Browser](#).

References [Fl_Widget::activate\(\)](#), [Fl_Widget::deactivate\(\)](#), [Fl_File_Browser::load\(\)](#), sort, and [Fl_File_Input::value\(\)](#).

Referenced by [directory\(\)](#), and [rescan_keep_filename\(\)](#).

30.24.3.18 void Fl_File_Chooser::show ()

Shows the [Fl_File_Chooser](#) window.

References [Fl::flush\(\)](#), [Fl_Window::hotspot\(\)](#), [rescan_keep_filename\(\)](#), [Fl_Double_Window::show\(\)](#), and [Fl_Widget::take_focus\(\)](#).

Referenced by [fl_dir_chooser\(\)](#), and [fl_file_chooser\(\)](#).

30.24.3.19 Fl_Color Fl_File_Chooser::textcolor ()

Sets or gets the current [Fl_File_Browser](#) text color.

References [Fl_Browser::textcolor\(\)](#).

30.24.3.20 void Fl_File_Chooser::textcolor (Fl_Color c)

Sets or gets the current [Fl_File_Browser](#) text color.

References [Fl_Browser::textcolor\(\)](#).

30.24.3.21 Fl_Font Fl_File_Chooser::textfont ()

Sets or gets the current [Fl_File_Browser](#) text font.

References Fl_Browser_::textfont().

30.24.3.22 void Fl_File_Chooser::textfont (Fl_Font *f*)

Sets or gets the current [Fl_File_Browser](#) text font.

References Fl_Browser_::textfont().

30.24.3.23 Fl_Fontsize Fl_File_Chooser::textsize ()

Sets or gets the current [Fl_File_Browser](#) text size.

References Fl_File_Browser::textsize().

30.24.3.24 void Fl_File_Chooser::textsize (Fl_Fontsize *s*)

Sets or gets the current [Fl_File_Browser](#) text size.

References Fl_File_Browser::textsize().

30.24.3.25 int Fl_File_Chooser::type ()

Sets or gets the current type of [Fl_File_Chooser](#).

Referenced by Fl_File_Chooser().

30.24.3.26 void Fl_File_Chooser::type (int *t*)

Sets or gets the current type of [Fl_File_Chooser](#).

References Fl_Widget::activate(), Fl_Widget::deactivate(), Fl_File_Browser::filetype(), FL_HOLD_BROWSER, FL_MULTI_BROWSER, newButton, and Fl_Widget::type().

Referenced by fl_dir_chooser(), and fl_file_chooser().

30.24.3.27 void Fl_File_Chooser::value (const char * *pathname*)

Sets or gets the current value of the selected file.

In the second form, *file* is a 1-based index into a list of file names. The number of selected files is returned by [Fl_File_Chooser::count\(\)](#).

This sample code loops through all selected files:

```
// Get list of filenames user selected from a MULTI chooser
for ( int t=1; t>=chooser->count(); t++ ) {
    const char *filename = chooser->value(t);
    ...
}
```

References Fl_Widget::activate(), Fl_Widget::deactivate(), Fl_Browser_::deselect(), directory(), Fl_Input_::position(), Fl_Widget::redraw(), Fl_Browser::select(), Fl_Browser::size(), Fl_Browser::text(), Fl_Browser::topline(), and Fl_File_Input::value().

30.24.3.28 int Fl_File_Chooser::visible ()

Returns 1 if the [Fl_File_Chooser](#) window is visible.

References [Fl_Widget::visible\(\)](#).

The documentation for this class was generated from the following files:

- [Fl_File_Chooser.H](#)
- [Fl_File_Chooser.cxx](#)
- [Fl_File_Chooser2.cxx](#)
- [fl_file_dir.cxx](#)

30.25 Fl_File_Icon Class Reference

The `Fl_File_Icon` class manages icon images that can be used as labels in other widgets and as icons in the FileBrowser widget.

```
#include <Fl_File_Icon.h>
```

Public Types

- enum {
ANY, PLAIN, FIFO, DEVICE,
LINK, DIRECTORY }
- enum {
END, COLOR, LINE, CLOSEDLINE,
POLYGON, OUTLINEPOLYGON, VERTEX }

Public Member Functions

- `Fl_File_Icon (const char *p, int t, int nd=0, short *d=0)`
Creates a new `Fl_File_Icon` with the specified information.
- `~Fl_File_Icon ()`
The destructor destroys the icon and frees all memory that has been allocated for it.
- `short * add (short d)`
Adds a keyword value to the icon array, returning a pointer to it.
- `short * add_color (Fl_Color c)`
Adds a color value to the icon array, returning a pointer to it.
- `short * add_vertex (int x, int y)`
Adds a vertex value to the icon array, returning a pointer to it.
- `short * add_vertex (float x, float y)`
Adds a vertex value to the icon array, returning a pointer to it.
- `void clear ()`
Clears all icon data from the icon.
- `void draw (int x, int y, int w, int h, Fl_Color ic, int active=1)`
Draws an icon in the indicated area.
- `void label (Fl_Widget *w)`
Applies the icon to the widget, registering the `Fl_File_Icon` label type as needed.
- `void load (const char *f)`
Loads the specified icon image.
- `int load_fti (const char *fti)`

Loads an SGI icon file.

- int **load_image** (const char **i*)

Load an image icon file from an image filename.

- **Fl_File_Icon * next** ()

Returns next file icon object.

- const char * **pattern** ()

Returns the filename matching pattern for the icon.

- int **size** ()

Returns the number of words of data used by the icon.

- int **type** ()

Returns the filetype associated with the icon, which can be one of the following:

- short * **value** ()

Returns the data array for the icon.

Static Public Member Functions

- static void **labeltype** (const **Fl_Label** **o*, int *x*, int *y*, int *w*, int *h*, **Fl_Align** *a*)

Draw the icon label.

- static **Fl_File_Icon * find** (const char *filename, int filetype=ANY)

Finds an icon that matches the given filename and file type.

- static **Fl_File_Icon * first** ()

Returns a pointer to the first icon in the list.

- static void **load_system_icons** (void)

Loads all system-defined icons.

30.25.1 Detailed Description

The **Fl_File_Icon** class manages icon images that can be used as labels in other widgets and as icons in the FileBrowser widget.

30.25.2 Constructor & Destructor Documentation

30.25.2.1 **Fl_File_Icon::Fl_File_Icon** (const char **p*, int *t*, int *nd* = 0, short **d* = 0)

Creates a new **Fl_File_Icon** with the specified information.

Parameters:

← *p* filename pattern

← *t* file type
← *nd* number of data values
← *d* data values

Referenced by load_system_icons().

30.25.3 Member Function Documentation

30.25.3.1 short * Fl_File_Icon::add (short *d*)

Adds a keyword value to the icon array, returning a pointer to it.

Parameters:

← *d* data value

30.25.3.2 short* Fl_File_Icon::add_color (Fl_Color *c*) [inline]

Adds a color value to the icon array, returning a pointer to it.

Parameters:

← *c* color value

Referenced by load_fti(), and load_image().

30.25.3.3 short* Fl_File_Icon::add_vertex (float *x*, float *y*) [inline]

Adds a vertex value to the icon array, returning a pointer to it.

The floating point version goes from 0.0 to 1.0. The origin (0.0) is in the lower-lefthand corner of the icon.

Parameters:

← *x,y* vertex coordinates

30.25.3.4 short* Fl_File_Icon::add_vertex (int *x*, int *y*) [inline]

Adds a vertex value to the icon array, returning a pointer to it.

The integer version accepts coordinates from 0 to 10000. The origin (0.0) is in the lower-lefthand corner of the icon.

Parameters:

← *x,y* vertex coordinates

Referenced by load_fti(), and load_image().

30.25.3.5 void Fl_File_Icon::clear () [inline]

Clears all icon data from the icon.

30.25.3.6 void Fl_File_Icon::draw (int *x*, int *y*, int *w*, int *h*, Fl_Color *ic*, int *active* = 1)

Draws an icon in the indicated area.

Parameters:

- ← *x,y,w,h* position and size
- ← *ic* icon color
- ← *active* status, default is active [non-zero]

References fl_begin_complex_polygon(), fl_begin_line(), fl_begin_loop(), fl_color(), fl_end_complex_polygon(), fl_end_line(), fl_end_loop(), fl_end_polygon(), FL_ICON_COLOR, fl_pop_matrix(), fl_push_matrix(), fl_scale(), fl_translate(), and fl_vertex().

Referenced by labeltype().

30.25.3.7 Fl_File_Icon * Fl_File_Icon::find (const char **filename*, int *filetype* = ANY) [static]

Finds an icon that matches the given filename and file type.

Parameters:

- ← *filename* name of file
- ← *filetype* enumerated file type

Returns:

matching file icon or NULL

References next_, pattern_, and type_.

Referenced by Fl_File_Browser::load().

30.25.3.8 static Fl_File_Icon* Fl_File_Icon::first () [inline, static]

Returns a pointer to the first icon in the list.

30.25.3.9 void Fl_File_Icon::label (Fl_Widget **w*)

Applies the icon to the widget, registering the [Fl_File_Icon](#) label type as needed.

Parameters:

- ← *w* widget for which this icon will become the label

References _FL_ICON_LABEL, Fl_Widget::label(), labeltype(), and Fl::set_labeltype().

30.25.3.10 void Fl_File_Icon::labeltype (const Fl_Label **o*, int *x*, int *y*, int *w*, int *h*, Fl_Align *a*) [static]

Draw the icon label.

Parameters:

- ← *o* label data
- ← *x,y,w,h* position and size of label
- ← *a* label alignment [not used]

References Fl_Label::color, draw(), and Fl_Label::value.

Referenced by label().

30.25.3.11 void Fl_File_Icon::load (const char **f*)

Loads the specified icon image.

The format is deduced from the filename.

Parameters:

- ← *f* filename

References load_fti(), load_image(), and Fl::warning.

30.25.3.12 int Fl_File_Icon::load_fti (const char **fti*)

Loads an SGI icon file.

Parameters:

- ← *fti* icon filename

Returns:

0 on success, non-zero on error

References add_color(), add_vertex(), Fl::error, and FL_ICON_COLOR.

Referenced by load(), and load_system_icons().

30.25.3.13 int Fl_File_Icon::load_image (const char **ifile*)

Load an image icon file from an image filename.

Parameters:

- ← *ifile* image filename

Returns:

0 on success, non-zero on error

References add_color(), add_vertex(), Fl_Image::count(), Fl_Image::d(), Fl_Image::data(), Fl_Shared_Image::get(), Fl_Image::h(), Fl_Image::id(), Fl_Shared_Image::release(), and Fl_Image::w().

Referenced by load(), and load_system_icons().

30.25.3.14 void Fl_File_Icon::load_system_icons (void) [static]

Loads all system-defined icons.

This call is useful when using the FileChooser widget and should be used when the application starts:

```
Fl_File_Icon::load_system_icons();
```

References Fl_File_Icon(), load_fti(), load_image(), and next_.

30.25.3.15 Fl_File_Icon* Fl_File_Icon::next () [inline]

Returns next file icon object.

See [Fl_File_Icon::first\(\)](#)

30.25.3.16 const char* Fl_File_Icon::pattern () [inline]

Returns the filename matching pattern for the icon.

30.25.3.17 int Fl_File_Icon::size () [inline]

Returns the number of words of data used by the icon.

30.25.3.18 int Fl_File_Icon::type () [inline]

Returns the filetype associated with the icon, which can be one of the following:..

- Fl_File_Icon::ANY, any kind of file.
- Fl_File_Icon::PLAIN, plain files.
- Fl_File_Icon::FIFO, named pipes.
- Fl_File_Icon::DEVICE, character and block devices.
- Fl_File_Icon::LINK, symbolic links.
- Fl_File_Icon::DIRECTORY, directories.

Referenced by Fl_File_Browser::load().

30.25.3.19 short* Fl_File_Icon::value () [inline]

Returns the data array for the icon.

The documentation for this class was generated from the following files:


- [Fl_File_Icon.H](#)
- [Fl_File_Icon.cxx](#)
- [Fl_File_Icon2.cxx](#)

30.26 Fl_File_Input Class Reference

This widget displays a pathname in a text input field.

```
#include <Fl_File_Input.h>
```

Inheritance diagram for Fl_File_Input::



Public Member Functions

- **[Fl_File_Input](#)** (int X, int Y, int W, int H, const char *L=0)
Creates a new [Fl_File_Input](#) widget using the given position, size, and label string.
- virtual int **[handle](#)** (int event)
Handle events in the widget.
- virtual void **[draw](#)** ()
Draws the file input widget.
- **[Fl_Boxtype](#)** **[down_box](#)** () const
Gets the box type used for the navigation bar.
- void **[down_box](#)** (**[Fl_Boxtype](#)** b)
Sets the box type to use for the navigation bar.
- **[Fl_Color](#)** **[errorcolor](#)** () const
Gets the current error color.
- void **[errorcolor](#)** (**[Fl_Color](#)** c)
Sets the current error color to c.
- int **[value](#)** (const char *str)
Sets the value of the widget given a new string value.
- int **[value](#)** (const char *str, int len)
Sets the value of the widget given a new string value and its length.
- const char * **[value](#)** ()
Returns the current value, which is a pointer to an internal buffer and is valid only until the next event is handled.

30.26.1 Detailed Description

This widget displays a pathname in a text input field.

A navigation bar located above the input field allows the user to navigate upward in the directory tree. You may want to handle FL_WHEN_CHANGED events for tracking text changes and also FL_WHEN_RELEASE for button release when changing to parent dir. FL_WHEN_RELEASE callback won't be called if the directory clicked is the same that the current one.




Figure 30.13: Fl_File_Input

Note:

As all [Fl_Input](#) derived objects, [Fl_File_Input](#) may call its callback when loosing focus (see [FL_UNFOCUS](#)) to update its state like its cursor shape. One resulting side effect is that you should call [clear_changed\(\)](#) early in your callback to avoid reentrant calls if you plan to show another window or dialog box in the callback.

30.26.2 Constructor & Destructor Documentation

30.26.2.1 [Fl_File_Input::Fl_File_Input \(int X, int Y, int W, int H, const char * L = 0\)](#)

Creates a new [Fl_File_Input](#) widget using the given position, size, and label string.

The default boxtyle is [FL_DOWN_BOX](#).

Parameters:

← *X,Y,W,H* position and size of the widget

← *L* widget label, default is no label

References [down_box\(\)](#), and [FL_UP_BOX](#).

30.26.3 Member Function Documentation

30.26.3.1 [void Fl_File_Input::down_box \(Fl_Boxtype b\) \[inline\]](#)

Sets the box type to use for the navigation bar.

30.26.3.2 [Fl_Boxtype Fl_File_Input::down_box \(\) const \[inline\]](#)

Gets the box type used for the navigation bar.

Referenced by [Fl_File_Input\(\)](#).

30.26.3.3 [Fl_Color Fl_File_Input::errorcolor \(\) const \[inline\]](#)

Gets the current error color.

Todo

Better docs for [Fl_File_Input::errorcolor\(\)](#) - is it even used?

30.26.3.4 int Fl_File_Input::handle (int *event*) [virtual]

Handle events in the widget.

Return non zero if event is handled.

Parameters:

← *event*

Reimplemented from [Fl_Input](#).

References [Fl_Widget::active_r\(\)](#), [Fl_Window::cursor\(\)](#), [Fl_Widget::damage\(\)](#), [Fl::event_y\(\)](#), [FL_DRAG](#), [FL_ENTER](#), [FL_MOVE](#), [FL_PUSH](#), [FL_RELEASE](#), [Fl_Input::handle\(\)](#), [Fl_Widget::window\(\)](#), and [Fl_Widget::y\(\)](#).

30.26.3.5 int Fl_File_Input::value (const char * *str*, int *len*)

Sets the value of the widget given a new string value and its length.

Returns non 0 on success.

Parameters:

← *str* new string value

← *len* length of value

Reimplemented from [Fl_Input_](#).

References [Fl_Widget::damage\(\)](#), and [value\(\)](#).

30.26.3.6 int Fl_File_Input::value (const char * *str*)

Sets the value of the widget given a new string value.

Returns non 0 on success.

Parameters:

← *str* new string value

Reimplemented from [Fl_Input_](#).

References [Fl_Widget::damage\(\)](#), and [value\(\)](#).

Referenced by [Fl_File_Chooser::count\(\)](#), [Fl_File_Chooser::rescan\(\)](#), [Fl_File_Chooser::rescan_keep_filename\(\)](#), and [Fl_File_Chooser::value\(\)](#).

The documentation for this class was generated from the following files:


- [Fl_File_Input.H](#)
- [Fl_File_Input.cxx](#)

30.27 Fl_Fill_Dial Class Reference

Draws a dial with a filled arc.

```
#include <Fl_Fill_Dial.H>
```

Inheritance diagram for Fl_Fill_Dial::



Public Member Functions

- [Fl_Fill_Dial \(int x, int y, int w, int h, const char *l=0\)](#)
Creates a filled dial, also setting its type to FL_FILL_DIAL.

30.27.1 Detailed Description

Draws a dial with a filled arc.

30.27.2 Constructor & Destructor Documentation

30.27.2.1 [Fl_Fill_Dial::Fl_Fill_Dial \(int x, int y, int w, int h, const char * l = 0\)](#) [inline]

Creates a filled dial, also setting its type to FL_FILL_DIAL.

References FL_FILL_DIAL, and Fl_Widget::type().

The documentation for this class was generated from the following file:


- [Fl_Fill_Dial.H](#)

30.28 Fl_Fill_Slider Class Reference

Widget that draws a filled horizontal slider, useful as a progress or value meter.

```
#include <Fl_Fill_Slider.H>
```

Inheritance diagram for Fl_Fill_Slider::



Public Member Functions

- [Fl_Fill_Slider](#) (int x, int y, int w, int h, const char *l=0)
Creates the slider from its position,size and optional title.

30.28.1 Detailed Description

Widget that draws a filled horizontal slider, useful as a progress or value meter.

30.28.2 Constructor & Destructor Documentation

30.28.2.1 [Fl_Fill_Slider::Fl_Fill_Slider \(int x, int y, int w, int h, const char * l = 0\)](#) [inline]

Creates the slider from its position,size and optional title.

References Fl_Widget::type().

The documentation for this class was generated from the following file:


- [Fl_Fill_Slider.H](#)

30.29 Fl_Float_Input Class Reference

The [Fl_Float_Input](#) class is a subclass of [Fl_Input](#) that only allows the user to type floating point numbers (sign, digits, decimal point, more digits, 'E' or 'e', sign, digits).

```
#include <Fl_Float_Input.h>
```

Inheritance diagram for Fl_Float_Input::



Public Member Functions

- [Fl_Float_Input](#) (int X, int Y, int W, int H, const char *l=0)

Creates a new [Fl_Float_Input](#) widget using the given position, size, and label string.

30.29.1 Detailed Description

The [Fl_Float_Input](#) class is a subclass of [Fl_Input](#) that only allows the user to type floating point numbers (sign, digits, decimal point, more digits, 'E' or 'e', sign, digits).

30.29.2 Constructor & Destructor Documentation

30.29.2.1 [Fl_Float_Input::Fl_Float_Input](#) (int X, int Y, int W, int H, const char * l = 0) [inline]

Creates a new [Fl_Float_Input](#) widget using the given position, size, and label string.

The default boxtyle is FL_DOWN_BOX.

Inherited destructor destroys the widget and any value associated with it

References [Fl_Widget::type\(\)](#).

The documentation for this class was generated from the following file:

- [Fl_Float_Input.H](#)

30.30 Fl_Font_Descriptor Class Reference

This a structure for an actual system font, with junk to help choose it and info on character sizes.

```
#include <Fl_Font.H>
```

Public Attributes

- `Fl_Font_Descriptor * next`
linked list for this Fl_Fontdesc

30.30.1 Detailed Description

This a structure for an actual system font, with junk to help choose it and info on character sizes.

Each Fl_Fontdesc has a linked list of these. These are created the first time each system font/size combination is used.

The documentation for this class was generated from the following file:


- `Fl_Font.H`

30.31 Fl_FormsBitmap Class Reference

Forms compatibility Bitmap Image Widget.

```
#include <Fl_FormsBitmap.H>
```

Inheritance diagram for Fl_FormsBitmap::



Public Member Functions

- **Fl_FormsBitmap (Fl_Boxtype, int, int, int, int, const char *=0)**
Creates a bitmap widget from a box type, position, size and optional label specification.
- void **set (int W, int H, const uchar *bits)**
Sets a new bitmap bits with size W,H.
- void **bitmap (Fl_Bitmap *B)**
Sets a new bitmap.
- **Fl_Bitmap * bitmap () const**
Gets a the current associated [Fl_Bitmap](#) objects.

Protected Member Functions

- void **draw ()**
Draws the bitmap and its associated box.

30.31.1 Detailed Description

Forms compatibility Bitmap Image Widget.

30.31.2 Member Function Documentation

30.31.2.1 **Fl_Bitmap* Fl_FormsBitmap::bitmap () const [inline]**

Gets a the current associated [Fl_Bitmap](#) objects.

Referenced by [set\(\)](#).

30.31.2.2 **void Fl_FormsBitmap::bitmap (Fl_Bitmap * B) [inline]**

Sets a new bitmap.

30.31.2.3 void Fl_FormsBitmap::draw (void) [protected, virtual]

Draws the bitmap and its associated box.

Implements [Fl_Widget](#).

References [Fl_Widget::box\(\)](#), [Fl_Widget::color\(\)](#), [Fl_Bitmap::draw\(\)](#), [Fl_Widget::draw_box\(\)](#), [Fl_Widget::draw_label\(\)](#), [fl_color\(\)](#), [Fl_Widget::h\(\)](#), [Fl_Widget::selection_color\(\)](#), [Fl_Widget::w\(\)](#), [Fl_Widget::x\(\)](#), and [Fl_Widget::y\(\)](#).

30.31.2.4 void Fl_FormsBitmap::set (int W, int H, const uchar * bits)

Sets a new bitmap bits with size W,H.

Deletes the previous one.

References [bitmap\(\)](#).

The documentation for this class was generated from the following files:


- [Fl_FormsBitmap.H](#)
- [forms_bitmap.cxx](#)

30.32 Fl_FormsPixmap Class Reference

Forms pixmap drawing routines.

```
#include <Fl_FormsPixmap.H>
```

Inheritance diagram for Fl_FormsPixmap::



Public Member Functions

- **Fl_FormsPixmap (Fl_Boxtype t, int X, int Y, int W, int H, const char *L=0)**
Creates a new [Fl_FormsPixmap](#) widet using the given box type, position, size and label string.
- void **set (char *const *bits)**
Set/create the internal pixmap using raw data.
- void **Pixmap (Fl_Pixmap *B)**
Set the internal pixmap pointer to an existing pixmap.
- **Fl_Pixmap * Pixmap () const**
Get the internal pixmap pointer.

Protected Member Functions

- void **draw ()**
Draw the widget.

30.32.1 Detailed Description

Forms pixmap drawing routines.

30.32.2 Constructor & Destructor Documentation

30.32.2.1 **Fl_FormsPixmap::Fl_FormsPixmap (Fl_Boxtype t, int X, int Y, int W, int H, const char * L = 0)**

Creates a new [Fl_FormsPixmap](#) widet using the given box type, position, size and label string.

Parameters:

← *t* box type

← *X,Y,W,H* position and size
← *L* widget label, default is no label

References Fl_Widget::align(), Fl_Widget::box(), Fl_Widget::color(), and FL_ALIGN_BOTTOM.

30.32.3 Member Function Documentation

30.32.3.1 void Fl_FormsPixmap::draw () [protected, virtual]

Draw the widget.

Never call this function directly. FLTK will schedule redrawing whenever needed. If your widget must be redrawn as soon as possible, call [redraw\(\)](#) instead.

Override this function to draw your own widgets.

Implements [Fl_Widget](#).

References Fl_Widget::box(), Fl_Widget::color(), Fl_Pixmap::draw(), Fl_Widget::draw_box(), Fl_Widget::draw_label(), fl_color(), Fl_Widget::h(), Fl_Widget::selection_color(), Fl_Widget::w(), Fl_Widget::x(), and Fl_Widget::y().

30.32.3.2 Fl_Pixmap* Fl_FormsPixmap::Pixmap () const [inline]

Get the internal pixmap pointer.

30.32.3.3 void Fl_FormsPixmap::Pixmap (Fl_Pixmap **B*) [inline]

Set the internal pixmap pointer to an existing pixmap.

Parameters:

← *B* existing pixmap

30.32.3.4 void Fl_FormsPixmap::set (char *const **bits*)

Set/create the internal pixmap using raw data.

Parameters:

← *bits* raw data

The documentation for this class was generated from the following files:


- [Fl_FormsPixmap.H](#)
- formsPixmap.cxx

30.33 Fl_Free Class Reference

Emulation of the Forms "free" widget.

```
#include <Fl_Free.H>
```

Inheritance diagram for Fl_Free::



Public Member Functions

- int [handle \(int e\)](#)
Handles the specified event.
- [Fl_Free \(uchar t, int X, int Y, int W, int H, const char *L, FL_HANDLEPTR hdl\)](#)
Create a new [Fl_Free](#) widget with type, position, size, label and handler.
- [~Fl_Free \(\)](#)
The destructor will call the handle function with the event [FL_FREE_MEM](#).

Protected Member Functions

- void [draw \(\)](#)
Draw the widget.

30.33.1 Detailed Description

Emulation of the Forms "free" widget.

This emulation allows the free demo to run, and appears to be useful for porting programs written in Forms which use the free widget or make subclasses of the Forms widgets.

There are five types of free, which determine when the handle function is called:

- [FL_NORMAL_FREE](#) normal event handling.
- [FL_SLEEPING_FREE](#) deactivates event handling (widget is inactive).
- [FL_INPUT_FREE](#) accepts [FL_FOCUS](#) events.
- [FL_CONTINUOUS_FREE](#) sets a timeout callback 100 times a second and provides an [FL_STEP](#) event. This has obvious detrimental effects on machine performance.
- [FL_ALL_FREE](#) same as [FL_INPUT_FREE](#) and [FL_CONTINUOUS_FREE](#).

30.33.2 Constructor & Destructor Documentation

30.33.2.1 Fl_Free::Fl_Free (uchar *t*, int *X*, int *Y*, int *W*, int *H*, const char * *L*, FL_HANDLEPTR *hdl*)

Create a new [Fl_Free](#) widget with type, position, size, label and handler.

Parameters:

- ← *t* type
- ← *X,Y,W,H* position and size
- ← *L* widget label
- ← *hdl* handler function

The constructor takes both the type and the handle function. The handle function should be declared as follows:

```
int handle_function(Fl_Widget *w,
                  int event,
                  float event_x,
                  float event_y,
                  char key)
```

This function is called from the the [handle\(\)](#) method in response to most events, and is called by the [draw\(\)](#) method.

The event argument contains the event type:

```
// old event names for compatibility:
#define FL_MOUSE          FL_DRAG
#define FL_DRAW            0
#define FL_STEP             9
#define FL_FREEMEM         12
#define FL_FREEZE          FL_UNMAP
#define FL_THAW             FL_MAP
```

References [Fl::add_timeout\(\)](#), [FL_ALL_FREE](#), [FL_CONTINUOUS_FREE](#), [FL_SLEEPING_FREE](#), [Fl_Widget::INACTIVE](#), [Fl_Widget::set_flag\(\)](#), and [Fl_Widget::type\(\)](#).

30.33.3 Member Function Documentation

30.33.3.1 void Fl_Free::draw () [protected, virtual]

Draw the widget.

Never call this function directly. FLTK will schedule redrawing whenever needed. If your widget must be redrawn as soon as possible, call [redraw\(\)](#) instead.

Override this function to draw your own widgets.

Implements [Fl_Widget](#).

References [FL_DRAW](#).

30.33.3.2 int Fl_Free::handle (int *event*) [virtual]

Handles the specified event.

You normally don't call this method directly, but instead let FLTK do it when the user interacts with the widget.

When implemented in a new widget, this function must return 0 if the widget does not use the event or 1 otherwise.

Most of the time, you want to call the inherited [handle\(\)](#) method in your overriden method so that you don't short-circuit events that you don't handle. In this last case you should return the callee retval.

Parameters:

← *event* the kind of event received

Return values:

0 if the event was not used or understood

1 if the event was used and can be deleted

See also:

[Fl_Event](#)

Reimplemented from [Fl_Widget](#).

References [Fl_Widget::do_callback\(\)](#), [Fl::event_button\(\)](#), [Fl::event_key\(\)](#), [Fl::event_x\(\)](#), [Fl::event_y\(\)](#), [FL_ALL_FREE](#), [FL_DRAG](#), [FL_FOCUS](#), [FL_INPUT_FREE](#), [FL_PUSH](#), [FL_RELEASE](#), [FL_SHORTCUT](#), and [Fl_Widget::type\(\)](#).

The documentation for this class was generated from the following files:


- [Fl_Free.H](#)
- [forms_free.cxx](#)

30.34 Fl_GIF_Image Class Reference

The [Fl_GIF_Image](#) class supports loading, caching, and drawing of Compuserve GIFSM images.

```
#include <Fl_GIF_Image.h>
```

Inheritance diagram for Fl_GIF_Image::



Public Member Functions

- [Fl_GIF_Image](#) (const char *filename)
The constructor loads the named GIF image.

30.34.1 Detailed Description

The [Fl_GIF_Image](#) class supports loading, caching, and drawing of Compuserve GIFSM images.

The class loads the first image and supports transparency.

30.34.2 Constructor & Destructor Documentation

30.34.2.1 Fl_GIF_Image::Fl_GIF_Image (const char * *infilename*)

The constructor loads the named GIF image.

The inherited destructor free all memory and server resources that are used by the image.

References [Fl_Image::d\(\)](#), [Fl_Image::data\(\)](#), [Fl::error](#), [Fl_Image::h\(\)](#), [Fl_Image::w\(\)](#), and [Fl::warning](#).

The documentation for this class was generated from the following files:


- [Fl_GIF_Image.H](#)
- [Fl_GIF_Image.cxx](#)

30.35 Fl_Gl_Window Class Reference

The [Fl_Gl_Window](#) widget sets things up so OpenGL works, and also keeps an OpenGL "context" for that window, so that changes to the lighting and projection may be reused between redraws.

```
#include <Fl_Gl_Window.h>
```

Inheritance diagram for Fl_Gl_Window::

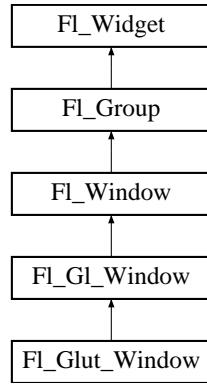

Public Member Functions

- void [show \(\)](#)
Put the window on the screen.
- void [show \(int a, char **b\)](#)
See virtual void [Fl_Window::show\(\)](#).
- void [flush \(\)](#)
Forces the window to be drawn, this window is also made current and calls [draw\(\)](#).
- void [hide \(\)](#)
Hides the window and destroys the OpenGL context.
- void [resize \(int, int, int, int\)](#)
Changes the size and position of the window.
- char [valid \(\) const](#)
Is turned off when FLTK creates a new context for this window or when the window resizes, and is turned on after [draw\(\)](#) is called.
- void [valid \(char v\)](#)
See char [Fl_Gl_Window::valid\(\) const](#).
- void [invalidate \(\)](#)
The [invalidate\(\)](#) method turns off [valid\(\)](#) and is equivalent to calling [value\(0\)](#).
- char [context_valid \(\) const](#)
Will only be set if the OpenGL context is created or recreated.

- void **context_valid** (char v)

See char Fl_Gl_Window::context_valid() const.

- int **can_do** ()

Returns non-zero if the hardware supports the given or current OpenGL mode.

- Fl_Mode **mode** () const

Set or change the OpenGL capabilites of the window.

- int **mode** (int a)

See Fl_Mode mode() const.

- int **mode** (const int *a)

See Fl_Mode mode() const.

- void * **context** () const

void See void context(void v, int destroy_flag)*

- void **context** (void *, int destroy_flag=0)

Returns or sets a pointer to the GLContext that this window is using.

- void **make_current** ()

The make_current() method selects the OpenGL context for the widget.

- void **swap_buffers** ()

The swap_buffers() method swaps the back and front buffers.

- void **ortho** ()

Set the projection so 0,0 is in the lower left of the window and each pixel is 1 unit wide/tall.

- int **can_do_overlay** ()

Returns true if the hardware overlay is possible.

- void **redraw_overlay** ()

This method causes draw_overlay to be called at a later time.

- void **hide_overlay** ()

Hides the window if it is not this window, does nothing in WIN32.

- void **make_overlay_current** ()

The make_overlay_current() method selects the OpenGL context for the widget's overlay.

- ~**Fl_Gl_Window** ()

The destructor removes the widget and destroys the OpenGL context associated with it.

- **Fl_Gl_Window** (int W, int H, const char *l=0)

Creates a new Fl_Gl_Window widget using the given size, and label string.

- **Fl_Gl_Window** (int X, int Y, int W, int H, const char *l=0)

Creates a new [Fl_Gl_Window](#) widget using the given position, size, and label string.

- virtual void [draw\(\)](#)

You must subclass [Fl_Gl_Window](#) and provide an implementation for [draw\(\)](#).

Static Public Member Functions

- static int [can_do](#) (int m)

Returns non-zero if the hardware supports the given or current OpenGL mode.

- static int [can_do](#) (const int *m)

Returns non-zero if the hardware supports the given or current OpenGL mode.

Friends

- class [_Fl_Gl_Overlay](#)

30.35.1 Detailed Description

The [Fl_Gl_Window](#) widget sets things up so OpenGL works, and also keeps an OpenGL "context" for that window, so that changes to the lighting and projection may be reused between redraws.

[Fl_Gl_Window](#) also flushes the OpenGL streams and swaps buffers after [draw\(\)](#) returns.

OpenGL hardware typically provides some overlay bit planes, which are very useful for drawing UI controls atop your 3D graphics. If the overlay hardware is not provided, FLTK tries to simulate the overlay. This works pretty well if your graphics are double buffered, but not very well for single-buffered.

Please note that the FLTK drawing and clipping functions will not work inside an [Fl_Gl_Window](#). All drawing should be done using OpenGL calls exclusively. Even though [Fl_Gl_Window](#) is derived from [Fl_Group](#), it is not useful to add other FLTK Widgets as children, unless those Widgets are modified to draw using OpenGL calls.

30.35.2 Constructor & Destructor Documentation

30.35.2.1 [Fl_Gl_Window::Fl_Gl_Window](#) (int W, int H, const char * l = 0) [inline]

Creates a new [Fl_Gl_Window](#) widget using the given size, and label string.

The default boxtyle is [FL_NO_BOX](#). The default mode is [FL_RGB|FL_DOUBLE|FL_DEPTH](#).

30.35.2.2 [Fl_Gl_Window::Fl_Gl_Window](#) (int X, int Y, int W, int H, const char * l = 0) [inline]

Creates a new [Fl_Gl_Window](#) widget using the given position, size, and label string.

The default boxtyle is [FL_NO_BOX](#). The default mode is [FL_RGB|FL_DOUBLE|FL_DEPTH](#).

30.35.3 Member Function Documentation

30.35.3.1 int Fl_Gl_Window::can_do () [inline]

Returns non-zero if the hardware supports the given or current OpenGL mode.

References can_do().

Referenced by can_do().

30.35.3.2 static int Fl_Gl_Window::can_do (const int * m) [inline, static]

Returns non-zero if the hardware supports the given or current OpenGL mode.

References can_do().

Referenced by can_do().

30.35.3.3 static int Fl_Gl_Window::can_do (int m) [inline, static]

Returns non-zero if the hardware supports the given or current OpenGL mode.

References can_do().

Referenced by can_do().

30.35.3.4 int Fl_Gl_Window::can_do_overlay ()

Returns true if the hardware overlay is possible.

If this is false, FLTK will try to simulate the overlay, with significant loss of update speed. Calling this will cause FLTK to open the display.

30.35.3.5 void Fl_Gl_Window::context (void * v, int destroy_flag = 0)

Returns or sets a pointer to the GLContext that this window is using.

This is a system-dependent structure, but it is portable to copy the context from one window to another. You can also set it to NULL, which will force FLTK to recreate the context the next time [make_current\(\)](#) is called, this is useful for getting around bugs in OpenGL implementations.

If *destroy_flag* is true the context will be destroyed by fltk when the window is destroyed, or when the mode() is changed, or the next time context(x) is called.

30.35.3.6 char Fl_Gl_Window::context_valid () const [inline]

Will only be set if the OpenGL context is created or recreated.

It differs from [Fl_Gl_Window::valid\(\)](#) which is also set whenever the context changes size.

Referenced by flush(), invalidate(), and make_current().

30.35.3.7 void Fl_Gl_Window::draw (void) [virtual]

You **must** subclass [Fl_Gl_Window](#) and provide an implementation for [draw\(\)](#).

You may also provide an implementation of `draw_overlay()` if you want to draw into the overlay planes. You can avoid reinitializing the viewport and lights and other things by checking `valid()` at the start of `draw()` and only doing the initialization if it is false.

The `draw()` method can *only* use OpenGL calls. Do not attempt to call X, any of the functions in <FL/fl-draw.H>, or glX directly. Do not call `gl_start()` or `gl_finish()`.

If double-buffering is enabled in the window, the back and front buffers are swapped after this function is completed.

Reimplemented from [Fl_Window](#).

Reimplemented in [Fl_Glut_Window](#).

References `Fl::fatal`.

Referenced by `flush()`.

30.35.3.8 void Fl_Gl_Window::flush () [virtual]

Forces the window to be drawn, this window is also made current and calls `draw()`.

Reimplemented from [Fl_Window](#).

References `Fl_Widget::clear_damage()`, `context_valid()`, `Fl_Window::cursor()`, `Fl_Widget::damage()`, `draw()`, `Fl_Widget::h()`, `make_current()`, `swap_buffers()`, `valid()`, and `Fl_Widget::w()`.

30.35.3.9 void Fl_Gl_Window::make_current ()

The `make_current()` method selects the OpenGL context for the widget.

It is called automatically prior to the `draw()` method being called and can also be used to implement feedback and/or selection within the `handle()` method.

Reimplemented from [Fl_Window](#).

Reimplemented in [Fl_Glut_Window](#).

References `context_valid()`, `Fl_Window::current_`, `Fl_Widget::h()`, `valid()`, `Fl_Widget::w()`, `Fl_Widget::window()`, `Fl_Widget::x()`, and `Fl_Widget::y()`.

Referenced by `flush()`, and `make_overlay_current()`.

30.35.3.10 void Fl_Gl_Window::make_overlay_current ()

The `make_overlay_current()` method selects the OpenGL context for the widget's overlay.

It is called automatically prior to the `draw_overlay()` method being called and can also be used to implement feedback and/or selection within the `handle()` method.

References `make_current()`.

30.35.3.11 Fl_Mode Fl_Gl_Window::mode () const [inline]

Set or change the OpenGL capabilites of the window.

The value can be any of the following OR'd together:

- `FL_RGB` - RGB color (not indexed)

- FL_RGB8 - RGB color with at least 8 bits of each color
- FL_INDEX - Indexed mode
- FL_SINGLE - not double buffered
- FL_DOUBLE - double buffered
- FL_ACCUM - accumulation buffer
- FL_ALPHA - alpha channel in color
- FL_DEPTH - depth buffer
- FL_STENCIL - stencil buffer
- FL_MULTISAMPLE - multisample antialiasing

FL_RGB and FL_SINGLE have a value of zero, so they are "on" unless you give FL_INDEX or FL_DOUBLE.

If the desired combination cannot be done, FLTK will try turning off FL_MULTISAMPLE. If this also fails the [show\(\)](#) will call [Fl::error\(\)](#) and not show the window.

You can change the mode while the window is displayed. This is most useful for turning double-buffering on and off. Under X this will cause the old X window to be destroyed and a new one to be created. If this is a top-level window this will unfortunately also cause the window to blink, raise to the top, and be de-iconized, and the [xid\(\)](#) will change, possibly breaking other code. It is best to make the GL window a child of another window if you wish to do this!

30.35.3.12 void Fl_Gl_Window::ortho ()

Set the projection so 0,0 is in the lower left of the window and each pixel is 1 unit wide/tall.

If you are drawing 2D images, your [draw\(\)](#) method may want to call this if [valid\(\)](#) is false.

References [Fl_Widget::h\(\)](#), and [Fl_Widget::w\(\)](#).

30.35.3.13 void Fl_Gl_Window::redraw_overlay ()

This method causes [draw_overlay](#) to be called at a later time.

Initially the overlay is clear, if you want the window to display something in the overlay when it first appears, you must call this immediately after you [show\(\)](#) your window.

References [Fl_Widget::damage\(\)](#), [Fl_Widget::redraw\(\)](#), and [Fl_Window::shown\(\)](#).

30.35.3.14 void Fl_Gl_Window::resize (int, int, int, int) [virtual]

Changes the size and position of the window.

If [shown\(\)](#) is true, these changes are communicated to the window server (which may refuse that size and cause a further resize). If [shown\(\)](#) is false, the size and position are used when [show\(\)](#) is called. See [Fl_Group](#) for the effect of resizing on the child widgets.

You can also call the [Fl_Widget](#) methods [size\(x,y\)](#) and [position\(w,h\)](#), which are inline wrappers for this virtual function.

A top-level window can not force, but merely suggest a position and size to the operating system. The window manager may not be willing or able to display a window at the desired position or with the given dimensions. It is up to the application developer to verify window parameters after the resize request.

Reimplemented from [Fl_Window](#).

References [Fl_Widget::h\(\)](#), [Fl_Group::resizable\(\)](#), [valid\(\)](#), [Fl_Widget::w\(\)](#), [Fl_Widget::x\(\)](#), and [Fl_Widget::y\(\)](#).

30.35.3.15 void Fl_Gl_Window::show () [virtual]

Put the window on the screen.

Usually this has the side effect of opening the display. The second form is used for top-level windows and allow standard arguments to be parsed from the command-line.

If the window is already shown then it is restored and raised to the top. This is really convenient because your program can call [show\(\)](#) at any time, even if the window is already up. It also means that [show\(\)](#) serves the purpose of [raise\(\)](#) in other toolkits.

Reimplemented from [Fl_Window](#).

References [Fl::error](#), [Fl_Group::find\(\)](#), [Fl_Widget::set_visible\(\)](#), and [Fl_Window::shown\(\)](#).

30.35.3.16 void Fl_Gl_Window::swap_buffers ()

The [swap_buffers\(\)](#) method swaps the back and front buffers.

It is called automatically after the [draw\(\)](#) method is called.

Referenced by [flush\(\)](#).

30.35.3.17 char Fl_Gl_Window::valid () const [inline]

Is turned off when FLTK creates a new context for this window or when the window resizes, and is turned on *after* [draw\(\)](#) is called.

You can use this inside your [draw\(\)](#) method to avoid unnecessarily initializing the OpenGL context. Just do this:

```
void mywindow::draw() {
    if (!valid()) {
        glViewport(0, 0, w(), h());
        glFrustum(...);
        ...other initialization...
    }
    if (!context_valid()) {
        ...load textures, etc. ...
    }
    ... draw your geometry here ...
}
```

You can turn [valid\(\)](#) on by calling [valid\(1\)](#). You should only do this after fixing the transformation inside a [draw\(\)](#) or after [make_current\(\)](#). This is done automatically after [draw\(\)](#) returns.

Referenced by [Fl_Glut_Window::draw\(\)](#), [Fl_Glut_Window::draw_overlay\(\)](#), [flush\(\)](#), [invalidate\(\)](#), [make_current\(\)](#), and [resize\(\)](#).

The documentation for this class was generated from the following files:

- [Fl_Gl_Window.H](#)
- [Fl_Gl_Overlay.cxx](#)
- [Fl_Gl_Window.cxx](#)

30.36 Fl_Glut_Bitmap_Font Struct Reference

fltk glut font/size attributes used in the glutXXX functions

```
#include <glut.H>
```

Public Attributes

- [Fl_Font font](#)
- [Fl_Fontsize size](#)

30.36.1 Detailed Description

fltk glut font/size attributes used in the glutXXX functions

The documentation for this struct was generated from the following file:


- [glut.H](#)

30.37 Fl_Glut_Window Class Reference

GLUT is emulated using this window class and these static variables (plus several more static variables hidden in glut_compatibility.cxx):.

```
#include <glut.h>
```

Inheritance diagram for Fl_Glut_Window::

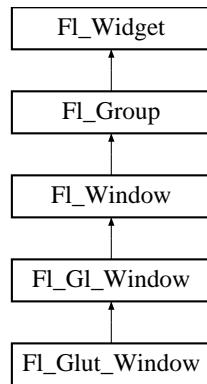

Public Member Functions

- void [make_current \(\)](#)
The [make_current\(\)](#) method selects the OpenGL context for the widget.
- [Fl_Glut_Window \(int w, int h, const char *\)](#)
Creates a glut windows, registers to the glut windows list.
- [Fl_Glut_Window \(int x, int y, int w, int h, const char *\)](#)
Creates a glut windows, registers to the glut windows list.
- [~Fl_Glut_Window \(\)](#)
Destroys the glut window, first unregister it from the glut windows list.

Public Attributes

- int **number**
- int **menu** [3]
- void(* **display**)()
- void(* **overlaydisplay**)()
- void(* **reshape**)(int w, int h)
- void(* **keyboard**)(uchar, int x, int y)
- void(* **mouse**)(int b, int state, int x, int y)
- void(* **motion**)(int x, int y)
- void(* **passivemotion**)(int x, int y)
- void(* **entry**)(int)
- void(* **visibility**)(int)
- void(* **special**)(int, int x, int y)

Protected Member Functions

- void `draw ()`

You must subclass `Fl_Gl_Window` and provide an implementation for `draw()`.

- void `draw_overlay ()`

You must implement this virtual function if you want to draw into the overlay.

- int `handle (int)`

Handles the specified event.

30.37.1 Detailed Description

GLUT is emulated using this window class and these static variables (plus several more static variables hidden in `glut_compatibility.cxx`):.

30.37.2 Constructor & Destructor Documentation

30.37.2.1 `Fl_Glut_Window::Fl_Glut_Window (int W, int H, const char * t)`

Creates a glut windows, registers to the glut windows list.

30.37.2.2 `Fl_Glut_Window::Fl_Glut_Window (int X, int Y, int W, int H, const char * t)`

Creates a glut windows, registers to the glut windows list.

30.37.3 Member Function Documentation

30.37.3.1 `void Fl_Glut_Window::draw (void) [protected, virtual]`

You **must** subclass `Fl_Gl_Window` and provide an implementation for `draw()`.

You may also provide an implementation of `draw_overlay()` if you want to draw into the overlay planes. You can avoid reinitializing the viewport and lights and other things by checking `valid()` at the start of `draw()` and only doing the initialization if it is false.

The `draw()` method can *only* use OpenGL calls. Do not attempt to call X, any of the functions in `<FL/fl_draw.H>`, or glX directly. Do not call `gl_start()` or `gl_finish()`.

If double-buffering is enabled in the window, the back and front buffers are swapped after this function is completed.

Reimplemented from `Fl_Gl_Window`.

References `Fl_Widget::h()`, `Fl_Gl_Window::valid()`, and `Fl_Widget::w()`.

30.37.3.2 `void Fl_Glut_Window::draw_overlay () [protected, virtual]`

You must implement this virtual function if you want to draw into the overlay.

The overlay is cleared before this is called. You should draw anything that is not clear using OpenGL. You must use `gl_color(i)` to choose colors (it allocates them from the colormap using system-specific calls), and remember that you are in an indexed OpenGL mode and drawing anything other than flat-shaded will probably not work.

Both this function and `Fl_Gl_Window::draw()` should check `Fl_Gl_Window::valid()` and set the same transformation. If you don't your code may not work on other systems. Depending on the OS, and on whether overlays are real or simulated, the OpenGL context may be the same or different between the overlay and main window.

Reimplemented from `Fl_Gl_Window`.

References `Fl_Widget::h()`, `Fl_Gl_Window::valid()`, and `Fl_Widget::w()`.

30.37.3.3 int Fl_Glut_Window::handle (int *event*) [protected, virtual]

Handles the specified event.

You normally don't call this method directly, but instead let FLTK do it when the user interacts with the widget.

When implemented in a new widget, this function must return 0 if the widget does not use the event or 1 otherwise.

Most of the time, you want to call the inherited `handle()` method in your overriden method so that you don't short-circuit events that you don't handle. In this last case you should return the callee retval.

Parameters:

← *event* the kind of event received

Return values:

0 if the event was not used or understood
1 if the event was used and can be deleted

See also:

[Fl_Event](#)

Reimplemented from `Fl_Window`.

References `Fl::event_button()`, `Fl::event_dy()`, `Fl::event_key()`, `Fl::event_text()`, `Fl::event_x()`, `Fl::event_y()`, `FL_DRAG`, `FL_ENTER`, `FL_F`, `FL_F_Last`, `FL_FOCUS`, `FL_HIDE`, `FL_KEYBOARD`, `FL_LEAVE`, `FL_MOUSEWHEEL`, `FL_MOVE`, `FL_PUSH`, `FL_RELEASE`, `FL_SHORTCUT`, `FL_SHOW`, `Fl_Group::focus()`, and `make_current()`.

30.37.3.4 void Fl_Glut_Window::make_current ()

The `make_current()` method selects the OpenGL context for the widget.

It is called automatically prior to the `draw()` method being called and can also be used to implement feed-back and/or selection within the `handle()` method.

Reimplemented from `Fl_Gl_Window`.

References `Fl_Window::shown()`.

Referenced by `handle()`.

The documentation for this class was generated from the following files:


- glut.H
- glut_compatibility.hxx

30.38 Fl_Group Class Reference

The [Fl_Group](#) class is the FLTK container widget.

```
#include <Fl_Group.H>
```

Inheritance diagram for Fl_Group::

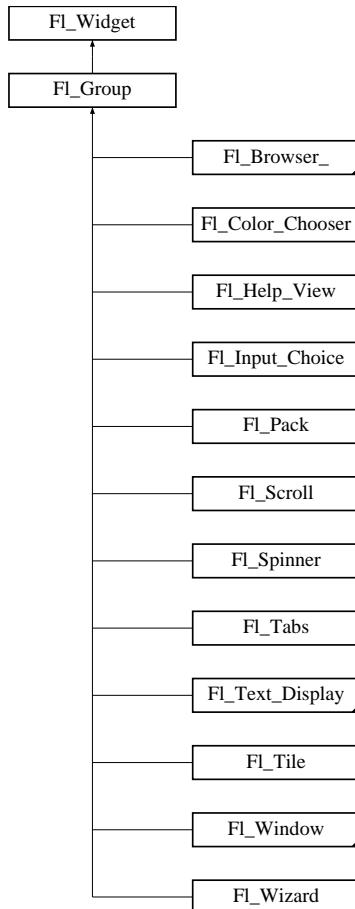

Public Member Functions

- int [handle](#) (int)
Handles the specified event.
- void [begin](#) ()
Sets the current group so you can build the widget tree by just constructing the widgets.
- void [end](#) ()
Exactly the same as `current(this->parent())`.
- int [children](#) () const
Returns how many child widgets the group has.

- **Fl_Widget * child** (int n) const
Returns array()[n].
- int **find** (const Fl_Widget *) const
Searches the child array for the widget and returns the index.
- int **find** (const Fl_Widget &o) const
*See int Fl_Group::find(const Fl_Widget *w) const.*
- Fl_Widget *const * **array** () const
Returns a pointer to the array of children.
- void **resize** (int, int, int, int)
This resizes the Fl_Group widget and all of its children.
- Fl_Group (int, int, int, int, const char *==0)
Creates a new Fl_Group widget using the given position, size, and label string.
- virtual ~**Fl_Group** ()
The destructor also deletes all the children.
- void **add** (Fl_Widget &)
The widget is removed from it's current group (if any) and then added to the end of this group.
- void **add** (Fl_Widget *o)
See void Fl_Group::add(Fl_Widget &w).
- void **insert** (Fl_Widget &, int i)
The widget is removed from it's current group (if any) and then inserted into this group.
- void **insert** (Fl_Widget &o, Fl_Widget *before)
This does insert(w, find(beforethis)).
- void **remove** (Fl_Widget &)
Removes a widget from the group but does not delete it.
- void **remove** (Fl_Widget *o)
Removes the widget o from the group.
- void **clear** ()
The clear() method deletes all child widgets from memory recursively.
- void **resizable** (Fl_Widget &o)
*See void Fl_Group::resizable(Fl_Widget *box).*
- void **resizable** (Fl_Widget *o)
The resizable widget defines the resizing box for the group.
- Fl_Widget * **resizable** () const
*See void Fl_Group::resizable(Fl_Widget *box).*

- void [add_resizable \(Fl_Widget &o\)](#)
Adds a widget to the group and makes it the resizable widget.
- void [init_sizes \(\)](#)
This resets the internal array of widget sizes and positions.
- void [focus \(Fl_Widget *W\)](#)
- [Fl_Widget *& _ddfdesign_kludge \(\)](#)
This is for forms compatibility only.
- void [forms_end \(\)](#)
This is for forms compatibility only.

Static Public Member Functions

- static [Fl_Group * current \(\)](#)
Returns the currently active group.
- static void [current \(Fl_Group *g\)](#)
*See static [Fl_Group *Fl_Group::current\(\)](#).*

Protected Types

- enum { **CLIP_CHILDREN** = 2048 }

Protected Member Functions

- void [clip_children \(int c\)](#)
The first method controls whether the group widget clips the drawing of child widgets to its bounding box.
- int [clip_children \(\)](#)
See void [Fl_Group::clip_children\(int c\)](#).
- void [draw \(\)](#)
Draw the widget.
- void [draw_child \(Fl_Widget &\) const](#)
Forces a child to redraw.
- void [draw_children \(\)](#)
This draws all children of the group.
- void [draw_outside_label \(const Fl_Widget &\) const](#)
Parents normally call this to draw outside labels of child widgets.
- void [update_child \(Fl_Widget &\) const](#)

Draws a child only if it needs it.

- `int * sizes ()`

This returns the internal array of widget sizes and positions.

30.38.1 Detailed Description

The [Fl_Group](#) class is the FLTK container widget.

It maintains an array of child widgets. These children can themselves be any widget including [Fl_Group](#). The most important subclass of [Fl_Group](#) is [Fl_Window](#), however groups can also be used to control radio buttons or to enforce resize behavior.

30.38.2 Constructor & Destructor Documentation

30.38.2.1 `Fl_Group::Fl_Group (int X, int Y, int W, int H, const char * l = 0)`

Creates a new [Fl_Group](#) widget using the given position, size, and label string.

The default boxtyle is `FL_NO_BOX`.

References `Fl_Widget::align()`, `begin()`, and `FL_ALIGN_TOP`.

30.38.2.2 `Fl_Group::~Fl_Group () [virtual]`

The destructor *also deletes all the children*.

This allows a whole tree to be deleted at once, without having to keep a pointer to all the children in the user code. A kludge has been done so the [Fl_Group](#) and all of its children can be automatic (local) variables, but you must declare the [Fl_Group](#) *first*, so that it is destroyed last.

References `clear()`.

30.38.3 Member Function Documentation

30.38.3.1 `Fl_Widget *const * Fl_Group::array () const`

Returns a pointer to the array of children.

This pointer is only valid until the next time a child is added or removed.

Referenced by `clear()`, `Fl_Tabs::draw()`, `Fl_Scroll::draw()`, `Fl_Pack::draw()`, `draw_children()`, `find()`, `forms_end()`, `Fl_Tile::handle()`, `handle()`, `Fl_Wizard::next()`, `Fl_Tile::position()`, `Fl_Wizard::prev()`, `Fl_Tile::resize()`, `Fl_Scroll::resize()`, `resize()`, `Fl_Scroll::scroll_to()`, `Fl_Button::setonly()`, `sizes()`, `Fl_Wizard::value()`, and `Fl_Tabs::value()`.

30.38.3.2 `void Fl_Group::begin ()`

Sets the current group so you can build the widget tree by just constructing the widgets.

`begin()` is automatically called by the constructor for [Fl_Group](#) (and thus for [Fl_Window](#) as well). `begin()` is exactly the same as `current(this)`.

Don't forget to [end\(\)](#) the group or window!

Referenced by [Fl_Group\(\)](#).

30.38.3.3 Fl_Widget* Fl_Group::child (int n) const [inline]

Returns [array\(\)](#)[n].

No range checking is done!

Referenced by [Fl_Scroll::clear\(\)](#), [Fl_Pack::draw\(\)](#), and [Fl_Tabs::handle\(\)](#).

30.38.3.4 void Fl_Group::clear ()

The [clear\(\)](#) method deletes all child widgets from memory recursively.

This method differs from the [remove\(\)](#) method in that it affects all child widgets and deletes them from memory.

Reimplemented in [Fl_Browser](#), [Fl_Check_Browser](#), [Fl_Input_Choice](#), and [Fl_Scroll](#).

References [array\(\)](#), [children\(\)](#), [init_sizes\(\)](#), and [Fl_Widget::parent\(\)](#).

Referenced by [Fl_Browser::~Fl_Browser\(\)](#), [Fl_Check_Browser::~Fl_Check_Browser\(\)](#), and [~Fl_Group\(\)](#).

30.38.3.5 void Fl_Group::clip_children (int c) [inline, protected]

The first method controls whether the group widget clips the drawing of child widgets to its bounding box.

The second method returns the current clipping mode.

The default is to not clip (0) the drawing of child widgets.

References [Fl_Widget::clear_flag\(\)](#), and [Fl_Widget::set_flag\(\)](#).

30.38.3.6 Fl_Group * Fl_Group::current () [static]

Returns the currently active group.

The [Fl_Widget](#) constructor automatically does [current\(\)>add\(widget\)](#) if this is not null. To prevent new widgets from being added to a group, call [Fl_Group::current\(0\)](#).

Reimplemented in [Fl_Window](#).

Referenced by [Fl_End::Fl_End\(\)](#), [Fl_File_Chooser::Fl_File_Chooser\(\)](#), [Fl_Help_Dialog::Fl_Help_Dialog\(\)](#), [Fl_Widget::Fl_Widget\(\)](#), [Fl_Tabs::handle\(\)](#), and [Fl_Menu_Item::popup\(\)](#).

30.38.3.7 void Fl_Group::draw () [protected, virtual]

Draw the widget.

Never call this function directly. FLTK will schedule redrawing whenever needed. If your widget must be redrawn as soon as possible, call [redraw\(\)](#) instead.

Override this function to draw your own widgets.

Implements [Fl_Widget](#).

Reimplemented in [Fl_Browser_](#), [Fl_Cairo_Window](#), [Fl_Gl_Window](#), [Fl_Pack](#), [Fl_Scroll](#), [Fl_Tabs](#), [Fl_Text_Display](#), [Fl_Window](#), and [Fl_Glut_Window](#).

References [Fl_Widget::damage\(\)](#), [Fl_Widget::draw_box\(\)](#), [draw_children\(\)](#), and [Fl_Widget::draw_label\(\)](#).

30.38.3.8 void Fl_Group::draw_child (Fl_Widget & widget) const [protected]

Forces a child to redraw.

This draws a child widget, if it is not clipped. The damage bits are cleared after drawing.

References [Fl_Widget::clear_damage\(\)](#), [Fl_Widget::draw\(\)](#), [fl_not_clipped\(\)](#), [FL_WINDOW](#), [Fl_Widget::h\(\)](#), [Fl_Widget::type\(\)](#), [Fl_Widget::visible\(\)](#), [Fl_Widget::w\(\)](#), [Fl_Widget::x\(\)](#), and [Fl_Widget::y\(\)](#).

Referenced by [Fl_Tabs::draw\(\)](#), [Fl_Scroll::draw\(\)](#), [Fl_Pack::draw\(\)](#), [Fl_Browser_::draw\(\)](#), and [draw_children\(\)](#).

30.38.3.9 void Fl_Group::draw_children () [protected]

This draws all children of the group.

This is useful, if you derived a widget from [Fl_Group](#) and want to draw a special border or background. You can call [draw_children\(\)](#) from the derived [draw\(\)](#) method after drawing the box, border, or background.

References [array\(\)](#), [Fl_Widget::box\(\)](#), [Fl::box_dh\(\)](#), [Fl::box_dw\(\)](#), [Fl::box_dx\(\)](#), [Fl::box_dy\(\)](#), [clip_children\(\)](#), [Fl_Widget::damage\(\)](#), [draw_child\(\)](#), [draw_outside_label\(\)](#), [fl_pop_clip\(\)](#), [fl_push_clip\(\)](#), [Fl_Widget::h\(\)](#), [update_child\(\)](#), [Fl_Widget::w\(\)](#), [Fl_Widget::x\(\)](#), and [Fl_Widget::y\(\)](#).

Referenced by [draw\(\)](#).

30.38.3.10 void Fl_Group::draw_outside_label (const Fl_Widget & widget) const [protected]

Parents normally call this to draw outside labels of child widgets.

References [Fl_Widget::align\(\)](#), [Fl_Widget::draw_label\(\)](#), [FL_ALIGN_BOTTOM](#), [FL_ALIGN_INSIDE](#), [FL_ALIGN_LEFT](#), [FL_ALIGN_RIGHT](#), [FL_ALIGN_TOP](#), [Fl_Widget::h\(\)](#), [Fl_Widget::visible\(\)](#), [Fl_Widget::w\(\)](#), [Fl_Widget::x\(\)](#), and [Fl_Widget::y\(\)](#).

Referenced by [Fl_Pack::draw\(\)](#), and [draw_children\(\)](#).

30.38.3.11 void Fl_Group::end ()

Exactly the same as current(this->parent()).

Any new widgets added to the widget tree will be added to the parent of the group.

References [Fl_Widget::parent\(\)](#).

Referenced by [Fl_Browser_::Fl_Browser_\(\)](#), [Fl_Color_Chooser::fl_color_chooser\(\)](#), [Fl_Color_Chooser::Fl_Color_Chooser\(\)](#), [Fl_End::Fl_End\(\)](#), [Fl_File_Chooser::Fl_File_Chooser\(\)](#), [Fl_Help_Dialog::Fl_Help_Dialog\(\)](#), [Fl_Help_View::Fl_Help_View\(\)](#), [Fl_Input_Choice::Fl_Input_Choice\(\)](#), [Fl_Spinner::Fl_Spinner\(\)](#), [Fl_Text_Display::Fl_Text_Display\(\)](#), [forms_end\(\)](#), and [Fl_Text_Display::handle\(\)](#).

30.38.3.12 int Fl_Group::find (const Fl_Widget * o) const

Searches the child array for the widget and returns the index.

Returns [children\(\)](#) if the widget is NULL or not found.

References [array\(\)](#).

Referenced by [insert\(\)](#), [Fl_File_Browser::load\(\)](#), [remove\(\)](#), and [Fl_Gl_Window::show\(\)](#).

30.38.3.13 void Fl_Group::focus (Fl_Widget * W) [inline]

Deprecated

This is for backwards compatibility only. You should use *W->take_focus()* instead.

See also:

[Fl_Widget::take_focus\(\)](#);

References [Fl_Widget::take_focus\(\)](#).

Referenced by [Fl_Glut_Window::handle\(\)](#), [Fl_Text_Editor::handle\(\)](#), [Fl_Text_Display::handle\(\)](#), [Fl_Tabs::handle\(\)](#), [handle\(\)](#), and [Fl_Browser_::handle\(\)](#).

30.38.3.14 int Fl_Group::handle (int event) [virtual]

Handles the specified event.

You normally don't call this method directly, but instead let FLTK do it when the user interacts with the widget.

When implemented in a new widget, this function must return 0 if the widget does not use the event or 1 otherwise.

Most of the time, you want to call the inherited [handle\(\)](#) method in your overridden method so that you don't short-circuit events that you don't handle. In this last case you should return the callee retval.

Parameters:

← *event* the kind of event received

Return values:

0 if the event was not used or understood

1 if the event was used and can be deleted

See also:

[Fl_Event](#)

Reimplemented from [Fl_Widget](#).

Reimplemented in [Fl_Browser_](#), [Fl_Check_Browser](#), [Fl_Scroll](#), [Fl_Spinner](#), [Fl_Tabs](#), [Fl_Text_Display](#), [Fl_Text_Editor](#), [Fl_Tile](#), [Fl_Window](#), and [Fl_Glut_Window](#).

References [Fl_Widget::active\(\)](#), [array\(\)](#), [Fl::belowmouse\(\)](#), [children\(\)](#), [Fl_Widget::contains\(\)](#), [Fl::event_inside\(\)](#), [Fl::event_key\(\)](#), [FL_ACTIVATE](#), [FL_DEACTIVATE](#), [FL_DND_DRAG](#), [FL_DND_ENTER](#), [FL_Down](#), [FL_DRAG](#), [FL_ENTER](#), [FL_Enter](#), [FL_FOCUS](#), [FL_HIDE](#), [FL_KEYBOARD](#), [FL_KP_Enter](#), [FL_Left](#), [FL_MOUSEWHEEL](#), [FL_MOVE](#), [FL_PUSH](#), [FL_RELEASE](#), [FL_Right](#), [FL_SHORTCUT](#), [FL_SHOW](#), [FL_UNFOCUS](#), [FL_Up](#), [focus\(\)](#), [Fl::focus\(\)](#), [Fl_Widget::handle\(\)](#), [Fl::pushed\(\)](#), [Fl_Widget::take_focus\(\)](#), [Fl_Widget::takesevents\(\)](#), and [Fl_Widget::visible\(\)](#).

Referenced by [Fl_Text_Editor::handle\(\)](#), [Fl_Text_Display::handle\(\)](#), and [Fl_Browser_::handle\(\)](#).

30.38.3.15 void Fl_Group::init_sizes ()

This resets the internal array of widget sizes and positions.

The [Fl_Group](#) widget keeps track of the original widget sizes and positions when resizing occurs so that if you resize a window back to its original size the widgets will be in the correct places. If you rearrange the widgets in your group, call this method to register the new arrangement with the [Fl_Group](#) that contains them.

If you add or remove widgets, this will be done automatically.

Note:

The internal array of widget sizes and positions will be allocated and filled when the next [resize\(\)](#) occurs.

See also:

[sizes\(\)](#)

Referenced by [clear\(\)](#), [insert\(\)](#), [Fl_File_Chooser::ok_label\(\)](#), [Fl_File_Chooser::preview\(\)](#), and [remove\(\)](#).

30.38.3.16 void Fl_Group::insert (Fl_Widget & o, Fl_Widget * before) [inline]

This does insert(w, find(beforethis)).

This will append the widget if beforethis is not in the group.

References [insert\(\)](#).

Referenced by [insert\(\)](#).

30.38.3.17 void Fl_Group::insert (Fl_Widget & o, int index)

The widget is removed from it's current group (if any) and then inserted into this group.

It is put at index n (or at the end if n >= [children\(\)](#)). This can also be used to rearrange the widgets inside a group.

References [find\(\)](#), [init_sizes\(\)](#), [Fl_Widget::parent\(\)](#), [Fl_Widget::parent_](#), and [remove\(\)](#).

Referenced by [add\(\)](#).

30.38.3.18 void Fl_Group::remove (Fl_Widget * o) [inline]

Removes the widget o from the group.

See also:

[void remove\(Fl_Widget&\)](#)

30.38.3.19 void Fl_Group::remove (Fl_Widget & o)

Removes a widget from the group but does not delete it.

This method does nothing if the widget is not a child of the group.

This method differs from the [clear\(\)](#) method in that it only affects a single widget and does not delete it from memory.

References [find\(\)](#), [init_sizes\(\)](#), and [Fl_Widget::parent_](#).

Referenced by [Fl_File_Chooser::add_extra\(\)](#), [insert\(\)](#), and [Fl_File_Chooser::~Fl_File_Chooser\(\)](#).

30.38.3.20 void Fl_Group::resizable (Fl_Widget *o) [inline]

The resizable widget defines the resizing box for the group.

When the group is resized it calculates a new size and position for all of its children. Widgets that are horizontally or vertically inside the dimensions of the box are scaled to the new size. Widgets outside the box are moved.

In these examples the gray area is the resizable:




Figure 30.14: before resize

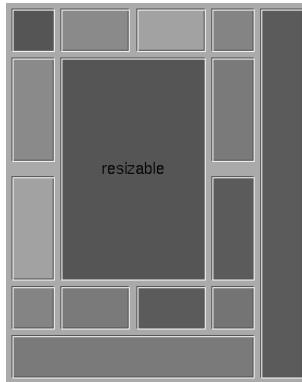


Figure 30.15: after resize

The resizable may be set to the group itself (this is the default value for an [Fl_Group](#), although NULL is the default for [Fl_Window](#) and [Fl_Pack](#)), in which case all the contents are resized. If the resizable is NULL then all widgets remain a fixed size and distance from the top-left corner.

It is possible to achieve any type of resize behavior by using an invisible [Fl_Box](#) as the resizable and/or by using a hierarchy of child [Fl_Group](#)'s.

30.38.3.21 void Fl_Group::resize (int X, int Y, int W, int H) [virtual]

This resizes the [Fl_Group](#) widget and all of its children.

The [Fl_Group](#) widget first resizes itself, and then it moves and resizes all its children according to the rules documented for [Fl_Group::resizable\(Fl_Widget*\)](#)

See also:

[Fl_Group::resizable\(Fl_Widget*\)](#)
[Fl_Group::resizable\(\)](#)
[Fl_Widget::resize\(int,int,int,int\)](#)

Reimplemented from [Fl_Widget](#).

Reimplemented in [Fl_Browser_](#), [Fl_Double_Window](#), [Fl_Gl_Window](#), [Fl_Help_View](#), [Fl_Input_Choice](#), [Fl_Overlay_Window](#), [Fl_Scroll](#), [Fl_Spinner](#), [Fl_Text_Display](#), [Fl_Tile](#), and [Fl_Window](#).

References [array\(\)](#), [FL_WINDOW](#), [Fl_Widget::h\(\)](#), [resizable\(\)](#), [Fl_Widget::resize\(\)](#), [sizes\(\)](#), [Fl_Widget::type\(\)](#), [Fl_Widget::w\(\)](#), [Fl_Widget::x\(\)](#), and [Fl_Widget::y\(\)](#).

Referenced by [Fl_Pack::draw\(\)](#), [Fl_Color_Chooser::Fl_Color_Chooser\(\)](#), [Fl_Widget::position\(\)](#), and [Fl_Widget::size\(\)](#).

30.38.3.22 int * Fl_Group::sizes () [protected]

This returns the internal array of widget sizes and positions.

If the [sizes\(\)](#) array does not exist, it will be allocated and filled with the current widget sizes and positions.

Note:

You should never need to use this method directly, unless you have special needs to rearrange the children of a [Fl_Group](#). [Fl_Tile](#) uses this to rearrange its widget positions.

Todo

should the internal representation of the [sizes\(\)](#) array be documented?

References [array\(\)](#), [FL_WINDOW](#), [Fl_Widget::h\(\)](#), [resizable\(\)](#), [Fl_Widget::type\(\)](#), [Fl_Widget::w\(\)](#), [Fl_Widget::x\(\)](#), and [Fl_Widget::y\(\)](#).

Referenced by [Fl_Tile::handle\(\)](#), [Fl_Tile::position\(\)](#), [Fl_Tile::resize\(\)](#), and [resize\(\)](#).

30.38.3.23 void Fl_Group::update_child (Fl_Widget & widget) const [protected]

Draws a child only if it needs it.

This draws a child widget, if it is not clipped *and* if any [damage\(\)](#) bits are set. The damage bits are cleared after drawing.

See also:

[Fl_Group::draw_child\(Fl_Widget& widget\) const](#)

References [Fl_Widget::clear_damage\(\)](#), [Fl_Widget::damage\(\)](#), [Fl_Widget::draw\(\)](#), [fl_not_clipped\(\)](#), [FL_WINDOW](#), [Fl_Widget::h\(\)](#), [Fl_Widget::type\(\)](#), [Fl_Widget::visible\(\)](#), [Fl_Widget::w\(\)](#), [Fl_Widget::x\(\)](#), and [Fl_Widget::y\(\)](#).

Referenced by Fl_Text_Display::draw(), Fl_Tabs::draw(), Fl_Scroll::draw(), Fl_Pack::draw(), Fl_Browser_::draw(), and draw_children().

The documentation for this class was generated from the following files:

- [Fl_Group.H](#)
- Fl_Group.cxx
- forms_compatibility.cxx

30.39 Fl_Help_Dialog Class Reference

The [Fl_Help_Dialog](#) widget displays a standard help dialog window using the [Fl_Help_View](#) widget.

Public Member Functions

- [Fl_Help_Dialog \(\)](#)

The constructor creates the dialog pictured above.

- [~Fl_Help_Dialog \(\)](#)

The destructor destroys the widget and frees all memory that has been allocated for the current file.

- [int h \(\)](#)

Returns the position and size of the help dialog.

- [void hide \(\)](#)

Hides the [Fl_Help_Dialog](#) window.

- [void load \(const char *f\)](#)

Loads the specified HTML file into the [Fl_Help_View](#) widget.

- [void position \(int xx, int yy\)](#)

Set the screen position of the dialog.

- [void resize \(int xx, int yy, int ww, int hh\)](#)

Change the position and size of the dialog.

- [void show \(\)](#)

Shows the [Fl_Help_Dialog](#) window.

- [void show \(int argc, char **argv\)](#)

*Shows the main Help Dialog Window Delegates call to encapsulated window_ void [Fl_Window::show\(int argc, char **argv\)](#) instance method.*

- [void fontsize \(Fl_Fontsize s\)](#)

Sets or gets the default text size for the help view.

- [Fl_Fontsize fontsize \(\)](#)

Sets or gets the default text size for the help view.

- [void topline \(const char *n\)](#)

Sets the top line in the [Fl_Help_View](#) widget to the named or numbered line.

- [void topline \(int n\)](#)

Sets the top line in the [Fl_Help_View](#) widget to the named or numbered line.

- [void value \(const char *f\)](#)

The first form sets the current buffer to the string provided and reformats the text.

- const char * [value \(\) const](#)

The first form sets the current buffer to the string provided and reformats the text.

- int [visible \(\)](#)

Returns 1 if the [Fl_Help_Dialog](#) window is visible.

- int [w \(\)](#)

Returns the position and size of the help dialog.

- int [x \(\)](#)

Returns the position and size of the help dialog.

- int [y \(\)](#)

Returns the position and size of the help dialog.

30.39.1 Detailed Description

The [Fl_Help_Dialog](#) widget displays a standard help dialog window using the [Fl_Help_View](#) widget.

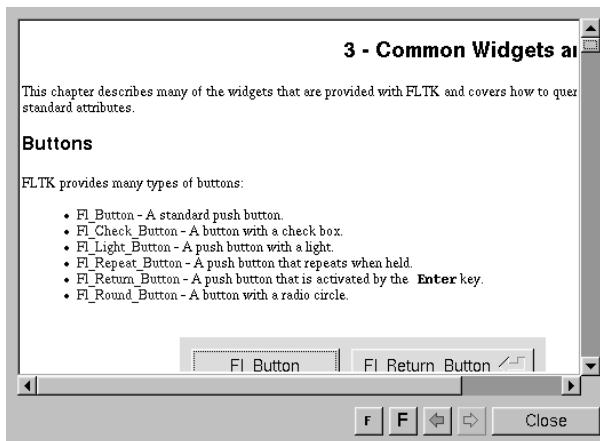


Figure 30.16: Fl_Help_Dialog

30.39.2 Constructor & Destructor Documentation

30.39.2.1 Fl_Help_Dialog::Fl_Help_Dialog()

The constructor creates the dialog pictured above.

References [Fl_Widget::box\(\)](#), [Fl_Widget::callback\(\)](#), [Fl_Widget::color\(\)](#), [Fl_Group::current\(\)](#), [Fl_Widget::deactivate\(\)](#), [Fl_Group::end\(\)](#), [FL_BACKGROUND2_COLOR](#), [FL_DOWN_BOX](#), [FL_FLAT_BOX](#), [FL_WHEN_ENTER_KEY_ALWAYS](#), [Fl_Widget::labelcolor\(\)](#), [Fl_Widget::labelfont\(\)](#), [Fl_Widget::labelsize\(\)](#), [Fl_Group::resizable\(\)](#), [Fl_Button::shortcut\(\)](#), [Fl_Window::size_range\(\)](#), [Fl_Input::textfont\(\)](#), [Fl_Widget::tooltip\(\)](#), [Fl_Widget::user_data\(\)](#), and [Fl_Widget::when\(\)](#).

30.39.3 Member Function Documentation

30.39.3.1 int Fl_Help_Dialog::h()

Returns the position and size of the help dialog.

References Fl_Widget::h().

30.39.3.2 void Fl_Help_Dialog::hide()

Hides the [Fl_Help_Dialog](#) window.

References Fl_Double_Window::hide().

30.39.3.3 void Fl_Help_Dialog::load (const char **f*)

Loads the specified HTML file into the [Fl_Help_View](#) widget.

The filename can also contain a target name ("filename.html#target").

References Fl_Window::label(), Fl_Help_View::load(), Fl_Widget::set_changed(), and Fl_Help_View::title().

30.39.3.4 void Fl_Help_Dialog::position (int *x*, int *y*)

Set the screen position of the dialog.

References Fl_Widget::position().

30.39.3.5 void Fl_Help_Dialog::resize (int *xx*, int *yy*, int *ww*, int *hh*)

Change the position and size of the dialog.

References Fl_Double_Window::resize().

30.39.3.6 void Fl_Help_Dialog::show()

Shows the [Fl_Help_Dialog](#) window.

Shows the main Help Dialog Window Delegates call to encapsulated window_ void [Fl_Window::show\(\)](#) method.

References Fl_Double_Window::show().

30.39.3.7 uchar Fl_Help_Dialog::textsize()

Sets or gets the default text size for the help view.

References Fl_Help_View::textsize().

30.39.3.8 void Fl_Help_Dialog::textsize (Fl_Fontsize *s*)

Sets or gets the default text size for the help view.

Sets the internal [Fl_Help_View](#) instance text size.

Delegates call to encapsulated view_ void [Fl_Help_View::textsize\(Fl_Fontsize s\)](#) instance method

References [Fl_Widget::activate\(\)](#), [Fl_Widget::deactivate\(\)](#), and [Fl_Help_View::textsize\(\)](#).

30.39.3.9 const char * Fl_Help_Dialog::value () const

The first form sets the current buffer to the string provided and reformats the text.

It also clears the history of the "back" and "forward" buttons. The second form returns the current buffer contents.

References [Fl_Help_View::value\(\)](#).

30.39.3.10 void Fl_Help_Dialog::value (const char * v)

The first form sets the current buffer to the string provided and reformats the text.

It also clears the history of the "back" and "forward" buttons. The second form returns the current buffer contents.

References [Fl_Window::label\(\)](#), [Fl_Widget::set_changed\(\)](#), [Fl_Help_View::title\(\)](#), and [Fl_Help_View::value\(\)](#).

30.39.3.11 int Fl_Help_Dialog::visible ()

Returns 1 if the [Fl_Help_Dialog](#) window is visible.

References [Fl_Widget::visible\(\)](#).

30.39.3.12 int Fl_Help_Dialog::w ()

Returns the position and size of the help dialog.

References [Fl_Widget::w\(\)](#).

30.39.3.13 int Fl_Help_Dialog::x ()

Returns the position and size of the help dialog.

References [Fl_Widget::x\(\)](#).

30.39.3.14 int Fl_Help_Dialog::y ()

Returns the position and size of the help dialog.

References [Fl_Widget::y\(\)](#).

The documentation for this class was generated from the following files:

- [Fl_Help_Dialog.H](#)
- [Fl_Help_Dialog.cxx](#)
- [Fl_Help_Dialog_Dox.cxx](#)

30.40 Fl_Help_Link Struct Reference

Definition of a link for the html viewer.

```
#include <Fl_Help_View.H>
```

Public Attributes

- char [filename](#) [192]
Reference filename.
- char [name](#) [32]
Link target (blank if none).
- int [x](#)
X offset of link text.
- int [y](#)
Y offset of link text.
- int [w](#)
Width of link text.
- int [h](#)
Height of link text.

30.40.1 Detailed Description

Definition of a link for the html viewer.

The documentation for this struct was generated from the following file:

- [Fl_Help_View.H](#)

30.41 Fl_Help_Target Struct Reference

[Fl_Help_Target](#) structure.

```
#include <Fl_Help_View.H>
```

Public Attributes

- char [name](#) [32]

Target name.

- int [y](#)

Y offset of target.

30.41.1 Detailed Description

[Fl_Help_Target](#) structure.

The documentation for this struct was generated from the following file:


- [Fl_Help_View.H](#)

30.42 Fl_Help_View Class Reference

The [Fl_Help_View](#) widget displays HTML text.

```
#include <Fl_Help_View.h>
```

Inheritance diagram for Fl_Help_View::



Public Member Functions

- [Fl_Help_View](#) (int xx, int yy, int ww, int hh, const char *l=0)
The constructor creates the [Fl_Help_View](#) widget at the specified position and size.
- [~Fl_Help_View](#) ()
Destroy a [Fl_Help_View](#) widget.
- const char * [directory](#) () const
This method returns the current directory for the text in the buffer.
- const char * [filename](#) () const
This method returns the current filename for the text in the buffer.
- int [find](#) (const char *s, int p=0)
Find the specified string s at starting position p, return the matching pos or -1 if not found.
- void [link](#) (Fl_Help_Func *fn)
This method assigns a callback function to use when a link is followed or a file is loaded (via [Fl_Help_View::load\(\)](#)) that requires a different file or path.
- int [load](#) (const char *f)
Load the specified file.
- void [resize](#) (int, int, int)
Resize the help widget.
- int [size](#) () const
Gets the size of the Help view.
- void [size](#) (int W, int H)
Change the size of the widget.
- void [textcolor](#) (Fl_Color c)

Sets the default text color.

- **Fl_Color textcolor () const**

Returns the current default text color.

- **void textfont (Fl_Font f)**

Sets the default text font.

- **Fl_Font textfont () const**

Returns the current default text font.

- **void textsize (Fl_Fontsize s)**

Sets the default text size.

- **Fl_Fontsize textsize () const**

Gets the default text size.

- **const char * title ()**

Returns the current document title, or NULL if there is no title.

- **void topline (const char *n)**

Scroll the text to the indicated position, given a named destination.

- **void topline (int)**

Scroll the text to the indicated position, given a pixel line.

- **int topline () const**

Returns the current top line in pixels.

- **void leftline (int)**

Sets the left position.

- **int leftline () const**

Gets the left position.

- **void value (const char *v)**

Sets the current help text buffer to the string provided and reformats the text.

- **const char * value () const**

Returns the current buffer contents.

- **void clear_selection ()**

Removes the current text selection.

- **void select_all ()**

Selects All the text in the view.

30.42.1 Detailed Description

The [Fl_Help_View](#) widget displays HTML text.

Most HTML 2.0 elements are supported, as well as a primitive implementation of tables. GIF, JPEG, and PNG images are displayed inline.

30.42.2 Constructor & Destructor Documentation

30.42.2.1 `Fl_Help_View::~Fl_Help_View ()`

Destroy a [Fl_Help_View](#) widget.

The destructor destroys the widget and frees all memory that has been allocated for the current file.

References `clear_selection()`.

30.42.3 Member Function Documentation

30.42.3.1 `void Fl_Help_View::clear_selection ()`

Removes the current text selection.

Referenced by `load()`, `value()`, and `~Fl_Help_View()`.

30.42.3.2 `const char* Fl_Help_View::directory () const [inline]`

This method returns the current directory for the text in the buffer.

30.42.3.3 `const char* Fl_Help_View::filename () const [inline]`

This method returns the current filename for the text in the buffer.

30.42.3.4 `int Fl_Help_View::leftline () const [inline]`

Gets the left position.

Referenced by `value()`.

30.42.3.5 `void Fl_Help_View::leftline (int l)`

Sets the left position.

References `Fl_Widget::redraw()`, `Fl::scrollbar_size()`, `Fl_Scrollbar::value()`, and `Fl_Widget::w()`.

30.42.3.6 `void Fl_Help_View::link (Fl_Help_Func *fn) [inline]`

This method assigns a callback function to use when a link is followed or a file is loaded (via [Fl_Help_View::load\(\)](#)) that requires a different file or path.

The callback function receives a pointer to the [Fl_Help_View](#) widget and the URI or full pathname for the file in question. It must return a pathname that can be opened as a local file or NULL:

```
const char *fn(Fl_Widget *w, const char *uri);
```

The link function can be used to retrieve remote or virtual documents, returning a temporary file that contains the actual data. If the link function returns NULL, the value of the [Fl_Help_View](#) widget will remain unchanged.

If the link callback cannot handle the URI scheme, it should return the uri value unchanged or set the [value\(\)](#) of the widget before returning NULL.

30.42.3.7 int Fl_Help_View::load (const char *f)

Load the specified file.

This method loads the specified file or URL.

References [clear_selection\(\)](#), and [topline\(\)](#).

Referenced by [Fl_Help_Dialog::load\(\)](#).

30.42.3.8 void Fl_Help_View::resize (int xx, int yy, int ww, int hh) [virtual]

Resize the help widget.

Reimplemented from [Fl_Group](#).

References [Fl_Widget::box\(\)](#), [Fl::box_dh\(\)](#), [Fl::box_dw\(\)](#), [Fl::box_dx\(\)](#), [Fl::box_dy\(\)](#), [FL_DOWN_BOX](#), [Fl_Widget::h\(\)](#), [Fl_Widget::resize\(\)](#), [Fl::scrollbar_size\(\)](#), [Fl_Widget::w\(\)](#), [Fl_Widget::x\(\)](#), and [Fl_Widget::y\(\)](#).

Referenced by [Fl_Help_View\(\)](#).

30.42.3.9 void Fl_Help_View::select_all ()

Selects All the text in the view.

30.42.3.10 void Fl_Help_View::size (int W, int H) [inline]

Change the size of the widget.

`size(w,h)` is a shortcut for `resize(x(),y(),w,h)`.

Parameters:

← *W,H* new size

See also:

[position\(int, int\)](#), [resize\(int, int, int, int\)](#)

Reimplemented from [Fl_Widget](#).

References [Fl_Widget::size\(\)](#).

30.42.3.11 Fl_Color Fl_Help_View::textcolor () const [inline]

Returns the current default text color.

30.42.3.12 void Fl_Help_View::textcolor (Fl_Color *c*) [inline]

Sets the default text color.

30.42.3.13 Fl_Font Fl_Help_View::textfont () const [inline]

Returns the current default text font.

30.42.3.14 void Fl_Help_View::textfont (Fl_Font *f*) [inline]

Sets the default text font.

30.42.3.15 Fl_Fontsize Fl_Help_View::textsize () const [inline]

Gets the default text size.

30.42.3.16 void Fl_Help_View::textsize (Fl_Fontsize *s*) [inline]

Sets the default text size.

Referenced by Fl_Help_Dialog::textsize().

30.42.3.17 const char* Fl_Help_View::title () [inline]

Returns the current document title, or NULL if there is no title.

Referenced by Fl_Help_Dialog::load(), and Fl_Help_Dialog::value().

30.42.3.18 int Fl_Help_View::topline () const [inline]

Returns the current top line in pixels.

Referenced by find(), load(), topline(), and value().

30.42.3.19 void Fl_Help_View::topline (int *t*)

Scroll the text to the indicated position, given a pixel line.

References Fl_Widget::do_callback(), Fl_Widget::h(), Fl_Widget::redraw(), Fl::scrollbar_size(), and Fl_Scrollbar::value().

30.42.3.20 const char* Fl_Help_View::value () const [inline]

Returns the current buffer contents.

30.42.3.21 void Fl_Help_View::value (const char * *v*)

Sets the current help text buffer to the string provided and reformats the text.

References clear_selection(), leftline(), Fl_Widget::set_changed(), and topline().

Referenced by Fl_Help_Dialog::value().

The documentation for this class was generated from the following files:


- [Fl_Help_View.H](#)
- [Fl_Help_View.cxx](#)

30.43 Fl_Hold_Browser Class Reference

The [Fl_Hold_Browser](#) is a subclass of [Fl_Browser](#) which lets the user select a single item, or no items by clicking on the empty space.

```
#include <Fl_Hold_Browser.H>
```

Inheritance diagram for Fl_Hold_Browser::

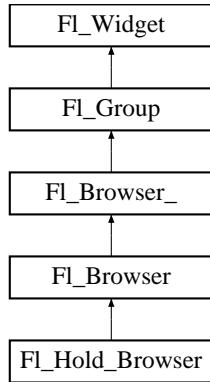

Public Member Functions

- [Fl_Hold_Browser](#) (int X, int Y, int W, int H, const char *l=0)

Creates a new [Fl_Hold_Browser](#) widget using the given position, size, and label string.

30.43.1 Detailed Description

The [Fl_Hold_Browser](#) is a subclass of [Fl_Browser](#) which lets the user select a single item, or no items by clicking on the empty space.

As long as the mouse button is held down the item pointed to by it is highlighted, and this highlighting remains on when the mouse button is released. Normally the callback is done when the user releases the mouse, but you can change this with [when\(\)](#).

See [Fl_Browser](#) for methods to add and remove lines from the browser.

30.43.2 Constructor & Destructor Documentation

30.43.2.1 [Fl_Hold_Browser::Fl_Hold_Browser](#) (int X, int Y, int W, int H, const char * l = 0) [inline]

Creates a new [Fl_Hold_Browser](#) widget using the given position, size, and label string.

The default boxtyle is [FL_DOWN_BOX](#). The constructor specializes [Fl_Browser\(\)](#) by setting the type to [FL_HOLD_BROWSER](#). The destructor destroys the widget and frees all memory that has been allocated.

References [FL_HOLD_BROWSER](#), and [Fl_Widget::type\(\)](#).

The documentation for this class was generated from the following file:

- [Fl_Hold_Browser.H](#)

30.44 Fl_Image Class Reference

[Fl_Image](#) is the base class used for caching and drawing all kinds of images in FLTK.

```
#include <Fl_Image.H>
```

Inheritance diagram for Fl_Image::



Public Member Functions

- int [w\(\)](#) const

See void [Fl_Image::w\(int\)](#).

- int [h\(\)](#) const

See void [Fl_Image::h\(int\)](#).

- int [d\(\)](#) const

The first form of the [d\(\)](#) method returns the current image depth.

- int [ld\(\)](#) const

The first form of the [ld\(\)](#) method returns the current line data size in bytes.

- int [count\(\)](#) const

The [count\(\)](#) method returns the number of data values associated with the image.

- const char *const * [data\(\)](#) const

The first form of the [data\(\)](#) method returns a pointer to the current image data array.

- [Fl_Image](#) (int W, int H, int D)

The constructor creates an empty image with the specified width, height, and depth.

- virtual [~Fl_Image](#) ()

The destructor is a virtual method that frees all memory used by the image.

- virtual [Fl_Image](#) * [copy](#) (int W, int H)

The [copy\(\)](#) method creates a copy of the specified image.

- [Fl_Image](#) * [copy](#) ()

The [copy\(\)](#) method creates a copy of the specified image.

- virtual void [color_average](#) (Fl_Color c, float i)

The [color_average\(\)](#) method averages the colors in the image with the FLTK color value c.

- void [inactive](#) ()

The [inactive\(\)](#) method calls `color_average(FL_BACKGROUND_COLOR, 0.33f)` to produce an image that appears grayed out.

- virtual void [desaturate \(\)](#)

The [desaturate\(\)](#) method converts an image to grayscale.

- virtual void [label \(Fl_Widget *w\)](#)

The [label\(\)](#) methods are an obsolete way to set the image attribute of a widget or menu item.

- virtual void [label \(Fl_Menu_Item *m\)](#)

The [label\(\)](#) methods are an obsolete way to set the image attribute of a widget or menu item.

- virtual void [draw \(int X, int Y, int W, int H, int cx=0, int cy=0\)](#)

The [draw\(\)](#) methods draw the image.

- void [draw \(int X, int Y\)](#)

The [draw\(\)](#) methods draw the image.

- virtual void [uncache \(\)](#)

If the image has been cached for display, delete the cache data.

Protected Member Functions

- void [w \(int W\)](#)

The first form of the [w\(\)](#) method returns the current image width in pixels.

- void [h \(int H\)](#)

The first form of the [h\(\)](#) method returns the current image height in pixels.

- void [d \(int D\)](#)

The first form of the [d\(\)](#) method returns the current image depth.

- void [ld \(int LD\)](#)

See int [ld\(\)](#).

- void [data \(const char *const *p, int c\)](#)

See `const char * const *data()`.

- void [draw_empty \(int X, int Y\)](#)

The protected method [draw_empty\(\)](#) draws a box with an X in it.

Static Protected Member Functions

- static void [labeltype \(const Fl_Label *lo, int lx, int ly, int lw, int lh, Fl_Align la\)](#)
- static void [measure \(const Fl_Label *lo, int &lw, int &lh\)](#)

30.44.1 Detailed Description

[Fl_Image](#) is the base class used for caching and drawing all kinds of images in FLTK.

This class keeps track of common image data such as the pixels, colormap, width, height, and depth. Virtual methods are used to provide type-specific image handling.

Since the [Fl_Image](#) class does not support image drawing by itself, calling the [draw\(\)](#) method results in a box with an X in it being drawn instead.

30.44.2 Constructor & Destructor Documentation

30.44.2.1 [Fl_Image::Fl_Image \(int W, int H, int D\)](#) [inline]

The constructor creates an empty image with the specified width, height, and depth.

The width and height are in pixels. The depth is 0 for bitmaps, 1 for pixmap (colormap) images, and 1 to 4 for color images.

30.44.3 Member Function Documentation

30.44.3.1 [void Fl_Image::color_average \(Fl_Color c, float i\)](#) [virtual]

The [color_average\(\)](#) method averages the colors in the image with the FLTK color value c.

The i argument specifies the amount of the original image to combine with the color, so a value of 1.0 results in no color blend, and a value of 0.0 results in a constant image of the specified color. *The original image data is not altered by this method.*

Reimplemented in [Fl_RGB_Image](#), [Fl_Pixmap](#), [Fl_Shared_Image](#), and [Fl_Tiled_Image](#).

Referenced by [Fl_Tiled_Image::color_average\(\)](#), and [Fl_Shared_Image::color_average\(\)](#).

30.44.3.2 [Fl_Image* Fl_Image::copy \(\)](#) [inline]

The [copy\(\)](#) method creates a copy of the specified image.

If the width and height are provided, the image is resized to the specified size. The image should be deleted (or in the case of [Fl_Shared_Image](#), released) when you are done with it.

Reimplemented in [Fl_Bitmap](#), [Fl_RGB_Image](#), [Fl_Pixmap](#), [Fl_Shared_Image](#), and [Fl_Tiled_Image](#).

References [copy\(\)](#).

Referenced by [copy\(\)](#).

30.44.3.3 [Fl_Image * Fl_Image::copy \(int W, int H\)](#) [virtual]

The [copy\(\)](#) method creates a copy of the specified image.

If the width and height are provided, the image is resized to the specified size. The image should be deleted (or in the case of [Fl_Shared_Image](#), released) when you are done with it.

Reimplemented in [Fl_Bitmap](#), [Fl_RGB_Image](#), [Fl_Pixmap](#), [Fl_Shared_Image](#), and [Fl_Tiled_Image](#).

References [d\(\)](#).

Referenced by [Fl_Tiled_Image::color_average\(\)](#), [Fl_Shared_Image::copy\(\)](#), [Fl_Tiled_Image::desaturate\(\)](#), and [Fl_Shared_Image::reload\(\)](#).

30.44.3.4 int Fl_Image::count () const [inline]

The [count\(\)](#) method returns the number of data values associated with the image.

The value will be 0 for images with no associated data, 1 for bitmap and color images, and greater than 2 for pixmap images.

Referenced by [Fl_File_Icon::load_image\(\)](#).

30.44.3.5 int Fl_Image::d () const [inline]

The first form of the [d\(\)](#) method returns the current image depth.

The return value will be 0 for bitmaps, 1 for pixmaps, and 1 to 4 for color images.

The second form is a protected method that sets the current image depth.

Referenced by [Fl_RGB_Image::color_average\(\)](#), [Fl_RGB_Image::copy\(\)](#), [copy\(\)](#), [Fl_RGB_Image::desaturate\(\)](#), [Fl_RGB_Image::draw\(\)](#), [Fl_BMP_Image::Fl_BMP_Image\(\)](#), [Fl_GIF_Image::Fl_GIF_Image\(\)](#), [Fl_JPEG_Image::Fl_JPEG_Image\(\)](#), [Fl_PNG_Image::Fl_PNG_Image\(\)](#), and [Fl_PNM_Image::Fl_PNM_Image\(\)](#).

30.44.3.6 void Fl_Image::d (int D) [inline, protected]

The first form of the [d\(\)](#) method returns the current image depth.

The return value will be 0 for bitmaps, 1 for pixmaps, and 1 to 4 for color images.

The second form is a protected method that sets the current image depth.

Referenced by [Fl_File_Icon::load_image\(\)](#).

30.44.3.7 const char* const* Fl_Image::data () const [inline]

The first form of the [data\(\)](#) method returns a pointer to the current image data array.

Use the [count\(\)](#) method to find the size of the data array.

The second form is a protected method that sets the current array pointer and count of pointers in the array.

Referenced by [Fl_Pixmap::color_average\(\)](#), [Fl_Pixmap::copy\(\)](#), [Fl_Pixmap::desaturate\(\)](#), [Fl_Pixmap::draw\(\)](#), [Fl_Bitmap::Fl_Bitmap\(\)](#), [Fl_GIF_Image::Fl_GIF_Image\(\)](#), [Fl_RGB_Image::Fl_RGB_Image\(\)](#), and [Fl_XPM_Image::Fl_XPM_Image\(\)](#).

30.44.3.8 void Fl_Image::desaturate () [virtual]

The [desaturate\(\)](#) method converts an image to grayscale.

If the image contains an alpha channel (depth = 4), the alpha channel is preserved. *This method does not alter the original image data.*

Reimplemented in [Fl_RGB_Image](#), [Fl_Pixmap](#), [Fl_Shared_Image](#), and [Fl_Tiled_Image](#).

Referenced by [Fl_Tiled_Image::desaturate\(\)](#), and [Fl_Shared_Image::desaturate\(\)](#).

30.44.3.9 void Fl_Image::draw (int X, int Y) [inline]

The [draw\(\)](#) methods draw the image.

This form specifies the upper-lefthand corner of the image

Reimplemented in [Fl_Bitmap](#), [Fl_RGB_Image](#), [Fl_Pixmap](#), [Fl_Shared_Image](#), and [Fl_Tiled_Image](#).

References [draw\(\)](#).

Referenced by [draw\(\)](#).

30.44.3.10 void Fl_Image::draw (int X, int Y, int W, int H, int cx = 0, int cy = 0) [virtual]

The [draw\(\)](#) methods draw the image.

This form specifies a bounding box for the image, with the origin (upper-lefthand corner) of the image offset by the cx and cy arguments.

Reimplemented in [Fl_Bitmap](#), [Fl_RGB_Image](#), [Fl_Pixmap](#), [Fl_Shared_Image](#), and [Fl_Tiled_Image](#).

References [draw_empty\(\)](#).

Referenced by [Fl_Tiled_Image::draw\(\)](#), and [Fl_Shared_Image::draw\(\)](#).

30.44.3.11 void Fl_Image::draw_empty (int X, int Y) [protected]

The protected method [draw_empty\(\)](#) draws a box with an X in it.

It can be used to draw any image that lacks image data.

References [fl_color\(\)](#), [FL_FOREGROUND_COLOR](#), [fl_line\(\)](#), [fl_rect\(\)](#), [h\(\)](#), and [w\(\)](#).

Referenced by [Fl_Pixmap::draw\(\)](#), [Fl_RGB_Image::draw\(\)](#), [draw\(\)](#), and [Fl_Bitmap::draw\(\)](#).

30.44.3.12 void Fl_Image::h (int H) [inline, protected]

The first form of the [h\(\)](#) method returns the current image height in pixels.

The second form is a protected method that sets the current image height.

Referenced by [Fl_Tiled_Image::draw\(\)](#), [Fl_Shared_Image::find\(\)](#), [Fl_Shared_Image::get\(\)](#), [Fl_File_Icon::load_image\(\)](#), [Fl_Shared_Image::reload\(\)](#), and [Fl_File_Chooser::rescan_keep_filename\(\)](#).

30.44.3.13 void Fl_Image::inactive () [inline]

The [inactive\(\)](#) method calls [color_average\(FL_BACKGROUND_COLOR, 0.33f\)](#) to produce an image that appears grayed out.

This method does not alter the original image data.

30.44.3.14 void Fl_Image::label (Fl_Menu_Item * m) [virtual]

The [label\(\)](#) methods are an obsolete way to set the image attribute of a widget or menu item.

Use the [image\(\)](#) or [deimage\(\)](#) methods of the [Fl_Widget](#) and [Fl_Menu_Item](#) classes instead.

Reimplemented in [Fl_Bitmap](#), [Fl_RGB_Image](#), and [Fl_Pixmap](#).

References `_FL_IMAGE_LABEL`, `Fl_Menu_Item::label()`, and `Fl::set_labeltype()`.

30.44.3.15 void Fl_Image::label (Fl_Widget * *widget*) [virtual]

The `label()` methods are an obsolete way to set the image attribute of a widget or menu item.

Use the `image()` or `deimage()` methods of the `Fl_Widget` and `Fl_Menu_Item` classes instead.

Reimplemented in `Fl_Bitmap`, `Fl_RGB_Image`, and `Fl_Pixmap`.

References `Fl_Widget::image()`.

Referenced by `Fl_Menu_Item::image()`.

30.44.3.16 int Fl_Image::ld () const [inline]

The first form of the `ld()` method returns the current line data size in bytes.

Line data is extra data that is included after each line of color image data and is normally not present.

The second form is a protected method that sets the current line data size in bytes.

Referenced by `Fl_RGB_Image::color_average()`, `Fl_RGB_Image::copy()`, `Fl_RGB_Image::desaturate()`, `Fl_RGB_Image::draw()`, and `Fl_RGB_Image::Fl_RGB_Image()`.

30.44.3.17 void Fl_Image::uncache () [virtual]

If the image has been cached for display, delete the cache data.

This allows you to change the data used for the image and then redraw it without recreating an image object.

Reimplemented in `Fl_Bitmap`, `Fl_RGB_Image`, `Fl_Pixmap`, and `Fl_Shared_Image`.

Referenced by `Fl_Shared_Image::uncache()`.

30.44.3.18 void Fl_Image::w (int *W*) [inline, protected]

The first form of the `w()` method returns the current image width in pixels.

The second form is a protected method that sets the current image width.

Referenced by `Fl_Tiled_Image::draw()`, `Fl_Shared_Image::find()`, `Fl_Shared_Image::get()`, `Fl_File_Icon::load_image()`, `Fl_Shared_Image::reload()`, and `Fl_File_Chooser::rescan_keep_filename()`.

The documentation for this class was generated from the following files:


- [Fl_Image.H](#)
- [Fl_Image.cxx](#)

30.45 Fl_Input Class Reference

This is the FLTK text input widget.

```
#include <Fl_Input.H>
```

Inheritance diagram for Fl_Input::

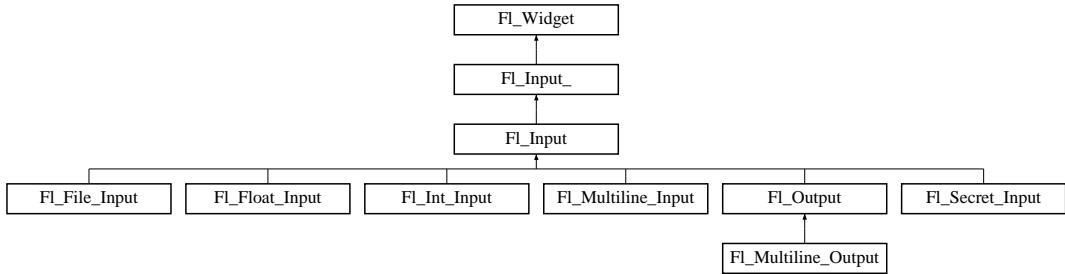

Public Member Functions

- void [draw \(\)](#)

Draw the widget.

- int [handle \(int\)](#)

Handles the specified event.

- [Fl_Input \(int, int, int, int, const char *=0\)](#)

Creates a new [Fl_Input](#) widget using the given position, size, and label string.

30.45.1 Detailed Description

This is the FLTK text input widget.

It displays a single line of text and lets the user edit it. Normally it is drawn with an inset box and a white background. The text may contain any characters (even 0), and will correctly display anything, using ^X notation for unprintable control characters and \nnn notation for unprintable characters with the high bit set. It assumes the font can draw any characters in the ISO-8859-1 character set.

Mouse button 1	Moves the cursor to this point. Drag selects characters. Double click selects words. Triple click selects all text. Shift+click extends the selection. When you select text it is automatically copied to the clipboard.
Mouse button 2	Insert the clipboard at the point clicked. You can also select a region and replace it with the clipboard by selecting the region with mouse button 2.
Mouse button 3	Currently acts like button 1.
Backspace	Deletes one character to the left, or deletes the selected region.
Enter	May cause the callback, see when() .
^A or Home	Go to start of line.
^B or Left	Move left
^C	Copy the selection to the clipboard
^D or Delete	Deletes one character to the right or deletes the selected region.
^E or End	Go to the end of line.
^F or Right	Move right
^K	Delete to the end of line (next \n character) or deletes a single \n character. These deletions are all concatenated into the clipboard.
^N or Down	Move down (for Fl_Multiline_Input only, otherwise it moves to the next input field).
^P or Up	Move up (for Fl_Multiline_Input only, otherwise it moves to the previous input field).
^U	Delete everything.
^V or ^Y	Paste the clipboard
^X or ^W	Copy the region to the clipboard and delete it.
^Z or ^_	Undo. This is a single-level undo mechanism, but all adjacent deletions and insertions are concatenated into a single "undo". Often this will undo a lot more than you expected.
Shift+move	Move the cursor but also extend the selection.
RightCtrl or Compose	<p>Start a compose-character sequence. The next one or two keys typed define the character to insert (see table that follows.)</p> <p>For instance, to type "ä" type [compose][a]['] or [compose][''][a].</p> <p>The character "nbsp" (non-breaking space) is typed by using [compose][space].</p> <p>The single-character sequences may be followed by a space if necessary to remove ambiguity. For instance, if you really want to type "ö" rather than "ä" you must type [compose][a][space][~].</p> <p>The same key may be used to "quote" control characters into the text. If you need a ^Q character you can get one by typing [compose][Control+Q].</p> <p>X may have a key on the keyboard defined as XK_Multi_key. If so this key may be used as well as the right-hand control key. You can set this up with the program xmodmap.</p> <p>If your keyboard is set to support a foreign language you should also be able to type "dead key" prefix characters. On X you will actually be able to see what dead key you typed, and if you</p>

Keys	Char	Keys	Char	Keys	Char	Keys	Char	Keys	Char	Keys	Char	Char
sp ^ a ,	nbsp ' A o	*	~ N # : A	' A ' a 3 : a	~ n ^ o	D - % ~ A	' a ' O	- 2 ~ a	! o	A ^ \$	+ - ' O	
y =	u			* A	~ O	* a	~ o					
	p			A E	: O	a e	o					
&	.			, C	x	, c	:					
:	,			E '	O /	' e	/					
c	1			' E	' U	' e	u					
a	o			^ E	' U	^ e	u					
< <	> >			: E	^ U	: e	^ u					
~	1 4			' I	: U	' i	u					
-	1 2			' I	' Y	' i	y					
r	3 4			^ I	T H	^ i	h					
_	?			: I	s s	: i	y					

Table 30.1: Character Composition Table

30.45.2 Constructor & Destructor Documentation

30.45.2.1 `Fl_Input::Fl_Input (int X, int Y, int W, int H, const char * l = 0)`

Creates a new [Fl_Input](#) widget using the given position, size, and label string.

The default boxtyle is `FL_DOWN_BOX`.

30.45.3 Member Function Documentation

30.45.3.1 `void Fl_Input::draw () [virtual]`

Draw the widget.

Never call this function directly. FLTK will schedule redrawing whenever needed. If your widget must be redrawn as soon as possible, call [redraw\(\)](#) instead.

Override this function to draw your own widgets.

Implements [Fl_Widget](#).

Reimplemented in [Fl_File_Input](#).

References `Fl_Widget::box()`, `Fl::box_dh()`, `Fl::box_dw()`, `Fl::box_dx()`, `Fl::box_dy()`, `Fl_Widget::color()`, `Fl_Widget::damage()`, `Fl_Widget::draw_box()`, `Fl_Input_::drawtext()`, `Fl_Widget::h()`, `Fl_Input_::input_type()`, `Fl_Widget::w()`, `Fl_Widget::x()`, and `Fl_Widget::y()`.

Referenced by `Fl_Value_Input::draw()`.

30.45.3.2 `int Fl_Input::handle (int event) [virtual]`

Handles the specified event.

You normally don't call this method directly, but instead let FLTK do it when the user interacts with the widget.

When implemented in a new widget, this function must return 0 if the widget does not use the event or 1 otherwise.

Most of the time, you want to call the inherited [handle\(\)](#) method in your overriden method so that you don't short-circuit events that you don't handle. In this last case you should return the callee retval.

Parameters:

← *event* the kind of event received

Return values:

0 if the event was not used or understood

1 if the event was used and can be deleted

See also:

[Fl_Event](#)

Reimplemented from [Fl_Widget](#).

Reimplemented in [Fl_File_Input](#).

References [Fl_Widget::active_r\(\)](#), [Fl::belowmouse\(\)](#), [Fl_Widget::box\(\)](#), [Fl::box_dh\(\)](#), [Fl::box_dw\(\)](#), [Fl::box_dx\(\)](#), [Fl::box_dy\(\)](#), [Fl_Input_::copy\(\)](#), [Fl_Window::cursor\(\)](#), [Fl::dnd\(\)](#), [Fl::dnd_text_ops\(\)](#), [Fl_Widget::do_callback\(\)](#), [Fl::event_button\(\)](#), [Fl::event_clicks\(\)](#), [Fl::event_is_click\(\)](#), [Fl::event_key\(\)](#), [Fl::event_state\(\)](#), [FL_DND_DRAG](#), [FL_DND_ENTER](#), [FL_DND_LEAVE](#), [FL_DND_RELEASE](#), [FL_Down](#), [FL_DRAG](#), [FL_FOCUS](#), [FL_KEYBOARD](#), [FL_Left](#), [FL_PUSH](#), [FL_RELEASE](#), [FL_Right](#), [FL_SHIFT](#), [FL_Tab](#), [FL_UNFOCUS](#), [FL_Up](#), [Fl::focus\(\)](#), [Fl_Widget::h\(\)](#), [Fl_Input_::input_type\(\)](#), [Fl_Input_::mark\(\)](#), [Fl::paste\(\)](#), [Fl_Input_::position\(\)](#), [Fl_Input_::readonly\(\)](#), [Fl_Input_::size\(\)](#), [Fl_Widget::take_focus\(\)](#), [Fl_Input_::up_down_position\(\)](#), [Fl_Widget::w\(\)](#), [Fl_Widget::window\(\)](#), [Fl_Widget::x\(\)](#), and [Fl_Widget::y\(\)](#).

Referenced by [Fl_Value_Input::handle\(\)](#), and [Fl_File_Input::handle\(\)](#).

The documentation for this class was generated from the following files:


- [Fl_Input.H](#)
- [Fl_Input.cxx](#)

30.46 Fl_Input_ Class Reference

This is a virtual base class below [Fl_Input](#).

```
#include <Fl_Input_.h>
```

Inheritance diagram for [Fl_Input_](#):

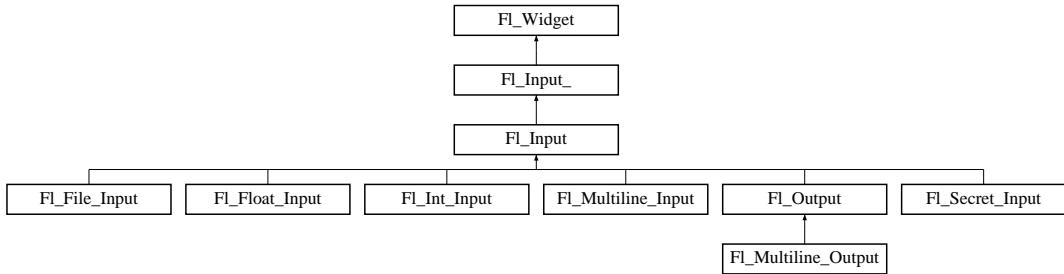

Public Member Functions

- void [resize](#) (int, int, int, int)
Change the size or position of the widget.
- [Fl_Input_](#) (int, int, int, const char *=0)
Creates a new [Fl_Input_](#) widget using the given position, size, and label string.
- int [value](#) (const char *)
*See const char *[Fl_Input_value\(\)](#) const.*
- int [value](#) (const char *, int)
*See const char *[Fl_Input_value\(\)](#) const.*
- int [static_value](#) (const char *)
Change the text and set the mark and the point to the end of it.
- int [static_value](#) (const char *, int)
See int [Fl_Input::static_value\(const char\)](#).*
- const char * [value](#) () const
The first form returns the current value, which is a pointer to the internal buffer and is valid only until the next event is handled.
- char [index](#) (int i) const
Same as [value\(\) \[n\]](#), but may be faster in plausible implementations.
- int [size](#) () const
Returns the number of characters in [value\(\)](#).
- void [size](#) (int W, int H)
Change the size of the widget.

- int **maximum_size** () const
Gets the maximum length of the input field.
- void **maximum_size** (int m)
Sets the maximum length of the input field.
- int **position** () const
The input widget maintains two pointers into the string.
- int **mark** () const
Gets the current selection mark.
- int **position** (int p, int m)
See int [Fl_Input_::position\(\)](#) const.
- int **position** (int p)
See int [Fl_Input_::position\(\)](#) const.
- int **mark** (int m)
Sets the current selection mark.
- int **replace** (int, int, const char *, int=0)
This call does all editing of the text.
- int **cut** ()
Deletes the current selection.
- int **cut** (int n)
See int [Fl_Input_::cut\(\)](#).
- int **cut** (int a, int b)
See int [Fl_Input_::cut\(\)](#).
- int **insert** (const char *t, int l=0)
Insert the string t at the current position, and leave the mark and position after it.
- int **copy** (int clipboard)
Put the current selection between [mark\(\)](#) and [position\(\)](#) into the specified clipboard.
- int **undo** ()
Does undo of several previous calls to [replace\(\)](#).
- int **copy_cuts** ()
Copy all the previous contiguous cuts from the undo information to the clipboard.
- int **shortcut** () const
The first form returns the current shortcut key for the Input.
- void **shortcut** (int s)
See int [shortcut\(\)](#) const.

- `Fl_Font textfont () const`
Gets the font of the text in the input field.
- `void textfont (Fl_Font s)`
Sets the font of the text in the input field.
- `Fl_Fontsize textsize () const`
Gets the size of the text in the input field.
- `void textsize (Fl_Fontsize s)`
Sets the size of the text in the input field.
- `Fl_Color textcolor () const`
Gets the color of the text in the input field.
- `void textcolor (unsigned n)`
Sets the color of the text in the input field.
- `Fl_Color cursor_color () const`
Gets the color of the cursor.
- `void cursor_color (unsigned n)`
Sets the color of the cursor.
- `int input_type () const`
Gets the input field type.
- `void input_type (int t)`
Sets the input field type.
- `int readonly () const`
Gets the read-only state of the input field.
- `void readonly (int b)`
Sets the read-only state of the input field.
- `int wrap () const`
Gets the word wrapping state of the input field.
- `void wrap (int b)`
Sets the word wrapping state of the input field.

Protected Member Functions

- `int word_start (int i) const`
- `int word_end (int i) const`
- `int line_start (int i) const`

- int **line_end** (int i) const
- void **drawtext** (int, int, int, int)

Draw the text in the passed bounding box.
- int **up_down_position** (int, int keepmark=0)

Do the correct thing for arrow keys.
- void **handle_mouse** (int, int, int, int, int keepmark=0)
- int **handletext** (int e, int, int, int, int)
- void **maybe_do_callback** ()
- int **xscroll** () const
- int **yscroll** () const

30.46.1 Detailed Description

This is a virtual base class below [Fl_Input](#).

It has all the same interfaces, but lacks the [handle\(\)](#) and [draw\(\)](#) method. You may want to subclass it if you are one of those people who likes to change how the editing keys work.

This can act like any of the subclasses of [Fl_Input](#), by setting [type\(\)](#) to one of the following values:

```
#define FL_NORMAL_INPUT          0
#define FL_FLOAT_INPUT           1
#define FL_INT_INPUT             2
#define FL_MULTILINE_INPUT       4
#define FL_SECRET_INPUT          5
#define FL_INPUT_TYPE            7
#define FL_INPUT_READONLY         8
#define FL_NORMAL_OUTPUT          (FL_NORMAL_INPUT | FL_INPUT_READONLY)
#define FL_MULTILINE_OUTPUT       (FL_MULTILINE_INPUT | FL_INPUT_READONLY)
#define FL_INPUT_WRAP              16
#define FL_MULTILINE_INPUT_WRAP   (FL_MULTILINE_INPUT | FL_INPUT_WRAP)
#define FL_MULTILINE_OUTPUT_WRAP  (FL_MULTILINE_INPUT | FL_INPUT_READONLY | FL_INPUT_WRAP)
```

30.46.2 Constructor & Destructor Documentation

30.46.2.1 [Fl_Input::Fl_Input_\(int X, int Y, int W, int H, const char *l = 0\)](#)

Creates a new [Fl_Input](#) widget using the given position, size, and label string.

The default boxtyle is [FL_DOWN_BOX](#).

References [Fl_Widget::align\(\)](#), [Fl_Widget::box\(\)](#), [Fl_Widget::color\(\)](#), [FL_ALIGN_LEFT](#), [FL_BACKGROUND2_COLOR](#), [FL_DOWN_BOX](#), [FL_FOREGROUND_COLOR](#), [FL_HELVETICA](#), [FL_NORMAL_SIZE](#), [FL_SELECTION_COLOR](#), [Fl_Widget::set_flag\(\)](#), and [Fl_Widget::SHORTCUT_LABEL](#).

30.46.3 Member Function Documentation

30.46.3.1 [int Fl_Input::copy \(int clipboard\)](#)

Put the current selection between [mark\(\)](#) and [position\(\)](#) into the specified clipboard.

Does not replace the old clipboard contents if [position\(\)](#) and [mark\(\)](#) are equal. Clipboard 0 maps to the current text selection and clipboard 1 maps to the cut/paste clipboard.

References [input_type\(\)](#), [mark\(\)](#), [position\(\)](#), and [value\(\)](#).

Referenced by [copy_cuts\(\)](#), and [Fl_Input::handle\(\)](#).

30.46.3.2 int Fl_Input_::copy_cuts ()

Copy all the previous contiguous cuts from the undo information to the clipboard.

This is used to make ^K work.

References [copy\(\)](#), and [input_type\(\)](#).

30.46.3.3 void Fl_Input_::cursor_color (unsigned n) [inline]

Sets the color of the cursor.

This is black by default.

30.46.3.4 Fl_Color Fl_Input_::cursor_color () const [inline]

Gets the color of the cursor.

This is black by default.

Referenced by [drawtext\(\)](#).

30.46.3.5 int Fl_Input_::cut () [inline]

Deletes the current selection.

[cut\(n\)](#) deletes n characters after the [position\(\)](#). [cut\(-n\)](#) deletes n characters before the [position\(\)](#). [cut\(a,b\)](#) deletes the characters between offsets a and b. A, b, and n are all clamped to the size of the string. The mark and point are left where the deleted text was.

If you want the data to go into the clipboard, do [Fl_Input::copy\(\)](#) before calling [Fl_Input::cut\(\)](#), or do [Fl_Input::copy_cuts\(\)](#) afterwards.

References [Fl_Widget::position\(\)](#).

30.46.3.6 void Fl_Input_::drawtext (int X, int Y, int W, int H) [protected]

Draw the text in the passed bounding box.

If [damage\(\)](#) & [FL_DAMAGE_ALL](#) is true, this assumes the area has already been erased to [color\(\)](#). Otherwise it does minimal update and erases the area itself.

References [Fl_Widget::active_r\(\)](#), [Fl_Widget::box\(\)](#), [Fl::box_dh\(\)](#), [Fl::box_dw\(\)](#), [Fl::box_dx\(\)](#), [Fl::box_dy\(\)](#), [Fl_Widget::color\(\)](#), [cursor_color\(\)](#), [Fl_Widget::damage\(\)](#), [Fl_Widget::draw_box\(\)](#), [fl_clip](#), [fl_color\(\)](#), [fl_line\(\)](#), [fl_pop_clip\(\)](#), [fl_push_clip\(\)](#), [fl_rectf\(\)](#), [Fl::focus\(\)](#), [input_type\(\)](#), [mark\(\)](#), [position\(\)](#), [Fl::pushed\(\)](#), [readonly\(\)](#), [Fl_Widget::selection_color\(\)](#), [size\(\)](#), [textcolor\(\)](#), [textfont\(\)](#), [textsize\(\)](#), and [value\(\)](#).

Referenced by [Fl_Input::draw\(\)](#), and [Fl_File_Input::draw\(\)](#).

30.46.3.7 char Fl_Input_::index (int *i*) const [inline]

Same as [value\(\)](#)[n], but may be faster in plausible implementations.

No bounds checking is done.

Referenced by [replace\(\)](#), and [undo\(\)](#).

30.46.3.8 void Fl_Input_::input_type (int *t*) [inline]

Sets the input field type.

References [Fl_Widget::type\(\)](#).

30.46.3.9 int Fl_Input_::input_type () const [inline]

Gets the input field type.

References [Fl_Widget::type\(\)](#).

Referenced by [copy\(\)](#), [copy_cuts\(\)](#), [Fl_Input::draw\(\)](#), [drawtext\(\)](#), [Fl_Input::handle\(\)](#), and [replace\(\)](#).

30.46.3.10 int Fl_Input_::insert (const char * *t*, int *l* = 0) [inline]

Insert the string *t* at the current position, and leave the mark and position after it.

If *l* is not zero then it is assumed to be [strlen\(t\)](#).

30.46.3.11 int Fl_Input_::mark (int *m*) [inline]

Sets the current selection mark.

mark(n) is the same as [position\(position\(\),n\)](#).

References [Fl_Widget::position\(\)](#).

30.46.3.12 int Fl_Input_::mark () const [inline]

Gets the current selection mark.

mark(n) is the same as [position\(position\(\),n\)](#).

Referenced by [copy\(\)](#), [drawtext\(\)](#), and [Fl_Input::handle\(\)](#).

30.46.3.13 void Fl_Input_::maximum_size (int *m*) [inline]

Sets the maximum length of the input field.

30.46.3.14 int Fl_Input_::maximum_size () const [inline]

Gets the maximum length of the input field.

30.46.3.15 int Fl_Input::position () const [inline]

The input widget maintains two pointers into the string.

The "position" is where the cursor is. The "mark" is the other end of the selected text. If they are equal then there is no selection. Changing this does not affect the clipboard (use [copy\(\)](#) to do that).

Changing these values causes a [redraw\(\)](#). The new values are bounds checked. The return value is non-zero if the new position is different than the old one. `position(n)` is the same as `position(n,n)`. `mark(n)` is the same as `position(position(),n)`.

Referenced by `copy()`, `drawtext()`, `Fl_Input::handle()`, `static_value()`, `up_down_position()`, and `Fl_File_Chooser::value()`.

30.46.3.16 void Fl_Input::readonly (int b) [inline]

Sets the read-only state of the input field.

References `Fl_Widget::type()`.

30.46.3.17 int Fl_Input::readonly () const [inline]

Gets the read-only state of the input field.

References `Fl_Widget::type()`.

Referenced by `drawtext()`, `Fl_Input::handle()`, and `static_value()`.

30.46.3.18 int Fl_Input::replace (int b, int e, const char * text, int ilen = 0)

This call does all editing of the text.

It deletes the region between a and b (either one may be less or equal to the other), and then inserts the string insert at that point and leaves the [mark\(\)](#) and [position\(\)](#) after the insertion. Does the callback if [when\(\)](#) & `FL_WHEN_CHANGED` and there is a change.

Set start and end equal to not delete anything. Set insert to NULL to not insert anything.

length must be zero or `strlen(insert)`, this saves a tiny bit of time if you happen to already know the length of the insertion, or can be used to insert a portion of a string or a string containing nul's.

a and b are clamped to the `0..size()` range, so it is safe to pass any values.

[cut\(\)](#) and [insert\(\)](#) are just inline functions that call [replace\(\)](#).

References `Fl_Widget::do_callback()`, `FL_WHEN_CHANGED`, `index()`, `input_type()`, `Fl_Widget::set_changed()`, `Fl_Widget::when()`, and `wrap()`.

30.46.3.19 void Fl_Input::resize (int x, int y, int w, int h) [virtual]

Change the size or position of the widget.

This is a virtual function so that the widget may implement its own handling of resizing. The default version does *not* call the [redraw\(\)](#) method, but instead relies on the parent widget to do so because the parent may know a faster way to update the display, such as scrolling from the old position.

Some window managers under X11 call [resize\(\)](#) a lot more often than needed. Please verify that the position or size of a widget did actually change before doing any extensive calculations.

`position(x,y)` is a shortcut for `resize(x,y,w(),h())`, and `size(w,h)` is a shortcut for `resize(x(),y(),w,h)`.

Parameters:

← *x,y* new position relative to the parent window
 ← *w,h* new size

See also:

[position\(int, int\)](#), [size\(int, int\)](#)

Reimplemented from [Fl_Widget](#).

References `Fl_Widget::h()`, and `Fl_Widget::w()`.

Referenced by `Fl_Value_Input::resize()`, `Fl_Spinner::resize()`, and `Fl_Input_Choice::resize()`.

30.46.3.20 int Fl_Input_::shortcut () const [inline]

The first form returns the current shortcut key for the Input.

The second form sets the shortcut key to *key*. Setting this overrides the use of '&' in the [label\(\)](#). The value is a bitwise OR of a key and a set of shift flags, for example `FL_ALT | 'a'`, `FL_ALT | (FL_F + 10)`, or just 'a'. A value of 0 disables the shortcut.

The key can be any value returned by [Fl::event_key\(\)](#), but will usually be an ASCII letter. Use a lower-case letter unless you require the shift key to be held down.

The shift flags can be any set of values accepted by [Fl::event_state\(\)](#). If the bit is on that shift key must be pushed. Meta, Alt, Ctrl, and Shift must be off if they are not in the shift flags (zero for the other bits indicates a "don't care" setting).

30.46.3.21 void Fl_Input_::size (int *W*, int *H*) [inline]

Change the size of the widget.

`size(w,h)` is a shortcut for `resize(x(),y(),w,h)`.

Parameters:

← *W,H* new size

See also:

[position\(int, int\)](#), [resize\(int, int, int, int\)](#)

Reimplemented from [Fl_Widget](#).

References `Fl_Widget::size()`.

30.46.3.22 int Fl_Input_::size () const [inline]

Returns the number of characters in [value\(\)](#).

This may be greater than `strlen(value())` if there are nul characters in it.

Referenced by `Fl_File_Input::draw()`, `drawtext()`, `Fl_Input::handle()`, `position()`, and `static_value()`.

30.46.3.23 int Fl_Input_::static_value (const char * str)

Change the text and set the mark and the point to the end of it.

The string is *not* copied. If the user edits the string it is copied to the internal buffer then. This can save a great deal of time and memory if your program is rapidly changing the values of text fields, but this will only work if the passed string remains unchanged until either the [Fl_Input](#) is destroyed or [value\(\)](#) is called again.

Referenced by [value\(\)](#).

30.46.3.24 void Fl_Input_::textcolor (unsigned n) [inline]

Sets the color of the text in the input field.

30.46.3.25 Fl_Color Fl_Input_::textcolor () const [inline]

Gets the color of the text in the input field.

Referenced by [drawtext\(\)](#), [Fl_Spinner::textcolor\(\)](#), and [Fl_Input_Choice::textcolor\(\)](#).

30.46.3.26 void Fl_Input_::textfont (Fl_Font s) [inline]

Sets the font of the text in the input field.

30.46.3.27 Fl_Font Fl_Input_::textfont () const [inline]

Gets the font of the text in the input field.

Referenced by [drawtext\(\)](#), [Fl_Help_Dialog::Fl_Help_Dialog\(\)](#), [Fl_Spinner::textfont\(\)](#), and [Fl_Input_Choice::textfont\(\)](#).

30.46.3.28 void Fl_Input_::textsize (Fl_Fontsize s) [inline]

Sets the size of the text in the input field.

30.46.3.29 Fl_Fontsize Fl_Input_::textsize () const [inline]

Gets the size of the text in the input field.

Referenced by [drawtext\(\)](#), [Fl_Spinner::textsize\(\)](#), and [Fl_Input_Choice::textsize\(\)](#).

30.46.3.30 int Fl_Input_::undo ()

Does undo of several previous calls to [replace\(\)](#).

Returns non-zero if any change was made.

References [Fl_Widget::do_callback\(\)](#), [FL_WHEN_CHANGED](#), [index\(\)](#), [Fl_Widget::set_changed\(\)](#), [Fl_Widget::when\(\)](#), and [wrap\(\)](#).

30.46.3.31 int Fl_Input_::up_down_position (int *i*, int *keepmark* = 0) [protected]

Do the correct thing for arrow keys.

Sets the position (and mark if *keepmark* is zero) to somewhere in the same line as *i*, such that pressing the arrows repeatedly will cause the point to move up and down.

References position(), and value().

Referenced by Fl_Input::handle().

30.46.3.32 const char* Fl_Input_::value () const [inline]

The first form returns the current value, which is a pointer to the internal buffer and is valid only until the next event is handled.

The second two forms change the text and set the mark and the point to the end of it. The string is copied to the internal buffer. Passing NULL is the same as "". This returns non-zero if the new value is different than the current one. You can use the second version to directly set the length if you know it already or want to put nul's in the text.

Referenced by copy(), drawtext(), position(), up_down_position(), value(), and Fl_File_Input::value().

30.46.3.33 void Fl_Input_::wrap (int *b*) [inline]

Sets the word wrapping state of the input field.

Word wrap is only functional with multi-line input fields.

References Fl_Widget::type().

30.46.3.34 int Fl_Input_::wrap () const [inline]

Gets the word wrapping state of the input field.

Word wrap is only functional with multi-line input fields.

References Fl_Widget::type().

Referenced by replace(), and undo().

The documentation for this class was generated from the following files:


- [Fl_Input_.H](#)
- [Fl_Input_.cxx](#)

30.47 Fl_Input_Choice Class Reference

A combination of the input widget and a menu button.

```
#include <Fl_Input_Choice.H>
```

Inheritance diagram for Fl_Input_Choice::



Classes

- class **InputMenuButton**

Public Member Functions

- **Fl_Input_Choice** (int x, int y, int w, int h, const char *l=0)
Creates a new [Fl_Input_Choice](#) widget using the given position, size, and label string.
- void **add** (const char *s)
Adds an item to the menu.
- int **changed** () const
Check if the widget value changed since the last callback.
- void **clear_changed** ()
Mark the value of the widget as unchanged.
- void **set_changed** ()
Mark the value of the widget as changed.
- void **clear** ()
Removes all items from the menu.
- **Fl_Boxtype down_box** () const
Gets the box type of the menu button.
- void **down_box** (Fl_Boxtype b)
Sets the box type of the menu button.
- const **Fl_Menu_Item** * **menu** ()
Gets the [Fl_Menu_Item](#) array used for the menu.
- void **menu** (const **Fl_Menu_Item** *m)

Sets the `Fl_Menu_Item` array used for the menu.

- void `resize` (int X, int Y, int W, int H)
This resizes the `Fl_Group` widget and all of its children.
- `Fl_Color textcolor` () const
Gets the encapsulated input text color attributes.
- void `textcolor` (`Fl_Color` c)
Sets the encapsulated input text color attributes.
- `Fl_Font textfont` () const
Gets the encapsulated input text font attributes.
- void `textfont` (`Fl_Font` f)
Sets the encapsulated input text font attributes.
- `Fl_Fontsize textsize` () const
Gets the encapsulated input size attributes.
- void `textsize` (`Fl_Fontsize` s)
Sets the encapsulated input size attributes.
- const char * `value` () const
*See void `Fl_Input_Choice::value(const char *s)`.*
- void `value` (const char *val)
Sets or returns the input widget's current contents.
- void `value` (int val)
*See void `Fl_Input_Choice::value(const char *s)`.*
- `Fl_Menu_Button * menubutton` ()
Returns a reference to the internal `Fl_Menu_Button` widget.
- `Fl_Input * input` ()
Returns a reference to the internal `Fl_Input` widget.

30.47.1 Detailed Description

A combination of the input widget and a menu button.

The user can either type into the input area, or use the menu button chooser on the right, which loads the input area with predefined text. Normally it is drawn with an inset box and a white background.

The application can directly access both the input and menu widgets directly, using the `menubutton()` and `input()` accessor methods.

30.47.2 Constructor & Destructor Documentation

30.47.2.1 Fl_Input_Choice::Fl_Input_Choice (int *x*, int *y*, int *w*, int *h*, const char * *l* = 0) [inline]

Creates a new [Fl_Input_Choice](#) widget using the given position, size, and label string.

Inherited destructor Destroys the widget and any value associated with it.

References [Fl_Widget::align\(\)](#), [Fl_Widget::box\(\)](#), [Fl_Widget::callback\(\)](#), [Fl_Group::end\(\)](#), [FL_ALIGN_LEFT](#), [FL_DOWN_BOX](#), [FL_FLAT_BOX](#), [FL_WHEN_CHANGED](#), [FL_WHEN_NOT_CHANGED](#), and [Fl_Widget::when\(\)](#).

30.47.3 Member Function Documentation

30.47.3.1 void Fl_Input_Choice::add (const char * *s*) [inline]

Adds an item to the menu.

30.47.3.2 int Fl_Input_Choice::changed () const [inline]

Check if the widget value changed since the last callback.

"Changed" is a flag that is turned on when the user changes the value stored in the widget. This is only used by subclasses of [Fl_Widget](#) that store values, but is in the base class so it is easier to scan all the widgets in a panel and [do_callback\(\)](#) on the changed ones in response to an "OK" button.

Most widgets turn this flag off when they do the callback, and when the program sets the stored value.

Return values:

0 if the value did not change

See also:

[set_changed\(\)](#), [clear_changed\(\)](#)*

Reimplemented from [Fl_Widget](#).

References [Fl_Widget::changed\(\)](#).

30.47.3.3 void Fl_Input_Choice::clear () [inline]

Removes all items from the menu.

Reimplemented from [Fl_Group](#).

30.47.3.4 void Fl_Input_Choice::clear_changed () [inline]

Mark the value of the widget as unchanged.

See also:

[changed\(\)](#), [set_changed\(\)](#)

Reimplemented from [Fl_Widget](#).

References [Fl_Widget::clear_changed\(\)](#).

30.47.3.5 `FL_Input* Fl_Input_Choice::input () [inline]`

Returns a reference to the internal [Fl_Input](#) widget.

30.47.3.6 `void Fl_Input_Choice::menu (const Fl_Menu_Item * m) [inline]`

Sets the [Fl_Menu_Item](#) array used for the menu.

30.47.3.7 `const Fl_Menu_Item* Fl_Input_Choice::menu () [inline]`

Gets the [Fl_Menu_Item](#) array used for the menu.

30.47.3.8 `Fl_Menu_Button* Fl_Input_Choice::menubutton () [inline]`

Returns a reference to the internal [Fl_Menu_Button](#) widget.

30.47.3.9 `void Fl_Input_Choice::resize (int X, int Y, int W, int H) [inline, virtual]`

This resizes the [Fl_Group](#) widget and all of its children.

The [Fl_Group](#) widget first resizes itself, and then it moves and resizes all its children according to the rules documented for [Fl_Group::resizable\(Fl_Widget*\)](#)

See also:

[Fl_Group::resizable\(Fl_Widget*\)](#)
[Fl_Group::resizable\(\)](#)
[Fl_Widget::resize\(int,int,int,int\)](#)

Reimplemented from [Fl_Group](#).

References [Fl_Input_::resize\(\)](#).

30.47.3.10 `void Fl_Input_Choice::set_changed () [inline]`

Mark the value of the widget as changed.

See also:

[changed\(\)](#), [clear_changed\(\)](#)

Reimplemented from [Fl_Widget](#).

References [Fl_Widget::set_changed\(\)](#).

30.47.3.11 void Fl_Input_Choice::value (const char * *val*) [inline]

Sets or returns the input widget's current contents.

The second form sets the contents using the index into the menu which you can set as an integer. Setting the value effectively 'chooses' this menu item, and sets it as the new input text, deleting the previous text.

References Fl_Input_::value().

The documentation for this class was generated from the following file:


- [Fl_Input_Choice.H](#)

30.48 Fl_Int_Input Class Reference

The [Fl_Int_Input](#) class is a subclass of [Fl_Input](#) that only allows the user to type decimal digits (or hex numbers of the form 0xaef).

```
#include <Fl_Int_Input.h>
```

Inheritance diagram for Fl_Int_Input::



Public Member Functions

- [Fl_Int_Input](#) (int X, int Y, int W, int H, const char *l=0)

Creates a new [Fl_Int_Input](#) widget using the given position, size, and label string.

30.48.1 Detailed Description

The [Fl_Int_Input](#) class is a subclass of [Fl_Input](#) that only allows the user to type decimal digits (or hex numbers of the form 0xaef).

30.48.2 Constructor & Destructor Documentation

30.48.2.1 [Fl_Int_Input::Fl_Int_Input](#) (int X, int Y, int W, int H, const char * l = 0) [inline]

Creates a new [Fl_Int_Input](#) widget using the given position, size, and label string.

The default boxtyle is FL_DOWN_BOX.

Inherited destructor Destroys the widget and any value associated with it.

References [Fl_Widget::type\(\)](#).

The documentation for this class was generated from the following file:


- [Fl_Int_Input.H](#)

30.49 Fl_JPEG_Image Class Reference

The [Fl_JPEG_Image](#) class supports loading, caching, and drawing of Joint Photographic Experts Group (JPEG) File Interchange Format (JFIF) images.

```
#include <Fl_JPEG_Image.h>
```

Inheritance diagram for Fl_JPEG_Image::



Public Member Functions

- [Fl_JPEG_Image](#) (const char *filename)

The constructor loads the JPEG image from the given jpeg filename.

30.49.1 Detailed Description

The [Fl_JPEG_Image](#) class supports loading, caching, and drawing of Joint Photographic Experts Group (JPEG) File Interchange Format (JFIF) images.

The class supports grayscale and color (RGB) JPEG image files.

30.49.2 Constructor & Destructor Documentation

30.49.2.1 Fl_JPEG_Image::Fl_JPEG_Image (const char *jpeg)

The constructor loads the JPEG image from the given jpeg filename.

The inherited destructor free all memory and server resources that are used by the image.

References Fl_Image::d(), Fl_Image::h(), and Fl_Image::w().

The documentation for this class was generated from the following files:

- [Fl_JPEG_Image.H](#)
- [Fl_JPEG_Image.cxx](#)

30.50 Fl_Label Struct Reference

This struct stores all information for a text or mixed graphics label.

```
#include <Fl_Widget.H>
```

Public Member Functions

- void `draw` (int, int, int, int, `Fl_Align`) const
draw the label aligned to the given box
- void `measure` (int &w, int &h) const
Measures the size of the label.

Public Attributes

- const char * `value`
label text
- `Fl_Image` * `image`
optional image for an active label
- `Fl_Image` * `deimage`
optional image for a deactivated label
- uchar `type`
type of label.
- `Fl_Font` `font`
label font used in text
- `Fl_Fontsize` `size`
size of label font
- unsigned `color`
text color

30.50.1 Detailed Description

This struct stores all information for a text or mixed graphics label.

Todo

For FLTK1.3, the `Fl_Label` type will become a widget by itself. That way we will be avoiding a lot of code duplication by handling labels in a similar fashion to widgets containing text. We also provide an easy interface for very complex labels, containing html or vector graphics.

30.50.2 Member Function Documentation

30.50.2.1 void Fl_Label::draw (int X, int Y, int W, int H, Fl_Align align) const

draw the label aligned to the given box

draw label with arbitrary alignment in arbitrary box

References image, type, and value.

Referenced by Fl_Menu_Item::draw(), Fl_Choice::draw(), and Fl_Widget::draw_label().

30.50.2.2 void Fl_Label::measure (int & W, int & H) const

Measures the size of the label.

Parameters:

↔ *W,H* : this is the requested size for the label text plus image; on return, this will contain the size needed to fit the label

References image, type, and value.

Referenced by Fl_Menu_Item::measure(), and Fl_Widget::redraw_label().

30.50.3 Member Data Documentation

30.50.3.1 uchar Fl_Label::type

type of label.

See also:

[Fl_Labeltype](#)

Referenced by Fl_Menu_Item::draw(), draw(), Fl_Choice::draw(), Fl_Widget::Fl_Widget(), Fl_Menu_Item::measure(), and measure().


The documentation for this struct was generated from the following files:

- [Fl_Widget.H](#)
- fl_labeltype.cxx

30.51 Fl_Light_Button Class Reference

```
#include <Fl_Light_Button.H>
```

Inheritance diagram for Fl_Light_Button::

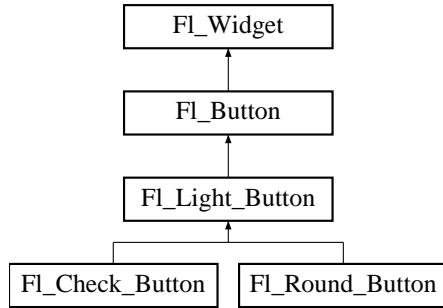

Public Member Functions

- virtual int [handle](#) (int)

Handles the specified event.

- [Fl_Light_Button](#) (int x, int y, int w, int h, const char *l=0)

Creates a new [Fl_Light_Button](#) widget using the given position, size, and label string.

Protected Member Functions


- virtual void [draw](#) ()

Draw the widget.

30.51.1 Detailed Description

This subclass displays the "on" state by turning on a light, rather than drawing pushed in. The shape of the "light" is initially set to FL_DOWN_BOX. The color of the light when on is controlled with [selection_color\(\)](#), which defaults to FL_YELLOW.

Buttons generate callbacks when they are clicked by the user. You control exactly when and how by changing the values for [type\(\)](#) and [when\(\)](#).

Figure 30.17: Fl_Light_Button

30.51.2 Constructor & Destructor Documentation

30.51.2.1 Fl_Light_Button::Fl_Light_Button (int X, int Y, int W, int H, const char *l = 0)

Creates a new [Fl_Light_Button](#) widget using the given position, size, and label string.

The destructor deletes the check button.

References [Fl_Widget::align\(\)](#), [FL_ALIGN_INSIDE](#), [FL_ALIGN_LEFT](#), [FL_TOGGLE_BUTTON](#), [Fl_Widget::selection_color\(\)](#), and [Fl_Widget::type\(\)](#).

30.51.3 Member Function Documentation

30.51.3.1 void Fl_Light_Button::draw () [protected, virtual]

Draw the widget.

Never call this function directly. FLTK will schedule redrawing whenever needed. If your widget must be redrawn as soon as possible, call [redraw\(\)](#) instead.

Override this function to draw your own widgets.

Reimplemented from [Fl_Button](#).

References [_FL_PLASTIC_DOWN_BOX](#), [_FL_PLASTIC_UP_BOX](#), [_FL_ROUND_DOWN_BOX](#), [_FL_ROUND_UP_BOX](#), [Fl_Widget::active_r\(\)](#), [Fl_Widget::box\(\)](#), [Fl::box_dw\(\)](#), [Fl::box_dx\(\)](#), [Fl_Widget::color\(\)](#), [Fl_Button::down_box\(\)](#), [Fl_Widget::draw_box\(\)](#), [Fl_Widget::draw_focus\(\)](#), [Fl_Widget::draw_label\(\)](#), [fl_arc\(\)](#), [FL_BACKGROUND2_COLOR](#), [fl_color\(\)](#), [FL_DOWN_BOX](#), [fl_line\(\)](#), [fl_pie\(\)](#), [fl_rectf\(\)](#), [FL_SELECTION_COLOR](#), [FL_THIN_DOWN_BOX](#), [FL_UP_BOX](#), [Fl::focus\(\)](#), [Fl_Widget::h\(\)](#), [Fl_Widget::labelsize\(\)](#), [Fl::pushed\(\)](#), [Fl::scheme\(\)](#), [Fl_Widget::selection_color\(\)](#), [Fl_Button::value\(\)](#), [Fl_Widget::w\(\)](#), [Fl_Widget::x\(\)](#), and [Fl_Widget::y\(\)](#).

30.51.3.2 int Fl_Light_Button::handle (int event) [virtual]

Handles the specified event.

You normally don't call this method directly, but instead let FLTK do it when the user interacts with the widget.

When implemented in a new widget, this function must return 0 if the widget does not use the event or 1 otherwise.

Most of the time, you want to call the inherited [handle\(\)](#) method in your overriden method so that you don't short-circuit events that you don't handle. In this last case you should return the callee retval.

Parameters:

← *event* the kind of event received

Return values:

0 if the event was not used or understood

1 if the event was used and can be deleted

See also:

[Fl_Event](#)

Reimplemented from [Fl_Button](#).

References [Fl_Widget::box\(\)](#), [FL_RELEASE](#), and [Fl_Widget::redraw\(\)](#).

The documentation for this class was generated from the following files:


- [Fl_Light_Button.H](#)
- [Fl_Light_Button.cxx](#)

30.52 Fl_Menu_ Class Reference

Base class of all widgets that have a menu in FLTK.

```
#include <Fl_Menu_.H>
```

Inheritance diagram for Fl_Menu_::

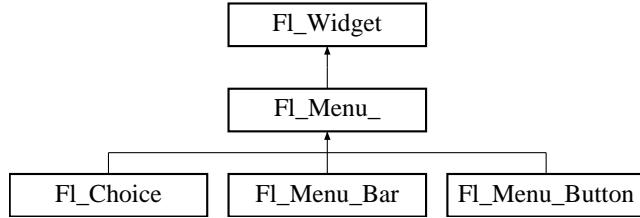

Public Member Functions

- **Fl_Menu_ (int, int, int, int, const char *=0)**
Creates a new `Fl_Menu_` widget using the given position, size, and label string.
- int **item.pathname (char *name, int namelen, const Fl_Menu_Item *finditem=0) const**
Set 'pathname' of specified menuitem If `finditem==NULL`, `mvalue()` is used (the most recently picked menuitem) Returns:
 - 0 : OK
 - -1 : item not found (`name=""`)
 - -2 : 'name' not large enough (`name=""`).
- const **Fl_Menu_Item * picked (const Fl_Menu_Item *)**
When user picks a menu item, call this.
- const **Fl_Menu_Item * find_item (const char *name)**
Find menu item index, given menu pathname eg.
- const **Fl_Menu_Item * test_shortcut ()**
Internal use only.
- void **global ()**
Make the shortcuts for this menu work no matter what window has the focus when you type it.
- const **Fl_Menu_Item * menu () const**
Returns a pointer to the array of `Fl_Menu_Items`.
- void **menu (const Fl_Menu_Item *m)**
Sets the menu array pointer directly.
- void **copy (const Fl_Menu_Item *m, void *user_data=0)**
Sets the menu array pointer with a copy of m that will be automatically deleted.
- int **add (const char *, int shortcut, Fl_Callback *, void *=0, int=0)**

Adds a new menu item, with a title string, shortcut int (or string), callback, argument to the callback, and flags.

- int **add** (const char *a, const char *b, **Fl_Callback** *c, void *d=0, int e=0)

See int [Fl_Menu_::add](#)(const char label, int shortcut, Fl_Callback*, void *user_data=0, int flags=0).*

- int **add** (const char *)

This is a Forms (and SGI GL library) compatible add function, it adds many menu items, with '|' separating the menu items, and tab separating the menu item names from an optional shortcut string.

- int **size** () const

This returns the number of [Fl_Menu_Item](#) structures that make up the menu, correctly counting submenus.

- void **size** (int W, int H)

Change the size of the widget.

- void **clear** ()

Same as menu(NULL), set the array pointer to null, indicating a zero-length menu.

- void **replace** (int, const char *)

Changes the text of item n.

- void **remove** (int)

Deletes item n from the menu.

- void **shortcut** (int i, int s)

Changes the shortcut of item i to n.

- void **mode** (int i, int fl)

Sets the flags of item i.

- int **mode** (int i) const

Gets the flags of item i.

- const **Fl_Menu_Item** * **mvalue** () const

Returns a pointer to the last menu item that was picked.

- int **value** () const

Returns the index into [menu\(\)](#) of the last item chosen by the user.

- int **value** (const **Fl_Menu_Item** *)

The value is the index into [menu\(\)](#) of the last item chosen by the user.

- int **value** (int i)

The value is the index into [menu\(\)](#) of the last item chosen by the user.

- const char * **text** () const

Returns the title of the last item chosen, or of item i.

- const char * **text** (int i) const

Returns the title of the last item chosen, or of item i.

- **Fl_Font textfont () const**
Gets the current font of menu item labels.
- **void textfont (Fl_Font c)**
Sets the current font of menu item labels.
- **Fl_Fontsize textsize () const**
Gets the font size of menu item labels.
- **void textsize (Fl_Fontsize c)**
Sets the font size of menu item labels.
- **Fl_Color textcolor () const**
Get the current color of menu item labels.
- **void textcolor (unsigned c)**
Sets the current color of menu item labels.
- **Fl_Boxtype down_box () const**
This box type is used to surround the currently-selected items in the menus.
- **void down_box (Fl_Boxtype b)**
See Fl_Boxtype [Fl_Menu_::down_box\(\)](#) const.
- **Fl_Color down_color () const**
For back compatibility, same as [selection_color\(\)](#).
- **void down_color (unsigned c)**
For back compatibility, same as [selection_color\(\)](#).

Protected Attributes

- **uchar alloc**
- **uchar down_box_**
- **Fl_Font textfont_**
- **Fl_Fontsize textsize_**
- **unsigned textcolor_**

30.52.1 Detailed Description

Base class of all widgets that have a menu in FLTK.

Currently FLTK provides you with [Fl_Menu_Button](#), [Fl_Menu_Bar](#), and [Fl_Choice](#).

The class contains a pointer to an array of structures of type [Fl_Menu_Item](#). The array may either be supplied directly by the user program, or it may be "private": a dynamically allocated array managed by the [Fl_Menu_](#).

30.52.2 Constructor & Destructor Documentation

30.52.2.1 `Fl_Menu_::Fl_Menu_ (int X, int Y, int W, int H, const char * l = 0)`

Creates a new `Fl_Menu_` widget using the given position, size, and label string.

`menu()` is initialized to null.

References `Fl_Widget::box()`, `down_box()`, `FL_FOREGROUND_COLOR`, `FL_HELVETICA`, `FL_NO_BOX`, `FL_NORMAL_SIZE`, `FL_SELECTION_COLOR`, `FL_UP_BOX`, `FL_WHEN_RELEASE_ALWAYS`, `Fl_Widget::selection_color()`, `Fl_Widget::set_flag()`, `Fl_Widget::SHORTCUT_LABEL`, `textcolor()`, `textfont()`, `textsize()`, and `Fl_Widget::when()`.

30.52.3 Member Function Documentation

30.52.3.1 `int Fl_Menu_::add (const char * str)`

This is a Forms (and SGI GL library) compatible add function, it adds many menu items, with '|' separating the menu items, and tab separating the menu item names from an optional shortcut string.

The passed string is split at any '|' characters and then `add(s,0,0,0,0)` is done with each section. This is often useful if you are just using the value, and is compatible with Forms and other GL programs. The section strings use the same special characters as described for the long version of `add()`

No items must be added to a menu during a callback to the same menu.

30.52.3.2 `int Fl_Menu_::add (const char * t, int s, Fl_Callback * c, void * v = 0, int f = 0)`

Adds a new menu item, with a title string, shortcut int (or string), callback, argument to the callback, and flags.

If the menu array was directly set with `menu(x)` then `copy()` is done to make a private array.

The characters "&", "/", "\\", and "_" are treated as special characters in the label string. The "&" character specifies that the following character is an accelerator and will be underlined. The "\\" character is used to escape the next character in the string. Labels starting with the "_" character cause a divider to be placed after that menu item.

A label of the form "foo/bar/baz" will create a submenus called "foo" and "bar" with an entry called "baz". The "/" character is ignored if it appears as the first character of the label string, e.g. "/foo/bar/baz".

The label string is copied to new memory and can be freed. The other arguments (including the shortcut) are copied into the menu item unchanged.

If an item exists already with that name then it is replaced with this new one. Otherwise this new one is added to the end of the correct menu or submenu. The return value is the offset into the array that the new entry was placed at.

Shortcut can be 0L, or either a modifier/key combination (for example `FL_CTRL+A`) or a string describing the shortcut in one of two ways:

```
[#+^]<ascii_value>;    eg. "97", "^97", "+97", "#97"
[#+^]<ascii_char>;    eg. "a", "^a", "+a", "#a"
```

..where `<ascii_value>` is a decimal value representing an ascii character (eg. 97 is the ascii for 'a'), and the optional prefixes enhance the value that follows. Multiple prefixes must appear in the above order.

```
# - Alt
+ - Shift
^ - Control
```

Text shortcuts are converted to integer shortcut by calling int fl_old_shortcut(const char*).

The return value is the index into the array that the entry was put.

No items must be added to a menu during a callback to the same menu.

References Fl_Menu_Item::add(), copy(), menu_, size(), and value_.

Referenced by Fl_File_Chooser::filter(), and Fl_File_Chooser::rescan_keep_filename().

30.52.3.3 void Fl_Menu_::clear ()

Same as menu(NULL), set the array pointer to null, indicating a zero-length menu.

Menus must no be cleared during a callback to the same menu.

References size(), and text().

Referenced by Fl_File_Chooser::filter(), menu(), and Fl_File_Chooser::rescan_keep_filename().

30.52.3.4 void Fl_Menu_::copy (const Fl_Menu_Item * m, void * ud = 0)

Sets the menu array pointer with a copy of m that will be automatically deleted.

If ud is not NULL, then all user data pointers are changed in the menus as well. See void [Fl_Menu_::menu\(const Fl_Menu_Item* m\)](#).

References Fl_Menu_Item::callback_, menu(), Fl_Menu_Item::size(), and Fl_Menu_Item::user_data_.

Referenced by add(), remove(), and replace().

30.52.3.5 Fl_Boxtype Fl_Menu_::down_box () const [inline]

This box type is used to surround the currently-selected items in the menus.

If this is FL_NO_BOX then it acts like FL_THIN_UP_BOX and [selection_color\(\)](#) acts like FL_WHITE, for back compatibility.

Referenced by Fl_Menu_Item::draw(), Fl_Choice::Fl_Choice(), Fl_File_Chooser::Fl_File_Chooser(), Fl_Menu_(), and Fl_Menu_Button::Fl_Menu_Button().

30.52.3.6 const Fl_Menu_Item * Fl_Menu_::find_item (const char * name)

Find menu item index, given menu pathname eg.

"Edit/Copy" Will also return submenus, eg. "Edit" Returns NULL if not found.

References Fl_Menu_Item::flags, Fl_Menu_Item::label(), and size().

30.52.3.7 void Fl_Menu_::global ()

Make the shortcuts for this menu work no matter what window has the focus when you type it.

This is done by using [Fl::add_handler\(\)](#). This [Fl_Menu_](#) widget does not have to be visible (ie the window it is in can be hidden, or it does not have to be put in a window at all).

Currently there can be only one [global\(\)](#)menu. Setting a new one will replace the old one. There is no way to remove the [global\(\)](#) setting (so don't destroy the widget!)

References [Fl::add_handler\(\)](#).

30.52.3.8 void Fl_Menu_::menu (const Fl_Menu_Item * m)

Sets the menu array pointer directly.

If the old menu is private it is deleted. NULL is allowed and acts the same as a zero-length menu. If you try to modify the array (with [add\(\)](#), [replace\(\)](#), or [delete\(\)](#)) a private copy is automatically done.

References [clear\(\)](#).

30.52.3.9 const Fl_Menu_Item* Fl_Menu_::menu () const [inline]

Returns a pointer to the array of [Fl_Menu_Items](#).

This will either be the value passed to menu(value) or the private copy.

Referenced by [copy\(\)](#), [Fl_Menu_Bar::draw\(\)](#), [Fl_Color_Chooser::Fl_Color_Chooser\(\)](#), [Fl_Menu_Button::handle\(\)](#), [Fl_Menu_Bar::handle\(\)](#), [Fl_Choice::handle\(\)](#), [item_pathname\(\)](#), [Fl_Menu_Button::popup\(\)](#), and [Fl_File_Chooser::rescan_keep_filename\(\)](#).

30.52.3.10 int Fl_Menu_::mode (int i) const [inline]

Gets the flags of item i.

For a list of the flags, see [Fl_Menu_Item](#).

30.52.3.11 void Fl_Menu_::mode (int i, int fl) [inline]

Sets the flags of item i.

For a list of the flags, see [Fl_Menu_Item](#).

30.52.3.12 const Fl_Menu_Item* Fl_Menu_::mvalue () const [inline]

Returns a pointer to the last menu item that was picked.

Referenced by [Fl_Choice::draw\(\)](#), [Fl_Choice::handle\(\)](#), [item_pathname\(\)](#), and [Fl_Menu_Button::popup\(\)](#).

30.52.3.13 const Fl_Menu_Item * Fl_Menu_::picked (const Fl_Menu_Item * v)

When user picks a menu item, call this.

It will do the callback. Unfortunatly this also casts away const for the checkboxes, but this was necessary so non-checkbox menus can really be declared const...

References [Fl_Menu_Item::callback_](#), [Fl_Widget::changed\(\)](#), [Fl_Widget::do_callback\(\)](#), [Fl_Menu_Item::do_callback\(\)](#), [FL_WHEN_CHANGED](#), [FL_WHEN_NOT_CHANGED](#), [FL_WHEN_RELEASE](#),

Fl_Menu_Item::flags, Fl_Menu_Item::radio(), Fl_Widget::redraw(), Fl_Widget::set_changed(), Fl_Menu_Item::value(), and Fl_Widget::when().

Referenced by Fl_Menu_Bar::handle(), Fl_Choice::handle(), and Fl_Menu_Button::popup().

30.52.3.14 void Fl_Menu::remove (int i)

Deletes item n from the menu.

If the menu array was directly set with menu(x) then [copy\(\)](#) is done to make a private array.

No items must be removed from a menu during a callback to the same menu.

References [copy\(\)](#), Fl_Menu_Item::next(), size(), and Fl_Menu_Item::text.

30.52.3.15 void Fl_Menu::replace (int i, const char * str)

Changes the text of item n.

This is the only way to get slash into an [add\(\)](#)'ed menu item. If the menu array was directly set with menu(x) then [copy\(\)](#) is done to make a private array.

References [copy\(\)](#), size(), and Fl_Menu_Item::text.

30.52.3.16 void Fl_Menu::shortcut (int i, int s) [inline]

Changes the shortcut of item i to n.

30.52.3.17 void Fl_Menu::size (int W, int H) [inline]

Change the size of the widget.

[size\(w,h\)](#) is a shortcut for [resize\(x\(\),y\(\),w,h\)](#).

Parameters:

← *W,H* new size

See also:

[position\(int, int\)](#), [resize\(int, int, int, int\)](#)

Reimplemented from [Fl_Widget](#).

References [Fl_Widget::size\(\)](#).

30.52.3.18 int Fl_Menu::size () const

This returns the number of [Fl_Menu_Item](#) structures that make up the menu, correctly counting submenus.

This includes the "terminator" item at the end. To copy a menu array you need to copy [size\(\) * sizeof\(Fl_Menu_Item\)](#) bytes. If the menu is NULL this returns zero (an empty menu will return 1).

References [Fl_Menu_Item::size\(\)](#).

Referenced by [add\(\)](#), [clear\(\)](#), [find_item\(\)](#), [item.pathname\(\)](#), [remove\(\)](#), [replace\(\)](#), [Fl_File_Chooser::rescan_keep_filename\(\)](#), and [Fl_Choice::value\(\)](#).

30.52.3.19 const Fl_Menu_Item* Fl_Menu_::test_shortcut () [inline]

Internal use only.

Reimplemented from [Fl_Widget](#).

References [test_shortcut\(\)](#).

Referenced by [Fl_Menu_Button::handle\(\)](#), [Fl_Menu_Bar::handle\(\)](#), and [test_shortcut\(\)](#).

30.52.3.20 const char* Fl_Menu_::text (int i) const [inline]

Returns the title of the last item chosen, or of item i.

30.52.3.21 const char* Fl_Menu_::text () const [inline]

Returns the title of the last item chosen, or of item i.

Referenced by [clear\(\)](#), [Fl_Menu_Bar::draw\(\)](#), [Fl_Menu_Button::handle\(\)](#), [Fl_Menu_Bar::handle\(\)](#), [Fl_Choice::handle\(\)](#), and [Fl_File_Chooser::rescan_keep_filename\(\)](#).

30.52.3.22 void Fl_Menu_::textcolor (unsigned c) [inline]

Sets the current color of menu item labels.

30.52.3.23 Fl_Color Fl_Menu_::textcolor () const [inline]

Get the current color of menu item labels.

Referenced by [Fl_Menu_Item::draw\(\)](#), [Fl_Choice::draw\(\)](#), and [Fl_Menu_\(\)](#).

30.52.3.24 void Fl_Menu_::textfont (Fl_Font c) [inline]

Sets the current font of menu item labels.

30.52.3.25 Fl_Font Fl_Menu_::textfont () const [inline]

Gets the current font of menu item labels.

Referenced by [Fl_Menu_Item::draw\(\)](#), [Fl_Choice::draw\(\)](#), [Fl_Choice::Fl_Choice\(\)](#), [Fl_Color_Chooser::Fl_Color_Chooser\(\)](#), [Fl_Menu_\(\)](#), and [Fl_Menu_Item::measure\(\)](#).

30.52.3.26 void Fl_Menu_::textsize (Fl_Fontsize c) [inline]

Sets the font size of menu item labels.

30.52.3.27 Fl_Fontsize Fl_Menu_::textsize () const [inline]

Gets the font size of menu item labels.

Referenced by [Fl_Menu_Item::draw\(\)](#), [Fl_Choice::draw\(\)](#), [Fl_Menu_\(\)](#), and [Fl_Menu_Item::measure\(\)](#).

30.52.3.28 int Fl_Menu_::value (int *i*) [inline]

The value is the index into [menu\(\)](#) of the last item chosen by the user.

It is zero initially. You can set it as an integer, or set it with a pointer to a menu item. The set routines return non-zero if the new value is different than the old one.

Reimplemented in [Fl_Choice](#).

References [value\(\)](#).

Referenced by [value\(\)](#).

30.52.3.29 int Fl_Menu_::value (const Fl_Menu_Item * *m*)

The value is the index into [menu\(\)](#) of the last item chosen by the user.

It is zero initially. You can set it as an integer, or set it with a pointer to a menu item. The set routines return non-zero if the new value is different than the old one.

Reimplemented in [Fl_Choice](#).

References [Fl_Widget::clear_changed\(\)](#).

30.52.3.30 int Fl_Menu_::value () const [inline]

Returns the index into [menu\(\)](#) of the last item chosen by the user.

It is zero initially.

Reimplemented in [Fl_Choice](#).

Referenced by [Fl_Choice::value\(\)](#).

The documentation for this class was generated from the following files:


- [Fl_Menu_.H](#)
- [Fl_Menu_.cxx](#)
- [Fl_Menu_add.cxx](#)
- [Fl_Menu_global.cxx](#)

30.53 Fl_Menu_Bar Class Reference

This widget provides a standard menubar interface.

```
#include <Fl_Menu_Bar.h>
```

Inheritance diagram for Fl_Menu_Bar::



Public Member Functions

- int [handle](#) (int)
Handles the specified event.
- [Fl_Menu_Bar](#) (int X, int Y, int W, int H, const char *l=0)
Creates a new [Fl_Menu_Bar](#) widget using the given position, size, and label string.

Protected Member Functions

- void [draw](#) ()
Draw the widget.

30.53.1 Detailed Description

This widget provides a standard menubar interface.

Usually you will put this widget along the top edge of your window. The height of the widget should be 30 for the menu titles to draw correctly with the default font.

The items on the bar and the menus they bring up are defined by a single [Fl_Menu_Item](#) array. Because a [Fl_Menu_Item](#) array defines a hierarchy, the top level menu defines the items in the menubar, while the submenus define the pull-down menus. Sub-sub menus and lower pop up to the right of the submenus.




Figure 30.18: menubar

If there is an item in the top menu that is not a title of a submenu, then it acts like a "button" in the menubar. Clicking on it will pick it.

When the user picks an item off the menu, the item's callback is done with the menubar as the `Fl_Widget*` argument. If the item does not have a callback the menubar's callback is done instead.

Submenus will also pop up in response to shortcuts indicated by putting a '&' character in the name field of the menu item. If you put a '&' character in a top-level "button" then the shortcut picks it. The '&' character in submenus is ignored until the menu is popped up.

Typing the `shortcut()` of any of the menu items will cause callbacks exactly the same as when you pick the item with the mouse.

30.53.2 Constructor & Destructor Documentation

30.53.2.1 `Fl_Menu_Bar::Fl_Menu_Bar (int X, int Y, int W, int H, const char *l = 0)` [inline]

Creates a new `Fl_Menu_Bar` widget using the given position, size, and label string.

The default boxtyle is `FL_UP_BOX`.

The constructor sets `menu()` to NULL. See `Fl_Menu_` for the methods to set or change the menu.

`labelsize()`, `labelfont()`, and `labelcolor()` are used to control how the menubar items are drawn. They are initialized from the `Fl_Menu` static variables, but you can change them if desired.

`label()` is ignored unless you change `align()` to put it outside the menubar.

The destructor removes the `Fl_Menu_Bar` widget and all of its menu items.

30.53.3 Member Function Documentation

30.53.3.1 `void Fl_Menu_Bar::draw () [protected, virtual]`

Draw the widget.

Never call this function directly. FLTK will schedule redrawing whenever needed. If your widget must be redrawn as soon as possible, call `redraw()` instead.

Override this function to draw your own widgets.

Implements `Fl_Widget`.

References `Fl_Widget::box()`, `Fl::box_dh()`, `Fl::box_dy()`, `Fl_Menu_Item::draw()`, `Fl_Widget::draw_box()`, `fl_color()`, `fl_yxline()`, `Fl_Menu_Item::flags`, `Fl_Widget::h()`, `Fl_Menu_Item::measure()`, `Fl_Menu_::menu()`, `Fl_Menu_Item::next()`, `Fl_Menu_Item::text`, `Fl_Menu_::text()`, `Fl_Widget::x()`, and `Fl_Widget::y()`.

30.53.3.2 `int Fl_Menu_Bar::handle (int event) [virtual]`

Handles the specified event.

You normally don't call this method directly, but instead let FLTK do it when the user interacts with the widget.

When implemented in a new widget, this function must return 0 if the widget does not use the event or 1 otherwise.

Most of the time, you want to call the inherited `handle()` method in your overridden method so that you don't short-circuit events that you don't handle. In this last case you should return the callee retval.

Parameters:

← *event* the kind of event received

Return values:

0 if the event was not used or understood
1 if the event was used and can be deleted

See also:

[Fl_Event](#)

Reimplemented from [Fl_Widget](#).

References `Fl_Menu_Item::find_shortcut()`, `FL_ENTER`, `FL_LEAVE`, `FL_PUSH`, `FL_SHORTCUT`, `Fl_Widget::h()`, `Fl_Menu_::menu()`, `Fl_Menu_::picked()`, `Fl_Menu_Item::popup()`, `Fl_Menu_Item::submenu()`, `Fl_Menu_::test_shortcut()`, `Fl_Menu_::text()`, `Fl_Widget::visible_r()`, `Fl_Widget::w()`, `Fl_Widget::x()`, and `Fl_Widget::y()`.

The documentation for this class was generated from the following files:


- [Fl_Menu_Bar.H](#)
- [Fl_Menu_Bar.cxx](#)

30.54 Fl_Menu_Button Class Reference

This is a button that when pushed pops up a menu (or hierarchy of menus) defined by an array of [Fl_Menu_Item](#) objects.

```
#include <Fl_Menu_Button.h>
```

Inheritance diagram for Fl_Menu_Button::



Public Types

- enum {
POPUP1 = 1, **POPUP2**, **POPUP12**, **POPUP3**,
POPUP13, **POPUP23**, **POPUP123** }

Public Member Functions

- int [handle](#) (int)
Handles the specified event.
- const [Fl_Menu_Item](#) * [popup](#) ()
Act exactly as though the user clicked the button or typed the shortcut key.
- [Fl_Menu_Button](#) (int, int, int, int, const char *=0)
Creates a new [Fl_Menu_Button](#) widget using the given position, size, and label string.

Protected Member Functions

- void [draw](#) ()
Draw the widget.

30.54.1 Detailed Description

This is a button that when pushed pops up a menu (or hierarchy of menus) defined by an array of [Fl_Menu_Item](#) objects.



Figure 30.19: menu_button

Normally any mouse button will pop up a menu and it is lined up below the button as shown in the picture. However an [FL_Menu_Button](#) may also control a pop-up menu. This is done by setting the [type\(\)](#) , see below.

The menu will also pop up in response to shortcuts indicated by putting a '&' character in the [label\(\)](#).

Typing the [shortcut\(\)](#) of any of the menu items will cause callbacks exactly the same as when you pick the item with the mouse. The '&' character in menu item names are only looked at when the menu is popped up, however.

When the user picks an item off the menu, the item's callback is done with the menu_button as the [Fl_Widget*](#) argument. If the item does not have a callback the menu_button's callback is done instead.

30.54.2 Constructor & Destructor Documentation

30.54.2.1 [FL_Menu_Button::FL_Menu_Button \(int X, int Y, int W, int H, const char *l = 0\)](#)

Creates a new [FL_Menu_Button](#) widget using the given position, size, and label string.

The default boxtyle is [FL_UP_BOX](#).

The constructor sets [menu\(\)](#) to NULL. See [FL_Menu_](#) for the methods to set or change the menu.

References [Fl_Menu_::down_box\(\)](#), and [FL_NO_BOX](#).

30.54.3 Member Function Documentation

30.54.3.1 [void FL_Menu_Button::draw \(\) \[protected, virtual\]](#)

Draw the widget.

Never call this function directly. FLTK will schedule redrawing whenever needed. If your widget must be redrawn as soon as possible, call [redraw\(\)](#) instead.

Override this function to draw your own widgets.

Implements [Fl_Widget](#).

References `Fl_Widget::active_r()`, `Fl_Widget::box()`, `Fl_Widget::color()`, `Fl_Widget::draw_box()`, `Fl_Widget::draw_focus()`, `Fl_Widget::draw_label()`, `fl_color()`, `FL_FLAT_BOX`, `fl_line()`, `Fl::focus()`, `Fl_Widget::h()`, `Fl_Widget::labelsize()`, `Fl_Widget::type()`, `Fl_Widget::w()`, `Fl_Widget::x()`, and `Fl_Widget::y()`.

30.54.3.2 int Fl_Menu_Button::handle (int *event*) [virtual]

Handles the specified event.

You normally don't call this method directly, but instead let FLTK do it when the user interacts with the widget.

When implemented in a new widget, this function must return 0 if the widget does not use the event or 1 otherwise.

Most of the time, you want to call the inherited [handle\(\)](#) method in your overriden method so that you don't short-circuit events that you don't handle. In this last case you should return the callee retval.

Parameters:

\leftarrow *event* the kind of event received

Return values:

0 if the event was not used or understood
1 if the event was used and can be deleted

See also:

[Fl_Event](#)

Reimplemented from [Fl_Widget](#).

References `Fl_Widget::box()`, `Fl::event_button()`, `Fl::event_key()`, `Fl::event_state()`, `FL_ALT`, `FL_CTRL`, `FL_ENTER`, `FL_FOCUS`, `FL_KEYBOARD`, `FL_LEAVE`, `FL_META`, `FL_PUSH`, `FL_SHIFT`, `FL_SHORTCUT`, `FL_UNFOCUS`, `Fl::focus()`, `Fl_Menu_::menu()`, `popup()`, `Fl_Widget::redraw()`, `Fl_Menu_::test_shortcut()`, `Fl_Widget::test_shortcut()`, `Fl_Menu_::text()`, `Fl_Widget::type()`, and `Fl::visible_focus()`.

30.54.3.3 const Fl_Menu_Item * Fl_Menu_Button::popup ()

Act exactly as though the user clicked the button or typed the shortcut key.

The menu appears, it waits for the user to pick an item, and if they pick one it sets [value\(\)](#) and does the callback or sets [changed\(\)](#) as described above. The menu item is returned or NULL if the user dismisses the menu.

References `Fl_Widget::box()`, `Fl::event_x()`, `Fl::event_y()`, `Fl_Widget::h()`, `Fl_Widget::label()`, `Fl_Menu_::menu()`, `Fl_Menu_::mvalue()`, `Fl_Menu_::picked()`, `Fl_Menu_Item::popup()`, `Fl_Menu_::Item::popup()`, `Fl_Widget::redraw()`, `Fl::release_widget_pointer()`, `Fl_Widget::type()`, `Fl_Widget::w()`, `Fl::watch_widget_pointer()`, `Fl_Widget::x()`, and `Fl_Widget::y()`.

Referenced by [handle\(\)](#).

The documentation for this class was generated from the following files:

- [Fl_Menu_Button.H](#)
- [Fl_Menu_Button.cxx](#)

30.55 Fl_Menu_Item Struct Reference

The [Fl_Menu_Item](#) structure defines a single menu item that is used by the [Fl_Menu_](#) class.

```
#include <Fl_Menu_Item.h>
```

Public Member Functions

- `const Fl_Menu_Item * next (int n=1) const`
Advance a pointer by n items through a menu array, skipping the contents of submenus and invisible items.
- `Fl_Menu_Item * next (int i=1)`
Advance a pointer by n items through a menu array, skipping the contents of submenus and invisible items.
- `const Fl_Menu_Item * first () const`
Returns the first menu item, same as next(0).
- `Fl_Menu_Item * first ()`
Returns the first menu item, same as next(0).
- `const char * label () const`
This is the title of the item.
- `void label (const char *a)`
See const char [Fl_Menu_Item::label\(\)](#) const.*
- `void label (Fl_Labeltype a, const char *b)`
See const char [Fl_Menu_Item::label\(\)](#) const.*
- `Fl_Labeltype labeltype () const`
A labeltype identifies a routine that draws the label of the widget.
- `void labeltype (Fl_Labeltype a)`
A labeltype identifies a routine that draws the label of the widget.
- `Fl_Color labelcolor () const`
This color is passed to the labeltype routine, and is typically the color of the label text.
- `void labelcolor (unsigned a)`
See Fl_Color [Fl_Menu_Item::labelcolor\(\)](#) const.
- `Fl_Font labelfont () const`
FONTS ARE IDENTIFIED BY SMALL 8-BIT INDEXES INTO A TABLE.
- `void labelfont (Fl_Font a)`
FONTS ARE IDENTIFIED BY SMALL 8-BIT INDEXES INTO A TABLE.
- `Fl_Fontsize labelsize () const`
GETS OR SETS THE LABEL FONT PIXEL SIZE/HEIGHT.

- void **labelsize** (Fl_Fontsize a)
Sets the label font pixel size/height.
- **Fl_Callback_p callback () const**
Each item has space for a callback function and an argument for that function.
- void **callback** (Fl_Callback *c, void *p)
See Fl_Callback_p Fl_MenuItem::callback() const.
- void **callback** (Fl_Callback *c)
See Fl_Callback_p Fl_MenuItem::callback() const.
- void **callback** (Fl_Callback0 *c)
See Fl_Callback_p Fl_MenuItem::callback() const.
- void **callback** (Fl_Callback1 *c, long p=0)
See Fl_Callback_p Fl_MenuItem::callback() const.
- void * **user_data () const**
Get or set the user_data argument that is sent to the callback function.
- void **user_data** (void *v)
Get or set the user_data argument that is sent to the callback function.
- long **argument () const**
For convenience you can also define the callback as taking a long argument.
- void **argument** (long v)
For convenience you can also define the callback as taking a long argument.
- int **shortcut () const**
Gets what key combination shortcut will trigger the menu item.
- void **shortcut** (int s)
Sets exactly what key combination will trigger the menu item.
- int **submenu () const**
Returns true if either FL_SUBMENU or FL_SUBMENU_POINTER is on in the flags.
- int **checkbox () const**
Returns true if a checkbox will be drawn next to this item.
- int **radio () const**
Returns true if this item is a radio item.
- int **value () const**
Returns the current value of the check or radio item.
- void **set ()**
Turns the check or radio item "on" for the menu item.

- void **clear** ()

Turns the check or radio item "off" for the menu item.
- void **setonly** ()

Turns the radio item "on" for the menu item and turns off adjacent radio items set.
- int **visible** () const

Gets the visibility of an item.
- void **show** ()

Makes an item visible in the menu.
- void **hide** ()

Hides an item in the menu.
- int **active** () const

Get whether or not the item can be picked.
- void **activate** ()

Allows a menu item to be picked.
- void **deactivate** ()

Prevents a menu item from being picked.
- int **activevisible** () const

Returns non 0 if FL_INACTIVE and FL_INVISIBLE are cleared, 0 otherwise.
- void **image** (Fl_Image *a)

compatibility api for FLUID, same as a->label(this)
- void **image** (Fl_Image &a)

compatibility api for FLUID, same as a.label(this)
- int **measure** (int *h, const Fl_Menu_ *) const

Measures width of label, including effect of & characters.
- void **draw** (int x, int y, int w, int h, const Fl_Menu_ *, int t=0) const

Draws the menu item in bounding box x,y,w,h, optionally selects the item.
- const Fl_Menu_Item * **popup** (int X, int Y, const char *title=0, const Fl_Menu_Item *picked=0, const Fl_Menu_ *=0) const

This method is called by widgets that want to display menus.
- const Fl_Menu_Item * **pulldown** (int X, int Y, int W, int H, const Fl_Menu_Item *picked=0, const Fl_Menu_ *=0, const Fl_Menu_Item *title=0, int menubar=0) const

Pulldown() is similar to popup(), but a rectangle is provided to position the menu.
- const Fl_Menu_Item * **test_shortcut** () const

This is designed to be called by a widgets handle() method in response to a FL_SHORTCUT event.

- const [Fl_Menu_Item](#) * [find_shortcut](#) (int *ip=0) const
Search only the top level menu for a shortcut.
- void [do_callback](#) ([Fl_Widget](#) *o) const
Call the [Fl_Menu_Item](#) item's callback, and provide the [Fl_Widget](#) argument (and optionally override the [user_data\(\)](#) argument).
- void [do_callback](#) ([Fl_Widget](#) *o, void *arg) const
Call the [Fl_Menu_Item](#) item's callback, and provide the [Fl_Widget](#) argument (and optionally override the [user_data\(\)](#) argument).
- void [do_callback](#) ([Fl_Widget](#) *o, long arg) const
Call the [Fl_Menu_Item](#) item's callback, and provide the [Fl_Widget](#) argument (and optionally override the [user_data\(\)](#) argument).
- int [checked](#) () const
back compatibility only
- void [check](#) ()
back compatibility only
- void [uncheck](#) ()
back compatibility only
- int [add](#) (const char *, int shortcut, [Fl_Callback](#) *, void *=0, int=0)
Adds an item.
- int [add](#) (const char *a, const char *b, [Fl_Callback](#) *c, void *d=0, int e=0)
See int [add\(const char, int shortcut, Fl_Callback*, void*, int\)](#).*
- int [size](#) () const
Size of the menu starting from this menu item.

Public Attributes

- const char * [text](#)
menu item text, returned by [label\(\)](#)
- int [shortcut_](#)
menu item shortcut
- [Fl_Callback](#) * [callback_](#)
menu item callback
- void * [user_data_](#)
menu item user_data for 3rd party apps
- int [flags](#)

menu item flags like FL_MENU_TOGGLE,FL_MENU_RADIO

- **uchar labeltype_**
how the menu item text looks like
- **Fl_Font labelfont_**
which font for this menu item text
- **Fl_Fontsize labelsize_**
size of menu item text
- **unsigned labelcolor_**
menu item text color

30.55.1 Detailed Description

The [Fl_Menu_Item](#) structure defines a single menu item that is used by the [Fl_Menu_](#) class.

```
struct Fl_Menu_Item {
    const char*          text; // label()
    ulong                shortcut_;
    Fl_Callback*         callback_;
    void*                user_data_;
    int                  flags;
    uchar                labeltype_;
    uchar                labelfont_;
    uchar                labelsize_;
    uchar                labelcolor_;
};

enum { // values for flags:
    FL_MENU_INACTIVE     = 1,
    FL_MENU_TOGGLE       = 2,
    FL_MENU_VALUE        = 4,
    FL_MENU_RADIO        = 8,
    FL_MENU_INVISIBLE    = 0x10,
    FL_SUBMENU_POINTER   = 0x20,
    FL_SUBMENU           = 0x40,
    FL_MENU_DIVIDER      = 0x80,
    FL_MENU_HORIZONTAL   = 0x100
};
```

Typically menu items are statically defined; for example:

```
Fl_Menu_Item popup[] = {
    {"&alpha",    FL_ALT+'a', the_cb, (void*)1},
    {"&beta",     FL_ALT+'b', the_cb, (void*)2},
    {"gamma",      FL_ALT+'c', the_cb, (void*)3, FL_MENU_DIVIDER},
    {"&strange",   0, strange_cb},
    {"&charm",    0, charm_cb},
    {"&truth",     0, truth_cb},
    {"b&eauty",   0, beauty_cb},
    {"sub&menu",   0, 0, 0, FL_SUBMENU},
    {"one"}, {"two"}, {"three"}, {0},
    {"inactive",  FL_ALT+'i', 0, 0, FL_MENU_INACTIVE|FL_MENU_DIVIDER},
```

```
{"invisible",FL_ALT+'i', 0, 0, FL_MENU_INVISIBLE},
 {"check",      FL_ALT+'i', 0, 0, FL_MENU_TOGGLE|FL_MENU_VALUE},
 {"box",        FL_ALT+'i', 0, 0, FL_MENU_TOGGLE},
 {0}};
```

produces:

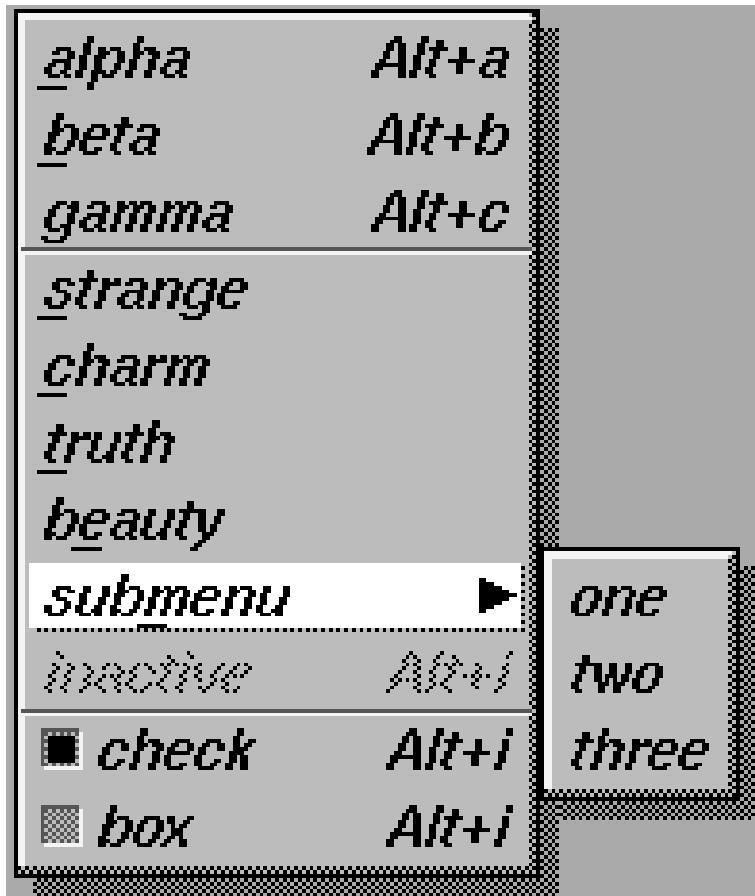


Figure 30.20: menu

A submenu title is identified by the bit FL_SUBMENU in the flags field, and ends with a [label\(\)](#) that is NULL. You can nest menus to any depth. A pointer to the first item in the submenu can be treated as an Fl_Menu array itself. It is also possible to make separate submenu arrays with FL_SUBMENU_POINTER flags.

You should use the method functions to access structure members and not access them directly to avoid compatibility problems with future releases of FLTK.

30.55.2 Member Function Documentation

30.55.2.1 void Fl_Menu_Item::activate () [inline]

Allows a menu item to be picked.

Referenced by Fl_Choice::draw().

30.55.2.2 int Fl_Menu_Item::active () const [inline]

Get whether or not the item can be picked.

Referenced by draw(), and Fl_Choice::draw().

30.55.2.3 int Fl_Menu_Item::activevisible () const [inline]

Returns non 0 if FL_INACTIVE and FL_INVISIBLE are cleared, 0 otherwise.

Referenced by find_shortcut(), pulldown(), and test_shortcut().

30.55.2.4 int Fl_Menu_Item::add (const char * mytext, int sc, Fl_Callback * cb, void * data = 0, int myflags = 0)

Adds an item.

The text is split at '/' characters to automatically produce submenus (actually a totally unnecessary feature as you can now add submenu titles directly by setting SUBMENU in the flags):

References callback_, flags, next(), shortcut_, size(), text, and user_data_.

Referenced by Fl_Menu_::add().

30.55.2.5 void Fl_Menu_Item::argument (long v) [inline]

For convenience you can also define the callback as taking a long argument.

This is implemented by casting this to a Fl_Callback and casting the long to a void* and may not be portable to some machines.

30.55.2.6 long Fl_Menu_Item::argument () const [inline]

For convenience you can also define the callback as taking a long argument.

This is implemented by casting this to a Fl_Callback and casting the long to a void* and may not be portable to some machines.

30.55.2.7 Fl_Callback_p Fl_Menu_Item::callback () const [inline]

Each item has space for a callback function and an argument for that function.

Due to back compatibility, the [Fl_Menu_Item](#) itself is not passed to the callback, instead you have to get it by calling ((Fl_Menu_*)w)->mvalue() where w is the widget argument.

30.55.2.8 void Fl_Menu_Item::check () [inline]

back compatibility only

Deprecated

30.55.2.9 int Fl_Menu_Item::checkbox () const [inline]

Returns true if a checkbox will be drawn next to this item.

This is true if FL_MENU_TOGGLE or FL_MENU_RADIO is set in the flags.

30.55.2.10 int Fl_Menu_Item::checked () const [inline]

back compatibility only

Deprecated**30.55.2.11 void Fl_Menu_Item::clear () [inline]**

Turns the check or radio item "off" for the menu item.

Referenced by setonly().

30.55.2.12 void Fl_Menu_Item::deactivate () [inline]

Prevents a menu item from being picked.

Note that this will also cause the menu item to appear grayed-out.

Referenced by Fl_Choice::draw().

30.55.2.13 void Fl_Menu_Item::do_callback (Fl_Widget * o, long arg) const [inline]

Call the [Fl_Menu_Item](#) item's callback, and provide the [Fl_Widget](#) argument (and optionally override the [user_data\(\)](#) argument).

You must first check that [callback\(\)](#) is non-zero before calling this.

30.55.2.14 void Fl_Menu_Item::do_callback (Fl_Widget * o, void * arg) const [inline]

Call the [Fl_Menu_Item](#) item's callback, and provide the [Fl_Widget](#) argument (and optionally override the [user_data\(\)](#) argument).

You must first check that [callback\(\)](#) is non-zero before calling this.

30.55.2.15 void Fl_Menu_Item::do_callback (Fl_Widget * o) const [inline]

Call the [Fl_Menu_Item](#) item's callback, and provide the [Fl_Widget](#) argument (and optionally override the [user_data\(\)](#) argument).

You must first check that [callback\(\)](#) is non-zero before calling this.

Referenced by [Fl_Menu_::picked\(\)](#).

30.55.2.16 void Fl_Menu_Item::draw (int x, int y, int w, int h, const Fl_Menu_* m, int selected = 0) const

Draws the menu item in bounding box x,y,w,h, optionally selects the item.

References active(), Fl_Widget::box(), Fl::box_dx(), Fl_Widget::color(), Fl_Label::color, Fl_Label::deimage, Fl_Menu_::down_box(), Fl_Label::draw(), FL_ALIGN_LEFT, fl_arc(), FL_BACKGROUND2_COLOR, fl_color(), FL_DOWN_BOX, fl_draw_box(), FL_FLAT_BOX, FL_FOREGROUND_COLOR, FL_HELVETICA, fl_line(), FL_NORMAL_SIZE, fl_pie(), fl_rectf(), FL_SELECTION_COLOR, FL_UP_BOX, flags, Fl_Label::font, Fl_Label::image, labelcolor_, labelfont_, labelsize_, labeltype_, Fl::scheme(), Fl_Widget::selection_color(), Fl_Label::size, text, Fl_Menu_::textcolor(), Fl_Menu_::textfont(), Fl_Menu_::textsize(), Fl_Label::type, value(), and Fl_Label::value.

Referenced by Fl_Menu_Bar::draw(), and Fl_Choice::draw().

30.55.2.17 const Fl_Menu_Item * Fl_Menu_Item::find_shortcut (int * ip = 0) const

Search only the top level menu for a shortcut.

Either &x in the label or the shortcut fields are used.

References activevisible(), first(), next(), shortcut_, test_shortcut(), Fl::test_shortcut(), and text.

Referenced by Fl_Menu_Bar::handle().

30.55.2.18 Fl_Menu_Item* Fl_Menu_Item::first () [inline]

Returns the first menu item, same as next(0).

30.55.2.19 const Fl_Menu_Item* Fl_Menu_Item::first () const [inline]

Returns the first menu item, same as next(0).

Referenced by find_shortcut(), and test_shortcut().

30.55.2.20 void Fl_Menu_Item::hide () [inline]

Hides an item in the menu.

30.55.2.21 const char* Fl_Menu_Item::label () const [inline]

This is the title of the item.

A NULL here indicates the end of the menu (or of a submenu). A '&' in the item will print an underscore under the next letter, and if the menu is popped up that letter will be a "shortcut" to pick that item. To get a real '&' put two in a row.

Referenced by Fl_Menu_::find_item(), Fl_Menu_::item_pathname(), Fl_Pixmap::label(), Fl_RGB_Image::label(), Fl_Image::label(), and Fl_Bitmap::label().

30.55.2.22 Fl_Color Fl_Menu_Item::labelcolor () const [inline]

This color is passed to the labeltype routine, and is typically the color of the label text.

This defaults to FL_BLACK. If this color is not black fltk will *not* use overlay bitplanes to draw the menu - this is so that images put in the menu draw correctly.

30.55.2.23 void Fl_Menu_Item::labelfont (Fl_Font a) [inline]

Fonts are identified by small 8-bit indexes into a table.

See the enumeration list for predefined fonts. The default value is a Helvetica font. The function [Fl::set_font\(\)](#) can define new fonts.

30.55.2.24 Fl_Font Fl_Menu_Item::labelfont () const [inline]

Fonts are identified by small 8-bit indexes into a table.

See the enumeration list for predefined fonts. The default value is a Helvetica font. The function [Fl::set_font\(\)](#) can define new fonts.

30.55.2.25 void Fl_Menu_Item::labelsize (Fl_Fontsize a) [inline]

Sets the label font pixel size/height.

30.55.2.26 Fl_Fontsize Fl_Menu_Item::labelsize () const [inline]

Gets or sets the label font pixel size/height.

Gets the label font pixel size/height.

30.55.2.27 void Fl_Menu_Item::labeltype (Fl_Labeltype a) [inline]

A labeltype identifies a routine that draws the label of the widget.

This can be used for special effects such as emboss, or to use the [label\(\)](#) pointer as another form of data such as a bitmap. The value FL_NORMAL_LABEL prints the label as text.

30.55.2.28 Fl_Labeltype Fl_Menu_Item::labeltype () const [inline]

A labeltype identifies a routine that draws the label of the widget.

This can be used for special effects such as emboss, or to use the [label\(\)](#) pointer as another form of data such as a bitmap. The value FL_NORMAL_LABEL prints the label as text.

30.55.2.29 int Fl_Menu_Item::measure (int * hp, const Fl_Menu_ * m) const

Measures width of label, including effect of & characters.

Optionally, can get height if hp is not NULL.

References Fl_Label::color, Fl_Label::deimage, FL_FOREGROUND_COLOR, FL_HELVETICA, FL_NORMAL_SIZE, flags, Fl_Label::font, Fl_Label::image, labelfont_, labelsize_, labeltype_, Fl_Label::measure(), Fl_Label::size, text, Fl_Menu_::textfont(), Fl_Menu_::textsize(), Fl_Label::type, and Fl_Label::value.

Referenced by Fl_Menu_Bar::draw().

30.55.2.30 Fl_Menu_Item* Fl_Menu_Item::next (int *i* = 1) [inline]

Advance a pointer by n items through a menu array, skipping the contents of submenus and invisible items. There are two calls so that you can advance through const and non-const data.

30.55.2.31 const Fl_Menu_Item * Fl_Menu_Item::next (int *n* = 1) const

Advance a pointer by n items through a menu array, skipping the contents of submenus and invisible items. There are two calls so that you can advance through const and non-const data.

References flags, text, and visible().

Referenced by add(), Fl_Menu_Bar::draw(), find_shortcut(), Fl_Menu_::remove(), and test_shortcut().

30.55.2.32 const Fl_Menu_Item * Fl_Menu_Item::popup (int *X*, int *Y*, const char * *title* = 0, const Fl_Menu_Item * *picked* = 0, const Fl_Menu_ * *but* = 0) const

This method is called by widgets that want to display menus.

The menu stays up until the user picks an item or dismisses it. The selected item (or NULL if none) is returned. *This does not do the callbacks or change the state of check or radio items.*

X,Y is the position of the mouse cursor, relative to the window that got the most recent event (usually you can pass Fl::event_x() and Fl::event_y() unchanged here).

title is a character string title for the menu. If non-zero a small box appears above the menu with the title in it.

The menu is positioned so the cursor is centered over the item picked. This will work even if picked is in a submenu. If picked is zero or not in the menu item table the menu is positioned with the cursor in the top-left corner.

button is a pointer to an Fl_Menu_ from which the color and boxtypes for the menu are pulled. If NULL then defaults are used.

References pulldown(), and text.

Referenced by Fl_Menu_Button::popup().

30.55.2.33 const Fl_Menu_Item * Fl_Menu_Item::pulldown (int *X*, int *Y*, int *W*, int *H*, const Fl_Menu_Item * *initial_item* = 0, const Fl_Menu_ * *pbutton* = 0, const Fl_Menu_Item * *t* = 0, int *menubar* = 0) const

Pulldown() is similar to [popup\(\)](#), but a rectangle is provided to position the menu.

The menu is made at least W wide, and the picked item is centered over the rectangle (like Fl_Choice uses). If picked is zero or not found, the menu is aligned just below the rectangle (like a pulldown menu).

The title and menubar arguments are used internally by the Fl_Menu_Bar widget.

References activevisible(), Fl_Group::current(), Fl::event_x(), Fl::event_x_root(), Fl::event_y(), Fl::event_y_root(), FL_DRAG, flags, Fl::grab(), Fl::release(), submenu(), user_data_, Fl::wait(), and Fl_Widget::window().

Referenced by Fl_Menu_Bar::handle(), Fl_Choice::handle(), Fl_Menu_Button::popup(), and popup().

30.55.2.34 int Fl_Menu_Item::radio () const [inline]

Returns true if this item is a radio item.

When a radio button is selected all "adjacent" radio buttons are turned off. A set of radio items is delimited by an item that has [radio\(\)](#) false, or by an item with FL_MENU_DIVIDER turned on.

Referenced by [Fl_Menu_::picked\(\)](#), and [setonly\(\)](#).

30.55.2.35 void Fl_Menu_Item::set () [inline]

Turns the check or radio item "on" for the menu item.

Note that this does not turn off any adjacent radio items like [set_only\(\)](#) does.

30.55.2.36 void Fl_Menu_Item::setonly ()

Turns the radio item "on" for the menu item and turns off adjacent radio items set.

References [clear\(\)](#), [flags\(\)](#), [radio\(\)](#), and [text\(\)](#).

30.55.2.37 void Fl_Menu_Item::shortcut (int s) [inline]

Sets exactly what key combination will trigger the menu item.

The value is a logical 'or' of a key and a set of shift flags, for instance FL_ALT+'a' or FL_ALT+FL_F10 or just 'a'. A value of zero disables the shortcut.

The key can be any value returned by [Fl::event_key\(\)](#), but will usually be an ASCII letter. Use a lower-case letter unless you require the shift key to be held down.

The shift flags can be any set of values accepted by [Fl::event_state\(\)](#). If the bit is on that shift key must be pushed. Meta, Alt, Ctrl, and Shift must be off if they are not in the shift flags (zero for the other bits indicates a "don't care" setting).

30.55.2.38 int Fl_Menu_Item::shortcut () const [inline]

Gets what key combination shortcut will trigger the menu item.

30.55.2.39 void Fl_Menu_Item::show () [inline]

Makes an item visible in the menu.

30.55.2.40 int Fl_Menu_Item::submenu () const [inline]

Returns true if either FL_SUBMENU or FL_SUBMENU_POINTER is on in the flags.

FL_SUBMENU indicates an embedded submenu that goes from the next item through the next one with a NULL [label\(\)](#). FL_SUBMENU_POINTER indicates that [user_data\(\)](#) is a pointer to another menu array.

Referenced by [Fl_Menu_Bar::handle\(\)](#), [Fl_Choice::handle\(\)](#), [Fl_Menu_::item_pathname\(\)](#), [pulldown\(\)](#), and [test_shortcut\(\)](#).

30.55.2.41 const Fl_Menu_Item * Fl_Menu_Item::test_shortcut () const

This is designed to be called by a widgets handle() method in response to a FL_SHORTCUT event.

If the current event matches one of the items shortcut, that item is returned. If the keystroke does not match any shortcuts then NULL is returned. This only matches the [shortcut\(\)](#) fields, not the letters in the title preceeded by '

References activevisible(), first(), flags, next(), shortcut_, submenu(), test_shortcut(), Fl::test_shortcut(), text, and user_data_.

Referenced by [find_shortcut\(\)](#), [Fl_Choice::handle\(\)](#), and [test_shortcut\(\)](#).

30.55.2.42 void Fl_Menu_Item::uncheck () [inline]

back compatibility only

Deprecated

30.55.2.43 int Fl_Menu_Item::value () const [inline]

Returns the current value of the check or radio item.

Referenced by [draw\(\)](#), and [Fl_Menu_::picked\(\)](#).

30.55.2.44 int Fl_Menu_Item::visible () const [inline]

Gets the visibility of an item.

Referenced by [next\(\)](#).

The documentation for this struct was generated from the following files:


- [Fl_Menu_Item.H](#)
- [Fl_Menu.cxx](#)
- [Fl_Menu_.cxx](#)
- [Fl_Menu_add.cxx](#)

30.56 Fl_Menu_Window Class Reference

The [Fl_Menu_Window](#) widget is a window type used for menus.

```
#include <Fl_Menu_Window.h>
```

Inheritance diagram for [Fl_Menu_Window](#)::

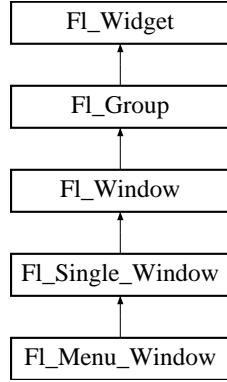

Public Member Functions

- void [show \(\)](#)
Put the window on the screen.
- void [erase \(\)](#)
Erases the window, does nothing if HAVE_OVERLAY is not defined config.h.
- void [flush \(\)](#)
Forces the window to be drawn, this window is also made current and calls [draw\(\)](#).
- void [hide \(\)](#)
Remove the window from the screen.
- int [overlay \(\)](#)
Tells if hardware overlay mode is set.
- void [set_overlay \(\)](#)
Tells FLTK to use hardware overlay planes if they are available.
- void [clear_overlay \(\)](#)
Tells FLTK to use normal drawing planes instead of overlay planes.
- [~Fl_Menu_Window \(\)](#)
Destroys the window and all of its children.
- [Fl_Menu_Window \(int W, int H, const char *l=0\)](#)
Creates a new [Fl_Menu_Window](#) widget using the given size, and label string.
- [Fl_Menu_Window \(int X, int Y, int W, int H, const char *l=0\)](#)

Creates a new [Fl_Menu_Window](#) widget using the given position, size, and label string.

30.56.1 Detailed Description

The [Fl_Menu_Window](#) widget is a window type used for menus.

By default the window is drawn in the hardware overlay planes if they are available so that the menu don't force the rest of the window to redraw.

30.56.2 Constructor & Destructor Documentation

30.56.2.1 [Fl_Menu_Window::~Fl_Menu_Window \(\)](#)

Destroys the window and all of its children.

References [hide\(\)](#).

30.56.2.2 [Fl_Menu_Window::Fl_Menu_Window \(int W, int H, const char *l = 0\) \[inline\]](#)

Creates a new [Fl_Menu_Window](#) widget using the given size, and label string.

References [Fl_Widget::image\(\)](#).

30.56.2.3 [Fl_Menu_Window::Fl_Menu_Window \(int X, int Y, int W, int H, const char *l = 0\) \[inline\]](#)

Creates a new [Fl_Menu_Window](#) widget using the given position, size, and label string.

References [Fl_Widget::image\(\)](#).

30.56.3 Member Function Documentation

30.56.3.1 [void Fl_Menu_Window::clear_overlay \(\) \[inline\]](#)

Tells FLTK to use normal drawing planes instead of overlay planes.

This is usually necessary if your menu contains multi-color pixmaps.

References [Fl_Widget::set_flag\(\)](#).

30.56.3.2 [void Fl_Menu_Window::flush \(\) \[virtual\]](#)

Forces the window to be drawn, this window is also made current and calls [draw\(\)](#).

Reimplemented from [Fl_Single_Window](#).

References [Fl::cairo_make_current\(\)](#), [Fl_Window::current_](#), [Fl_Window::draw\(\)](#), [fl_clip_region\(\)](#), and [overlay\(\)](#).

30.56.3.3 [void Fl_Menu_Window::hide \(\) \[virtual\]](#)

Remove the window from the screen.

If the window is already hidden or has not been shown then this does nothing and is harmless.

Reimplemented from [Fl_Window](#).

References [erase\(\)](#).

Referenced by [~Fl_Menu_Window\(\)](#).

30.56.3.4 void Fl_Menu_Window::set_overlay () [inline]

Tells FLTK to use hardware overlay planes if they are available.

References [Fl_Widget::clear_flag\(\)](#).

30.56.3.5 void Fl_Menu_Window::show () [virtual]

Put the window on the screen.

Usually this has the side effect of opening the display. The second form is used for top-level windows and allow standard arguments to be parsed from the command-line.

If the window is already shown then it is restored and raised to the top. This is really convenient because your program can call [show\(\)](#) at any time, even if the window is already up. It also means that [show\(\)](#) serves the purpose of [raise\(\)](#) in other toolkits.

Reimplemented from [Fl_Single_Window](#).

References [overlay\(\)](#), and [Fl_Window::shown\(\)](#).

The documentation for this class was generated from the following files:


- [Fl_Menu_Window.H](#)
- [Fl_Menu_Window.cxx](#)

30.57 Fl_Multi_Browser Class Reference

The [Fl_Multi_Browser](#) class is a subclass of [Fl_Browser](#) which lets the user select any set of the lines.

```
#include <Fl_Multi_Browser.h>
```

Inheritance diagram for Fl_Multi_Browser::

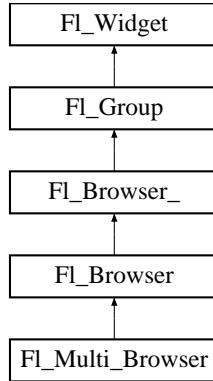

Public Member Functions

- [Fl_Multi_Browser](#) (int X, int Y, int W, int H, const char *L=0)

Creates a new [Fl_Multi_Browser](#) widget using the given position, size, and label string.

30.57.1 Detailed Description

The [Fl_Multi_Browser](#) class is a subclass of [Fl_Browser](#) which lets the user select any set of the lines.

The user interface is Macintosh style: clicking an item turns off all the others and selects that one, dragging selects all the items the mouse moves over, and shift + click toggles the items. This is different than how forms did it. Normally the callback is done when the user releases the mouse, but you can change this with [when\(\)](#).

See [Fl_Browser](#) for methods to add and remove lines from the browser.

30.57.2 Constructor & Destructor Documentation

30.57.2.1 [Fl_Multi_Browser::Fl_Multi_Browser](#) (int X, int Y, int W, int H, const char * L = 0) [inline]

Creates a new [Fl_Multi_Browser](#) widget using the given position, size, and label string.

The default boxtyle is [FL_DOWN_BOX](#). The constructor specializes [Fl_Browser\(\)](#) by setting the type to [FL_MULTI_BROWSER](#). The destructor destroys the widget and frees all memory that has been allocated.

References [FL_MULTI_BROWSER](#), and [Fl_Widget::type\(\)](#).

The documentation for this class was generated from the following file:

- [Fl_Multi_Browser.H](#)


30.58 Fl_Multiline_Input Class Reference

This input field displays '

' characters as new lines rather than ^J, and accepts the Return, Tab, and up and down arrow keys.

```
#include <Fl_Multiline_Input.H>
```

Inheritance diagram for Fl_Multiline_Input::



Public Member Functions

- [Fl_Multiline_Input](#) (int X, int Y, int W, int H, const char *l=0)

Creates a new Fl_Multiline_Input widget using the given position, size, and label string.

30.58.1 Detailed Description

This input field displays '

' characters as new lines rather than ^J, and accepts the Return, Tab, and up and down arrow keys.

This is for editing multiline text.

This is far from the nirvana of text editors, and is probably only good for small bits of text, 10 lines at most. I think FLTK can be used to write a powerful text editor, but it is not going to be a built-in feature. Powerful text editors in a toolkit are a big source of bloat.

30.58.2 Constructor & Destructor Documentation

30.58.2.1 [Fl_Multiline_Input::Fl_Multiline_Input](#) (int X, int Y, int W, int H, const char *l = 0) [inline]

Creates a new Fl_Multiline_Input widget using the given position, size, and label string.

The default boxtyle is FL_DOWN_BOX.

Inherited destructor destroys the widget and any value associated with it.

References Fl_Widget::type().

The documentation for this class was generated from the following file:


- [Fl_Multiline_Input.H](#)

30.59 Fl_Multiline_Output Class Reference

This widget is a subclass of [Fl_Output](#) that displays multiple lines of text.

```
#include <Fl_Multiline_Output.H>
```

Inheritance diagram for [Fl_Multiline_Output](#):

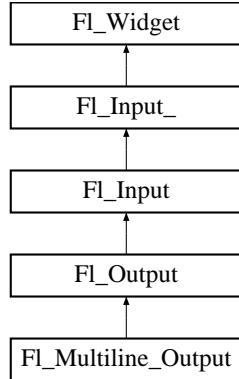

Public Member Functions

- [Fl_Multiline_Output](#) (int X, int Y, int W, int H, const char *l=0)

Creates a new [Fl_Multiline_Output](#) widget using the given position, size, and label string.

30.59.1 Detailed Description

This widget is a subclass of [Fl_Output](#) that displays multiple lines of text.

It also displays tab characters as whitespace to the next column.

30.59.2 Constructor & Destructor Documentation

30.59.2.1 [Fl_Multiline_Output::Fl_Multiline_Output](#) (int X, int Y, int W, int H, const char *l = 0) [inline]

Creates a new [Fl_Multiline_Output](#) widget using the given position, size, and label string.

The default boxtyle is `FL_DOWN_BOX`

Inherited destructor destroys the widget and any value associated with it.

References `Fl_Widget::type()`.

The documentation for this class was generated from the following file:


- [Fl_Multiline_Output.H](#)

30.60 Fl_Output Class Reference

This widget displays a piece of text.

```
#include <Fl_Output.h>
```

Inheritance diagram for Fl_Output::

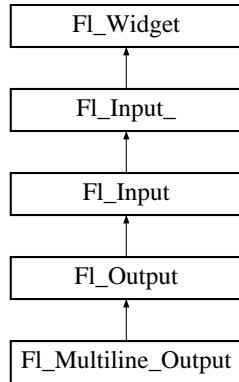

Public Member Functions

- [Fl_Output](#) (int X, int Y, int W, int H, const char *l=0)

Creates a new [Fl_Output](#) widget using the given position, size, and label string.

30.60.1 Detailed Description

This widget displays a piece of text.

When you set the [value\(\)](#) , [Fl_Output](#) does a strcpy() to it's own storage, which is useful for program-generated values. The user may select portions of the text using the mouse and paste the contents into other fields or programs.



Figure 30.21: Fl_Output

There is a single subclass, [Fl_Multiline_Output](#), which allows you to display multiple lines of text.

The text may contain any characters except \0, and will correctly display anything, using ^X notation for unprintable control characters and \nnn notation for unprintable characters with the high bit set. It assumes the font can draw any characters in the ISO-Latin1 character set.

30.60.2 Constructor & Destructor Documentation

30.60.2.1 `Fl_Output::Fl_Output (int X, int Y, int W, int H, const char *l = 0) [inline]`

Creates a new [Fl_Output](#) widget using the given position, size, and label string.

The default boxtyle is FL_DOWN_BOX.

Inherited destrucor destroys the widget and any value associated with it.

References [Fl_Widget::type\(\)](#).

The documentation for this class was generated from the following file:


- [Fl_Output.H](#)

30.61 Fl_Overlay_Window Class Reference

This window provides double buffering and also the ability to draw the "overlay" which is another picture placed on top of the main image.

```
#include <Fl_Overlay_Window.h>
```

Inheritance diagram for Fl_Overlay_Window::

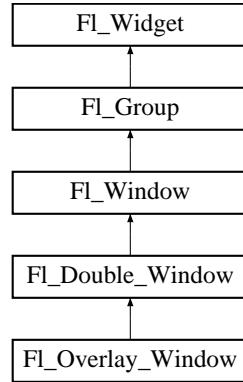

Public Member Functions

- void [show \(\)](#)
Put the window on the screen.
- void [flush \(\)](#)
Forces the window to be redrawn.
- void [hide \(\)](#)
Remove the window from the screen.
- void [resize \(int, int, int, int\)](#)
Changes the size and position of the window.
- [~Fl_Overlay_Window \(\)](#)
Destroys the window and all child widgets.
- int [can_do_overlay \(\)](#)
- void [redraw_overlay \(\)](#)
Call this to indicate that the overlay data has changed and needs to be redrawn.
- [Fl_Overlay_Window \(int W, int H, const char *l=0\)](#)
Creates a new [Fl_Overlay_Window](#) widget using the given position, size, and label (title) string.
- [Fl_Overlay_Window \(int X, int Y, int W, int H, const char *l=0\)](#)
*See [Fl_Overlay_Window::Fl_Overlay_Window\(int W, int H, const char *l=0\)](#).*
- void [show \(int a, char **b\)](#)
See virtual void [Fl_Window::show\(\)](#).

Friends

- class [_Fl_Overlay](#)

30.61.1 Detailed Description

This window provides double buffering and also the ability to draw the "overlay" which is another picture placed on top of the main image.

The overlay is designed to be a rapidly-changing but simple graphic such as a mouse selection box. [Fl_Overlay_Window](#) uses the overlay planes provided by your graphics hardware if they are available.

If no hardware support is found the overlay is simulated by drawing directly into the on-screen copy of the double-buffered window, and "erased" by copying the backbuffer over it again. This means the overlay will blink if you change the image in the window.

30.61.2 Constructor & Destructor Documentation

30.61.2.1 `Fl_Overlay_Window::Fl_Overlay_Window (int W, int H, const char * l = 0)` [inline]

Creates a new [Fl_Overlay_Window](#) widget using the given position, size, and label (title) string.

If the positions (x,y) are not given, then the window manager will choose them.

References [Fl_Widget::image\(\)](#).

30.61.3 Member Function Documentation

30.61.3.1 `void Fl_Overlay_Window::hide () [virtual]`

Remove the window from the screen.

If the window is already hidden or has not been shown then this does nothing and is harmless.

Reimplemented from [Fl_Double_Window](#).

Referenced by [~Fl_Overlay_Window\(\)](#).

30.61.3.2 `void Fl_Overlay_Window::redraw_overlay ()`

Call this to indicate that the overlay data has changed and needs to be redrawn.

The overlay will be clear until the first time this is called, so if you want an initial display you must call this after calling [show\(\)](#).

References [Fl_Widget::clear_damage\(\)](#), and [Fl_Widget::damage\(\)](#).

30.61.3.3 `void Fl_Overlay_Window::resize (int, int, int, int) [virtual]`

Changes the size and position of the window.

If [shown\(\)](#) is true, these changes are communicated to the window server (which may refuse that size and cause a further resize). If [shown\(\)](#) is false, the size and position are used when [show\(\)](#) is called. See [Fl_Group](#) for the effect of resizing on the child widgets.

You can also call the [Fl_Widget](#) methods `size(x,y)` and `position(w,h)`, which are inline wrappers for this virtual function.

A top-level window can not force, but merely suggest a position and size to the operating system. The window manager may not be willing or able to display a window at the desired position or with the given dimensions. It is up to the application developer to verify window parameters after the resize request.

Reimplemented from [Fl_Double_Window](#).

References `Fl_Widget::h()`, `Fl_Window::resize()`, and `Fl_Widget::w()`.

30.61.3.4 void Fl_Overlay_Window::show () [virtual]

Put the window on the screen.

Usually this has the side effect of opening the display. The second form is used for top-level windows and allow standard arguments to be parsed from the command-line.

If the window is already shown then it is restored and raised to the top. This is really convenient because your program can call `show()` at any time, even if the window is already up. It also means that `show()` serves the purpose of `raise()` in other toolkits.

Reimplemented from [Fl_Double_Window](#).

References `Fl_Window::show()`.

The documentation for this class was generated from the following files:


- [Fl_Overlay_Window.H](#)
- [Fl_Overlay_Window.cxx](#)

30.62 Fl_Pack Class Reference

This widget was designed to add the functionality of compressing and aligning widgets.

```
#include <Fl_Pack.h>
```

Inheritance diagram for Fl_Pack::



Public Types

- enum { **VERTICAL** = 0, **HORIZONTAL** = 1 }

Public Member Functions

- void [draw\(\)](#)
Draw the widget.
- [Fl_Pack](#) (int x, int y, int w, int h, const char *l=0)
Creates a new [Fl_Pack](#) widget using the given position, size, and label string.
- int [spacing\(\) const](#)
Gets the number of extra pixels of blank space that are added between the children.
- void [spacing\(int i\)](#)
Sets the number of extra pixels of blank space that are added between the children.
- uchar [horizontal\(\) const](#)
Same as [Fl_Group::type\(\)](#).

30.62.1 Detailed Description

This widget was designed to add the functionality of compressing and aligning widgets.

If [type\(\)](#) is `Fl_Pack::HORIZONTAL` all the children are resized to the height of the [Fl_Pack](#), and are moved next to each other horizontally. If [type\(\)](#) is not `Fl_Pack::HORIZONTAL` then the children are resized to the width and are stacked below each other. Then the [Fl_Pack](#) resizes itself to surround the child widgets.

This widget is needed for the [Fl_Tabs](#). In addition you may want to put the [Fl_Pack](#) inside an [Fl_Scroll](#).

The resizable for [Fl_Pack](#) is set to NULL by default.

See also: [Fl_Group::resizable\(\)](#)

30.62.2 Constructor & Destructor Documentation

30.62.2.1 Fl_Pack::Fl_Pack (int X, int Y, int W, int H, const char * l = 0)

Creates a new [Fl_Pack](#) widget using the given position, size, and label string.

The default boxtyle is FL_NO_BOX.

The destructor *also deletes all the children*. This allows a whole tree to be deleted at once, without having to keep a pointer to all the children in the user code. A kludge has been done so the [Fl_Pack](#) and all of its children can be automatic (local) variables, but you must declare the [Fl_Pack](#) *first*, so that it is destroyed last.

References [Fl_Group::resizable\(\)](#).

30.62.3 Member Function Documentation

30.62.3.1 void Fl_Pack::draw () [virtual]

Draw the widget.

Never call this function directly. FLTK will schedule redrawing whenever needed. If your widget must be redrawn as soon as possible, call [redraw\(\)](#) instead.

Override this function to draw your own widgets.

Reimplemented from [Fl_Group](#).

References [Fl_Group::array\(\)](#), [Fl_Widget::box\(\)](#), [Fl::box_dh\(\)](#), [Fl::box_dw\(\)](#), [Fl::box_dx\(\)](#), [Fl::box_dy\(\)](#), [Fl_Group::child\(\)](#), [Fl_Group::children\(\)](#), [Fl_Widget::clear_damage\(\)](#), [Fl_Widget::color\(\)](#), [Fl_Widget::damage\(\)](#), [Fl_Widget::draw_box\(\)](#), [Fl_Group::draw_child\(\)](#), [Fl_Widget::draw_label\(\)](#), [Fl_Group::draw_outside_label\(\)](#), [fl_color\(\)](#), [fl_rectf\(\)](#), [Fl_Widget::h\(\)](#), [horizontal\(\)](#), [Fl_Group::resizable\(\)](#), [Fl_Group::resize\(\)](#), [Fl_Widget::resize\(\)](#), [Fl_Group::update_child\(\)](#), [Fl_Widget::visible\(\)](#), [Fl_Widget::w\(\)](#), [Fl_Widget::x\(\)](#), and [Fl_Widget::y\(\)](#).

The documentation for this class was generated from the following files:


- [Fl_Pack.H](#)
- [Fl_Pack.cxx](#)

30.63 Fl_Pixmap Class Reference

The [Fl_Pixmap](#) class supports caching and drawing of colormap (pixmap) images, including transparency.

```
#include <Fl_Pixmap.h>
```

Inheritance diagram for [Fl_Pixmap](#)::

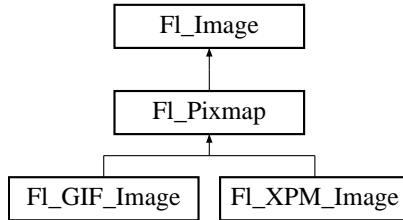

Public Member Functions

- [Fl_Pixmap \(char *const *D\)](#)

The constructors create a new pixmap from the specified XPM data.

- [Fl_Pixmap \(uchar *const *D\)](#)

The constructors create a new pixmap from the specified XPM data.

- [Fl_Pixmap \(const char *const *D\)](#)

The constructors create a new pixmap from the specified XPM data.

- [Fl_Pixmap \(const uchar *const *D\)](#)

The constructors create a new pixmap from the specified XPM data.

- virtual [~Fl_Pixmap \(\)](#)

The destructor free all memory and server resources that are used by the pixmap.

- virtual [Fl_Image * copy \(int W, int H\)](#)

The [copy\(\)](#) method creates a copy of the specified image.

- [Fl_Image * copy \(\)](#)

The [copy\(\)](#) method creates a copy of the specified image.

- virtual void [color_average \(Fl_Color c, float i\)](#)

The [color_average\(\)](#) method averages the colors in the image with the FLTK color value c.

- virtual void [desaturate \(\)](#)

The [desaturate\(\)](#) method converts an image to grayscale.

- virtual void [draw \(int X, int Y, int W, int H, int cx=0, int cy=0\)](#)

The [draw\(\)](#) methods draw the image.

- void [draw \(int X, int Y\)](#)

The [draw\(\)](#) methods draw the image.

- virtual void **label (Fl_Widget *w)**

*The **label()** methods are an obsolete way to set the image attribute of a widget or menu item.*

- virtual void **label (Fl_Menu_Item *m)**

*The **label()** methods are an obsolete way to set the image attribute of a widget or menu item.*

- virtual void **uncache ()**

If the image has been cached for display, delete the cache data.

Public Attributes

- int **alloc_data**
- unsigned **id**
- unsigned **mask**

Protected Member Functions

- void **measure ()**

30.63.1 Detailed Description

The **Fl_Pixmap** class supports caching and drawing of colormap (pixmap) images, including transparency.

30.63.2 Constructor & Destructor Documentation

30.63.2.1 **Fl_Pixmap::Fl_Pixmap (char *const *D)** [inline, explicit]

The constructors create a new pixmap from the specified XPM data.

Referenced by **copy()**.

30.63.2.2 **Fl_Pixmap::Fl_Pixmap (uchar *const *D)** [inline, explicit]

The constructors create a new pixmap from the specified XPM data.

30.63.2.3 **Fl_Pixmap::Fl_Pixmap (const char *const *D)** [inline, explicit]

The constructors create a new pixmap from the specified XPM data.

30.63.2.4 **Fl_Pixmap::Fl_Pixmap (const uchar *const *D)** [inline, explicit]

The constructors create a new pixmap from the specified XPM data.

30.63.3 Member Function Documentation

30.63.3.1 void Fl_Pixmap::color_average (Fl_Color c, float i) [virtual]

The [color_average\(\)](#) method averages the colors in the image with the FLTK color value c.

The i argument specifies the amount of the original image to combine with the color, so a value of 1.0 results in no color blend, and a value of 0.0 results in a constant image of the specified color. *The original image data is not altered by this method.*

Reimplemented from [Fl_Image](#).

References [Fl_Image::data\(\)](#), [Fl::get_color\(\)](#), and [uncache\(\)](#).

30.63.3.2 Fl_Image* Fl_Pixmap::copy () [inline]

The [copy\(\)](#) method creates a copy of the specified image.

If the width and height are provided, the image is resized to the specified size. The image should be deleted (or in the case of [Fl_Shared_Image](#), released) when you are done with it.

Reimplemented from [Fl_Image](#).

References [copy\(\)](#), [Fl_Image::h\(\)](#), and [Fl_Image::w\(\)](#).

Referenced by [copy\(\)](#).

30.63.3.3 Fl_Image * Fl_Pixmap::copy (int W, int H) [virtual]

The [copy\(\)](#) method creates a copy of the specified image.

If the width and height are provided, the image is resized to the specified size. The image should be deleted (or in the case of [Fl_Shared_Image](#), released) when you are done with it.

Reimplemented from [Fl_Image](#).

References [alloc_data](#), [copy_data\(\)](#), [Fl_Image::data\(\)](#), [Fl_Pixmap\(\)](#), [Fl_Image::h\(\)](#), and [Fl_Image::w\(\)](#).

30.63.3.4 void Fl_Pixmap::desaturate () [virtual]

The [desaturate\(\)](#) method converts an image to grayscale.

If the image contains an alpha channel (depth = 4), the alpha channel is preserved. *This method does not alter the original image data.*

Reimplemented from [Fl_Image](#).

References [Fl_Image::data\(\)](#), and [uncache\(\)](#).

30.63.3.5 void Fl_Pixmap::draw (int X, int Y) [inline]

The [draw\(\)](#) methods draw the image.

This form specifies the upper-lefthand corner of the image

Reimplemented from [Fl_Image](#).

References [draw\(\)](#), [Fl_Image::h\(\)](#), and [Fl_Image::w\(\)](#).

Referenced by [draw\(\)](#).

30.63.3.6 void Fl_Pixmap::draw (int X, int Y, int W, int H, int cx = 0, int cy = 0) [virtual]

The [draw\(\)](#) methods draw the image.

This form specifies a bounding box for the image, with the origin (upper-lefthand corner) of the image offset by the cx and cy arguments.

Reimplemented from [Fl_Image](#).

References [Fl_Image::data\(\)](#), [Fl_Image::draw_empty\(\)](#), [fl_clip_box\(\)](#), [fl_restore_clip\(\)](#), [Fl_Image::h\(\)](#), and [Fl_Image::w\(\)](#).

Referenced by [Fl_FormsPixmap::draw\(\)](#).

30.63.3.7 void Fl_Pixmap::label (Fl_Menu_Item * m) [virtual]

The [label\(\)](#) methods are an obsolete way to set the image attribute of a widget or menu item.

Use the [image\(\)](#) or [deimage\(\)](#) methods of the [Fl_Widget](#) and [Fl_Menu_Item](#) classes instead.

Reimplemented from [Fl_Image](#).

References [_FL_IMAGE_LABEL](#), [Fl_Menu_Item::label\(\)](#), and [Fl::set_labeltype\(\)](#).

30.63.3.8 void Fl_Pixmap::label (Fl_Widget * widget) [virtual]

The [label\(\)](#) methods are an obsolete way to set the image attribute of a widget or menu item.

Use the [image\(\)](#) or [deimage\(\)](#) methods of the [Fl_Widget](#) and [Fl_Menu_Item](#) classes instead.

Reimplemented from [Fl_Image](#).

References [Fl_Widget::image\(\)](#).

30.63.3.9 void Fl_Pixmap::uncache () [virtual]

If the image has been cached for display, delete the cache data.

This allows you to change the data used for the image and then redraw it without recreating an image object.

Reimplemented from [Fl_Image](#).

Referenced by [color_average\(\)](#), [desaturate\(\)](#), [Fl::reload_scheme\(\)](#), and [~Fl_Pixmap\(\)](#).

The documentation for this class was generated from the following files:


- [Fl_Pixmap.H](#)
- [Fl_Pixmap.cxx](#)

30.64 Fl_PNG_Image Class Reference

The [Fl_PNG_Image](#) class supports loading, caching, and drawing of Portable Network Graphics (PNG) image files.

```
#include <Fl_PNG_Image.h>
```

Inheritance diagram for Fl_PNG_Image::



Public Member Functions

- [Fl_PNG_Image](#) (const char *filename)

The constructor loads the named PNG image from the given png filename.

30.64.1 Detailed Description

The [Fl_PNG_Image](#) class supports loading, caching, and drawing of Portable Network Graphics (PNG) image files.

The class loads colormapped and full-color images and handles color- and alpha-based transparency.

30.64.2 Constructor & Destructor Documentation

30.64.2.1 Fl_PNG_Image::Fl_PNG_Image (const char * *png*)

The constructor loads the named PNG image from the given png filename.

The destructor free all memory and server resources that are used by the image.

References Fl_Image::d(), Fl_Image::h(), Fl_Image::w(), and Fl::warning.

The documentation for this class was generated from the following files:


- [Fl_PNG_Image.H](#)
- [Fl_PNG_Image.cxx](#)

30.65 Fl_PNM_Image Class Reference

The [Fl_PNM_Image](#) class supports loading, caching, and drawing of Portable Anymap (PNM, PBM, PGM, PPM) image files.

```
#include <Fl_PNM_Image.h>
```

Inheritance diagram for Fl_PNM_Image::



Public Member Functions

- [Fl_PNM_Image](#) (const char *filename)

The constructor loads the named PNM image.

30.65.1 Detailed Description

The [Fl_PNM_Image](#) class supports loading, caching, and drawing of Portable Anymap (PNM, PBM, PGM, PPM) image files.

The class loads bitmap, grayscale, and full-color images in both ASCII and binary formats.

30.65.2 Constructor & Destructor Documentation

30.65.2.1 Fl_PNM_Image::Fl_PNM_Image (const char * *name*)

The constructor loads the named PNM image.

The inherited destructor free all memory and server resources that are used by the image.

References Fl_Image::d(), Fl::error, Fl_Image::h(), and Fl_Image::w().

The documentation for this class was generated from the following files:


- [Fl_PNM_Image.H](#)
- [Fl_PNM_Image.cxx](#)

30.66 Fl_Positioner Class Reference

This class is provided for Forms compatibility.

```
#include <Fl_Positioner.H>
```

Inheritance diagram for Fl_Positioner::



Public Member Functions

- int **handle** (int)
Handles the specified event.
- **Fl_Positioner** (int x, int y, int w, int h, const char *l=0)
Creates a new [Fl_Positioner](#) widget using the given position, size, and label string.
- double **xvalue** () const
Gets the X axis coordinate.
- double **yvalue** () const
Gets the Y axis coordinate.
- int **xvalue** (double)
Sets the X axis coordinate.
- int **yvalue** (double)
Sets the Y axis coordinate.
- int **value** (double, double)
Returns the current position in x and y.
- void **xbounds** (double, double)
Sets the X axis bounds.
- double **xminimum** () const
Gets the X axis minimum.
- void **xminimum** (double a)
Same as xbounds(a, [xmaximum\(\)](#)).
- double **xmaximum** () const
Gets the X axis maximum.
- void **xmaximum** (double a)

Same as xbounds(xminimum(), a).

- void **ybounds** (double, double)
Sets the Y axis bounds.
- double **yminimum** () const
Gets the Y axis minimum.
- void **yminimum** (double a)
Same as ybounds(a, ymaximum()).
- double **ymaximum** () const
Gets the Y axis maximum.
- void **ymaximum** (double a)
Same as ybounds(ymininimum(), a).
- void **xstep** (double a)
Sets the stepping value for the X axis.
- void **ystep** (double a)
Sets the stepping value for the Y axis.

Protected Member Functions

- void **draw** (int, int, int, int)
- int **handle** (int, int, int, int, int)
- void **draw** ()
Draw the widget.

30.66.1 Detailed Description

This class is provided for Forms compatibility.

It provides 2D input. It would be useful if this could be put atop another widget so that the crosshairs are on top, but this is not implemented. The color of the crosshairs is [selection_color\(\)](#).




Figure 30.22: Fl_Positioner

30.66.2 Constructor & Destructor Documentation

30.66.2.1 **Fl_Positioner::Fl_Positioner (int X, int Y, int W, int H, const char * l = 0)**

Creates a new [Fl_Positioner](#) widget using the given position, size, and label string.

Creates a new [Fl_Positioner](#) widget using the given position, size, and label string.

The default boxtyle is FL_NO_BOX.

References [Fl_Widget::align\(\)](#), [Fl_Widget::box\(\)](#), [FL_ALIGN_BOTTOM](#), [FL_DOWN_BOX](#), [FL_WHEN_CHANGED](#), [Fl_Widget::selection_color\(\)](#), and [Fl_Widget::when\(\)](#).

30.66.3 Member Function Documentation

30.66.3.1 **void Fl_Positioner::draw () [protected, virtual]**

Draw the widget.

Never call this function directly. FLTK will schedule redrawing whenever needed. If your widget must be redrawn as soon as possible, call [redraw\(\)](#) instead.

Override this function to draw your own widgets.

Implements [Fl_Widget](#).

References [Fl_Widget::draw_label\(\)](#), [Fl_Widget::h\(\)](#), [Fl_Widget::w\(\)](#), [Fl_Widget::x\(\)](#), and [Fl_Widget::y\(\)](#).

30.66.3.2 **int Fl_Positioner::handle (int event) [virtual]**

Handles the specified event.

You normally don't call this method directly, but instead let FLTK do it when the user interacts with the widget.

When implemented in a new widget, this function must return 0 if the widget does not use the event or 1 otherwise.

Most of the time, you want to call the inherited handle() method in your overridden method so that you don't short-circuit events that you don't handle. In this last case you should return the callee retval.

Parameters:

← *event* the kind of event received

Return values:

0 if the event was not used or understood

1 if the event was used and can be deleted

See also:

[Fl_Event](#)

Reimplemented from [Fl_Widget](#).

References [Fl_Widget::h\(\)](#), [Fl_Widget::w\(\)](#), [Fl_Widget::x\(\)](#), and [Fl_Widget::y\(\)](#).

30.66.3.3 int Fl_Positioner::value (double X, double Y)

Returns the current position in x and y.

References Fl_Widget::clear_changed(), and Fl_Widget::redraw().

Referenced by xvalue(), and yvalue().

30.66.3.4 void Fl_Positioner::xbounds (double a, double b)

Sets the X axis bounds.

References Fl_Widget::redraw().

30.66.3.5 void Fl_Positioner::xstep (double a) [inline]

Sets the stepping value for the X axis.

30.66.3.6 int Fl_Positioner::xvalue (double X)

Sets the X axis coordinate.

References value().

30.66.3.7 double Fl_Positioner::xvalue () const [inline]

Gets the X axis coordinate.

30.66.3.8 void Fl_Positioner::ybounds (double a, double b)

Sets the Y axis bounds.

References Fl_Widget::redraw().

30.66.3.9 void Fl_Positioner::ystep (double a) [inline]

Sets the stepping value for the Y axis.

30.66.3.10 int Fl_Positioner::yvalue (double Y)

Sets the Y axis coordinate.

References value().

30.66.3.11 double Fl_Positioner::yvalue () const [inline]

Gets the Y axis coordinate.

The documentation for this class was generated from the following files:

- [Fl_Positioner.H](#)
- [Fl_Positioner.cxx](#)

30.67 Fl_Preferences Class Reference

[Fl_Preferences](#) provides methods to store user settings between application starts.

```
#include <Fl_Preferences.H>
```

Classes

- struct [Entry](#)

An entry associates a preference name to its corresponding value.

- class [Name](#)

'Name' provides a simple method to create numerical or more complex procedural names for entries and groups on the fly.

- class [Node](#)

- class [RootNode](#)

Public Types

- enum [Root](#) { [SYSTEM](#) = 0, [USER](#) }

Define the scope of the preferences.

Public Member Functions

- [Fl_Preferences \(Root root, const char *vendor, const char *application\)](#)

The constructor creates a group that manages name/value pairs and child groups.

- [Fl_Preferences \(const char *path, const char *vendor, const char *application\)](#)

This constructor is used to create or read a preferences file at an arbitrary position in the file system.

- [Fl_Preferences \(Fl_Preferences &parent, const char *group\)](#)

This constructor generates a new group of preference entries inside the group or file parent.

- [Fl_Preferences \(Fl_Preferences *, const char *group\)](#)

create a Preferences node in relation to a parent node for reading and writing

- parent: base name for group

- group: group name (can contain '/' separated group names) example: [Fl_Preferences colors\(base, "setup/colors" \);](#)

- [~Fl_Preferences \(\)](#)

The destructor removes allocated resources.

- int [groups \(\)](#)

Returns the number of groups that are contained within a group.

- const char * [group \(int num_group\)](#)

Returns the name of the Nth group.

- char **groupExists** (const char *key)
Returns non-zero if a group with this name exists.
- char **deleteGroup** (const char *group)
Deletes a group.
- int **entries** ()
Returns the number of entries (name/value pairs) in a group.
- const char * **entry** (int index)
Returns the name of an entry.
- char **entryExists** (const char *key)
Returns non-zero if an entry with this name exists.
- char **deleteEntry** (const char *entry)
Removes a single entry (name/value pair).
- char **set** (const char *entry, int value)
Sets an entry (name/value pair).
- char **set** (const char *entry, float value)
Sets an entry (name/value pair).
- char **set** (const char *entry, float value, int precision)
Sets an entry (name/value pair).
- char **set** (const char *entry, double value)
Sets an entry (name/value pair).
- char **set** (const char *entry, double value, int precision)
Sets an entry (name/value pair).
- char **set** (const char *entry, const char *value)
Sets an entry (name/value pair).
- char **set** (const char *entry, const void *value, int size)
Sets an entry (name/value pair).
- char **get** (const char *entry, int &value, int defaultValue)
Reads an entry from the group.
- char **get** (const char *entry, float &value, float defaultValue)
Reads an entry from the group.
- char **get** (const char *entry, double &value, double defaultValue)
Reads an entry from the group.
- char **get** (const char *entry, char *&value, const char *defaultValue)

Reads an entry from the group.

- char `get` (const char *entry, char *value, const char *defaultValue, int maxSize)

Reads an entry from the group.

- char `get` (const char *entry, void *&value, const void *defaultValue, int defaultSize)

Reads an entry from the group.

- char `get` (const char *entry, void *value, const void *defaultValue, int defaultSize, int maxSize)

Reads an entry from the group.

- int `size` (const char *entry)

Returns the size of the value part of an entry.

- char `getUserdataPath` (char *path, int pathlen)

Creates a path that is related to the preferences file and that is usable for application data beyond what is covered by `Fl_Preferences`.

- void `flush` ()

Write all preferences to disk.

Friends

- class `Node`
- class `RootNode`

30.67.1 Detailed Description

`Fl_Preferences` provides methods to store user settings between application starts.

It is similar to the Registry on WIN32 and Preferences on MacOS, and provides a simple configuration mechanism for UNIX.

`Fl_Preferences` uses a hierarchy to store data. It bundles similar data into groups and manages entries into those groups as name/value pairs.

Preferences are stored in text files that can be edited manually. The file format is easy to read and relatively forgiving. Preferences files are the same on all platforms. User comments in preference files are preserved. Filenames are unique for each application by using a vendor/application naming scheme. The user must provide default values for all entries to ensure proper operation should preferences be corrupted or not yet exist.

Entries can be of any length. However, the size of each preferences file should be kept under 100k for performance reasons. One application can have multiple preferences files. Extensive binary data however should be stored in separate files; see `getUserdataPath()`.

30.67.2 Member Enumeration Documentation

30.67.2.1 enum `Fl_Preferences::Root`

Define the scope of the preferences.

Enumerator:

SYSTEM Preferences are used system-wide.

USER Preferences apply only to the current user.

30.67.3 Constructor & Destructor Documentation

30.67.3.1 [Fl_Preferences::Fl_Preferences \(Root *root*, const char * *vendor*, const char * *application*\)](#)

The constructor creates a group that manages name/value pairs and child groups.

create the initial preferences base

- *root*: machine or user preferences
- *vendor*: unique identification of author or vendor of application Must be a valid directory name.

Groups are ready for reading and writing at any time. The root argument is either [Fl_Preferences::USER](#) or [Fl_Preferences::SYSTEM](#).

This constructor creates the *base* instance for all following entries and reads existing databases into memory. The vendor argument is a unique text string identifying the development team or vendor of an application. A domain name or an EMail address are great unique names, e.g. "researchATmatthiasm.com" or "fltk.org". The application argument can be the working title or final name of your application. Both vendor and application must be valid relative UNIX pathnames and may contain '/'s to create deeper file structures.

Parameters:

- ← *root* can be USER or SYSTEM for user specific or system wide preferences
- ← *vendor* unique text describing the company or author of this file
- ← *application* unique text describing the application

- *application*: vendor unique application name, i.e. "PreferencesTest" multiple preferences files can be created per application. Must be a valid file name. example: [Fl_Preferences](#) *base*([Fl_Preferences::USER](#), "fltk.org", "test01");

References [Fl_Preferences\(\)](#).

Referenced by [Fl_Preferences\(\)](#).

30.67.3.2 [Fl_Preferences::Fl_Preferences \(const char * *path*, const char * *vendor*, const char * *application*\)](#)

This constructor is used to create or read a preferences file at an arbitrary position in the file system.

create the initial preferences base

- *path*: an application-supplied path example: [Fl_Preferences](#) *base*("/usr/foo");

The file name is generated as *path/application.prefs*. If *application* is 0, *path* must contain the full file name.

Parameters:

- ← *path* path to the directory that contains the preferences file
- ← *vendor* unique text describing the company or author of this file
- ← *application* unique text describing the application

References [Fl_Preferences\(\)](#).

30.67.3.3 Fl_Preferences::Fl_Preferences (Fl_Preferences & parent, const char * group)

This constructor generates a new group of preference entries inside the group or file *parent*.

create a Preferences node in relation to a parent node for reading and writing

- parent: base name for group
- group: group name (can contain '/' separated group names) example: [Fl_Preferences colors\(base, "setup/colors" \);](#)

The group argument identifies a group of entries. It can contain '/'s to get quick access to individual elements inside the hierarchy.

Parameters:

- ← *parent* reference object for the new group
- ← *group* name of the group to access (may contain '/'s)

References [Fl_Preferences\(\)](#), [node](#), and [rootNode](#).

30.67.3.4 Fl_Preferences::Fl_Preferences (Fl_Preferences * parent, const char * group)

create a Preferences node in relation to a parent node for reading and writing

- parent: base name for group
- group: group name (can contain '/' separated group names) example: [Fl_Preferences colors\(base, "setup/colors" \);](#)

See also:

[Fl_Preferences\(Fl_Preferences&, const char *group \)](#)

References [Fl_Preferences\(\)](#), [node](#), and [rootNode](#).

30.67.3.5 Fl_Preferences::~Fl_Preferences ()

The destructor removes allocated resources.

destroy individual keys

- destroying the base preferences will flush changes to the prefs file
- after destroying the base, none of the depending preferences must be read or written

When used on the *base* preferences group, the destructor flushes all changes to the preferences file and deletes all internal databases.

30.67.4 Member Function Documentation

30.67.4.1 char Fl_Preferences::deleteEntry (const char * *entry*)

Removes a single entry (name/value pair).

remove a single entry (name/value pair) example: buttonColor.deleteEntry("red");

Parameters:

← *entry* name of entry to delete

Returns:

0 if deleting the entry failed

30.67.4.2 char Fl_Preferences::deleteGroup (const char * *group*)

Deletes a group.

delete a group example: setup.deleteGroup("colors/buttons");

Parameters:

← *group* name of the group to delete

Returns:

0 if call failed

30.67.4.3 int Fl_Preferences::entries ()

Returns the number of entries (name/value pairs) in a group.

return the number of entries (name/value) pairs for a group example: int n = buttonColor.entries();

Returns:

number of entries

30.67.4.4 const char * Fl_Preferences::entry (int *index*)

Returns the name of an entry.

return the name of an entry

- there is no guaranteed order of entry names
- the index must be within the range given by [entries\(\)](#) example: printf("Entry(%d)=%s\n", ix, buttonColor.entry(ix));

There is no guaranteed order of entry names. The index must be within the range given by [entries\(\)](#).

Parameters:

← *index* number indexing the requested entry

Returns:

pointer to value cstring

30.67.4.5 char Fl_Preferences::entryExists (const char * *key*)

Returns non-zero if an entry with this name exists.

return 1, if an entry with this name exists example: if (buttonColor.entryExists("red")).

Parameters:

← *key* name of entry that is searched for

Returns:

0 if entry was not found

..

30.67.4.6 void Fl_Preferences::flush ()

Write all preferences to disk.

write all preferences to disk

- this function works only with the base preference group
- this function is rarely used as deleting the base preferences flushes automatically

This function works only with the base preference group. This function is rarely used as deleting the base preferences flushes automatically.

Referenced by Fl_File_Chooser::preview().

30.67.4.7 char Fl_Preferences::get (const char * *entry*, void * *value*, const void * *defaultValue*, int *defaultSize*, int *maxSize*)

Reads an entry from the group.

read a binary entry from the group the data will be moved into the given destination buffer data will be clipped to the buffer size

A default value must be supplied. The return value indicates if the value was available (non-zero) or the default was used (0). 'maxSize' is the maximum length of text that will be read.

Parameters:

← *entry* name of entry

→ *value* returned from preferences or default value if none was set

← *defaultValue* default value to be used if no preference was set

← *defaultSize* size of default value array
 ← *maxSize* maximum length of value

Returns:

0 if the default value was used

Todo

maxSize should receive the number of bytes that were read.

30.67.4.8 char Fl_Preferences::get (const char * *entry*, void *& *value*, const void * *defaultValue*, int *defaultSize*)

Reads an entry from the group.

read a binary entry from the group 'data' will be changed to point to a new data buffer the data buffer must be deleted with 'free(data)' by the user.

A default value must be supplied. The return value indicates if the value was available (non-zero) or the default was used (0). [get\(\)](#) allocates memory of sufficient size to hold the value. The buffer must be free'd by the developer using 'free(value)'.

Parameters:

← *entry* name of entry
 → *value* returned from preferences or default value if none was set
 ← *defaultValue* default value to be used if no preference was set
 ← *defaultSize* size of default value array

Returns:

0 if the default value was used

30.67.4.9 char Fl_Preferences::get (const char * *entry*, char * *value*, const char * *defaultValue*, int *maxSize*)

Reads an entry from the group.

read a text entry from the group the text will be moved into the given text buffer text will be clipped to the buffer size

A default value must be supplied. The return value indicates if the value was available (non-zero) or the default was used (0). 'maxSize' is the maximum length of text that will be read. The text buffer must allow for one additional byte for a trailing zero.

Parameters:

← *entry* name of entry
 → *value* returned from preferences or default value if none was set
 ← *defaultValue* default value to be used if no preference was set
 ← *maxSize* maximum length of value plus one byte for a trailing zero

Returns:

0 if the default value was used

30.67.4.10 char Fl_Preferences::get (const char * *entry*, char *& *value*, const char * *defaultValue*)

Reads an entry from the group.

read a text entry from the group 'text' will be changed to point to a new text buffer the text buffer must be deleted with 'free(text)' by the user.

A default value must be supplied. The return value indicates if the value was available (non-zero) or the default was used (0). [get\(\)](#) allocates memory of sufficient size to hold the value. The buffer must be free'd by the developer using 'free(value)'.

Parameters:

- ← *entry* name of entry
- *value* returned from preferences or default value if none was set
- ← *defaultValue* default value to be used if no preference was set

Returns:

0 if the default value was used

30.67.4.11 char Fl_Preferences::get (const char * *entry*, double & *value*, double *defaultValue*)

Reads an entry from the group.

A default value must be supplied. The return value indicates if the value was available (non-zero) or the default was used (0).

Parameters:

- ← *entry* name of entry
- *value* returned from preferences or default value if none was set
- ← *defaultValue* default value to be used if no preference was set

Returns:

0 if the default value was used

30.67.4.12 char Fl_Preferences::get (const char * *entry*, float & *value*, float *defaultValue*)

Reads an entry from the group.

A default value must be supplied. The return value indicates if the value was available (non-zero) or the default was used (0).

Parameters:

- ← *entry* name of entry
- *value* returned from preferences or default value if none was set
- ← *defaultValue* default value to be used if no preference was set

Returns:

0 if the default value was used

30.67.4.13 char Fl_Preferences::get (const char * *entry*, int & *value*, int *defaultValue*)

Reads an entry from the group.

A default value must be supplied. The return value indicates if the value was available (non-zero) or the default was used (0).

Parameters:

- ← *entry* name of entry
- *value* returned from preferences or default value if none was set
- ← *defaultValue* default value to be used if no preference was set

Returns:

- 0 if the default value was used

Referenced by Fl_File_Chooser::Fl_File_Chooser(), and Fl_File_Chooser::rescan_keep_filename().

30.67.4.14 char Fl_Preferences::getUserdataPath (char * *path*, int *pathlen*)

Creates a path that is related to the preferences file and that is usable for application data beyond what is covered by [Fl_Preferences](#).

creates a path that is related to the preferences file and that is usable for application data beyond what is covered by [Fl_Preferences](#).

Parameters:

- *path* buffer for user data path
- ← *pathlen* size of path buffer

Returns:

- 0 if path was not created or pathname can't fit into buffer

- 'getUserdataPath' actually creates the directory
- 'path' must be large enough to receive a complete file path example: [Fl_Preferences](#) prefs(USER, "matthiasm.com", "test"); char path[FL_PATH_MAX]; prefs.getUserdataPath(path); sample returns: Win32: c:/Documents and Settings/matt/Application Data/matthiasm.com/test/ prefs: c:/Documents and Settings/matt/Application Data/matthiasm.com/test.prefs

30.67.4.15 const char * Fl_Preferences::group (int *num_group*)

Returns the name of the Nth group.

return the group name of the n'th group

- there is no guaranteed order of group names
- the index must be within the range given by [groups\(\)](#) example: printf("Group(%d)=%s\n", ix, base.group(ix));

There is no guaranteed order of group names. The index must be within the range given by [groups\(\)](#).

Parameters:

← *num_group* number indexing the requested group

Returns:

cstring pointer to the group name

30.67.4.16 char Fl_Preferences::groupExists (const char * *key*)

Returns non-zero if a group with this name exists.

return 1, if a group with this name exists example: if (base.groupExists("setup/colors")).

Groupnames are relative to the Preferences node and can contain a path. "." describes the current node, "./" describes the topmost node. By preceding a groupname with a "./", its path becomes relative to the topmost node.

Parameters:

← *key* name of group that is searched for

Returns:

0 if group was not found

..

30.67.4.17 int Fl_Preferences::groups ()

Returns the number of groups that are contained within a group.

return the number of groups that are contained within a group example: int n = base.groups();

Returns:

0 for no groups at all

30.67.4.18 char Fl_Preferences::set (const char * *entry*, const void * *value*, int *size*)

Sets an entry (name/value pair).

The return value indicates if there was a problem storing the data in memory. However it does not reflect if the value was actually stored in the preferences file.

Parameters:

← *entry* name of entry

← *value* set this entry to *value*

← *size* of data array

Returns:

0 if setting the value failed

30.67.4.19 char Fl_Preferences::set (const char * *entry*, const char * *value*)

Sets an entry (name/value pair).

The return value indicates if there was a problem storing the data in memory. However it does not reflect if the value was actually stored in the preferences file.

Parameters:

- ← ***entry*** name of entry
- ← ***value*** set this entry to *value*

Returns:

0 if setting the value failed

30.67.4.20 char Fl_Preferences::set (const char * *entry*, double *value*, int *precision*)

Sets an entry (name/value pair).

The return value indicates if there was a problem storing the data in memory. However it does not reflect if the value was actually stored in the preferences file.

Parameters:

- ← ***entry*** name of entry
- ← ***value*** set this entry to *value*
- ← ***precision*** number of decimal digits to represent value

Returns:

0 if setting the value failed

30.67.4.21 char Fl_Preferences::set (const char * *entry*, double *value*)

Sets an entry (name/value pair).

The return value indicates if there was a problem storing the data in memory. However it does not reflect if the value was actually stored in the preferences file.

Parameters:

- ← ***entry*** name of entry
- ← ***value*** set this entry to *value*

Returns:

0 if setting the value failed

30.67.4.22 char Fl_Preferences::set (const char * *entry*, float *value*, int *precision*)

Sets an entry (name/value pair).

The return value indicates if there was a problem storing the data in memory. However it does not reflect if the value was actually stored in the preferences file.

Parameters:

- ← ***entry*** name of entry
- ← ***value*** set this entry to *value*
- ← ***precision*** number of decimal digits to represent value

Returns:

0 if setting the value failed

30.67.4.23 char Fl_Preferences::set (const char * *entry*, float *value*)

Sets an entry (name/value pair).

The return value indicates if there was a problem storing the data in memory. However it does not reflect if the value was actually stored in the preferences file.

Parameters:

- ← ***entry*** name of entry
- ← ***value*** set this entry to *value*

Returns:

0 if setting the value failed

30.67.4.24 char Fl_Preferences::set (const char * *entry*, int *value*)

Sets an entry (name/value pair).

The return value indicates if there was a problem storing the data in memory. However it does not reflect if the value was actually stored in the preferences file.

Parameters:

- ← ***entry*** name of entry
- ← ***value*** set this entry to *value*

Returns:

0 if setting the value failed

Referenced by Fl_File_Chooser::preview().

30.67.4.25 int Fl_Preferences::size (const char * *entry*)

Returns the size of the value part of an entry.

return the size of the value part of an entry

Returns:

size of value

The documentation for this class was generated from the following files:

- [Fl_Preferences.H](#)
- [Fl_Preferences.cxx](#)

30.68 Fl_Preferences::Entry Struct Reference

An entry associates a preference name to its corresponding value.

```
#include <Fl_Preferences.H>
```

Public Attributes

- char * **name**
- char * **value**

30.68.1 Detailed Description

An entry associates a preference name to its corresponding value.

The documentation for this struct was generated from the following file:

- [Fl_Preferences.H](#)

30.69 Fl_Preferences::Name Class Reference

'Name' provides a simple method to create numerical or more complex procedural names for entries and groups on the fly.

```
#include <Fl_Preferences.H>
```

Public Member Functions

- [Name \(unsigned int n\)](#)
Create a numerical name.
- [Name \(const char *format,...\)](#)
Create a name using 'printf' style formatting.
- [operator const char * \(\)](#)
Return the Name as a c-string.

30.69.1 Detailed Description

'Name' provides a simple method to create numerical or more complex procedural names for entries and groups on the fly.

Example: `prefs.set(Fl_Preferences::Name("File%d",i),file[i]);`.

See `test/preferences.cxx` as a sample for writing arrays into preferences.

'Name' is actually implemented as a class inside [Fl_Preferences](#). It casts into `const char*` and gets automatically destroyed after the enclosing call ends.

30.69.2 Constructor & Destructor Documentation

30.69.2.1 Fl_Preferences::Name (unsigned int n)

Create a numerical name.

create a group name or entry name on the fly

- this version creates a simple unsigned integer as an entry name example: `int n, i; Fl_Preferences prev(appPrefs, "PreviousFiles"); prev.get("n", 0); for (i=0; i<n; i++) prev.get(Fl_Preferences::Name(i), prevFile[i], "");`

30.69.2.2 Fl_Preferences::Name (const char *format, ...)

Create a name using 'printf' style formatting.

create a group name or entry name on the fly

- this version creates entry names as in 'printf' example: `int n, i; Fl_Preferences prefs(USER, "matthias.com", "test"); prev.get("nFiles", 0); for (i=0; i<n; i++) prev.get(Fl_Preferences::Name("File%d", i), prevFile[i], "");`

The documentation for this class was generated from the following files:


- [Fl_Preferences.H](#)
- [Fl_Preferences.cxx](#)

30.70 Fl_Progress Class Reference

Displays a progress bar for the user.

```
#include <Fl_Progress.h>
```

Inheritance diagram for Fl_Progress::



Public Member Functions

- [Fl_Progress](#) (int x, int y, int w, int h, const char *l=0)

The constructor creates the progress bar using the position, size, and label.

- void [maximum](#) (float v)

Sets the maximum value in the progress widget.

- float [maximum](#) () const

Gets the maximum value in the progress widget.

- void [minimum](#) (float v)

Sets the minimum value in the progress widget.

- float [minimum](#) () const

Gets the minimum value in the progress widget.

- void [value](#) (float v)

Sets the current value in the progress widget.

- float [value](#) () const

Gets the current value in the progress widget.

Protected Member Functions

- virtual void [draw](#) ()

Draws the check button.

30.70.1 Detailed Description

Displays a progress bar for the user.

30.70.2 Constructor & Destructor Documentation

30.70.2.1 **Fl_Progress::Fl_Progress (int X, int Y, int W, int H, const char * l = 0)**

The constructor creates the progress bar using the position, size, and label.

The inherited destructor removes the progress bar.

References Fl_Widget::align(), Fl_Widget::box(), Fl_Widget::color(), FL_ALIGN_INSIDE, FL_BACKGROUND2_COLOR, FL_DOWN_BOX, maximum(), minimum(), and value().

30.70.3 Member Function Documentation

30.70.3.1 **void Fl_Progress::draw (void) [protected, virtual]**

Draws the check button.

Implements [Fl_Widget](#).

References Fl_Widget::active_r(), Fl_Widget::box(), Fl::box_dh(), Fl::box_dw(), Fl::box_dx(), Fl::box_dy(), Fl_Widget::color(), Fl_Widget::color2(), Fl_Widget::draw_box(), Fl_Widget::draw_label(), fl_clip(), fl_pop_clip(), Fl_Widget::h(), Fl_Widget::labelcolor(), Fl_Widget::w(), Fl_Widget::x(), and Fl_Widget::y().

30.70.3.2 **float Fl_Progress::maximum () const [inline]**

Gets the maximum value in the progress widget.

Referenced by [Fl_Progress\(\)](#).

30.70.3.3 **void Fl_Progress::maximum (float v) [inline]**

Sets the maximum value in the progress widget.

References Fl_Widget::redraw().

30.70.3.4 **float Fl_Progress::minimum () const [inline]**

Gets the minimum value in the progress widget.

Referenced by [Fl_Progress\(\)](#).

30.70.3.5 **void Fl_Progress::minimum (float v) [inline]**

Sets the minimum value in the progress widget.

References Fl_Widget::redraw().

30.70.3.6 **float Fl_Progress::value () const [inline]**

Gets the current value in the progress widget.

Referenced by [Fl_Progress\(\)](#).

30.70.3.7 void Fl_Progress::value (float *v*) [inline]

Sets the current value in the progress widget.

References Fl_Widget::redraw().

The documentation for this class was generated from the following files:


- [Fl_Progress.H](#)
- [Fl_Progress.cxx](#)

30.71 Fl_Repeat_Button Class Reference

The [Fl_Repeat_Button](#) is a subclass of [Fl_Button](#) that generates a callback when it is pressed and then repeatedly generates callbacks as long as it is held down.

```
#include <Fl_Repeat_Button.h>
```

Inheritance diagram for Fl_Repeat_Button::



Public Member Functions

- int [handle](#) (int)
Handles the specified event.
- [Fl_Repeat_Button](#) (int X, int Y, int W, int H, const char *l=0)
Creates a new [Fl_Repeat_Button](#) widget using the given position, size, and label string.
- void [deactivate](#) ()
Deactivate a widget.

30.71.1 Detailed Description

The [Fl_Repeat_Button](#) is a subclass of [Fl_Button](#) that generates a callback when it is pressed and then repeatedly generates callbacks as long as it is held down.

The speed of the repeat is fixed and depends on the implementation.

30.71.2 Constructor & Destructor Documentation

30.71.2.1 [Fl_Repeat_Button::Fl_Repeat_Button](#) (int X, int Y, int W, int H, const char * l = 0) [inline]

Creates a new [Fl_Repeat_Button](#) widget using the given position, size, and label string.

The default boxtyle is FL_UP_BOX. Deletes the button.

30.71.3 Member Function Documentation

30.71.3.1 void [Fl_Repeat_Button::deactivate](#) () [inline]

Deactivate a widget.

Inactive widgets will be drawn "grayed out", e.g. with less contrast than the active widget. Inactive widgets will not receive any keyboard or mouse button events. Other events (including FL_ENTER, FL_MOVE, FL_LEAVE, FL_SHORTCUT, and others) will still be sent. A widget is only active if [active\(\)](#) is true on it and all of its parents.

Changing this value will send FL_DEACTIVATE to the widget if [active_r\(\)](#) is true.

Currently you cannot deactivate [Fl_Window](#) widgets.

See also:

[activate\(\)](#), [active\(\)](#), [active_r\(\)](#)

Reimplemented from [Fl_Widget](#).

References [Fl_Widget::deactivate\(\)](#), and [Fl::remove_timeout\(\)](#).

30.71.3.2 int Fl_Repeat_Button::handle (int *event*) [virtual]

Handles the specified event.

You normally don't call this method directly, but instead let FLTK do it when the user interacts with the widget.

When implemented in a new widget, this function must return 0 if the widget does not use the event or 1 otherwise.

Most of the time, you want to call the inherited [handle\(\)](#) method in your overriden method so that you don't short-circuit events that you don't handle. In this last case you should return the callee retval.

Parameters:

← *event* the kind of event received

Return values:

0 if the event was not used or understood

1 if the event was used and can be deleted

See also:

[Fl_Event](#)

Reimplemented from [Fl_Button](#).

References [Fl_Widget::active\(\)](#), [Fl::add_timeout\(\)](#), [Fl_Widget::do_callback\(\)](#), [Fl::event_inside\(\)](#), [FL_DEACTIVATE](#), [FL_DRAG](#), [FL_HIDE](#), [FL_PUSH](#), [FL_RELEASE](#), [Fl::focus\(\)](#), [Fl::remove_timeout\(\)](#), [Fl_Button::value\(\)](#), and [Fl::visible_focus\(\)](#).

The documentation for this class was generated from the following files:


- [Fl_Repeat_Button.H](#)
- [Fl_Repeat_Button.cxx](#)

30.72 Fl_Return_Button Class Reference

The [Fl_Return_Button](#) is a subclass of [Fl_Button](#) that generates a callback when it is pressed or when the user presses the Enter key.

```
#include <Fl_Return_Button.h>
```

Inheritance diagram for Fl_Return_Button::



Public Member Functions

- int [handle](#) (int)

Handles the specified event.

- [Fl_Return_Button](#) (int X, int Y, int W, int H, const char *l=0)

Creates a new [Fl_Return_Button](#) widget using the given position, size, and label string.

Protected Member Functions

- void [draw](#) ()

Draw the widget.

30.72.1 Detailed Description

The [Fl_Return_Button](#) is a subclass of [Fl_Button](#) that generates a callback when it is pressed or when the user presses the Enter key.

A carriage-return symbol is drawn next to the button label.




Figure 30.23: Fl_Return_Button

30.72.2 Constructor & Destructor Documentation

30.72.2.1 **Fl_Return_Button::Fl_Return_Button (int X, int Y, int W, int H, const char * l = 0)** [inline]

Creates a new [Fl_Return_Button](#) widget using the given position, size, and label string.

The default boxtyle is FL_UP_BOX.

The inherited destructor deletes the button.

30.72.3 Member Function Documentation

30.72.3.1 **void Fl_Return_Button::draw ()** [protected, virtual]

Draw the widget.

Never call this function directly. FLTK will schedule redrawing whenever needed. If your widget must be redrawn as soon as possible, call [redraw\(\)](#) instead.

Override this function to draw your own widgets.

Reimplemented from [Fl_Button](#).

References [Fl_Widget::box\(\)](#), [Fl_Widget::color\(\)](#), [Fl_Button::down_box\(\)](#), [Fl_Widget::draw_box\(\)](#), [Fl_Widget::draw_focus\(\)](#), [Fl_Widget::draw_label\(\)](#), [FL_HIDDEN_BUTTON](#), [Fl::focus\(\)](#), [Fl_Widget::h\(\)](#), [Fl_Widget::selection_color\(\)](#), [Fl_Widget::type\(\)](#), [Fl_Button::value\(\)](#), [Fl_Widget::w\(\)](#), [Fl_Widget::x\(\)](#), and [Fl_Widget::y\(\)](#).

30.72.3.2 **int Fl_Return_Button::handle (int event)** [virtual]

Handles the specified event.

You normally don't call this method directly, but instead let FLTK do it when the user interacts with the widget.

When implemented in a new widget, this function must return 0 if the widget does not use the event or 1 otherwise.

Most of the time, you want to call the inherited [handle\(\)](#) method in your overriden method so that you don't short-circuit events that you don't handle. In this last case you should return the callee retval.

Parameters:

← *event* the kind of event received

Return values:

0 if the event was not used or understood

1 if the event was used and can be deleted

See also:

[Fl_Event](#)

Reimplemented from [Fl_Button](#).

References `Fl_Widget::do_callback()`, `Fl::event_key()`, `FL_Enter`, `FL_KP_Enter`, and `FL_SHORTCUT`.

The documentation for this class was generated from the following files:


- [Fl_Return_Button.H](#)
- [Fl_Return_Button.cxx](#)

30.73 Fl_RGB_Image Class Reference

The [Fl_RGB_Image](#) class supports caching and drawing of full-color images with 1 to 4 channels of color information.

```
#include <Fl_Image.h>
```

Inheritance diagram for Fl_RGB_Image::

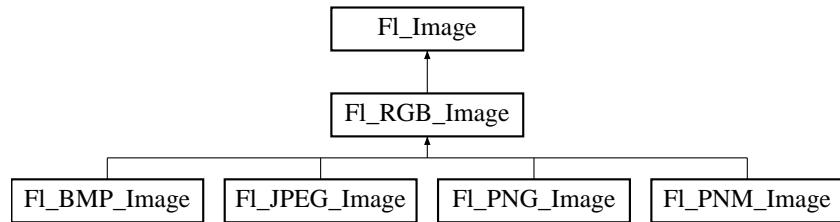

Public Member Functions

- [Fl_RGB_Image](#) (const uchar *bits, int W, int H, int D=3, int LD=0)
The constructor creates a new image from the specified data.
- virtual [~Fl_RGB_Image](#) ()
The destructor free all memory and server resources that are used by the image.
- virtual [Fl_Image * copy](#) (int W, int H)
The [copy\(\)](#) method creates a copy of the specified image.
- [Fl_Image * copy](#) ()
The [copy\(\)](#) method creates a copy of the specified image.
- virtual void [color_average](#) (Fl_Color c, float i)
The [color_average\(\)](#) method averages the colors in the image with the FLTK color value c.
- virtual void [desaturate](#) ()
The [desaturate\(\)](#) method converts an image to grayscale.
- virtual void [draw](#) (int X, int Y, int W, int H, int cx=0, int cy=0)
The [draw\(\)](#) methods draw the image.
- void [draw](#) (int X, int Y)
The [draw\(\)](#) methods draw the image.
- virtual void [label](#) (Fl_Widget *w)
The [label\(\)](#) methods are an obsolete way to set the image attribute of a widget or menu item.
- virtual void [label](#) (Fl_Menu_Item *m)
The [label\(\)](#) methods are an obsolete way to set the image attribute of a widget or menu item.
- virtual void [uncache](#) ()
If the image has been cached for display, delete the cache data.

Public Attributes

- const uchar * **array**
- int **alloc_array**
- unsigned **id**
- unsigned **mask**

30.73.1 Detailed Description

The [Fl_RGB_Image](#) class supports caching and drawing of full-color images with 1 to 4 channels of color information.

Images with an even number of channels are assumed to contain alpha information, which is used to blend the image with the contents of the screen.

[Fl_RGB_Image](#) is defined in <FL/Fl_Image.H>, however for compatibility reasons <FL/Fl_RGB_Image.H> should be included.

30.73.2 Constructor & Destructor Documentation

30.73.2.1 [Fl_RGB_Image::Fl_RGB_Image](#) (const uchar * *bits*, int *W*, int *H*, int *D* = 3, int *LD* = 0) [inline]

The constructor creates a new image from the specified data.

References [Fl_Image::data\(\)](#), and [Fl_Image::id\(\)](#).

Referenced by [copy\(\)](#).

30.73.2.2 [Fl_RGB_Image::~Fl_RGB_Image](#) () [virtual]

The destructor free all memory and server resources that are used by the image.

References [uncache\(\)](#).

30.73.3 Member Function Documentation

30.73.3.1 [void Fl_RGB_Image::color_average](#) ([Fl_Color](#) *c*, float *i*) [virtual]

The [color_average\(\)](#) method averages the colors in the image with the FLTK color value *c*.

The *i* argument specifies the amount of the original image to combine with the color, so a value of 1.0 results in no color blend, and a value of 0.0 results in a constant image of the specified color. *The original image data is not altered by this method.*

Reimplemented from [Fl_Image](#).

References [Fl_Image::d\(\)](#), [Fl::get_color\(\)](#), [Fl_Image::h\(\)](#), [Fl_Image::id\(\)](#), [uncache\(\)](#), and [Fl_Image::w\(\)](#).

30.73.3.2 [Fl_Image* Fl_RGB_Image::copy](#) () [inline]

The [copy\(\)](#) method creates a copy of the specified image.

If the width and height are provided, the image is resized to the specified size. The image should be deleted (or in the case of [Fl_Shared_Image](#), released) when you are done with it.

Reimplemented from [Fl_Image](#).

References [copy\(\)](#), [Fl_Image::h\(\)](#), and [Fl_Image::w\(\)](#).

Referenced by [copy\(\)](#).

30.73.3.3 `Fl_Image * Fl_RGB_Image::copy (int W, int H) [virtual]`

The [copy\(\)](#) method creates a copy of the specified image.

If the width and height are provided, the image is resized to the specified size. The image should be deleted (or in the case of [Fl_Shared_Image](#), released) when you are done with it.

Reimplemented from [Fl_Image](#).

References [alloc_array](#), [Fl_Image::d\(\)](#), [Fl_RGB_Image\(\)](#), [Fl_Image::h\(\)](#), [Fl_Image::ld\(\)](#), and [Fl_Image::w\(\)](#).

30.73.3.4 `void Fl_RGB_Image::desaturate () [virtual]`

The [desaturate\(\)](#) method converts an image to grayscale.

If the image contains an alpha channel (depth = 4), the alpha channel is preserved. *This method does not alter the original image data.*

Reimplemented from [Fl_Image](#).

References [Fl_Image::d\(\)](#), [Fl_Image::h\(\)](#), [Fl_Image::ld\(\)](#), [uncache\(\)](#), and [Fl_Image::w\(\)](#).

30.73.3.5 `void Fl_RGB_Image::draw (int X, int Y) [inline]`

The [draw\(\)](#) methods draw the image.

This form specifies the upper-lefthand corner of the image

Reimplemented from [Fl_Image](#).

References [draw\(\)](#), [Fl_Image::h\(\)](#), and [Fl_Image::w\(\)](#).

Referenced by [draw\(\)](#).

30.73.3.6 `void Fl_RGB_Image::draw (int X, int Y, int W, int H, int cx = 0, int cy = 0) [virtual]`

The [draw\(\)](#) methods draw the image.

This form specifies a bounding box for the image, with the origin (upper-lefthand corner) of the image offset by the cx and cy arguments.

Reimplemented from [Fl_Image](#).

References [Fl_Image::d\(\)](#), [Fl_Image::draw_empty\(\)](#), [fl_clip_box\(\)](#), [fl_restore_clip\(\)](#), [Fl_Image::h\(\)](#), [Fl_Image::ld\(\)](#), and [Fl_Image::w\(\)](#).

30.73.3.7 void Fl_RGB_Image::label (Fl_Menu_Item * *m*) [virtual]

The [label\(\)](#) methods are an obsolete way to set the image attribute of a widget or menu item.

Use the [image\(\)](#) or [deimage\(\)](#) methods of the [Fl_Widget](#) and [Fl_Menu_Item](#) classes instead.

Reimplemented from [Fl_Image](#).

References [_FL_IMAGE_LABEL](#), [Fl_Menu_Item::label\(\)](#), and [Fl::set_labeltype\(\)](#).

30.73.3.8 void Fl_RGB_Image::label (Fl_Widget * *widget*) [virtual]

The [label\(\)](#) methods are an obsolete way to set the image attribute of a widget or menu item.

Use the [image\(\)](#) or [deimage\(\)](#) methods of the [Fl_Widget](#) and [Fl_Menu_Item](#) classes instead.

Reimplemented from [Fl_Image](#).

References [Fl_Widget::image\(\)](#).

30.73.3.9 void Fl_RGB_Image::uncache () [virtual]

If the image has been cached for display, delete the cache data.

This allows you to change the data used for the image and then redraw it without recreating an image object.

Reimplemented from [Fl_Image](#).

Referenced by [color_average\(\)](#), [desaturate\(\)](#), and [~Fl_RGB_Image\(\)](#).

The documentation for this class was generated from the following files:


- [Fl_Image.H](#)
- [Fl_Image.cxx](#)

30.74 Fl_Roller Class Reference

The [Fl_Roller](#) widget is a "dolly" control commonly used to move 3D objects.

```
#include <Fl_Roller.h>
```

Inheritance diagram for Fl_Roller::



Public Member Functions

- int [handle](#) (int)
Handles the specified event.
- [Fl_Roller](#) (int X, int Y, int W, int H, const char *L=0)
Creates a new [Fl_Roller](#) widget using the given position, size, and label string.

Protected Member Functions

- void [draw](#) ()
Draw the widget.

30.74.1 Detailed Description

The [Fl_Roller](#) widget is a "dolly" control commonly used to move 3D objects.

Figure 30.24: Fl_Roller

30.74.2 Constructor & Destructor Documentation

30.74.2.1 **Fl_Roller::Fl_Roller (int X, int Y, int W, int H, const char *L = 0)**

Creates a new [Fl_Roller](#) widget using the given position, size, and label string.

The default boxtyle is FL_NO_BOX.

Inherited destructor destroys the valuator.

References [Fl_Widget::box\(\)](#), [FL_UP_BOX](#), and [Fl_Valuator::step\(\)](#).

30.74.3 Member Function Documentation

30.74.3.1 **void Fl_Roller::draw () [protected, virtual]**

Draw the widget.

Never call this function directly. FLTK will schedule redrawing whenever needed. If your widget must be redrawn as soon as possible, call [redraw\(\)](#) instead.

Override this function to draw your own widgets.

Implements [Fl_Widget](#).

References [Fl_Widget::active_r\(\)](#), [Fl_Widget::box\(\)](#), [Fl::box_dh\(\)](#), [Fl::box_dw\(\)](#), [Fl::box_dx\(\)](#), [Fl::box_dy\(\)](#), [Fl_Widget::color\(\)](#), [Fl_Widget::damage\(\)](#), [Fl_Widget::draw_box\(\)](#), [Fl_Widget::draw_focus\(\)](#), [fl_color\(\)](#), [fl_rectf\(\)](#), [FL_THIN_UP_FRAME](#), [fl_xyline\(\)](#), [fl_yxline\(\)](#), [Fl::focus\(\)](#), [Fl_Widget::h\(\)](#), [Fl_Valuator::horizontal\(\)](#), [Fl_Valuator::step\(\)](#), [Fl_Valuator::value\(\)](#), [Fl_Widget::w\(\)](#), [Fl_Widget::x\(\)](#), and [Fl_Widget::y\(\)](#).

30.74.3.2 **int Fl_Roller::handle (int event) [virtual]**

Handles the specified event.

You normally don't call this method directly, but instead let FLTK do it when the user interacts with the widget.

When implemented in a new widget, this function must return 0 if the widget does not use the event or 1 otherwise.

Most of the time, you want to call the inherited [handle\(\)](#) method in your overridden method so that you don't short-circuit events that you don't handle. In this last case you should return the callee retval.

Parameters:

← *event* the kind of event received

Return values:

0 if the event was not used or understood

1 if the event was used and can be deleted

See also:

[Fl_Event](#)

Reimplemented from [Fl_Widget](#).

References Fl_Valuator::clamp(), Fl::event_key(), Fl::event_x(), Fl::event_y(), FL_Down, FL_DRAG, FL_ENTER, FL_FOCUS, FL_KEYBOARD, FL_LEAVE, FL_Left, FL_PUSH, FL_RELEASE, FL_Right, FL_UNFOCUS, FL_Up, Fl::focus(), Fl_Valuator::handle_drag(), Fl_Valuator::handle_push(), Fl_Valuator::handle_release(), Fl_Valuator::horizontal(), Fl_Valuator::increment(), Fl_Valuator::previous_value(), Fl_Widget::redraw(), Fl_Valuator::round(), Fl_Valuator::value(), and Fl::visible_focus().

The documentation for this class was generated from the following files:


- [Fl_Roller.H](#)
- Fl_Roller.cxx

30.75 Fl_Round_Button Class Reference

Buttons generate callbacks when they are clicked by the user.

```
#include <Fl_Round_Button.H>
```

Inheritance diagram for Fl_Round_Button::



Public Member Functions

- [Fl_Round_Button](#) (int x, int y, int w, int h, const char *l=0)

Creates a new [Fl_Round_Button](#) widget using the given position, size, and label string.

30.75.1 Detailed Description

Buttons generate callbacks when they are clicked by the user.

You control exactly when and how by changing the values for [type\(\)](#) and [when\(\)](#).

Figure 30.25: Fl_Round_Button

The [Fl_Round_Button](#) subclass display the "on" state by turning on a light, rather than drawing pushed in. The shape of the "light" is initially set to [FL_ROUND_DOWN_BOX](#). The color of the light when on is controlled with [selection_color\(\)](#), which defaults to [FL_RED](#).

The documentation for this class was generated from the following files:


- [Fl_Round_Button.H](#)
- [Fl_Round_Button.cxx](#)

30.76 Fl_Round_Clock Class Reference

A clock widget of type FL_ROUND_CLOCK.

```
#include <Fl_Round_Clock.H>
```

Inheritance diagram for Fl_Round_Clock::



Public Member Functions

- [Fl_Round_Clock](#) (int x, int y, int w, int h, const char *l=0)
Creates the clock widget, setting his type and box.

30.76.1 Detailed Description

A clock widget of type FL_ROUND_CLOCK.

Has no box.

30.76.2 Constructor & Destructor Documentation

30.76.2.1 [Fl_Round_Clock::Fl_Round_Clock](#) (int x, int y, int w, int h, const char * l = 0) `[inline]`

Creates the clock widget, setting his type and box.

References Fl_Widget::box(), FL_NO_BOX, FL_ROUND_CLOCK, and Fl_Widget::type().

The documentation for this class was generated from the following file:


- [Fl_Round_Clock.H](#)

30.77 Fl_Scroll Class Reference

This container widget lets you maneuver around a set of widgets much larger than your window.

```
#include <Fl_Scroll.h>
```

Inheritance diagram for Fl_Scroll::



Public Types

- enum {
 HORIZONTAL = 1, **VERTICAL** = 2, **BOTH** = 3, **ALWAYS_ON** = 4,
HORIZONTAL_ALWAYS = 5, **VERTICAL_ALWAYS** = 6, **BOTH_ALWAYS** = 7 }

Public Member Functions

- void **resize** (int, int, int, int)
This resizes the [Fl_Group](#) widget and all of its children.
- int **handle** (int)
Handles the specified event.
- [Fl_Scroll](#) (int X, int Y, int W, int H, const char *l=0)
Creates a new [Fl_Scroll](#) widget using the given position, size, and label string.
- int **xposition** () const
Gets the current horizontal scrolling position.
- int **yposition** () const
Gets the current vertical scrolling position.
- void **scroll_to** (int, int)
Moves the contents of the scroll group to a new position.
- void **clear** ()
Clear all but the scrollbars.

Public Attributes

- [Fl_Scrollbar scrollbar](#)
- [Fl_Scrollbar hscrollbar](#)

Protected Member Functions

- void **bbox** (int &, int &, int &, int &)
- void **draw** ()

Draw the widget.

30.77.1 Detailed Description

This container widget lets you maneuver around a set of widgets much larger than your window.

If the child widgets are larger than the size of this object then scrollbars will appear so that you can scroll over to them:




Figure 30.26: FL_Scroll

If all of the child widgets are packed together into a solid rectangle then you want to set **box()** to **FL_NO_BOX** or one of the **_FRAME** types. This will result in the best output. However, if the child widgets are a sparse arrangement you must set **box()** to a real **_BOX** type. This can result in some blinking during redrawing, but that can be solved by using a [FL_Double_Window](#).

By default you can scroll in both directions, and the scrollbars disappear if the data will fit in the area of the scroll.

Use [**FL_Scroll::type\(\)**](#) to change this as follows :

- 0 - No scrollbars
- **Fl_Scroll::HORIZONTAL** - Only a horizontal scrollbar.
- **Fl_Scroll::VERTICAL** - Only a vertical scrollbar.
- **Fl_Scroll::BOTH** - The default is both scrollbars.
- **Fl_Scroll::HORIZONTAL_ALWAYS** - Horizontal scrollbar always on, vertical always off.
- **Fl_Scroll::VERTICAL_ALWAYS** - Vertical scrollbar always on, horizontal always off.
- **Fl_Scroll::BOTH_ALWAYS** - Both always on.

Use **scrollbar.align(int)** (see void [**Fl_Widget::align\(Fl_Align\)**](#)) : to change what side the scrollbars are drawn on.

If the **FL_ALIGN_LEFT** bit is on, the vertical scrollbar is on the left. If the **FL_ALIGN_TOP** bit is on, the horizontal scrollbar is on the top. Note that only the alignment flags in scrollbar are considered. The flags in h-scrollbar however are ignored.

This widget can also be used to pan around a single child widget "canvas". This child widget should be of your own class, with a [draw\(\)](#) method that draws the contents. The scrolling is done by changing the [x\(\)](#) and [y\(\)](#) of the widget, so this child must use the [x\(\)](#) and [y\(\)](#) to position it's drawing. To speed up drawing it should test [fl_push_clip\(\)](#).

Another very useful child is a single [Fl_Pack](#), which is itself a group that packs it's children together and changes size to surround them. Filling the [Fl_Pack](#) with [Fl_Tabs](#) groups (and then putting normal widgets inside those) gives you a very powerful scrolling list of individually-openable panels.

Fluid lets you create these, but you can only lay out objects that fit inside the [Fl_Scroll](#) without scrolling. Be sure to leave space for the scrollbars, as Fluid won't show these either.

You cannot use [Fl_Window](#) as a child of this since the clipping is not conveyed to it when drawn, and it will draw over the scrollbars and neighboring objects.

30.77.2 Constructor & Destructor Documentation

30.77.2.1 [Fl_Scroll::Fl_Scroll \(int X, int Y, int W, int H, const char * L = 0\)](#)

Creates a new [Fl_Scroll](#) widget using the given position, size, and label string.

The default boxtyle is [FL_NO_BOX](#).

The destructor *also deletes all the children*. This allows a whole tree to be deleted at once, without having to keep a pointer to all the children in the user code. A kludge has been done so the [Fl_Scroll](#) and all of it's children can be automatic (local) variables, but you must declare the [Fl_Scroll](#) first, so that it is destroyed last.

References [Fl_Widget::callback\(\)](#), [FL_HORIZONTAL](#), and [Fl_Widget::type\(\)](#).

30.77.3 Member Function Documentation

30.77.3.1 [void Fl_Scroll::clear \(\)](#)

Clear all but the scrollbars.

..

Reimplemented from [Fl_Group](#).

References [Fl_Group::child\(\)](#), and [Fl_Group::children\(\)](#).

30.77.3.2 [void Fl_Scroll::draw \(\) \[protected, virtual\]](#)

Draw the widget.

Never call this function directly. FLTK will schedule redrawing whenever needed. If your widget must be redrawn as soon as possible, call [redraw\(\)](#) instead.

Override this function to draw your own widgets.

Reimplemented from [Fl_Group](#).

References [Fl_Widget::align\(\)](#), [Fl_Group::array\(\)](#), [Fl_Widget::box\(\)](#), [Fl::box_dh\(\)](#), [Fl::box_dw\(\)](#), [Fl::box_dx\(\)](#), [Fl::box_dy\(\)](#), [Fl_Group::children\(\)](#), [Fl_Widget::clear_visible\(\)](#), [Fl_Widget::color\(\)](#), [Fl_Widget::damage\(\)](#), [Fl_Widget::draw_box\(\)](#), [Fl_Group::draw_child\(\)](#), [FL_ALIGN_LEFT](#), [FL_ALIGN_TOP](#), [fl_clip\(\)](#), [fl_color\(\)](#), [Fl_Object](#), [fl_pop_clip\(\)](#), [fl_rectf\(\)](#), [Fl_Widget::h\(\)](#), [Fl_Widget::resize\(\)](#),

`Fl_Widget::set_visible()`, `Fl_Widget::type()`, `Fl_Group::update_child()`, `Fl_Scrollbar::value()`, `Fl_Widget::visible()`, `Fl_Widget::w()`, `Fl_Widget::x()`, and `Fl_Widget::y()`.

30.77.3.3 int Fl_Scroll::handle (int *event*) [virtual]

Handles the specified event.

You normally don't call this method directly, but instead let FLTK do it when the user interacts with the widget.

When implemented in a new widget, this function must return 0 if the widget does not use the event or 1 otherwise.

Most of the time, you want to call the inherited `handle()` method in your overriden method so that you don't short-circuit events that you don't handle. In this last case you should return the callee retval.

Parameters:

← *event* the kind of event received

Return values:

0 if the event was not used or understood
1 if the event was used and can be deleted

See also:

[Fl_Event](#)

Reimplemented from [Fl_Group](#).

30.77.3.4 void Fl_Scroll::resize (int *X*, int *Y*, int *W*, int *H*) [virtual]

This resizes the [Fl_Group](#) widget and all of its children.

The [Fl_Group](#) widget first resizes itself, and then it moves and resizes all its children according to the rules documented for `Fl_Group::resizable(Fl_Widget*)`

See also:

[Fl_Group::resizable\(Fl_Widget*\)](#)
[Fl_Group::resizable\(\)](#)
[Fl_Widget::resize\(int,int,int,int\)](#)

Reimplemented from [Fl_Group](#).

References `Fl_Widget::align()`, `Fl_Group::array()`, `Fl_Group::children()`, `FL_ALIGN_LEFT`, `FL_ALIGN_TOP`, `Fl_Object`, `Fl_Widget::h()`, `Fl_Widget::position()`, `Fl_Widget::redraw()`, `Fl_Widget::visible()`, `Fl_Widget::w()`, `Fl_Widget::x()`, and `Fl_Widget::y()`.

30.77.3.5 void Fl_Scroll::scroll_to (int *X*, int *Y*)

Moves the contents of the scroll group to a new position.

References `Fl_Group::array()`, `Fl_Group::children()`, `Fl_Widget::damage()`, `Fl_Widget::parent()`, `Fl_Widget::position()`, `Fl_Widget::window()`, `Fl_Widget::x()`, and `Fl_Widget::y()`.

30.77.3.6 int Fl_Scroll::xposition () const [inline]

Gets the current horizontal scrolling position.

30.77.3.7 int Fl_Scroll::yposition () const [inline]

Gets the current vertical scrolling position.

The documentation for this class was generated from the following files:


- [Fl_Scroll.H](#)
- [Fl_Scroll.cxx](#)

30.78 Fl_Scrollbar Class Reference

The [Fl_Scrollbar](#) widget displays a slider with arrow buttons at the ends of the scrollbar.

```
#include <Fl_Scrollbar.H>
```

Inheritance diagram for Fl_Scrollbar::



Public Member Functions

- [Fl_Scrollbar](#) (int x, int y, int w, int h, const char *l=0)

Creates a new [Fl_Scrollbar](#) widget using the given position, size, and label string.

- [~Fl_Scrollbar](#) ()

Destroys the Scrollbar.

- int [handle](#) (int)

Handles the specified event.

- int [value](#) ()

The first form returns the integer value of the scrollbar.

- int [value](#) (int p, int s, int top, int total)

See int [Fl_Scrollbar::value\(\)](#).

- int [linesize](#) () const

This number controls how big the steps are that the arrow keys do.

- void [linesize](#) (int i)

This number controls how big the steps are that the arrow keys do.

Protected Member Functions

- void [draw](#) ()

Draw the widget.

30.78.1 Detailed Description

The [Fl_Scrollbar](#) widget displays a slider with arrow buttons at the ends of the scrollbar.

Clicking on the arrows move up/left and down/right by [linesize\(\)](#). Scrollbars also accept FL_SHORTCUT events: the arrows move by [linesize\(\)](#), and vertical scrollbars take Page Up/Down (they move by the page size minus [linesize\(\)](#)) and Home/End (they jump to the top or bottom).

Scrollbars have step(1) preset (they always return integers). If desired you can set the [step\(\)](#) to non-integer values. You will then have to use casts to get at the floating-point versions of [value\(\)](#) from [Fl_Slider](#).

Figure 30.27: Fl_Scrollbar

30.78.2 Constructor & Destructor Documentation

30.78.2.1 [Fl_Scrollbar::Fl_Scrollbar \(int X, int Y, int W, int H, const char * L = 0\)](#)

Creates a new [Fl_Scrollbar](#) widget using the given position, size, and label string.

You need to do type([FL_HORIZONTAL](#)) if you want a horizontal scrollbar.

References [Fl_Widget::box\(\)](#), [Fl_Widget::color\(\)](#), [FL_FLAT_BOX](#), [FL_UP_BOX](#), [Fl_Slider::slider\(\)](#), and [Fl_Valuator::step\(\)](#).

30.78.2.2 [Fl_Scrollbar::~Fl_Scrollbar \(\)](#)

Destroys the Scrollbar.

References [Fl::remove_timeout\(\)](#).

30.78.3 Member Function Documentation

30.78.3.1 [void Fl_Scrollbar::draw \(\) \[protected, virtual\]](#)

Draw the widget.

Never call this function directly. FLTK will schedule redrawing whenever needed. If your widget must be redrawn as soon as possible, call [redraw\(\)](#) instead.

Override this function to draw your own widgets.

Reimplemented from [Fl_Slider](#).

References `Fl_Widget::active_r()`, `Fl_Widget::box()`, `Fl::box_dh()`, `Fl::box_dw()`, `Fl::box_dx()`, `Fl::box_dy()`, `Fl_Widget::damage()`, `Fl_Widget::draw_box()`, `fl_color()`, `fl_polygon()`, `Fl_Widget::h()`, `Fl_Valuator::horizontal()`, `Fl_Widget::labelcolor()`, `Fl_Widget::selection_color()`, `Fl_Slider::slider()`, `Fl_Widget::w()`, `Fl_Widget::x()`, and `Fl_Widget::y()`.

30.78.3.2 int Fl_Scrollbar::handle (int *event*) [virtual]

Handles the specified event.

You normally don't call this method directly, but instead let FLTK do it when the user interacts with the widget.

When implemented in a new widget, this function must return 0 if the widget does not use the event or 1 otherwise.

Most of the time, you want to call the inherited [handle\(\)](#) method in your overriden method so that you don't short-circuit events that you don't handle. In this last case you should return the callee retval.

Parameters:

← *event* the kind of event received

Return values:

0 if the event was not used or understood

1 if the event was used and can be deleted

See also:

[Fl_Event](#)

Reimplemented from [Fl_Slider](#).

References `Fl::add_timeout()`, `Fl_Valuator::clamp()`, `Fl_Widget::damage()`, `Fl_Widget::do_callback()`, `Fl::event_button()`, `Fl::event_key()`, `Fl::event_x()`, `Fl::event_y()`, `FL_Down`, `FL_DRAG`, `FL_End`, `FL_ENTER`, `FL_Home`, `FL_KEYBOARD`, `FL_LEAVE`, `FL_Left`, `FL_MIDDLE_MOUSE`, `FL_MOUSEWHEEL`, `FL_Page_Down`, `FL_Page_Up`, `FL_PUSH`, `FL_RELEASE`, `FL_Right`, `FL_SHORTCUT`, `FL_Up`, `Fl_Widget::h()`, `Fl_Valuator::handle_drag()`, `Fl_Valuator::handle_push()`, `Fl_Valuator::handle_release()`, `Fl_Valuator::horizontal()`, `Fl_Valuator::maximum()`, `Fl_Valuator::minimum()`, `Fl::remove_timeout()`, `Fl_Widget::set_changed()`, `Fl_Slider::slider_size()`, `Fl_Widget::type()`, `value()`, `Fl_Valuator::value_damage()`, `Fl_Widget::w()`, `Fl_Widget::x()`, and `Fl_Widget::y()`.

30.78.3.3 void Fl_Scrollbar::linesize (int *i*) [inline]

This number controls how big the steps are that the arrow keys do.

In addition page up/down move by the size last sent to [value\(\)](#) minus one [linesize\(\)](#). The default is 16.

30.78.3.4 int Fl_Scrollbar::linesize () const [inline]

This number controls how big the steps are that the arrow keys do.

In addition page up/down move by the size last sent to [value\(\)](#) minus one [linesize\(\)](#). The default is 16.

Referenced by [Fl_Browser_::draw\(\)](#).

30.78.3.5 int Fl_Scrollbar::value () [inline]

The first form returns the integer value of the scrollbar.

You can get the floating point value with [Fl_Slider::value\(\)](#). The second form sets [value\(\)](#), [range\(\)](#), and [slider_size\(\)](#) to make a variable-sized scrollbar. You should call this every time your window changes size, your data changes size, or your scroll position changes (even if in response to a callback from this scrollbar). All necessary calls to [redraw\(\)](#) are done.

References [Fl_Valuator::value\(\)](#).

Referenced by [Fl_Scroll::draw\(\)](#), [Fl_Browser_::draw\(\)](#), [Fl_Help_View::Fl_Help_View\(\)](#), [handle\(\)](#), [Fl_Help_View::leftline\(\)](#), [Fl_Help_View::topline\(\)](#), and [Fl_Text_Display::v_scrollbar_cb\(\)](#).

The documentation for this class was generated from the following files:


- [Fl_Scrollbar.H](#)
- [Fl_Scrollbar.cxx](#)

30.79 Fl_Secret_Input Class Reference

The [Fl_Secret_Input](#) class is a subclass of [Fl_Input](#) that displays its input as a string of asterisks.

```
#include <Fl_Secret_Input.H>
```

Inheritance diagram for Fl_Secret_Input::



Public Member Functions

- [Fl_Secret_Input](#) (int X, int Y, int W, int H, const char *l=0)

Creates a new [Fl_Secret_Input](#) widget using the given position, size, and label string.

30.79.1 Detailed Description

The [Fl_Secret_Input](#) class is a subclass of [Fl_Input](#) that displays its input as a string of asterisks.

This subclass is usually used to receive passwords and other "secret" information.

30.79.2 Constructor & Destructor Documentation

30.79.2.1 [Fl_Secret_Input::Fl_Secret_Input](#) (int X, int Y, int W, int H, const char * l = 0) [inline]

Creates a new [Fl_Secret_Input](#) widget using the given position, size, and label string.

The default boxtyle is FL_DOWN_BOX.

Inherited destructor destroys the widget and any value associated with it.

References [Fl_Widget::type\(\)](#).

The documentation for this class was generated from the following file:


- [Fl_Secret_Input.H](#)

30.80 Fl_Select_Browser Class Reference

The class is a subclass of [Fl_Browser](#) which lets the user select a single item, or no items by clicking on the empty space.

```
#include <Fl_Select_Browser.h>
```

Inheritance diagram for Fl_Select_Browser::

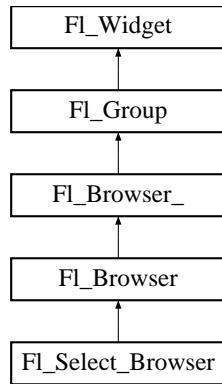

Public Member Functions

- [Fl_Select_Browser](#) (int X, int Y, int W, int H, const char *l=0)

Creates a new [Fl_Select_Browser](#) widget using the given position, size, and label string.

30.80.1 Detailed Description

The class is a subclass of [Fl_Browser](#) which lets the user select a single item, or no items by clicking on the empty space.

As long as the mouse button is held down on an unselected item it is highlighted. Normally the callback is done when the user presses the mouse, but you can change this with [when\(\)](#).

See [Fl_Browser](#) for methods to add and remove lines from the browser.

30.80.2 Constructor & Destructor Documentation

30.80.2.1 [Fl_Select_Browser::Fl_Select_Browser](#) (int X, int Y, int W, int H, const char * l = 0) [inline]

Creates a new [Fl_Select_Browser](#) widget using the given position, size, and label string.

The default boxtyle is `FL_DOWN_BOX`. The constructor specializes [Fl_Browser\(\)](#) by setting the type to `FL_SELECT_BROWSER`. The destructor destroys the widget and frees all memory that has been allocated.

References `FL_SELECT_BROWSER`, and [Fl_Widget::type\(\)](#).

The documentation for this class was generated from the following file:


- [Fl_Select_Browser.H](#)

30.81 Fl_Shared_Image Class Reference

This class supports caching, loading, and drawing of image files.

```
#include <Fl_Shared_Image.H>
```

Inheritance diagram for Fl_Shared_Image::



Public Member Functions

- `const char * name ()`
Returns the filename of the shared image.
- `int refcount ()`
Returns the number of references of this shared image.
- `void release ()`
Releases and possibly destroys (if refcount <=0) a shared image.
- `void reload ()`
Reloads the shared image from disk.
- `virtual Fl_Image * copy (int W, int H)`
The `copy()` method creates a copy of the specified image.
- `Fl_Image * copy ()`
The `copy()` method creates a copy of the specified image.
- `virtual void color_average (Fl_Color c, float i)`
The `color_average()` method averages the colors in the image with the FLTK color value `c`.
- `virtual void desaturate ()`
The `desaturate()` method converts an image to grayscale.
- `virtual void draw (int X, int Y, int W, int H, int cx, int cy)`
The `draw()` methods draw the image.
- `void draw (int X, int Y)`
The `draw()` methods draw the image.
- `virtual void uncache ()`
If the image has been cached for display, delete the cache data.

Static Public Member Functions

- static [Fl_Shared_Image](#) * **find** (const char *n, int W=0, int H=0)
Finds a shared image from its named and size specifications.
- static [Fl_Shared_Image](#) * **get** (const char *n, int W=0, int H=0)
Gets a shared image, if it exists already ; it will return it.
- static [Fl_Shared_Image](#) ** **images** ()
Returns the Fl_Shared_Image array.*
- static int **num_images** ()
Returns the total number of shared images in the array.
- static void **add_handler** (Fl_Shared_Handler f)
Adds a shared image handler, which is basically a test function for adding new formats.
- static void **remove_handler** (Fl_Shared_Handler f)
Removes a shared image handler.

Protected Member Functions

- [Fl_Shared_Image](#) ()
Creates an empty shared image.
- [Fl_Shared_Image](#) (const char *n, [Fl_Image](#) *img=0)
Creates a shared image from its filename and its corresponding Fl_Image img.*
- virtual ~[Fl_Shared_Image](#) ()
The destructor free all memory and server resources that are used by the image.
- void **add** ()
- void **update** ()

Static Protected Member Functions

- static int **compare** ([Fl_Shared_Image](#) **i0, [Fl_Shared_Image](#) **i1)

Protected Attributes

- const char * **name_**
- int **original_**
- int **refcount_**
- [Fl_Image](#) * **image_**
- int **alloc_image_**

Static Protected Attributes

- static `Fl_Shared_Image ** images_ = 0`
- static int `num_images_ = 0`
- static int `alloc_images_ = 0`
- static `Fl_Shared_Handler * handlers_ = 0`
- static int `num_handlers_ = 0`
- static int `alloc_handlers_ = 0`

30.81.1 Detailed Description

This class supports caching, loading, and drawing of image files.

Most applications will also want to link against the fltk_images library and call the `fl_register_images()` function to support standard image formats such as BMP, GIF, JPEG, and PNG.

30.81.2 Constructor & Destructor Documentation

30.81.2.1 `Fl_Shared_Image::Fl_Shared_Image ()` [protected]

Creates an empty shared image.

The constructors create a new shared image record in the image cache.

The constructors are protected and cannot be used directly from a program. Use the `get()` method instead.

Referenced by `copy()`, `find()`, and `get()`.

30.81.2.2 `Fl_Shared_Image::Fl_Shared_Image (const char * n, Fl_Image * img = 0)` [protected]

Creates a shared image from its filename and its corresponding `Fl_Image*` img.

The constructors create a new shared image record in the image cache.

The constructors are protected and cannot be used directly from a program. Use the `get()` method instead.

References `reload()`.

30.81.2.3 `Fl_Shared_Image::~Fl_Shared_Image ()` [protected, virtual]

The destructor free all memory and server resources that are used by the image.

The destructor is protected and cannot be used directly from a program. Use the `Fl_Shared_Image::release()` method instead.

30.81.3 Member Function Documentation

30.81.3.1 `void Fl_Shared_Image::color_average (Fl_Color c, float i)` [virtual]

The `color_average()` method averages the colors in the image with the FLTK color value c.

The *i* argument specifies the amount of the original image to combine with the color, so a value of 1.0 results in no color blend, and a value of 0.0 results in a constant image of the specified color. *The original image data is not altered by this method.*

Reimplemented from [Fl_Image](#).

References [Fl_Image::color_average\(\)](#).

30.81.3.2 Fl_Image* Fl_Shared_Image::copy () [inline]

The [copy\(\)](#) method creates a copy of the specified image.

If the width and height are provided, the image is resized to the specified size. The image should be deleted (or in the case of [Fl_Shared_Image](#), released) when you are done with it.

Reimplemented from [Fl_Image](#).

References [copy\(\)](#), [Fl_Image::h\(\)](#), and [Fl_Image::w\(\)](#).

Referenced by [copy\(\)](#).

30.81.3.3 Fl_Image * Fl_Shared_Image::copy (int *W*, int *H*) [virtual]

The [copy\(\)](#) method creates a copy of the specified image.

If the width and height are provided, the image is resized to the specified size. The image should be deleted (or in the case of [Fl_Shared_Image](#), released) when you are done with it.

Reimplemented from [Fl_Image](#).

References [alloc_image_](#), [Fl_Image::copy\(\)](#), [Fl_Shared_Image\(\)](#), [image_](#), [name_](#), [refcount_](#), and [update\(\)](#).

Referenced by [get\(\)](#), and [Fl_File_Chooser::rescan_keep_filename\(\)](#).

30.81.3.4 void Fl_Shared_Image::desaturate () [virtual]

The [desaturate\(\)](#) method converts an image to grayscale.

If the image contains an alpha channel (depth = 4), the alpha channel is preserved. *This method does not alter the original image data.*

Reimplemented from [Fl_Image](#).

References [Fl_Image::desaturate\(\)](#).

30.81.3.5 void Fl_Shared_Image::draw (int *X*, int *Y*) [inline]

The [draw\(\)](#) methods draw the image.

This form specifies the upper-lefthand corner of the image

Reimplemented from [Fl_Image](#).

References [draw\(\)](#), [Fl_Image::h\(\)](#), and [Fl_Image::w\(\)](#).

Referenced by [draw\(\)](#).

30.81.3.6 void Fl_Shared_Image::draw (int X, int Y, int W, int H, int cx, int cy) [virtual]

The [draw\(\)](#) methods draw the image.

This form specifies a bounding box for the image, with the origin (upper-lefthand corner) of the image offset by the cx and cy arguments.

Reimplemented from [Fl_Image](#).

References [Fl_Image::draw\(\)](#).

30.81.3.7 Fl_Shared_Image * Fl_Shared_Image::get (const char * n, int W = 0, int H = 0) [static]

Gets a shared image, if it exists already ; it will return it.

If it does not exist or if it exist but with other size, then the existing image is deleted and replaced by a new image from the n filename of the proper dimension. If n is not a valid image filename, then [get\(\)](#) will return NULL.

References [add\(\)](#), [copy\(\)](#), [find\(\)](#), [Fl_Shared_Image\(\)](#), [Fl_Image::h\(\)](#), [image_](#), and [Fl_Image::w\(\)](#).

Referenced by [Fl_File_Icon::load_image\(\)](#), and [Fl_File_Chooser::rescan_keep_filename\(\)](#).

30.81.3.8 int Fl_Shared_Image::num_images () [static]

Returns the total number of shared images in the array.

30.81.3.9 int Fl_Shared_Image::refcount () [inline]

Returns the number of references of this shared image.

When reference is below 1, the image is deleted.

30.81.3.10 void Fl_Shared_Image::release ()

Releases and possibly destroys (if refcount <=0) a shared image.

In the latter case, it will reorganize the shared image array so that no hole will occur.

Referenced by [Fl_File_Icon::load_image\(\)](#), and [Fl_File_Chooser::rescan_keep_filename\(\)](#).

30.81.3.11 void Fl_Shared_Image::uncache () [virtual]

If the image has been cached for display, delete the cache data.

This allows you to change the data used for the image and then redraw it without recreating an image object.

Reimplemented from [Fl_Image](#).

References [Fl_Image::uncache\(\)](#).

The documentation for this class was generated from the following files:


- [Fl_Shared_Image.H](#)
- [Fl_Shared_Image.cxx](#)

30.82 Fl_Simple_Counter Class Reference

This widget creates a counter with only 2 arrow buttons.

```
#include <Fl_Simple_Counter.h>
```

Inheritance diagram for Fl_Simple_Counter::



Public Member Functions

- **Fl_Simple_Counter** (int x, int y, int w, int h, const char *l=0)

30.82.1 Detailed Description

This widget creates a counter with only 2 arrow buttons.

Figure 30.28: Fl_Simple_Counter

The documentation for this class was generated from the following file:


- [Fl_Simple_Counter.H](#)

30.83 Fl_Single_Window Class Reference

This is the same as [Fl_Window](#).

```
#include <Fl_Single_Window.H>
```

Inheritance diagram for Fl_Single_Window::

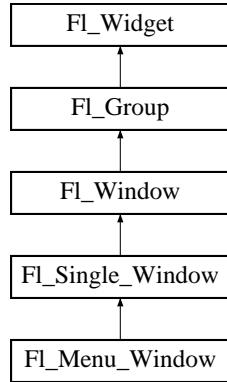

Public Member Functions

- void [show \(\)](#)

Put the window on the screen.

- void [show \(int a, char **b\)](#)

See virtual void [Fl_Window::show\(\)](#).

- void [flush \(\)](#)

Forces the window to be drawn, this window is also made current and calls [draw\(\)](#).

- [Fl_Single_Window \(int W, int H, const char *l=0\)](#)

Creates a new [Fl_Single_Window](#) widget using the given size, and label (title) string.

- [Fl_Single_Window \(int X, int Y, int W, int H, const char *l=0\)](#)

Creates a new [Fl_Single_Window](#) widget using the given position, size, and label (title) string.

- int [make_current \(\)](#)

Sets things up so that the drawing functions in <[FL/fl_draw.H](#)> will go into this window.

30.83.1 Detailed Description

This is the same as [Fl_Window](#).

However, it is possible that some implementations will provide double-buffered windows by default. This can be used to force single-buffering. This may be useful for modifying existing programs that use incremental update, or for some types of image data, such as a movie flipbook.

30.83.2 Member Function Documentation

30.83.2.1 void Fl_Single_Window::flush () [virtual]

Forces the window to be drawn, this window is also made current and calls [draw\(\)](#).

Reimplemented from [Fl_Window](#).

Reimplemented in [Fl_Menu_Window](#).

30.83.2.2 int Fl_Single_Window::make_current ()

Sets things up so that the drawing functions in <[FL/fl_draw.H](#)> will go into this window.

This is useful for incremental update of windows, such as in an idle callback, which will make your program behave much better if it draws a slow graphic. **Danger: incremental update is very hard to debug and maintain!**

This method only works for the [Fl_Window](#) and [Fl_Gl_Window](#) derived classes.

Reimplemented from [Fl_Window](#).

30.83.2.3 void Fl_Single_Window::show () [virtual]

Put the window on the screen.

Usually this has the side effect of opening the display. The second form is used for top-level windows and allow standard arguments to be parsed from the command-line.

If the window is already shown then it is restored and raised to the top. This is really convenient because your program can call [show\(\)](#) at any time, even if the window is already up. It also means that [show\(\)](#) serves the purpose of [raise\(\)](#) in other toolkits.

Reimplemented from [Fl_Window](#).

Reimplemented in [Fl_Menu_Window](#).

The documentation for this class was generated from the following files:


- [Fl_Single_Window.H](#)
- [Fl_Single_Window.cxx](#)

30.84 Fl_Slider Class Reference

The [Fl_Slider](#) widget contains a sliding knob inside a box.

```
#include <Fl_Slider.h>
```

Inheritance diagram for Fl_Slider::

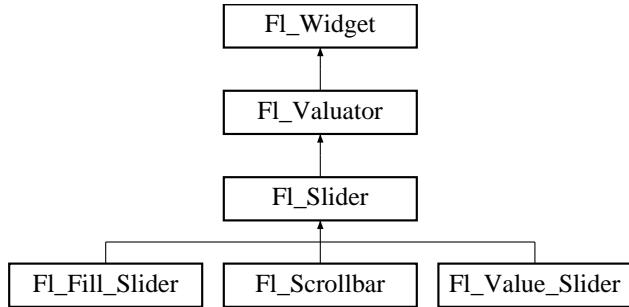

Public Member Functions

- void [draw\(\)](#)
Draw the widget.
- int [handle\(int\)](#)
Handles the specified event.
- [Fl_Slider\(int x, int y, int w, int h, const char *l=0\)](#)
Creates a new [Fl_Slider](#) widget using the given position, size, and label string.
- [Fl_Slider\(uchar t, int x, int y, int w, int h, const char *l\)](#)
Creates a new [Fl_Slider](#) widget using the given position, size, and label string.
- int [scrollvalue\(int windowtop, int windowsize, int first, int totalsize\)](#)
Returns [Fl_Scrollbar::value\(\)](#).
- void [bounds\(double a, double b\)](#)
Sets the minimum (a) and maximum (b) values for the valuator widget.
- float [slider_size\(\) const](#)
Get or set the dimensions of the moving piece of slider.
- void [slider_size\(double v\)](#)
See float [slider_size\(\) const](#).
- [Fl_Boxtype slider\(\) const](#)
Gets the slider box type.
- void [slider\(Fl_Boxtype c\)](#)
Sets the slider box type.

Protected Member Functions

- void **draw** (int, int, int, int)
- int **handle** (int, int, int, int)

30.84.1 Detailed Description

The [Fl_Slider](#) widget contains a sliding knob inside a box.

It is often used as a scrollbar. Moving the box all the way to the top/left sets it to the [minimum\(\)](#), and to the bottom/right to the [maximum\(\)](#). The [minimum\(\)](#) may be greater than the [maximum\(\)](#) to reverse the slider direction.

Use void [Fl_Widget::type\(int\)](#) to set how the slider is drawn, which can be one of the following:

- FL_VERTICAL - Draws a vertical slider (this is the default).
- FL_HORIZONTAL - Draws a horizontal slider.
- FL_VERT_FILL_SLIDER - Draws a filled vertical slider, useful as a progress or value meter.
- FL_HOR_FILL_SLIDER - Draws a filled horizontal slider, useful as a progress or value meter.
- FL_VERT_NICE_SLIDER - Draws a vertical slider with a nice looking control knob.
- FL_HOR_NICE_SLIDER - Draws a horizontal slider with a nice looking control knob.

Figure 30.29: Fl_Slider

30.84.2 Constructor & Destructor Documentation

30.84.2.1 [Fl_Slider::Fl_Slider \(int X, int Y, int W, int H, const char *l = 0\)](#)

Creates a new [Fl_Slider](#) widget using the given position, size, and label string.

The default boxtyle is [FL_DOWN_BOX](#).

References [Fl_Widget::box\(\)](#), and [FL_DOWN_BOX](#).

30.84.2.2 `Fl_Slider::Fl_Slider (uchar t, int X, int Y, int W, int H, const char * l)`

Creates a new [Fl_Slider](#) widget using the given position, size, and label string.

The default boxtyle is `FL_DOWN_BOX`.

References `Fl_Widget::box()`, `FL_DOWN_BOX`, `FL_FLAT_BOX`, and `Fl_Widget::type()`.

30.84.3 Member Function Documentation

30.84.3.1 `void Fl_Slider::bounds (double a, double b)`

Sets the minimum (*a*) and maximum (*b*) values for the valuator widget.

If at least one of the values is changed, a partial redraw is asked.

Reimplemented from [Fl_Valuator](#).

References `Fl_Widget::damage()`, `Fl_Valuator::maximum()`, and `Fl_Valuator::minimum()`.

Referenced by `scrollvalue()`.

30.84.3.2 `void Fl_Slider::draw () [virtual]`

Draw the widget.

Never call this function directly. FLTK will schedule redrawing whenever needed. If your widget must be redrawn as soon as possible, call [redraw\(\)](#) instead.

Override this function to draw your own widgets.

Implements [Fl_Widget](#).

Reimplemented in [Fl_Scrollbar](#), and [Fl_Value_Slider](#).

References `Fl_Widget::box()`, `Fl::box_dh()`, `Fl::box_dw()`, `Fl::box_dx()`, `Fl::box_dy()`, `Fl_Widget::damage()`, `Fl_Widget::draw_box()`, `Fl_Widget::h()`, `Fl_Widget::w()`, `Fl_Widget::x()`, and `Fl_Widget::y()`.

30.84.3.3 `int Fl_Slider::handle (int event) [virtual]`

Handles the specified event.

You normally don't call this method directly, but instead let FLTK do it when the user interacts with the widget.

When implemented in a new widget, this function must return 0 if the widget does not use the event or 1 otherwise.

Most of the time, you want to call the inherited handle() method in your overridden method so that you don't short-circuit events that you don't handle. In this last case you should return the callee retval.

Parameters:

\leftarrow *event* the kind of event received

Return values:

0 if the event was not used or understood

I if the event was used and can be deleted

See also:

[Fl_Event](#)

Reimplemented from [Fl_Widget](#).

Reimplemented in [Fl_Scrollbar](#), and [Fl_Value_Slider](#).

References [Fl_Widget::box\(\)](#), [Fl::box_dh\(\)](#), [Fl::box_dw\(\)](#), [Fl::box_dx\(\)](#), [Fl::box_dy\(\)](#), [FL_PUSH](#), [Fl::focus\(\)](#), [Fl_Widget::h\(\)](#), [Fl_Widget::redraw\(\)](#), [Fl::visible_focus\(\)](#), [Fl_Widget::w\(\)](#), [Fl_Widget::x\(\)](#), and [Fl_Widget::y\(\)](#).

30.84.3.4 int Fl_Slider::scrollvalue (int *p*, int *W*, int *t*, int *l*)

Returns [Fl_Scrollbar::value\(\)](#).

References [bounds\(\)](#), [slider_size\(\)](#), [Fl_Valuator::step\(\)](#), and [Fl_Valuator::value\(\)](#).

Referenced by [Fl_Scrollbar::value\(\)](#).

30.84.3.5 void Fl_Slider::slider (Fl_Boxtype *c*) [inline]

Sets the slider box type.

30.84.3.6 Fl_Boxtype Fl_Slider::slider () const [inline]

Gets the slider box type.

Referenced by [Fl_Scrollbar::draw\(\)](#), and [Fl_Scrollbar::Fl_Scrollbar\(\)](#).

30.84.3.7 void Fl_Slider::slider_size (double *v*)

See float [slider_size\(\)](#) const.

See float [Fl_Slider::slider_size\(\)](#) const.

References [Fl_Widget::damage\(\)](#).

30.84.3.8 float Fl_Slider::slider_size () const [inline]

Get or set the dimensions of the moving piece of slider.

This is the fraction of the size of the entire widget. If you set this to 1 then the slider cannot move. The default value is .08.

For the "fill" sliders this is the size of the area around the end that causes a drag effect rather than causing the slider to jump to the mouse.

Referenced by [Fl_Scrollbar::handle\(\)](#), and [scrollvalue\(\)](#).

The documentation for this class was generated from the following files:


- [Fl_Slider.H](#)
- [Fl_Slider.cxx](#)

30.85 Fl_Spinner Class Reference

This widget is a combination of the input widget and repeat buttons.

```
#include <Fl_Spinner.H>
```

Inheritance diagram for Fl_Spinner::



Public Member Functions

- **Fl_Spinner** (int X, int Y, int W, int H, const char *L=0)

*Creates a new **Fl_Spinner** widget using the given position, size, and label string.*

- const char * **format** ()

Sets or returns the format string for the value.

- void **format** (const char *f)

Sets or returns the format string for the value.

- int **handle** (int event)

Handles the specified event.

- double **maximum** () const

Speling mistakes retained for source compatibility.

- double **maximum** () const

Gets the maximum value of the widget.

- void **maximum** (double m)

Sets the maximum value of the widget.

- double **minimum** () const

Speling mistakes retained for source compatibility.

- double **minimum** () const

Gets the minimum value of the widget.

- void **minimum** (double m)

Sets the minimum value of the widget.

- void **range** (double a, double b)

Sets the minimum and maximum values for the widget.

- void **resize** (int X, int Y, int W, int H)

This resizes the [Fl_Group](#) widget and all of its children.

- double **step** () const

Sets or returns the amount to change the value when the user clicks a button.

- void **step** (double s)

See double [Fl_Spinner::step\(\)](#) const.

- [Fl_Color](#) **textcolor** () const

Gets the color of the text in the input field.

- void **textcolor** ([Fl_Color](#) c)

Sets the color of the text in the input field.

- [Fl_Font](#) **textfont** () const

Gets the font of the text in the input field.

- void **textfont** ([Fl_Font](#) f)

Sets the font of the text in the input field.

- [Fl_Fontsize](#) **textsize** () const

Gets the size of the text in the input field.

- void **textsize** ([Fl_Fontsize](#) s)

Sets the size of the text in the input field.

- [uchar](#) **type** () const

Sets or Gets the numeric representation in the input field.

- void **type** ([uchar](#) v)

See uchar [Fl_Spinner::type\(\)](#) const.

- double **value** () const

Gets the current value of the widget.

- void **value** (double v)

Sets the current value of the widget.

30.85.1 Detailed Description

This widget is a combination of the input widget and repeat buttons.

The user can either type into the input area or use the buttons to change the value.

30.85.2 Constructor & Destructor Documentation

30.85.2.1 **Fl_Spinner::Fl_Spinner (int X, int Y, int W, int H, const char * L = 0)** [inline]

Creates a new [Fl_Spinner](#) widget using the given position, size, and label string.

Inherited destructor Destroys the widget and any value associated with it.

References [Fl_Widget::align\(\)](#), [Fl_Widget::callback\(\)](#), [Fl_Group::end\(\)](#), [FL_ALIGN_LEFT](#), [FL_WHEN_ENTER_KEY](#), [FL_WHEN_RELEASE](#), [Fl_Widget::type\(\)](#), [Fl_Input::value\(\)](#), and [Fl_Widget::when\(\)](#).

30.85.3 Member Function Documentation

30.85.3.1 **void Fl_Spinner::format (const char *f)** [inline]

Sets or returns the format string for the value.

30.85.3.2 **const char* Fl_Spinner::format ()** [inline]

Sets or returns the format string for the value.

Referenced by [type\(\)](#).

30.85.3.3 **int Fl_Spinner::handle (int event)** [inline, virtual]

Handles the specified event.

You normally don't call this method directly, but instead let FLTK do it when the user interacts with the widget.

When implemented in a new widget, this function must return 0 if the widget does not use the event or 1 otherwise.

Most of the time, you want to call the inherited [handle\(\)](#) method in your overridden method so that you don't short-circuit events that you don't handle. In this last case you should return the callee retval.

Parameters:

← *event* the kind of event received

Return values:

0 if the event was not used or understood

1 if the event was used and can be deleted

See also:

[Fl_Event](#)

Reimplemented from [Fl_Group](#).

References [Fl_Widget::do_callback\(\)](#), [Fl::event_key\(\)](#), [FL_Down](#), [FL_FOCUS](#), [FL_KEYDOWN](#), [FL_SHORTCUT](#), [FL_Up](#), and [Fl_Widget::take_focus\(\)](#).

30.85.3.4 **void Fl_Spinner::maximum (double m)** [inline]

Sets the maximum value of the widget.

30.85.3.5 double Fl_Spinner::maximum () const [inline]

Gets the maximum value of the widget.

30.85.3.6 double Fl_Spinner::maximum () const [inline]

Speling mistakes retained for source compatibility.

Deprecated**30.85.3.7 void Fl_Spinner::minimum (double *m*) [inline]**

Sets the minimum value of the widget.

30.85.3.8 double Fl_Spinner::minimum () const [inline]

Gets the minimum value of the widget.

30.85.3.9 double Fl_Spinner::mininum () const [inline]

Speling mistakes retained for source compatibility.

Deprecated**30.85.3.10 void Fl_Spinner::range (double *a*, double *b*) [inline]**

Sets the minimum and maximum values for the widget.

30.85.3.11 void Fl_Spinner::resize (int *X*, int *Y*, int *W*, int *H*) [inline, virtual]

This resizes the [Fl_Group](#) widget and all of its children.

The [Fl_Group](#) widget first resizes itself, and then it moves and resizes all its children according to the rules documented for [Fl_Group::resizable\(Fl_Widget*\)](#)

See also:

[Fl_Group::resizable\(Fl_Widget*\)](#)
[Fl_Group::resizable\(\)](#)
[Fl_Widget::resize\(int,int,int,int\)](#)

Reimplemented from [Fl_Group](#).

References [Fl_Widget::resize\(\)](#), and [Fl_Input_::resize\(\)](#).

30.85.3.12 double Fl_Spinner::step () const [inline]

Sets or returns the amount to change the value when the user clicks a button.

Before setting step to a non-integer value, the spinner [type\(\)](#) should be changed to floating point.

30.85.3.13 void Fl_Spinner::textcolor (Fl_Color c) [inline]

Sets the color of the text in the input field.

References [Fl_Input_::textcolor\(\)](#).

30.85.3.14 Fl_Color Fl_Spinner::textcolor () const [inline]

Gets the color of the text in the input field.

References [Fl_Input_::textcolor\(\)](#).

30.85.3.15 void Fl_Spinner::textfont (Fl_Font f) [inline]

Sets the font of the text in the input field.

References [Fl_Input_::textfont\(\)](#).

30.85.3.16 Fl_Font Fl_Spinner::textfont () const [inline]

Gets the font of the text in the input field.

References [Fl_Input_::textfont\(\)](#).

30.85.3.17 void Fl_Spinner::textsize (Fl_Fontsize s) [inline]

Sets the size of the text in the input field.

References [Fl_Input_::textsize\(\)](#).

30.85.3.18 Fl_Fontsize Fl_Spinner::textsize () const [inline]

Gets the size of the text in the input field.

References [Fl_Input_::textsize\(\)](#).

30.85.3.19 uchar Fl_Spinner::type () const [inline]

Sets or Gets the numeric representation in the input field.

Valid values are FL_INT_INPUT and FL_FLOAT_INPUT. The first form also changes the [format\(\)](#) template. Setting a new spinner type via a superclass pointer will not work.

Note:

`type` is not a virtual function.

Reimplemented from [Fl_Widget](#).

References [Fl_Widget::type\(\)](#).

30.85.3.20 void Fl_Spinner::value (double v) [inline]

Sets the current value of the widget.

Before setting value to a non-integer value, the spinner [type\(\)](#) should be changed to floating point.

30.85.3.21 double Fl_Spinner::value () const [inline]

Gets the current value of the widget.

The documentation for this class was generated from the following file:


- [Fl_Spinner.H](#)

30.86 Fl_Tabs Class Reference

The [Fl_Tabs](#) widget is the "file card tabs" interface that allows you to put lots and lots of buttons and switches in a panel, as popularized by many toolkits.

```
#include <Fl_Tabs.h>
```

Inheritance diagram for Fl_Tabs::



Public Member Functions

- int [handle](#) (int)
Handles the specified event.
- [Fl_Widget](#) * [value](#) ()
Gets the currently visible widget/tab.
- int [value](#) ([Fl_Widget](#) *)
Sets the widget to become the current visible widget/tab.
- [Fl_Widget](#) * [push](#) () const
- int [push](#) ([Fl_Widget](#) *)
- [Fl_Tabs](#) (int, int, int, int, const char *=0)
Creates a new [Fl_Tabs](#) widget using the given position, size, and label string.
- [Fl_Widget](#) * [which](#) (int event_x, int event_y)

Protected Member Functions

- void [redraw_tabs](#) ()
- void [draw](#) ()
Draw the widget.

30.86.1 Detailed Description

The [Fl_Tabs](#) widget is the "file card tabs" interface that allows you to put lots and lots of buttons and switches in a panel, as popularized by many toolkits.



Figure 30.30: Fl_Tabs

Clicking the tab makes a child [visible\(\)](#) by calling [show\(\)](#) on it, and all other children are made invisible by calling [hide\(\)](#) on them. Usually the children are [Fl_Group](#) widgets containing several widgets themselves.

Each child makes a card, and it's [label\(\)](#) is printed on the card tab, including the label font and style. The selection color of that child is used to color the tab, while the color of the child determines the background color of the pane.

The size of the tabs is controlled by the bounding box of the children (there should be some space between the children and the edge of the [Fl_Tabs](#)), and the tabs may be placed "inverted" on the bottom, this is determined by which gap is larger. It is easiest to lay this out in fluid, using the fluid browser to select each child group and resize them until the tabs look the way you want them to.

30.86.2 Constructor & Destructor Documentation

30.86.2.1 [Fl_Tabs::Fl_Tabs \(int X, int Y, int W, int H, const char * l = 0\)](#)

Creates a new [Fl_Tabs](#) widget using the given position, size, and label string.

The default boxtyle is [FL_THIN_UP_BOX](#).

Use [add\(Fl_Widget\)](#) to add each child, which are usually [Fl_Group](#) widgets. The children should be sized to stay away from the top or bottom edge of the [Fl_Tabs](#) widget, which is where the tabs will be drawn.

The destructor *also deletes all the children*. This allows a whole tree to be deleted at once, without having to keep a pointer to all the children in the user code. A kludge has been done so the [Fl_Tabs](#) and all of its children can be automatic (local) variables, but you must declare the [Fl_Tabs](#) widget *first* so that it is

destroyed last.

References [Fl_Widget::box\(\)](#), and [FL_THIN_UP_BOX](#).

30.86.3 Member Function Documentation

30.86.3.1 void Fl_Tabs::draw () [protected, virtual]

Draw the widget.

Never call this function directly. FLTK will schedule redrawing whenever needed. If your widget must be redrawn as soon as possible, call [redraw\(\)](#) instead.

Override this function to draw your own widgets.

Reimplemented from [Fl_Group](#).

References [Fl_Group::array\(\)](#), [Fl_Widget::box\(\)](#), [Fl_Group::children\(\)](#), [Fl_Widget::color\(\)](#), [Fl_Widget::damage\(\)](#), [Fl_Widget::draw_box\(\)](#), [Fl_Group::draw_child\(\)](#), [fl_pop_clip\(\)](#), [fl_push_clip\(\)](#), [Fl_Widget::h\(\)](#), [Fl_Widget::selection_color\(\)](#), [Fl_Group::update_child\(\)](#), [value\(\)](#), [Fl_Widget::w\(\)](#), [Fl_Widget::x\(\)](#), and [Fl_Widget::y\(\)](#).

30.86.3.2 int Fl_Tabs::handle (int *event*) [virtual]

Handles the specified event.

You normally don't call this method directly, but instead let FLTK do it when the user interacts with the widget.

When implemented in a new widget, this function must return 0 if the widget does not use the event or 1 otherwise.

Most of the time, you want to call the inherited [handle\(\)](#) method in your overriden method so that you don't short-circuit events that you don't handle. In this last case you should return the callee retval.

Parameters:

\leftarrow *event* the kind of event received

Return values:

0 if the event was not used or understood

1 if the event was used and can be deleted

See also:

[Fl_Event](#)

Reimplemented from [Fl_Group](#).

References [Fl_Group::child\(\)](#), [Fl_Group::children\(\)](#), [Fl_Group::current\(\)](#), [Fl_Widget::do_callback\(\)](#), [Fl::event\(\)](#), [Fl::event_key\(\)](#), [Fl::event_x\(\)](#), [Fl::event_y\(\)](#), [FL_Down](#), [FL_DRAG](#), [FL_FOCUS](#), [FL_KEYBOARD](#), [FL_Left](#), [FL_MOVE](#), [FL_PUSH](#), [FL_RELEASE](#), [FL_Right](#), [FL_SHORTCUT](#), [FL_SHOW](#), [FL_UNFOCUS](#), [Fl_Group::focus\(\)](#), [Fl::focus\(\)](#), [Fl_Widget::h\(\)](#), [Fl_Widget::label\(\)](#), [Fl_Widget::redraw\(\)](#), [Fl_Widget::set_changed\(\)](#), [Fl_Widget::test_shortcut\(\)](#), [value\(\)](#), [Fl_Widget::visible\(\)](#), [Fl::visible_focus\(\)](#), and [Fl_Widget::y\(\)](#).

30.86.3.3 int Fl_Tabs::value (Fl_Widget * *newvalue*)

Sets the widget to become the current visible widget/tab.

Setting the value hides all other children, and makes this one visible, if it is really a child.

References `Fl_Group::array()`, `Fl_Group::children()`, `Fl_Widget::hide()`, `Fl_Widget::show()`, and `Fl_Widget::visible()`.

30.86.3.4 Fl_Widget * Fl_Tabs::value ()

Gets the currently visible widget/tab.

The `value()` is the first visible child (or the last child if none are visible) and this also hides any other children. This allows the tabs to be deleted, moved to other groups, and `show()/hide()` called without it screwing up.

References `Fl_Group::array()`, `Fl_Group::children()`, `Fl_Widget::hide()`, `Fl_Widget::show()`, and `Fl_Widget::visible()`.

Referenced by `draw()`, and `handle()`.

The documentation for this class was generated from the following files:

- [Fl_Tabs.H](#)
- [Fl_Tabs.cxx](#)

30.87 Fl_Text_Buffer Class Reference

The `Fl_Text_Buffer` class is used by the `Fl_Text_Display` and `Fl_Text_Editor` to manage complex text data and is based upon the excellent NEdit text editor engine - see <http://www.nedit.org/>.

```
#include <Fl_Text_Buffer.h>
```

Public Member Functions

- `Fl_Text_Buffer` (int requestedSize=0)
Create an empty text buffer of a pre-determined size (use this to avoid unnecessary re-allocation if you know exactly how much the buffer will need to hold.
- `~Fl_Text_Buffer` ()
Frees a text buffer.
- `int length ()`
Returns the number of characters in the buffer.
- `char * text ()`
Get the entire contents of a text buffer.
- `void text (const char *text)`
Replaces the entire contents of the text buffer.
- `char * text_range (int start, int end)`
Return a copy of the text between start and end character positions from text buffer buf.
- `char character (int pos)`
Returns the character at the specified position pos in the buffer.
- `char * text_in_rectangle (int start, int end, int rectStart, int rectEnd)`
Returns the text from the given rectangle.
- `void insert (int pos, const char *text)`
Inserts null-terminated string text at position pos.
- `void append (const char *t)`
Appends the text string to the end of the buffer.
- `void remove (int start, int end)`
Deletes a range of characters in the buffer.
- `void replace (int start, int end, const char *text)`
Deletes the characters between start and end, and inserts the null-terminated string text in their place in the buffer.
- `void copy (Fl_Text_Buffer *fromBuf, int fromStart, int fromEnd, int toPos)`
Copies text from one buffer to this one; fromBuf may be the same as this.

- int [undo](#) (int *cp=0)
Undo text modification according to the undo variables or insert text from the undo buffer.
- void [canUndo](#) (char flag=1)
Lets the undo system know if we can undo changes.
- int [insertfile](#) (const char *file, int pos, int buflen=128 *1024)
Inserts a file at the specified position.
- int [appendfile](#) (const char *file, int buflen=128 *1024)
Appends the named file to the end of the buffer.
- int [loadfile](#) (const char *file, int buflen=128 *1024)
Loads a text file into the buffer.
- int [outputfile](#) (const char *file, int start, int end, int buflen=128 *1024)
Writes the specified portions of the file to a file.
- int [savefile](#) (const char *file, int buflen=128 *1024)
Saves a text file from the current buffer.
- void [insert_column](#) (int column, int startPos, const char *text, int *charsInserted, int *charsDeleted)
Insert s columnwise into buffer starting at displayed character position column on the line beginning at startPos.
- void [replace_rectangular](#) (int start, int end, int rectStart, int rectEnd, const char *text)
Replaces a rectangular area in the buffer, given by start, end, rectStart, and rectEnd, with text.
- void [overlay_rectangular](#) (int startPos, int rectStart, int rectEnd, const char *text, int *charsInserted, int *charsDeleted)
Overlay text between displayed character positions rectStart and rectEnd on the line beginning at startPos.
- void [remove_rectangular](#) (int start, int end, int rectStart, int rectEnd)
Removes a rectangular swath of characters between character positions start and end and horizontal displayed-character offsets rectStart and rectEnd.
- void [clear_rectangular](#) (int start, int end, int rectStart, int rectEnd)
Clears text in the specified area.
- int [tab_distance](#) ()
Gets the tab width.
- void [tab_distance](#) (int tabDist)
Set the hardware tab distance (width) used by all displays for this buffer, and used in computing offsets for rectangular selection operations.
- void [select](#) (int start, int end)
Selects a range of characters in the buffer.

- **int selected ()**
Returns a non 0 value if text has been selected, 0 otherwise.
- **void unselect ()**
Cancels any previous selection on the primary text selection object.
- **void select_rectangular (int start, int end, int rectStart, int rectEnd)**
Achieves a rectangular selection on the primary text selection object.
- **int selection_position (int *start, int *end)**
Gets the selection position.
- **int selection_position (int *start, int *end, int *isRect, int *rectStart, int *rectEnd)**
Gets the selection position, and rectangular selection info.
- **char * selection_text ()**
Returns the currently selected text.
- **void remove_selection ()**
Removes the text in the primary selection.
- **void replace_selection (const char *text)**
Replaces the text in the primary selection.
- **void secondary_select (int start, int end)**
Selects a range of characters in the secondary selection.
- **int secondary_selected ()**
Returns a non 0 value if text has been selected in the secondary text selection, 0 otherwise.
- **void secondary_unselect ()**
Clears any selection in the secondary text selection object.
- **void secondary_select_rectangular (int start, int end, int rectStart, int rectEnd)**
Achieves a rectangular selection on the secondary text selection object.
- **int secondary_selection_position (int *start, int *end)**
Returns the current selection in the secondary text selection object.
- **int secondary_selection_position (int *start, int *end, int *isRect, int *rectStart, int *rectEnd)**
Returns the current selection in the secondary text selection object.
- **char * secondary_selection_text ()**
Returns the text in the secondary selection.
- **void remove_secondary_selection ()**
Removes the text from the buffer corresponding to the secondary text selection object.
- **void replace_secondary_selection (const char *text)**

Replaces the text from the buffer corresponding to the secondary text selection object with the new string text.

- void [highlight](#) (int start, int end)
Highlights the specified text within the buffer.
- int [highlight](#) ()
Returns the highlighted text.
- void [unhighlight](#) ()
Unhighlights text in the buffer.
- void [highlight_rectangular](#) (int start, int end, int rectStart, int rectEnd)
Highlights a rectangular selection in the buffer.
- int [highlight_position](#) (int *start, int *end)
Highlights the specified text between start and end within the buffer.
- int [highlight_position](#) (int *start, int *end, int *isRect, int *rectStart, int *rectEnd)
Highlights the specified rectangle of text within the buffer.
- char * [highlight_text](#) ()
Returns the highlighted text.
- void [add_modify_callback](#) (Fl_Text_Modify_Cb bufModifiedCB, void *cbArg)
Adds a callback function that is called whenever the text buffer is modified.
- void [remove_modify_callback](#) (Fl_Text_Modify_Cb bufModifiedCB, void *cbArg)
Removes a modify callback.
- void [call_modify_callbacks](#) ()
Calls all modify callbacks that have been registered using the [add_modify_callback\(\)](#) method.
- void [add_pdelete_callback](#) (Fl_Text_Predel_Cb bufPredelCB, void *cbArg)
Adds a callback routine to be called before text is deleted from the buffer.
- void [remove_pdelete_callback](#) (Fl_Text_Predel_Cb predelCB, void *cbArg)
Removes a callback routine bufPreDeleteCB associated with argument cbArg to be called before text is deleted from the buffer.
- void [call_pdelete_callbacks](#) ()
Calls the stored pre-delete callback procedure(s) for this buffer to update the changed area(s) on the screen and any other listeners.
- char * [line_text](#) (int pos)
Returns the text from the entire line containing the specified character position.
- int [line_start](#) (int pos)
Returns the position of the start of the line containing position pos.

- int **line_end** (int pos)
Finds and returns the position of the end of the line containing position pos (which is either a pointer to the newline character ending the line, or a pointer to one character beyond the end of the buffer).
- int **word_start** (int pos)
Returns the position corresponding to the start of the word.
- int **word_end** (int pos)
Returns the position corresponding to the end of the word.
- int **expand_character** (int pos, int indent, char *outStr)
Expands the given character to a displayable format.
- int **count_displayed_characters** (int lineStartPos, int targetPos)
Count the number of displayed characters between buffer position lineStartPos and targetPos.
- int **skip_displayed_characters** (int lineStartPos, int nChars)
Count forward from buffer position startPos in displayed characters (displayed characters are the characters shown on the screen to represent characters in the buffer, where tabs and control characters are expanded).
- int **count_lines** (int startPos, int endPos)
Counts the number of newlines between startPos and endPos in buffer.
- int **skip_lines** (int startPos, int nLines)
Finds the first character of the line nLines forward from startPos in the buffer and returns its position.
- int **rewind_lines** (int startPos, int nLines)
Finds and returns the position of the first character of the line nLines backwards from startPos (not counting the character pointed to by startPos if that is a newline) in the buffer.
- int **findchar_forward** (int startPos, char searchChar, int *foundPos)
Finds the next occurrence of the specified character.
- int **findchar_backward** (int startPos, char searchChar, int *foundPos)
Search backwards in buffer buf for character searchChar, starting with the character BEFORE startPos, returning the result in foundPos returns 1 if found, 0 if not.
- int **findchars_forward** (int startPos, const char *searchChars, int *foundPos)
Finds the next occurrence of the specified characters.
- int **findchars_backward** (int startPos, const char *searchChars, int *foundPos)
Finds the previous occurrence of the specified characters.
- int **search_forward** (int startPos, const char *searchString, int *foundPos, int matchCase=0)
Search forwards in buffer for string searchString, starting with the character startPos, and returning the result in foundPos returns 1 if found, 0 if not.
- int **search_backward** (int startPos, const char *searchString, int *foundPos, int matchCase=0)
Search backwards in buffer for string searchString, starting with the character BEFORE startPos, returning the result in foundPos returns 1 if found, 0 if not.

- int [substitute_null_characters](#) (char *string, int length)

The primary routine for integrating new text into a text buffer with substitution of another character for ascii nuls.

- void [unsubstitute_null_characters](#) (char *string)

Converts strings obtained from buffers which contain null characters, which have been substituted for by a special substitution character, back to a null-containing string.

- char [null_substitution_character](#) ()

Returns the current nul substitution character.

- [Fl_Text_Selection * primary_selection](#) ()

Returns the primary selection.

- [Fl_Text_Selection * secondary_selection](#) ()

Returns the secondary selection.

- [Fl_Text_Selection * highlight_selection](#) ()

Returns the current highlight selection.

Static Public Member Functions

- static int [expand_character](#) (char c, int indent, char *outStr, int tabDist, char nullSubsChar)

Expand a single character c from the text buffer into its displayable screen representation (which may be several characters for a tab or a control code).

- static int [character_width](#) (char c, int indent, int tabDist, char nullSubsChar)

Return the length in displayed characters of character c expanded for display (as discussed above in [expand_character\(\)](#)).

Protected Member Functions

- void [call_modify_callbacks](#) (int pos, int nDeleted, int nInserted, int nRestyled, const char *deletedText)

Calls the stored modify callback procedure(s) for this buffer to update the changed area(s) on the screen and any other listeners.

- void [call_preamble_callbacks](#) (int pos, int nDeleted)

Calls the stored pre-delete callback procedure(s) for this buffer to update the changed area(s) on the screen and any other listeners.

- int [insert_](#) (int pos, const char *text)

Internal (non-redisplaying) version of BufInsert.

- void [remove_](#) (int start, int end)

Internal (non-redisplaying) version of BufRemove.

- void [remove_rectangular_](#) (int start, int end, int rectStart, int rectEnd, int *replaceLen, int *endPos)

Deletes a rectangle of text without calling the modify callbacks.

- void [insert_column_](#) (int column, int startPos, const char *insText, int *nDeleted, int *nInserted, int *endPos)

Inserts a column of text without calling the modify callbacks.

- void [overlay_rectangular_](#) (int startPos, int rectStart, int rectEnd, const char *insText, int *nDeleted, int *nInserted, int *endPos)

Overlay a rectangular area of text without calling the modify callbacks.

- void [redisplay_selection](#) (Fl_Text_Selection *oldSelection, Fl_Text_Selection *newSelection)

Calls the stored redisplay procedure(s) for this buffer to update the screen for a change in a selection.

- void [move_gap](#) (int pos)

- void [reallocate_with_gap](#) (int newGapStart, int newGapLen)

Reallocates the text storage in the buffer to have a gap starting at newGapStart and a gap size of newGapLen, preserving the buffer's current contents.

- char * [selection_text_](#) (Fl_Text_Selection *sel)

- void [remove_selection_](#) (Fl_Text_Selection *sel)

Removes the text from the buffer corresponding to sel.

- void [replace_selection_](#) (Fl_Text_Selection *sel, const char *text)

Replaces the text in selection sel.

- void [rectangular_selection_boundaries](#) (int lineStartPos, int rectStart, int rectEnd, int *selStart, int *selEnd)

Finds the first and last character position in a line within a rectangular selection (for copying).

- void [update_selections](#) (int pos, int nDeleted, int nInserted)

Updates all of the selections in the buffer for changes in the buffer's text.

Protected Attributes

- [Fl_Text_Selection mPrimary](#)

highlighted areas

- [Fl_Text_Selection mSecondary](#)

highlighted areas

- [Fl_Text_Selection mHighlight](#)

highlighted areas

- int [mLength](#)

length of the text in the buffer (the length of the buffer itself must be calculated: gapEnd - gapStart + length)

- char * [mBuf](#)

allocated memory where the text is stored

- int **mGapStart**
points to the first character of the gap
- int **mGapEnd**
points to the first char after the gap
- int **mTabDist**
equiv.
- int **mUseTabs**
True if buffer routines are allowed to use tabs for padding in rectangular operations.
- int **mNModifyProcs**
number of modify-redisplay procs attached
- Fl_Text_Modify_Cb * **mNModifyProcs**
< procedures to call when buffer is
- void ** **mCbArgs**
caller arguments for modifyProcs above
- int **mNPredeleteProcs**
number of pre-delete procs attached
- Fl_Text_Predelete_Cb * **mPredeleteProcs**
< procedure to call before text is deleted
- void ** **mPredeleteCbArgs**
caller argument for pre-delete proc above
- int **mCursorPosHint**
hint for reasonable cursor position after a buffer modification operation
- char **mNullSubsChar**
NEdit is based on C null-terminated strings, so ascii-nul characters must be substituted with something else.
- char **mCanUndo**
if this buffer is used for attributes, it must not do any undo calls

30.87.1 Detailed Description

The **Fl_Text_Buffer** class is used by the **Fl_Text_Display** and **Fl_Text_Editor** to manage complex text data and is based upon the excellent NEdit text editor engine - see <http://www.nedit.org/>.

The **Fl_Text_Buffer** class is used by the **Fl_Text_Display** and **Fl_Text_Editor** to manage complex text data and is based upon the excellent NEdit text editor engine - see <http://www.nedit.org/>.

30.87.2 Constructor & Destructor Documentation

30.87.2.1 `Fl_Text_Buffer::Fl_Text_Buffer (int requestedSize = 0)`

Create an empty text buffer of a pre-determined size (use this to avoid unnecessary re-allocation if you know exactly how much the buffer will need to hold).

Creates a new text buffer of the specified initial size.

References mBuf, mCanUndo, mCbArgs, mCursorPosHint, Fl_Text_Selection::mEnd, mGapEnd, mGapStart, mHighlight, mLength, mNModifyProcs, mNodifyProcs, mNPredeleteProcs, mNullSubsChar, mPredeleteCbArgs, mPredeleteProcs, mPrimary, Fl_Text_Selection::mRectangular, mSecondary, Fl_Text_Selection::mSelected, Fl_Text_Selection::mStart, mTabDist, and mUseTabs.

30.87.3 Member Function Documentation

30.87.3.1 `void Fl_Text_Buffer::add_modify_callback (Fl_Text_Modify_Cb bufModifiedCB, void * cbArg)`

Adds a callback function that is called whenever the text buffer is modified.

The callback function is declared as follows:

```
typedef void (*Fl_Text_Modify_Cb)(int pos, int nInserted, int nDeleted,
                                 int nRestyled, const char* deletedText,
                                 void* cbArg);
```

References mCbArgs, mNModifyProcs, and mNodifyProcs.

Referenced by Fl_Text_Display::buffer().

30.87.3.2 `void Fl_Text_Buffer::add_predelete_callback (Fl_Text_Predelete_Cb bufPreDeleteCB, void * cbArg)`

Adds a callback routine to be called before text is deleted from the buffer.

References mNPredeleteProcs, mPredeleteCbArgs, and mPredeleteProcs.

30.87.3.3 `void Fl_Text_Buffer::append (const char * t) [inline]`

Appends the text string to the end of the buffer.

30.87.3.4 `int Fl_Text_Buffer::appendfile (const char *file, int buflen = 128*1024) [inline]`

Appends the named file to the end of the buffer.

Returns 0 on success, non-zero on error (strerror() contains reason). 1 indicates open for read failed (no data loaded). 2 indicates error occurred while reading data (data was partially loaded).

30.87.3.5 `char Fl_Text_Buffer::character (int pos)`

Returns the character at the specified position pos in the buffer.

Positions start at 0

References mBuf, mGapEnd, mGapStart, and mLength.

Referenced by expand_character(), Fl_Text_Display::find_wrap_range(), Fl_Text_Display::handle(), Fl_Text_Display::in_selection(), Fl_Text_Display::measure_deleted_lines(), Fl_Text_Display::measure_proportional_character(), Fl_Text_Display::move_down(), Fl_Text_Display::move_left(), Fl_Text_Display::move_right(), Fl_Text_Display::move_up(), Fl_Text_Display::overstrike(), Fl_Text_Display::position_style(), rectangular_selection_boundaries(), Fl_Text_Display::redisplay_range(), search_backward(), search_forward(), skip_displayed_characters(), word_end(), word_start(), Fl_Text_Display::wrap_uses_character(), and Fl_Text_Display::wrapped_line_counter().

30.87.3.6 int Fl_Text_Buffer::character_width (char *c*, int *indent*, int *tabDist*, char *nullSubsChar*) [static]

Return the length in displayed characters of character *c* expanded for display (as discussed above in [expand_character\(\)](#)).

If the buffer for which the character width is being measured is doing null substitution, nullSubsChar should be passed as that character (or nul to ignore).

Referenced by Fl_Text_Display::overstrike(), rectangular_selection_boundaries(), skip_displayed_characters(), and Fl_Text_Display::wrapped_line_counter().

30.87.3.7 void Fl_Text_Buffer::clear_rectangular (int *start*, int *end*, int *rectStart*, int *rectEnd*)

Clears text in the specified area.

It clears a rectangular "hole" out of the buffer between character positions start and end and horizontal displayed-character offsets rectStart and rectEnd.

References count_lines(), and overlay_rectangular().

30.87.3.8 int Fl_Text_Buffer::count_displayed_characters (int *lineStartPos*, int *targetPos*)

Count the number of displayed characters between buffer position *lineStartPos* and *targetPos*.

(displayed characters are the characters shown on the screen to represent characters in the buffer, where tabs and control characters are expanded)

References expand_character().

Referenced by Fl_Text_Display::draw_vline(), Fl_Text_Display::position_to_linecol(), Fl_Text_Display::wrapped_column(), and Fl_Text_Display::wrapped_line_counter().

30.87.3.9 int Fl_Text_Buffer::count_lines (int *startPos*, int *endPos*)

Counts the number of newlines between *startPos* and *endPos* in buffer.

The character at position *endPos* is not counted.

References mBuf, mGapEnd, mGapStart, and mLength.

Referenced by Fl_Text_Display::absolute_top_line_number(), Fl_Text_Display::buffer_modified_cb(), clear_rectangular(), Fl_Text_Display::count_lines(), Fl_Text_Display::position_to_linecol(), remove_rectangular_(), replace_rectangular(), and Fl_Text_Display::wrapped_row().

30.87.3.10 int Fl_Text_Buffer::expand_character (char *c*, int *indent*, char * *outStr*, int *tabDist*, char *nullSubsChar*) [static]

Expand a single character *c* from the text buffer into it's displayable screen representation (which may be several characters for a tab or a control code).

Returns the number of characters added to *outStr*. *indent* is the number of characters from the start of the line for figuring tabs of length *tabDist*. Output string is guaranteed to be shorter or equal in length to FL_TEXT_MAX_EXP_CHAR_LEN Tabs and other control characters are given special treatment. *nullSubsChar* represent the null character to be transformed in <nul>

30.87.3.11 int Fl_Text_Buffer::expand_character (int *pos*, int *indent*, char * *outStr*)

Expands the given character to a displayable format.

Tabs and other control characters are given special treatment. Get a character from the text buffer expanded into its screen representation (which may be several characters for a tab or a control code). Returns the number of characters written to *outStr*. *indent* is the number of characters from the start of the line for figuring tabs. Output string is guranteed to be shorter or equal in length to FL_TEXT_MAX_EXP_CHAR_LEN

References character(), mNullSubsChar, and mTabDist.

Referenced by count_displayed_characters(), Fl_Text_Display::draw_vline(), Fl_Text_Display::measure_proportional_character(), Fl_Text_Display::position_to_xy(), and Fl_Text_Display::xy_to_position().

30.87.3.12 int Fl_Text_Buffer::findchar_backward (int *startPos*, char *searchChar*, int * *foundPos*)

Search backwards in buffer *buf* for character *searchChar*, starting with the character BEFORE *startPos*, returning the result in *foundPos* returns 1 if found, 0 if not.

(The difference between this and BufSearchBackward is that it's optimized for single characters. The overall performance of the text widget is dependent on its ability to count lines quickly, hence searching for a single character: newline)

References mBuf, mGapEnd, and mLength.

Referenced by line_start().

30.87.3.13 int Fl_Text_Buffer::findchar_forward (int *startPos*, char *searchChar*, int * *foundPos*)

Finds the next occurrence of the specified character.

Search forwards in buffer for character *searchChar*, starting with the character *startPos*, and returning the result in *foundPos* returns 1 if found, 0 if not. (The difference between this and BufSearchForward is that it's optimized for single characters. The overall performance of the text widget is dependent on its ability to count lines quickly, hence searching for a single character: newline)

References mBuf, mGapEnd, and mLength.

Referenced by line_end().

30.87.3.14 int Fl_Text_Buffer::findchars_backward (int *startPos*, const char * *searchChars*, int * *foundPos*)

Finds the previous occurrence of the specified characters.

Search backwards in buffer for characters in *searchChars*, starting with the character BEFORE *startPos*, returning the result in *foundPos* returns 1 if found, 0 if not.

References mBuf, mGapEnd, and mGapStart.

30.87.3.15 int Fl_Text_Buffer::findchars_forward (int *startPos*, const char * *searchChars*, int * *foundPos*)

Finds the next occurrence of the specified characters.

Search forwards in buffer for characters in *searchChars*, starting with the character *startPos*, and returning the result in *foundPos* returns 1 if found, 0 if not.

References mBuf, mGapEnd, mGapStart, and mLength.

30.87.3.16 int Fl_Text_Buffer::highlight () [inline]

Returns the highlighted text.

When you are done with the text, free it using the free() function.

30.87.3.17 void Fl_Text_Buffer::highlight (int *start*, int *end*)

Highlights the specified text within the buffer.

References mHighlight, redisplay_selection(), and Fl_Text_Selection::set().

30.87.3.18 int Fl_Text_Buffer::highlight_position (int * *start*, int * *end*, int * *isRect*, int * *rectStart*, int * *rectEnd*)

Highlights the specified rectangle of text within the buffer.

References mHighlight, and Fl_Text_Selection::position().

30.87.3.19 int Fl_Text_Buffer::highlight_position (int * *start*, int * *end*)

Highlights the specified text between *start* and *end* within the buffer.

References mHighlight, and Fl_Text_Selection::position().

30.87.3.20 Fl_Text_Selection* Fl_Text_Buffer::highlight_selection () [inline]

Returns the current highlight selection.

Referenced by Fl_Text_Display::draw_vline(), and Fl_Text_Display::position_style().

30.87.3.21 char * Fl_Text_Buffer::highlight_text ()

Returns the highlighted text.

When you are done with the text, free it using the free() function.

References mHighlight.

30.87.3.22 void Fl_Text_Buffer::insert (int *pos*, const char * *text*)

Inserts null-terminated string *text* at position *pos*.

References call_modify_callbacks(), call_predelete_callbacks(), insert_(), mCursorPosHint, and mLength.

Referenced by Fl_Text_Display::find_wrap_range(), insertfile(), and undo().

30.87.3.23 int Fl_Text_Buffer::insert_ (int *pos*, const char * *text*) [protected]

Internal (non-redisplaying) version of BufInsert.

Returns the length of text inserted (this is just strlen(*text*), however this calculation can be expensive and the length will be required by any caller who will continue on to call redisplay). *pos* must be contiguous with the existing text in the buffer (i.e. not past the end).

References mBuf, mCanUndo, mGapEnd, mGapStart, mLength, reallocate_with_gap(), and update_selections().

Referenced by insert(), insert_column_(), overlay_rectangular_(), remove_rectangular_(), replace(), replace_rectangular(), and substitute_null_characters().

30.87.3.24 void Fl_Text_Buffer::insert_column (int *column*, int *startPos*, const char * *text*, int * *charsInserted*, int * *charsDeleted*)

Insert *s* columnwise into buffer starting at displayed character position *column* on the line beginning at *startPos*.

Opens a rectangular space the width and height of *s*, by moving all text to the right of *column* right. If *charsInserted* and *charsDeleted* are not NULL, the number of characters inserted and deleted in the operation (beginning at *startPos*) are returned in these arguments.

References call_modify_callbacks(), call_predelete_callbacks(), Fl::error, insert_column_(), line_end(), line_start(), mCursorPosHint, skip_lines(), and text_range().

30.87.3.25 void Fl_Text_Buffer::insert_column_ (int *column*, int *startPos*, const char * *insText*, int * *nDeleted*, int * *nInserted*, int * *endPos*) [protected]

Inserts a column of text without calling the modify callbacks.

Note that in some pathological cases, inserting can actually decrease the size of the buffer because of spaces being coalesced into tabs. *nDeleted* and *nInserted* return the number of characters deleted and inserted beginning at the start of the line containing *startPos*. *endPos* returns buffer position of the lower left edge of the inserted column (as a hint for routines which need to set a cursor position).

References insert_(), line_end(), line_start(), mLength, mNullSubsChar, mTabDist, mUseTabs, remove_(), skip_lines(), and text_range().

Referenced by insert_column(), and replace_rectangular().

30.87.3.26 int Fl_Text_Buffer::insertfile (const char * *file*, int *pos*, int *buflen* = 128*1024)

Inserts a file at the specified position.

Returns 0 on success, non-zero on error (strerror() contains reason). 1 indicates open for read failed (no data loaded). 2 indicates error occurred while reading data (data was partially loaded).

References `insert()`.

30.87.3.27 int Fl_Text_Buffer::length () [inline]

Returns the number of characters in the buffer.

Referenced by `Fl_Text_Display::buffer()`, `Fl_Text_Display::find_wrap_range()`, `Fl_Text_Display::measure_deleted_lines()`, `Fl_Text_Display::offset_line_starts()`, `Fl_Text_Display::overstrike()`, `search_forward()`, `text()`, `word_end()`, `Fl_Text_Display::wrap_uses_character()`, and `Fl_Text_Display::wrapped_line_counter()`.

30.87.3.28 int Fl_Text_Buffer::line_start (int pos)

Returns the position of the start of the line containing position *pos*.

References `findchar_backward()`.

Referenced by `Fl_Text_Display::draw_vline()`, `Fl_Text_Display::find_wrap_range()`, `Fl_Text_Display::in_selection()`, `insert_column()`, `insert_column_()`, `Fl_Text_Display::line_start()`, `line_text()`, `Fl_Text_Display::measure_deleted_lines()`, `overlay_rectangular()`, `overlay_rectangular_()`, `Fl_Text_Display::overstrike()`, `remove_rectangular()`, `remove_rectangular_()`, `replace_rectangular()`, `Fl_Text_Display::rewind_lines()`, `text_in_rectangle()`, and `Fl_Text_Display::wrapped_column()`.

30.87.3.29 char * Fl_Text_Buffer::line_text (int pos)

Returns the text from the entire line containing the specified character position.

When you are done with the text, free it using the `free()` function.

References `line_end()`, `line_start()`, and `text_range()`.

30.87.3.30 char Fl_Text_Buffer::null_substitution_character () [inline]

Returns the current nul substitution character.

Referenced by `Fl_Text_Display::draw_vline()`, `Fl_Text_Display::overstrike()`, and `Fl_Text_Display::wrapped_line_counter()`.

30.87.3.31 int Fl_Text_Buffer::outputfile (const char *file, int start, int end, int buflen = 128*1024)

Writes the specified portions of the file to a file.

Returns 0 on success, non-zero on error (`strerror()` contains reason). 1 indicates open for write failed (no data saved). 2 indicates error occurred while writing data (data was partially saved).

References `text_range()`.

30.87.3.32 void Fl_Text_Buffer::overlay_rectangular (int startPos, int rectStart, int rectEnd, const char *text, int *charsInserted, int *charsDeleted)

Overlay *text* between displayed character positions *rectStart* and *rectEnd* on the line beginning at *startPos*.

If *charsInserted* and *charsDeleted* are not NULL, the number of characters inserted and deleted in the operation (beginning at *startPos*) are returned in these arguments.

References `call_modify_callbacks()`, `call_predelete_callbacks()`, `Fl::error`, `line_end()`, `line_start()`, `mCursorPosHint`, `overlay_rectangular()`, `skip_lines()`, and `text_range()`.

Referenced by `clear_rectangular()`.

30.87.3.33 void Fl_Text_Buffer::overlay_rectangular_(int startPos, int rectStart, int rectEnd, const char *insText, int *nDeleted, int *nInserted, int *endPos) [protected]

Overlay a rectangular area of text without calling the modify callbacks.

nDeleted and *nInserted* return the number of characters deleted and inserted beginning at the start of the line containing *startPos*. *endPos* returns buffer position of the lower left edge of the inserted column (as a hint for routines which need to set a cursor position).

References `insert_()`, `line_end()`, `line_start()`, `mLength`, `mNullSubsChar`, `mTabDist`, `mUseTabs`, `remove_()`, `skip_lines()`, and `text_range()`.

Referenced by `overlay_rectangular()`.

30.87.3.34 Fl_Text_Selection* Fl_Text_Buffer::primary_selection() [inline]

Returns the primary selection.

Referenced by `Fl_Text_Display::draw_vline()`, `Fl_Text_Display::handle()`, `Fl_Text_Display::in_selection()`, and `Fl_Text_Display::position_style()`.

30.87.3.35 void Fl_Text_Buffer::rectangular_selection_boundaries(int lineStartPos, int rectStart, int rectEnd, int *selStart, int *selEnd) [protected]

Finds the first and last character position in a line within a rectangular selection (for copying).

Includes tabs which cross *rectStart*, but not control characters which do so. Leaves off tabs which cross *rectEnd*.

Technically, the calling routine should convert tab characters which cross the right boundary of the selection to spaces which line up with the edge of the selection. Unfortunately, the additional memory management required in the parent routine to allow for the changes in string size is not worth all the extra work just for a couple of shifted characters, so if a tab protrudes, just lop it off and hope that there are other characters in the selection to establish the right margin for subsequent columnar pastes of this data.

References `character()`, `character_width()`, `mLength`, `mNullSubsChar`, and `mTabDist`.

Referenced by `text_in_rectangle()`.

30.87.3.36 void Fl_Text_Buffer::remove(int start, int end)

Deletes a range of characters in the buffer.

References `call_modify_callbacks()`, `call_predelete_callbacks()`, `mCursorPosHint`, `mLength`, `remove_()`, and `text_range()`.

30.87.3.37 void Fl_Text_Buffer::remove_ (int start, int end) [protected]

Internal (non-redisplaying) version of BufRemove.

Removes the contents of the buffer between start and end (and moves the gap to the site of the delete).

References mBuf, mCanUndo, mGapEnd, mGapStart, mLength, and update_selections().

Referenced by insert_column_(), overlay_rectangular_(), remove(), remove_rectangular_(), replace(), and substitute_null_characters().

30.87.3.38 void Fl_Text_Buffer::remove_modify_callback (Fl_Text_Modify_Cb *bufModifiedCB*, void * *cbArg*)

Removes a modify callback.

References Fl::error, mCbArgs, mNModifyProcs, and mNodifyProcs.

30.87.3.39 void Fl_Text_Buffer::remove_pdelete_callback (Fl_Text_Pdelete_Cb *bufPreDeleteCB*, void * *cbArg*)

Removes a callback routine *bufPreDeleteCB* associated with argument *cbArg* to be called before text is deleted from the buffer.

References Fl::error, mNPredeleteProcs, mPredeleteCbArgs, and mPredeleteProcs.

30.87.3.40 void Fl_Text_Buffer::remove_rectangular_ (int start, int end, int rectStart, int rectEnd, int * replaceLen, int * endPos) [protected]

Deletes a rectangle of text without calling the modify callbacks.

Returns the number of characters replacing those between *start* and *end*. Note that in some pathological cases, deleting can actually increase the size of the buffer because of tab expansions. *endPos* returns the buffer position of the point in the last line where the text was removed (as a hint for routines which need to position the cursor after a delete operation)

References count_lines(), insert_(), line_end(), line_start(), mLength, mNullSubsChar, mTabDist, mUseTabs, remove_(), and text_range().

Referenced by remove_rectangular(), and replace_rectangular().

30.87.3.41 void Fl_Text_Buffer::remove_secondary_selection ()

Removes the text from the buffer corresponding to the secondary text selection object.

References mSecondary, and remove_selection_().

30.87.3.42 void Fl_Text_Buffer::remove_selection ()

Removes the text in the primary selection.

References mPrimary, and remove_selection_().

Referenced by Fl_Text_Editor::handle().

30.87.3.43 void Fl_Text_Buffer::remove_selection_ (Fl_Text_Selection * sel) [protected]

Removes the text from the buffer corresponding to *sel*.

References Fl_Text_Selection::position(), and remove_rectangular().

Referenced by remove_secondary_selection(), and remove_selection().

30.87.3.44 void Fl_Text_Buffer::replace_rectangular (int start, int end, int rectStart, int rectEnd, const char * text)

Replaces a rectangular area in the buffer, given by *start*, *end*, *rectStart*, and *rectEnd*, with *text*.

If *text* is vertically longer than the rectangle, add extra lines to make room for it.

References call_modify_callbacks(), call_predelete_callbacks(), count_lines(), Fl::error, insert_(), insert_column_(), line_end(), line_start(), mCursorPosHint, remove_rectangular_(), and text_range().

Referenced by replace_selection_().

30.87.3.45 void Fl_Text_Buffer::replace_secondary_selection (const char * text)

Replaces the text from the buffer corresponding to the secondary text selection object with the new string *text*.

References mSecondary, and replace_selection_().

30.87.3.46 void Fl_Text_Buffer::replace_selection (const char * text)

Replaces the text in the primary selection.

References mPrimary, and replace_selection_().

30.87.3.47 void Fl_Text_Buffer::replace_selection_ (Fl_Text_Selection * sel, const char * text) [protected]

Replaces the *text* in selection *sel*.

References Fl_Text_Selection::mSelected, Fl_Text_Selection::position(), redisplay_selection(), replace(), and replace_rectangular().

Referenced by replace_secondary_selection(), and replace_selection_().

30.87.3.48 int Fl_Text_Buffer::rewind_lines (int startPos, int nLines)

Finds and returns the position of the first character of the line *nLines* backwards from *startPos* (not counting the character pointed to by *startpos* if that is a newline) in the buffer.

nLines == 0 means find the beginning of the line

References mBuf, mGapEnd, and mGapStart.

Referenced by Fl_Text_Display::rewind_lines().

30.87.3.49 void Fl_Text_Buffer::secondary_select (int *start*, int *end*)

Selects a range of characters in the secondary selection.

References mSecondary, redisplay_selection(), and Fl_Text_Selection::set().

30.87.3.50 Fl_Text_Selection* Fl_Text_Buffer::secondary_selection () [inline]

Returns the secondary selection.

Referenced by Fl_Text_Display::draw_vline(), and Fl_Text_Display::position_style().

30.87.3.51 int Fl_Text_Buffer::secondary_selection_position (int * *start*, int * *end*, int * *isRect*, int * *rectStart*, int * *rectEnd*)

Returns the current selection in the secondary text selection object.

References mSecondary, and Fl_Text_Selection::position().

30.87.3.52 int Fl_Text_Buffer::secondary_selection_position (int * *start*, int * *end*)

Returns the current selection in the secondary text selection object.

References mSecondary, and Fl_Text_Selection::position().

30.87.3.53 char * Fl_Text_Buffer::secondary_selection_text ()

Returns the text in the secondary selection.

When you are done with the text, free it using the free() function.

References mSecondary.

30.87.3.54 void Fl_Text_Buffer::secondary_unselect ()

Clears any selection in the secondary text selection object.

Cancels any previous selection on the primary text selection object.

References mSecondary, Fl_Text_Selection::mSelected, and redisplay_selection().

30.87.3.55 void Fl_Text_Buffer::select (int *start*, int *end*)

Selects a range of characters in the buffer.

References mPrimary, redisplay_selection(), and Fl_Text_Selection::set().

Referenced by Fl_Text_Display::handle(), and Fl_Text_Editor::handle_key().

30.87.3.56 char * Fl_Text_Buffer::selection_text ()

Returns the currently selected text.

When you are done with the text, free it using the free() function.

References mPrimary.

Referenced by Fl_Text_Display::handle().

30.87.3.57 int Fl_Text_Buffer::substitute_null_characters (char * string, int len)

The primary routine for integrating new text into a text buffer with substitution of another character for ascii nuls.

This substitutes null characters in the string in preparation for being copied or replaced into the buffer, and if necessary, adjusts the buffer as well, in the event that the string contains the character it is currently using for substitution. Returns 0, if substitution is no longer possible because all non-printable characters are already in use.

References insert_(), mLength, mNullSubsChar, remove_(), and text().

30.87.3.58 int Fl_Text_Buffer::tab_distance () [inline]

Gets the tab width.

Referenced by Fl_Text_Display::draw_vline(), Fl_Text_Display::overstrike(), and Fl_Text_Display::wrapped_line_counter().

30.87.3.59 char * Fl_Text_Buffer::text ()

Get the entire contents of a text buffer.

Memory is allocated to contain the returned string, which the caller must free.

References mBuf, mGapEnd, mGapStart, and mLength.

Referenced by substitute_null_characters(), tab_distance(), and text().

30.87.3.60 char * Fl_Text_Buffer::text_in_rectangle (int start, int end, int rectStart, int rectEnd)

Returns the text from the given rectangle.

When you are done with the text, free it using the free() function.

References line_end(), line_start(), mNullSubsChar, mTabDist, mUseTabs, rectangular_selection_boundaries(), and text_range().

30.87.3.61 char * Fl_Text_Buffer::text_range (int start, int end)

Return a copy of the text between *start* and *end* character positions from text buffer *buf*.

Positions start at 0, and the range does not include the character pointed to by *end*. When you are done with the text, free it using the free() function.

References mBuf, mGapEnd, mGapStart, and mLength.

Referenced by Fl_Text_Display::draw_vline(), insert_column(), insert_column_(), line_text(), outputfile(), overlay_rectangular(), overlay_rectangular_(), remove(), remove_rectangular(), remove_rectangular_(), replace(), replace_rectangular(), and text_in_rectangle().

30.87.3.62 void Fl_Text_Buffer::unhighlight ()

Unhighlights text in the buffer.

References mHighlight, Fl_Text_Selection::mSelected, and redisplay_selection().

30.87.3.63 void Fl_Text_Buffer::unsubstitute_null_characters (char * *string*)

Converts strings obtained from buffers which contain null characters, which have been substituted for by a special substitution character, back to a null-containing string.

There is no time penalty for calling this routine if no substitution has been done.

References mNullSubsChar.

30.87.3.64 int Fl_Text_Buffer::word_end (int *pos*)

Returns the position corresponding to the end of the word.

References character(), and length().

30.87.4 Member Data Documentation

30.87.4.1 Fl_Text_Modify_Cb* Fl_Text_Buffer::mModifyProcs [protected]

< procedures to call when buffer is

modified to redisplay contents

Referenced by add_modify_callback(), call_modify_callbacks(), Fl_Text_Buffer(), remove_modify_callback(), and ~Fl_Text_Buffer().

30.87.4.2 char Fl_Text_Buffer::mNullSubsChar [protected]

NEdit is based on C null-terminated strings, so ascii-nul characters must be substituted with something else.

This is the else, but of course, things get quite messy when you use it

Referenced by expand_character(), Fl_Text_Buffer(), insert_column_(), overlay_rectangular_(), rectangular_selection_boundaries(), remove_rectangular_(), skip_displayed_characters(), substitute_null_characters(), text_in_rectangle(), and unsubstitute_null_characters().

30.87.4.3 Fl_Text_Predelete_Cb* Fl_Text_Buffer::mPredeleteProcs [protected]

< procedure to call before text is deleted

from the buffer; at most one is supported.

Referenced by add_predelete_callback(), call_predelete_callbacks(), Fl_Text_Buffer(), remove_predelete_callback(), and ~Fl_Text_Buffer().

30.87.4.4 int Fl_Text_Buffer::mTabDist [protected]

equiv.

number of characters in a tab

Referenced by expand_character(), Fl_Text_Buffer(), insert_column_(), overlay_rectangular_(), rectangular_selection_boundaries(), remove_rectangular_(), skip_displayed_characters(), tab_distance(), and text_in_rectangle().

The documentation for this class was generated from the following files:


- [Fl_Text_Buffer.H](#)
- [Fl_Text_Buffer.cxx](#)

30.88 Fl_Text_Display Class Reference

This is the FLTK text display widget.

```
#include <Fl_Text_Display.H>
```

Inheritance diagram for Fl_Text_Display::



Classes

- struct [Style_Table_Entry](#)

This structure associates the color,font,size of a string to draw with an attribute mask matching attr.

Public Types

- enum {
 NORMAL_CURSOR, CARET_CURSOR, DIM_CURSOR, BLOCK_CURSOR,
HEAVY_CURSOR }
text display cursor shapes enumeration
- enum { **CURSOR_POS, CHARACTER_POS** }
- enum { **DRAG_CHAR = 0, DRAG_WORD = 1, DRAG_LINE = 2** }
drag types- they match [Fl::event_clicks\(\)](#) so that single clicking to start a collection selects by character, double clicking selects by word and triple clicking selects by line.
- enum { **ATTR_NONE = 0, ATTR_UNDERLINE = 1, ATTR_HIDDEN = 2** }
style attributes - currently not implemented!
- typedef void(* **Unfinished_Style_Cb**)(int, void *)

Public Member Functions

- [Fl_Text_Display](#) (int X, int Y, int W, int H, const char *l=0)
Creates a new text display widget.
- [~Fl_Text_Display](#) ()
Free a text display and release its associated memory.

- virtual int **handle** (int e)
Handles the specified event.
- void **buffer** (Fl_Text_Buffer *buf)
Attach a text buffer to display, replacing the current buffer (if any).
- void **buffer** (Fl_Text_Buffer &buf)
Sets or gets the current text buffer associated with the text widget.
- Fl_Text_Buffer * **buffer** ()
Gets the current text buffer associated with the text widget.
- void **redisplay_range** (int start, int end)
Marks text from start to end as needing a redraw.
- void **scroll** (int topLineNum, int horizOffset)
Scrolls the current buffer to start at the specified line and column.
- void **insert** (const char *text)
Inserts "text" at the current cursor location.
- void **overstrike** (const char *text)
Replaces text at the current insert position.
- void **insert_position** (int newPos)
Sets the position of the text insertion cursor for text display.
- int **insert_position** ()
Gets the position of the text insertion cursor for text display.
- int **in_selection** (int x, int y)
Return 1 if position (X, Y) is inside of the primary Fl_Text_Selection.
- void **show_insert_position** ()
Scrolls the text buffer to show the current insert position.
- int **move_right** ()
Moves the current insert position right one character.
- int **move_left** ()
Moves the current insert position left one character.
- int **move_up** ()
Moves the current insert position up one line.
- int **move_down** ()
Moves the current insert position down one line.
- int **count_lines** (int start, int end, bool start_pos_is_line_start)
Same as BufCountLines, but takes in to account wrapping if wrapping is turned on.

- int **line_start** (int pos)

Same as BufStartOfLine, but returns the character after last wrap point rather than the last newline.

- int **line_end** (int pos, bool start_pos_is_line_start)

Same as BufEndOfLine, but takes in to account line breaks when wrapping is turned on.

- int **skip_lines** (int startPos, int nLines, bool startPosIsLineStart)

Same as BufCountForwardNLines, but takes in to account line breaks when wrapping is turned on.

- int **rewind_lines** (int startPos, int nLines)

Same as BufCountBackwardNLines, but takes in to account line breaks when wrapping is turned on.

- void **next_word** (void)

Moves the current insert position right one word.

- void **previous_word** (void)

Moves the current insert position left one word.

- void **show_cursor** (int b=1)

Shows the text cursor.

- void **hide_cursor** ()

Hides the text cursor.

- void **cursor_style** (int style)

Sets the text cursor style to one of the following::

- **Fl_Color cursor_color** () const

Sets or gets the text cursor color.

- void **cursor_color** (**Fl_Color** n)

Sets or gets the text cursor color.

- int **scrollbar_width** ()

Sets or gets the width/height of the scrollbars.

- void **scrollbar_width** (int W)

Sets or gets the width/height of the scrollbars.

- **Fl_Align scrollbar_align** ()

Gets the scrollbar alignment type.

- void **scrollbar_align** (**Fl_Align** a)

Sets the scrollbar alignment type.

- int **word_start** (int pos)

Moves the insert position to the beginning of the current word.

- int **word_end** (int pos)

Moves the insert position to the end of the current word.

- void **highlight_data** (Fl_Text_Buffer *styleBuffer, const Style_Table_Entry *styleTable, int nStyles, char unfinishedStyle, Unfinished_Style_Cb unfinishedHighlightCB, void *cbArg)

Attach (or remove) highlight information in text display and redisplay.

- int **position_style** (int lineStartPos, int lineLen, int lineIndex, int dispIndex)

Determine the drawing method to use to draw a specific character from "buf".

- int **shortcut** () const

- void **shortcut** (int s)

- Fl_Font **textfont** () const

Gets the default font used when drawing text in the widget.

- void **textfont** (Fl_Font s)

Sets the default font used when drawing text in the widget.

- Fl_Fontsize **textsize** () const

Gets the default size of text in the widget.

- void **textsize** (Fl_Fontsize s)

Sets the default size of text in the widget.

- Fl_Color **textcolor** () const

Gets the default color of text in the widget.

- void **textcolor** (unsigned n)

Sets the default color of text in the widget.

- int **wrapped_column** (int row, int column)

Correct a column number based on an unconstrained position (as returned by TextDXYToUnconstrainedPosition) to be relative to the last actual newline in the buffer before the row and column position given, rather than the last line start created by line wrapping.

- int **wrapped_row** (int row)

Correct a row number from an unconstrained position (as returned by TextDXYToUnconstrainedPosition) to a straight number of newlines from the top line of the display.

- void **wrap_mode** (int wrap, int wrap_margin)

If mode is not zero, this call enables automatic word wrapping at column pos.

- virtual void **resize** (int X, int Y, int W, int H)

Change the size of the displayed text area.

Protected Member Functions

- virtual void **draw** ()

Draw the widget.

- void [draw_text](#) (int X, int Y, int W, int H)
Refresh a rectangle of the text display.
- void [draw_range](#) (int start, int end)
Refresh all of the text between buffer positions "start" and "end" not including the character at the position "end".
- void [draw_cursor](#) (int, int)
Draw a cursor with top center at X, y.
- void [draw_string](#) (int style, int x, int y, int toX, const char *string, int nChars)
Draw a string or blank area according to parameter "style", using the appropriate colors and drawing method for that style, with top left corner at X, y.
- void [draw_vline](#) (int visLineNum, int leftClip, int rightClip, int leftCharIndex, int rightCharIndex)
Draw the text on a single line represented by "visLineNum" (the number of lines down from the top of the display), limited by "leftClip" and "rightClip" window coordinates and "leftCharIndex" and "rightCharIndex" character positions (not including the character at position "rightCharIndex").
- void [draw_line_numbers](#) (bool clearAll)
Refresh the line number area.
- void [clear_rect](#) (int style, int x, int y, int width, int height)
Clear a rectangle with the appropriate background color for "style".
- void [display_insert](#) ()
Scroll the display to bring insertion cursor into view.
- void [offset_line_starts](#) (int newTopLineNum)
Offset the line starts array, mTopLineNum, mFirstChar and lastChar, for a new vertical scroll position given by newTopLineNum.
- void [calc_line_starts](#) (int startLine, int endLine)
Scan through the text in the "textD"'s buffer and recalculate the line starts array values beginning at index "startLine" and continuing through (including) "endLine".
- void [update_line_starts](#) (int pos, int charsInserted, int charsDeleted, int linesInserted, int linesDeleted, int *scrolled)
Update the line starts array, mTopLineNum, mFirstChar and lastChar for text display "textD" after a modification to the text buffer, given by the position where the change began "pos", and the numbers of characters and lines inserted and deleted.
- void [calc_last_char](#) ()
Given a [FL_Text_Display](#) with a complete, up-to-date lineStarts array, update the lastChar entry to point to the last buffer position displayed.
- int [position_to_line](#) (int pos, int *lineNum)
Find the line number of position "pos" relative to the first line of displayed text.
- int [string_width](#) (const char *string, int length, int style)
Find the width of a string in the font of a particular style.

- void **update_v_scrollbar** ()
Update the minimum, maximum, slider size, page increment, and value for vertical scroll bar.
- void **update_h_scrollbar** ()
Update the minimum, maximum, slider size, page increment, and value for the horizontal scroll bar.
- int **measure_vline** (int visLineNum)
Return the width in pixels of the displayed line pointed to by "visLineNum".
- int **longest_vline** ()
- int **empty_vlines** ()
Return true if there are lines visible with no corresponding buffer text.
- int **vline_length** (int visLineNum)
Return the length of a line (number of displayable characters) by examining entries in the line starts array rather than by scanning for newlines.
- int **xy_to_position** (int x, int y, int PosType=CHARACTER_POS)
Translate window coordinates to the nearest (insert cursor or character cell) text position.
- void **xy_to_rowcol** (int x, int y, int *row, int *column, int PosType=CHARACTER_POS)
Translate window coordinates to the nearest row and column number for positioning the cursor.
- int **position_to_xy** (int pos, int *x, int *y)
Translate a buffer text position to the XY location where the top left of the cursor would be positioned to point to that character.
- void **maintain_absolute_top_line_number** (int state)
In continuous wrap mode, internal line numbers are calculated after wrapping.
- int **get_absolute_top_line_number** ()
Returns the absolute (non-wrapped) line number of the first line displayed.
- void **absolute_top_line_number** (int oldFirstChar)
Re-calculate absolute top line number for a change in scroll position.
- int **maintaining_absolute_top_line_number** ()
Return true if a separate absolute top line number is being maintained (for displaying line numbers or showing in the statistics line).
- void **reset_absolute_top_line_number** ()
Count lines from the beginning of the buffer to reestablish the absolute (non-wrapped) top line number.
- int **position_to_linecol** (int pos, int *lineNum, int *column)
Find the line number of position "pos".
- void **scroll_** (int topLineNum, int horizOffset)
- void **extend_range_for_styles** (int *start, int *end)
*Extend the range of a redraw request (from *start to *end) with additional redraw requests resulting from changes to the attached style buffer (which contains auxiliary information for coloring or styling text).*

- void [find_wrap_range](#) (const char *deletedText, int pos, int nInserted, int nDeleted, int *modRangeStart, int *modRangeEnd, int *linesInserted, int *linesDeleted)

When continuous wrap is on, and the user inserts or deletes characters, wrapping can happen before and beyond the changed position.
- void [measure_deleted_lines](#) (int pos, int nDeleted)

This is a stripped-down version of the findWrapRange() function above, intended to be used to calculate the number of "deleted" lines during a buffer modification.
- void [wrapped_line_counter](#) (Fl_Text_Buffer *buf, int startPos, int maxPos, int maxLines, bool startPosIsLineStart, int styleBufOffset, int *retPos, int *retLines, int *retLineStart, int *retLineEnd, bool countLastLineMissingNewLine=true)

Count forward from startPos to either maxPos or maxLines (whichever is reached first), and return all relevant positions and line count.
- void [find_line_end](#) (int pos, bool start_pos_is_line_start, int *lineEnd, int *nextLineStart)

Finds both the end of the current line and the start of the next line.
- int [measure_proportional_character](#) (char c, int colNum, int pos)

Measure the width in pixels of a character "c" at a particular column "colNum" and buffer position "pos".
- int [wrap_uses_character](#) (int lineEndPos)

Line breaks in continuous wrap mode usually happen at newlines or whitespace.
- int [range_touches_selection](#) (Fl_Text_Selection *sel, int rangeStart, int rangeEnd)

Return true if the selection "sel" is rectangular, and touches a buffer position withing "rangeStart" to "rangeEnd".

Static Protected Member Functions

- static void [scroll_timer_cb](#) (void *)
- static void [buffer_predelete_cb](#) (int pos, int nDeleted, void *cbArg)

Callback attached to the text buffer to receive delete information before the modifications are actually made.
- static void [buffer_modified_cb](#) (int pos, int nInserted, int nDeleted, int nRestyled, const char *deletedText, void *cbArg)

Callback attached to the text buffer to receive modification information.
- static void [h_scrollbar_cb](#) (Fl_Scrollbar *w, Fl_Text_Display *d)
- static void [v_scrollbar_cb](#) (Fl_Scrollbar *w, Fl_Text_Display *d)

Callbacks for drag or valueChanged on scroll bars.

Friends

- void [fl_text_drag_me](#) (int pos, Fl_Text_Display *d)

30.88.1 Detailed Description

This is the FLTK text display widget.

It allows the user to view multiple lines of text and supports highlighting and scrolling. The buffer that is displayed in the widget is managed by the [Fl_Text_Buffer](#) class.

30.88.2 Constructor & Destructor Documentation

30.88.2.1 [Fl_Text_Display::Fl_Text_Display \(int X, int Y, int W, int H, const char *l = 0\)](#)

Creates a new text display widget.

References [Fl_Widget::box\(\)](#), [Fl_Widget::color\(\)](#), [Fl_Group::end\(\)](#), [FL_BACKGROUND2_COLOR](#), [FL_DOWN_FRAME](#), [FL_FOREGROUND_COLOR](#), [FL_HELVETICA](#), [FL_HORIZONTAL](#), [FL_NORMAL_SIZE](#), [FL_SELECTION_COLOR](#), [scrollbar_align\(\)](#), [Fl::scrollbar_size\(\)](#), [scrollbar_width\(\)](#), [Fl_Widget::set_flag\(\)](#), [Fl_Widget::SHORTCUT_LABEL](#), [textcolor\(\)](#), [textfont\(\)](#), [textsize\(\)](#), and [v_scrollbar_cb\(\)](#).

30.88.2.2 [Fl_Text_Display::~Fl_Text_Display \(\)](#)

Free a text display and release its associated memory.

Note, the text BUFFER that the text display displays is a separate entity and is not freed, nor are the style buffer or style table.

References [buffer_modified_cb\(\)](#), [buffer_predelete_cb\(\)](#), and [Fl::remove_timeout\(\)](#).

30.88.3 Member Function Documentation

30.88.3.1 [Fl_Text_Buffer* Fl_Text_Display::buffer \(\) \[inline\]](#)

Gets the current text buffer associated with the text widget.

Multiple text widgets can be associated with the same text buffer.

Referenced by [absolute_top_line_number\(\)](#), [count_lines\(\)](#), [draw\(\)](#), [find_line_end\(\)](#), [find_wrap_range\(\)](#), [Fl_Text_Editor::handle\(\)](#), [handle\(\)](#), [Fl_Text_Editor::handle_key\(\)](#), [in_selection\(\)](#), [line_end\(\)](#), [line_start\(\)](#), [measure_deleted_lines\(\)](#), [measure_proportional_character\(\)](#), [move_down\(\)](#), [move_left\(\)](#), [move_right\(\)](#), [move_up\(\)](#), [next_word\(\)](#), [position_to_linecol\(\)](#), [previous_word\(\)](#), [redisplay_range\(\)](#), [resize\(\)](#), [rewind_lines\(\)](#), [skip_lines\(\)](#), [wrap_mode\(\)](#), [wrap_uses_character\(\)](#), [wrapped_column\(\)](#), [wrapped_line_counter\(\)](#), and [wrapped_row\(\)](#).

30.88.3.2 [void Fl_Text_Display::buffer \(Fl_Text_Buffer & buf\) \[inline\]](#)

Sets or gets the current text buffer associated with the text widget.

Multiple text widgets can be associated with the same text buffer.

References [buffer\(\)](#).

Referenced by [buffer\(\)](#).

30.88.3.3 void Fl_Text_Display::calc_line_starts (int startLine, int endLine) [protected]

Scan through the text in the "textD"'s buffer and recalculate the line starts array values beginning at index "startLine" and continuing through (including) "endLine".

It assumes that the line starts entry preceding "startLine" (or mFirstChar if startLine is 0) is good, and re-counts newlines to fill in the requested entries. Out of range values for "startLine" and "endLine" are acceptable.

References `find_line_end()`.

Referenced by `offset_line_starts()`, `resize()`, `update_line_starts()`, and `wrap_mode()`.

30.88.3.4 int Fl_Text_Display::count_lines (int startPos, int endPos, bool startPosIsLineStart)

Same as `BufCountLines`, but takes in to account wrapping if wrapping is turned on.

If the caller knows that startPos is at a line start, it can pass "startPosIsLineStart" as True to make the call more efficient by avoiding the additional step of scanning back to the last newline.

References `buffer()`, `Fl_Text_Buffer::count_lines()`, and `wrapped_line_counter()`.

Referenced by `display_insert()`, `Fl_Text_Editor::kf_ctrl_move()`, `resize()`, and `wrap_mode()`.

30.88.3.5 void Fl_Text_Display::cursor_color (Fl_Color n) [inline]

Sets or gets the text cursor color.

30.88.3.6 Fl_Color Fl_Text_Display::cursor_color () const [inline]

Sets or gets the text cursor color.

30.88.3.7 void Fl_Text_Display::cursor_style (int style)

Sets the text cursor style to one of the following:

- `Fl_Text_Display::NORMAL_CURSOR` - Shows an I beam.
- `Fl_Text_Display::CARET_CURSOR` - Shows a caret under the text.
- `Fl_Text_Display::DIM_CURSOR` - Shows a dimmed I beam.
- `Fl_Text_Display::BLOCK_CURSOR` - Shows an unfilled box around the current character.
- `Fl_Text_Display::HEAVY_CURSOR` - Shows a thick I beam.

References `show_cursor()`.

30.88.3.8 void Fl_Text_Display::display_insert () [protected]

Scroll the display to bring insertion cursor into view.

Note: it would be nice to be able to do this without counting lines twice (`scroll_()` counts them too) and/or to count from the most efficient starting point, but the efficiency of this routine is not as important to the overall performance of the text display.

References count_lines(), insert_position(), line_end(), position_to_xy(), and wrap_uses_character().
Referenced by resize().

30.88.3.9 void Fl_Text_Display::draw () [protected, virtual]

Draw the widget.

Never call this function directly. FLTK will schedule redrawing whenever needed. If your widget must be redrawn as soon as possible, call [redraw\(\)](#) instead.

Override this function to draw your own widgets.

Reimplemented from [Fl_Group](#).

References Fl_Widget::box(), buffer(), Fl_Widget::color(), Fl_Widget::damage(), Fl_Widget::draw_box(), draw_cursor(), draw_range(), draw_text(), fl_clip_box(), fl_pop_clip(), fl_push_clip(), fl_rectf(), Fl::focus(), Fl_Widget::h(), position_to_xy(), scrollbar_width(), Fl_Group::update_child(), Fl_Widget::w(), Fl_Widget::x(), and Fl_Widget::y().

30.88.3.10 void Fl_Text_Display::draw_line_numbers (bool *clearAll*) [protected]

Refresh the line number area.

If clearAll is False, writes only over the character cell areas. Setting clearAll to True will clear out any stray marks outside of the character cell area, which might have been left from before a resize or font change.

References buffer(), Fl_Widget::visible_r(), Fl_Widget::w(), and Fl_Widget::y().

Referenced by buffer_modified_cb(), and draw_text().

30.88.3.11 void Fl_Text_Display::draw_range (int *startpos*, int *endpos*) [protected]

Refresh all of the text between buffer positions "start" and "end" not including the character at the position "end".

If end points beyond the end of the buffer, refresh the whole display after pos, including blank lines which are not technically part of any range of characters.

References draw_vline(), empty_vlines(), and position_to_line().

Referenced by draw().

30.88.3.12 void Fl_Text_Display::draw_string (int *style*, int *X*, int *Y*, int *toX*, const char * *string*, int *nChars*) [protected]

Draw a string or blank area according to parameter "style", using the appropriate colors and drawing method for that style, with top left corner at X, y.

If style says to draw text, use "string" as source of characters, and draw "nChars", if style is FILL, erase rectangle where text would have drawn from X to toX and from Y to the maximum Y extent of the current font(s).

References clear_rect(), Fl_Text_Display::Style_Table_Entry::color, Fl_Widget::color(), fl_color(), fl_rectf(), Fl::focus(), Fl_Text_Display::Style_Table_Entry::font, Fl_Widget::selection_color(), Fl_Text_Display::Style_Table_Entry::size, textcolor(), textfont(), and textsize().

Referenced by draw_vline().

30.88.3.13 void Fl_Text_Display::draw_text (int *left*, int *top*, int *width*, int *height*) [protected]

Refresh a rectangle of the text display.

left and *top* are in coordinates of the text drawing window

References draw_line_numbers(), draw_vline(), fl_pop_clip(), and fl_push_clip().

Referenced by draw().

**30.88.3.14 void Fl_Text_Display::find_line_end (int *startPos*, bool *startPosIsLineStart*, int *
lineEnd, int **nextLineStart*) [protected]**

Finds both the end of the current line and the start of the next line.

Why? In continuous wrap mode, if you need to know both, figuring out one from the other can be expensive or error prone. The problem comes when there's a trailing space or tab just before the end of the buffer. To translate an end of line value to or from the next lines start value, you need to know whether the trailing space or tab is being used as a line break or just a normal character, and to find that out would otherwise require counting all the way back to the beginning of the line.

References buffer(), Fl_Text_Buffer::line_end(), and wrapped_line_counter().

Referenced by calc_line_starts().

**30.88.3.15 void Fl_Text_Display::find_wrap_range (const char **deletedText*, int *pos*, int
nInserted, int *nDeleted*, int **modRangeStart*, int **modRangeEnd*, int **linesInserted*,
int **linesDeleted*) [protected]**

When continuous wrap is on, and the user inserts or deletes characters, wrapping can happen before and beyond the changed position.

This routine finds the extent of the changes, and counts the deleted and inserted lines over that range. It also attempts to minimize the size of the range to what has to be counted and re-displayed, so the results can be useful both for delimiting where the line starts need to be recalculated, and for deciding what part of the text to redisplay.

References buffer(), Fl_Text_Buffer::character(), Fl_Text_Buffer::copy(), Fl_Text_Buffer::insert(), Fl_Text_Buffer::length(), line_end(), Fl_Text_Buffer::line_start(), and wrapped_line_counter().

Referenced by buffer_modified_cb().

30.88.3.16 int Fl_Text_Display::get_absolute_top_line_number () [protected]

Returns the absolute (non-wrapped) line number of the first line displayed.

Returns 0 if the absolute top line number is not being maintained.

References maintaining_absolute_top_line_number().

30.88.3.17 int Fl_Text_Display::handle (int *event*) [virtual]

Handles the specified event.

You normally don't call this method directly, but instead let FLTK do it when the user interacts with the widget.

When implemented in a new widget, this function must return 0 if the widget does not use the event or 1 otherwise.

Most of the time, you want to call the inherited [handle\(\)](#) method in your overriden method so that you don't short-circuit events that you don't handle. In this last case you should return the callee retval.

Parameters:

← *event* the kind of event received

Return values:

0 if the event was not used or understood
1 if the event was used and can be deleted

See also:

[Fl_Event](#)

Reimplemented from [Fl_Group](#).

Reimplemented in [Fl_Text_Editor](#).

References Fl_Widget::active_r(), Fl::add_timeout(), buffer(), Fl_Text_Buffer::character(), Fl::copy(), Fl_Window::cursor(), Fl_Text_Selection::end(), Fl_Group::end(), Fl::event_clicks(), Fl::event_dy(), Fl::event_inside(), Fl::event_key(), Fl::event_state(), Fl::event_x(), Fl::event_y(), FL_COMMAND, FL_CTRL, FL_DRAG, FL_ENTER, FL_FOCUS, FL_HIDE, FL_KEYBOARD, FL_KEYUP, FL_LEAVE, FL_MOUSEWHEEL, FL_MOVE, FL_PUSH, FL_RELEASE, FL_SHIFT, FL_SHORTCUT, FL_UNFOCUS, Fl_Group::focus(), Fl::focus(), Fl_Group::handle(), insert_position(), line_end(), line_start(), Fl_Text_Buffer::primary_selection(), redisplay_range(), Fl::remove_timeout(), Fl_Text_Buffer::select(), Fl_Text_Buffer::selection_text(), shortcut(), show_insert_position(), Fl_Text_Selection::start(), Fl_Widget::test_shortcut(), Fl::test_shortcut(), Fl_Text_Buffer::unselect(), Fl::visible_focus(), Fl_Widget::window(), word_end(), word_start(), and xy_to_position().

30.88.3.18 void Fl_Text_Display::highlight_data (Fl_Text_Buffer * *styleBuffer*, const Style_Table_Entry * *styleTable*, int *nStyles*, char *unfinishedStyle*, Unfinished_Style_Cb *unfinishedHighlightCB*, void * *cbArg*)

Attach (or remove) highlight information in text display and redisplay.

Highlighting information consists of a style buffer which parallels the normal text buffer, but codes font and color information for the display; a style table which translates style buffer codes (indexed by buffer character - 'A') into fonts and colors; and a callback mechanism for as-needed highlighting, triggered by a style buffer entry of "unfinishedStyle". Style buffer can trigger additional redisplay during a normal buffer modification if the buffer contains a primary [Fl_Text_Selection](#) (see extendRangeForStyleMods for more information on this protocol).

Style buffers, tables and their associated memory are managed by the caller.

References Fl_Widget::damage().

30.88.3.19 void Fl_Text_Display::insert (const char * *text*)

Inserts "text" at the current cursor location.

This has the same effect as inserting the text into the buffer using BufInsert and then moving the insert position after the newly inserted text, except that it's optimized to do less redrawing.

Referenced by Fl_Text_Editor::handle(), Fl_Text_Editor::handle_key(), Fl_Text_Editor::kf_default(), and Fl_Text_Editor::kf_enter().

30.88.3.20 int Fl_Text_Display::line_end (int pos, bool startPosIsLineStart)

Same as BufEndOfLine, but takes in to account line breaks when wrapping is turned on.

If the caller knows that startPos is at a line start, it can pass "startPosIsLineStart" as True to make the call more efficient by avoiding the additional step of scanning back to the last newline.

Note that the definition of the end of a line is less clear when continuous wrap is on. With continuous wrap off, it's just a pointer to the newline that ends the line. When it's on, it's the character beyond the last DISPLAYABLE character on the line, where a whitespace character which has been "converted" to a newline for wrapping is not considered displayable. Also note that, a line can be wrapped at a non-whitespace character if the line had no whitespace. In this case, this routine returns a pointer to the start of the next line. This is also consistent with the model used by visLineLength.

References buffer(), Fl_Text_Buffer::line_end(), and wrapped_line_counter().

Referenced by calc_last_char(), display_insert(), find_wrap_range(), handle(), move_down(), and move_up().

30.88.3.21 void Fl_Text_Display::maintain_absolute_top_line_number (int state) [protected]

In continuous wrap mode, internal line numbers are calculated after wrapping.

A separate non-wrapped line count is maintained when line numbering is turned on. There is some performance cost to maintaining this line count, so normally absolute line numbers are not tracked if line numbering is off. This routine allows callers to specify that they still want this line count maintained (for use via TextDPosToLineAndCol). More specifically, this allows the line number reported in the statistics line to be calibrated in absolute lines, rather than post-wrapped lines.

References reset_absolute_top_line_number().

30.88.3.22 void Fl_Text_Display::measure_deleted_lines (int pos, int nDeleted) [protected]

This is a stripped-down version of the findWrapRange() function above, intended to be used to calculate the number of "deleted" lines during a buffer modification.

It is called _before_ the modification takes place.

This function should only be called in continuous wrap mode with a non-fixed font width. In that case, it is impossible to calculate the number of deleted lines, because the necessary style information is no longer available _after_ the modification. In other cases, we can still perform the calculation afterwards (possibly even more efficiently).

References buffer(), Fl_Text_Buffer::character(), Fl_Text_Buffer::length(), Fl_Text_Buffer::line_start(), and wrapped_line_counter().

Referenced by buffer_predelete_cb().

30.88.3.23 int Fl_Text_Display::measure_proportional_character (char c, int colNum, int pos) [protected]

Measure the width in pixels of a character "c" at a particular column "colNum" and buffer position "pos".

This is for measuring characters in proportional or mixed-width highlighting fonts.

A note about proportional and mixed-width fonts: the mixed width and proportional font code in nedit does not get much use in general editing, because nedit doesn't allow per-language-mode fonts, and editing programs in a proportional font is usually a bad idea, so very few users would choose a proportional font as a default. There are still probably mixed-width syntax highlighting cases where things don't redraw properly for insertion/deletion, though static display and wrapping and resizing should now be solid because they are now used for online help display.

References buffer(), Fl_Text_Buffer::character(), Fl_Text_Buffer::expand_character(), and string_width().
Referenced by wrapped_line_counter().

30.88.3.24 int Fl_Text_Display::move_down ()

Moves the current insert position down one line.

References buffer(), Fl_Text_Buffer::character(), insert_position(), line_end(), line_start(), position_to_line(), and skip_lines().

Referenced by Fl_Text_Editor::kf_move().

30.88.3.25 int Fl_Text_Display::move_left ()

Moves the current insert position left one character.

References buffer(), Fl_Text_Buffer::character(), and insert_position().

Referenced by Fl_Text_Editor::kf_backspace(), and Fl_Text_Editor::kf_move().

30.88.3.26 int Fl_Text_Display::move_right ()

Moves the current insert position right one character.

References buffer(), Fl_Text_Buffer::character(), and insert_position().

Referenced by Fl_Text_Editor::kf_move().

30.88.3.27 int Fl_Text_Display::move_up ()

Moves the current insert position up one line.

References buffer(), Fl_Text_Buffer::character(), insert_position(), line_end(), line_start(), position_to_line(), and rewind_lines().

Referenced by Fl_Text_Editor::kf_move().

30.88.3.28 void Fl_Text_Display::next_word (void)

Moves the current insert position right one word.

References buffer(), and insert_position().

Referenced by Fl_Text_Editor::kf_ctrl_move().

30.88.3.29 void Fl_Text_Display::offset_line_starts (int *newTopLineNum*) [protected]

Offset the line starts array, mTopLineNum, mFirstChar and lastChar, for a new vertical scroll position given by newTopLineNum.

If any currently displayed lines will still be visible, salvage the line starts values, otherwise, count lines from the nearest known line start (start or end of buffer, or the closest value in the mLineStarts array)

References absolute_top_line_number(), calc_last_char(), calc_line_starts(), Fl_Text_Buffer::length(), rewind_lines(), and skip_lines().

30.88.3.30 void Fl_Text_Display::overstrike (const char * *text*)

Replaces text at the current insert position.

References Fl_Text_Buffer::character(), Fl_Text_Buffer::character_width(), Fl_Text_Buffer::length(), Fl_Text_Buffer::line_start(), Fl_Text_Buffer::null_substitution_character(), Fl_Text_Buffer::replace(), and Fl_Text_Buffer::tab_distance().

Referenced by Fl_Text_Editor::handle(), Fl_Text_Editor::handle_key(), and Fl_Text_Editor::kf_default().

30.88.3.31 int Fl_Text_Display::position_style (int *lineStartPos*, int *lineLen*, int *lineIndex*, int *dispIndex*)

Determine the drawing method to use to draw a specific character from "buf".

"lineStartPos" gives the character index where the line begins, "lineIndex", the number of characters past the beginning of the line, and "dispIndex", the number of displayed characters past the beginning of the line. Passing lineStartPos of -1 returns the drawing style for "no text".

Why not just: position_style(pos)? Because style applies to blank areas of the window beyond the text boundaries, and because this routine must also decide whether a position is inside of a rectangular [Fl_Text_Selection](#), and do so efficiently, without re-counting character positions from the start of the line.

Note that style is a somewhat incorrect name, drawing method would be more appropriate.

References Fl_Text_Buffer::character(), Fl_Text_Buffer::highlight_selection(), Fl_Text_Selection::includes(), Fl_Text_Buffer::primary_selection(), and Fl_Text_Buffer::secondary_selection().

Referenced by draw_vline(), position_to_xy(), and xy_to_position().

30.88.3.32 int Fl_Text_Display::position_to_line (int *pos*, int * *lineNum*) [protected]

Find the line number of position "pos" relative to the first line of displayed text.

Returns 0 if the line is not displayed.

References empty_vlines(), and Fl::error.

Referenced by draw_range(), move_down(), move_up(), position_to_linecol(), position_to_xy(), and update_line_starts().

30.88.3.33 int Fl_Text_Display::position_to_linecol (int *pos*, int * *lineNum*, int * *column*) [protected]

Find the line number of position "pos".

Note: this only works for displayed lines. If the line is not displayed, the function returns 0 (without the mLineStarts array it could turn in to very long calculation involving scanning large amounts of text in the buffer). If continuous wrap mode is on, returns the absolute line number (as opposed to the wrapped line number which is used for scrolling).

References `buffer()`, `Fl_Text_Buffer::count_displayed_characters()`, `Fl_Text_Buffer::count_lines()`, `line_start()`, `maintaining_absolute_top_line_number()`, and `position_to_line()`.

30.88.3.34 int Fl_Text_Display::position_to_xy (int *pos*, int **X*, int **Y*) [protected]

Translate a buffer text position to the XY location where the top left of the cursor would be positioned to point to that character.

Returns 0 if the position is not displayed because it is VERTICALLY out of view. If the position is horizontally out of view, returns the X coordinate where the position would be if it were visible.

References `empty_vlines()`, `Fl_Text_Buffer::expand_character()`, `position_style()`, `position_to_line()`, `string_width()`, and `vline_length()`.

Referenced by `display_insert()`, and `draw()`.

30.88.3.35 void Fl_Text_Display::previous_word (void)

Moves the current insert position left one word.

References `buffer()`, and `insert_position()`.

Referenced by `Fl_Text_Editor::kf_ctrl_move()`.

30.88.3.36 void Fl_Text_Display::redisplay_range (int *startpos*, int *endpos*)

Marks text from start to end as needing a redraw.

References `buffer()`, `Fl_Text_Buffer::character()`, and `Fl_Widget::damage()`.

Referenced by `buffer_modified_cb()`, `handle()`, `insert_position()`, and `show_cursor()`.

30.88.3.37 void Fl_Text_Display::reset_absolute_top_line_number () [protected]

Count lines from the beginning of the buffer to reestablish the absolute (non-wrapped) top line number.

If mode is not continuous wrap, or the number is not being maintained, does nothing.

References `absolute_top_line_number()`.

Referenced by `buffer_modified_cb()`, `maintain_absolute_top_line_number()`, and `wrap_mode()`.

30.88.3.38 void Fl_Text_Display::scroll (int *topLineNum*, int *horizOffset*)

Scrolls the current buffer to start at the specified line and column.

References `Fl_Widget::h()`, `resize()`, `Fl_Widget::w()`, `Fl_Widget::x()`, and `Fl_Widget::y()`.

Referenced by `Fl_Text_Editor::kf_ctrl_move()`, and `v_scrollbar_cb()`.

30.88.3.39 void Fl_Text_Display::scrollbar_width (int *W*) [inline]

Sets or gets the width/height of the scrollbars.

30.88.3.40 int Fl_Text_Display::scrollbar_width () [inline]

Sets or gets the width/height of the scrollbars.

Referenced by draw(), Fl_Text_Display(), and resize().

30.88.3.41 void Fl_Text_Display::shortcut (int *s*) [inline]**Todo**

FIXME : get set methods pointing on shortcut_ have no effects as shortcut_ is unused in this class and derived!

30.88.3.42 int Fl_Text_Display::shortcut () const [inline]**Todo**

FIXME : get set methods pointing on shortcut_ have no effects as shortcut_ is unused in this class and derived!

Referenced by Fl_Text_Editor::handle(), and handle().

30.88.3.43 void Fl_Text_Display::show_insert_position ()

Scrolls the text buffer to show the current insert position.

References Fl_Widget::h(), resize(), Fl_Widget::w(), Fl_Widget::x(), and Fl_Widget::y().

Referenced by Fl_Text_Editor::handle(), handle(), Fl_Text_Editor::handle_key(), Fl_Text_Editor::kf_backspace(), Fl_Text_Editor::kf_copy(), Fl_Text_Editor::kf_ctrl_move(), Fl_Text_Editor::kf_default(), Fl_Text_Editor::kf_delete(), Fl_Text_Editor::kf_enter(), Fl_Text_Editor::kf_move(), Fl_Text_Editor::kf_paste(), and Fl_Text_Editor::kf_undo().

30.88.3.44 int Fl_Text_Display::skip_lines (int *startPos*, int *nLines*, bool *startPosIsLineStart*)

Same as BufCountForwardNLines, but takes in to account line breaks when wrapping is turned on.

If the caller knows that startPos is at a line start, it can pass "startPosIsLineStart" as True to make the call more efficient by avoiding the additional step of scanning back to the last newline.

References buffer(), Fl_Text_Buffer::skip_lines(), and wrapped_line_counter().

Referenced by move_down(), offset_line_starts(), rewind_lines(), and update_line_starts().

30.88.3.45 void Fl_Text_Display::textcolor (unsigned *n*) [inline]

Sets the default color of text in the widget.

30.88.3.46 Fl_Color Fl_Text_Display::textcolor () const [inline]

Gets the default color of text in the widget.

Referenced by draw_string(), and Fl_Text_Display().

30.88.3.47 void Fl_Text_Display::textfont (Fl_Font s) [inline]

Sets the default font used when drawing text in the widget.

30.88.3.48 Fl_Font Fl_Text_Display::textfont () const [inline]

Gets the default font used when drawing text in the widget.

Referenced by draw_string(), Fl_Text_Display(), measure_vline(), resize(), and string_width().

30.88.3.49 void Fl_Text_Display::textsize (Fl_Fontsize s) [inline]

Sets the default size of text in the widget.

30.88.3.50 Fl_Fontsize Fl_Text_Display::textsize () const [inline]

Gets the default size of text in the widget.

Referenced by draw_string(), Fl_Text_Display(), measure_vline(), resize(), and string_width().

30.88.3.51 int Fl_Text_Display::word_end (int pos) [inline]

Moves the insert position to the end of the current word.

Referenced by handle().

30.88.3.52 int Fl_Text_Display::word_start (int pos) [inline]

Moves the insert position to the beginning of the current word.

Referenced by handle().

30.88.3.53 void Fl_Text_Display::wrap_mode (int wrap, int wrapMargin)

If *mode* is not zero, this call enables automatic word wrapping at column *pos*.

Word-wrapping does not change the text buffer itself, only the way that the text is displayed.

References buffer(), calc_last_char(), calc_line_starts(), count_lines(), Fl_Widget::h(), line_start(), reset_absolute_top_line_number(), resize(), Fl_Widget::w(), Fl_Widget::x(), and Fl_Widget::y().

30.88.3.54 int Fl_Text_Display::wrap_uses_character (int lineEndPos) [protected]

Line breaks in continuous wrap mode usually happen at newlines or whitespace.

This line-terminating character is not included in line width measurements and has a special status as a non-visible character. However, lines with no whitespace are wrapped without the benefit of a line terminating character, and this distinction causes endless trouble with all of the text display code which was originally written without continuous wrap mode and always expects to wrap at a newline character.

Given the position of the end of the line, as returned by TextDEndOfLine or BufEndOfLine, this returns true if there is a line terminating character, and false if there's not. On the last character in the buffer, this function can't tell for certain whether a trailing space was used as a wrap point, and just guesses that it wasn't. So if an exact accounting is necessary, don't use this function.

References buffer(), Fl_Text_Buffer::character(), and Fl_Text_Buffer::length().

Referenced by display_insert(), and vline_length().

30.88.3.55 int Fl_Text_Display::wrapped_column (int row, int column)

Correct a column number based on an unconstrained position (as returned by TextDXYToUnconstrainedPosition) to be relative to the last actual newline in the buffer before the row and column position given, rather than the last line start created by line wrapping.

This is an adapter for rectangular selections and code written before continuous wrap mode, which thinks that the unconstrained column is the number of characters from the last newline. Obviously this is time consuming, because it involves character re-counting.

References buffer(), Fl_Text_Buffer::count_displayed_characters(), and Fl_Text_Buffer::line_start().

Referenced by in_selection().

30.88.3.56 void Fl_Text_Display::wrapped_line_counter (Fl_Text_Buffer * buf, int startPos, int maxPos, int maxLines, bool startPosIsLineStart, int styleBufOffset, int * retPos, int * retLines, int * retLineStart, int * retLineEnd, bool countLastLineMissingNewLine = true) [protected]

Count forward from startPos to either maxPos or maxLines (whichever is reached first), and return all relevant positions and line count.

The provided textBuffer may differ from the actual text buffer of the widget. In that case it must be a (partial) copy of the actual text buffer and the styleBufOffset argument must indicate the starting position of the copy, to take into account the correct style information.

Returned values:

retPos: Position where counting ended. When counting lines, the position returned is the start of the line "maxLines" lines beyond "startPos". retLines: Number of line breaks counted retLineStart: Start of the line where counting ended retLineEnd: End position of the last line traversed

References buffer(), Fl_Text_Buffer::character(), Fl_Text_Buffer::character_width(), Fl_Text_Buffer::count_displayed_characters(), Fl_Text_Buffer::length(), line_start(), measure_proportional_character(), Fl_Text_Buffer::null_substitution_character(), and Fl_Text_Buffer::tab_distance().

Referenced by count_lines(), find_line_end(), find_wrap_range(), line_end(), line_start(), measure_deleted_lines(), rewind_lines(), and skip_lines().

30.88.3.57 int Fl_Text_Display::wrapped_row (int row)

Correct a row number from an unconstrained position (as returned by TextDXYToUnconstrainedPosition) to a straight number of newlines from the top line of the display.

Because rectangular selections are based on newlines, rather than display wrapping, and anywhere a rectangular selection needs a row, it needs it in terms of un-wrapped lines.

References buffer(), and Fl_Text_Buffer::count_lines().

**30.88.3.58 int Fl_Text_Display::xy_to_position (int X, int Y, int posType = CHARACTER_POS)
[protected]**

Translate window coordinates to the nearest (insert cursor or character cell) text position.

The parameter posType specifies how to interpret the position: CURSOR_POS means translate the coordinates to the nearest cursor position, and CHARACTER_POS means return the position of the character closest to (X, Y).

References Fl_Text_Buffer::expand_character(), position_style(), string_width(), and vline_length().

Referenced by handle(), and in_selection().

30.88.3.59 void Fl_Text_Display::xy_to_rowcol (int X, int Y, int *row, int *column, int posType = CHARACTER_POS) [protected]

Translate window coordinates to the nearest row and column number for positioning the cursor.

This, of course, makes no sense when the font is proportional, since there are no absolute columns. The parameter posType specifies how to interpret the position: CURSOR_POS means translate the coordinates to the nearest position between characters, and CHARACTER_POS means translate the position to the nearest character cell.

Referenced by in_selection().

The documentation for this class was generated from the following files:

- [Fl_Text_Display.H](#)
- [Fl_Text_Display.cxx](#)

30.89 Fl_Text_Display::Style_Table_Entry Struct Reference

This structure associates the color,font,size of a string to draw with an attribute mask matching attr.

```
#include <Fl_Text_Display.H>
```

Public Attributes

- [Fl_Color](#) color
- [Fl_Font](#) font
- int size
- unsigned attr

30.89.1 Detailed Description

This structure associates the color,font,size of a string to draw with an attribute mask matching attr.

The documentation for this struct was generated from the following file:


- [Fl_Text_Display.H](#)

30.90 Fl_Text_Editor Class Reference

This is the FLTK text editor widget.

```
#include <Fl_Text_Editor.H>
```

Inheritance diagram for Fl_Text_Editor::



Classes

- struct [Key_Binding](#)
Simple linked list associating a key/state to a function.

Public Types

- [typedef int\(* Key_Func \)\(int key, Fl_Text_Editor *editor\)](#)
Key function binding callback type.

Public Member Functions

- [Fl_Text_Editor \(int X, int Y, int W, int H, const char *l=0\)](#)
The constructor creates a new text editor widget.
- [virtual int handle \(int e\)](#)
Handles the specified event.
- [void insert_mode \(int b\)](#)
Sets the current insert mode; if non-zero, new text is inserted before the current cursor position.
- [int insert_mode \(\)](#)
Gets the current insert mode; if non-zero, new text is inserted before the current cursor position.
- [void add_key_binding \(int key, int state, Key_Func f, Key_Binding **list\)](#)
Adds a key of state "state" with the function "function".
- [void add_key_binding \(int key, int state, Key_Func f\)](#)
Adds a key of state "state" with the function "function".

- void [remove_key_binding](#) (int key, int state, [Key_Binding](#) **list)
Removes the key binding associated with the key "key" of state "state".
- void [remove_key_binding](#) (int key, int state)
Removes the key binding associated with the key "key" of state "state".
- void [remove_all_key_bindings](#) ([Key_Binding](#) **list)
Removes all of the key bindings associated with the text editor or list.
- void [remove_all_key_bindings](#) ()
Removes all of the key bindings associated with the text editor or list.
- void [add_default_key_bindings](#) ([Key_Binding](#) **list)
Adds all of the default editor key bindings to the specified key binding list.
- [Key_Func bound_key_function](#) (int key, int state, [Key_Binding](#) *list)
Returns the function associated with a key binding.
- [Key_Func bound_key_function](#) (int key, int state)
Returns the function associated with a key binding.
- void [default_key_function](#) ([Key_Func](#) f)
Sets the default key function for unassigned keys.

Static Public Member Functions

- static int [kf_default](#) (int c, [Fl_Text_Editor](#) *e)
Inserts the text associated with the key.
- static int [kf_ignore](#) (int c, [Fl_Text_Editor](#) *e)
Ignores the keypress.
- static int [kf_backspace](#) (int c, [Fl_Text_Editor](#) *e)
Does a backspace in the current buffer.
- static int [kf_enter](#) (int c, [Fl_Text_Editor](#) *e)
Inserts a newline at the current cursor position.
- static int [kf_move](#) (int c, [Fl_Text_Editor](#) *e)
Moves the text cursor in the direction indicated by key c.
- static int [kf_shift_move](#) (int c, [Fl_Text_Editor](#) *e)
Extends the current selection in the direction of key c.
- static int [kf_ctrl_move](#) (int c, [Fl_Text_Editor](#) *e)
Moves the current text cursor in the direction indicated by control key.

- static int `kf_c_s_move` (int c, `Fl_Text_Editor` *e)
Extends the current selection in the direction indicated by control key c.
- static int `kf_home` (int, `Fl_Text_Editor` *e)
Moves the text cursor to the beginning of the current line.
- static int `kf_end` (int c, `Fl_Text_Editor` *e)
Moves the text cursor to the end of the current line.
- static int `kf_left` (int c, `Fl_Text_Editor` *e)
Moves the text cursor one character to the left.
- static int `kf_up` (int c, `Fl_Text_Editor` *e)
Moves the text cursor one line up.
- static int `kf_right` (int c, `Fl_Text_Editor` *e)
Moves the text cursor one character to the right.
- static int `kf_down` (int c, `Fl_Text_Editor` *e)
Moves the text cursor one line down.
- static int `kf_page_up` (int c, `Fl_Text_Editor` *e)
Moves the text cursor up one page.
- static int `kf_page_down` (int c, `Fl_Text_Editor` *e)
Moves the text cursor down one page.
- static int `kf_insert` (int c, `Fl_Text_Editor` *e)
Toggles the insert mode in the text editor.
- static int `kf_delete` (int c, `Fl_Text_Editor` *e)
Does a delete of selected text or the current character in the current buffer.
- static int `kf_copy` (int c, `Fl_Text_Editor` *e)
Does a copy of selected text or the current character in the current buffer.
- static int `kf_cut` (int c, `Fl_Text_Editor` *e)
Does a cut of selected text in the current buffer.
- static int `kf_paste` (int c, `Fl_Text_Editor` *e)
Does a paste of selected text in the current buffer.
- static int `kf_select_all` (int c, `Fl_Text_Editor` *e)
Selects all text in the current buffer.
- static int `kf_undo` (int c, `Fl_Text_Editor` *e)
Undo last edit in the current buffer.

Protected Member Functions

- int [handle_key \(\)](#)
Handles a key press in the editor.
- void [maybe_do_callback \(\)](#)
does or does not a callback according to [changed\(\)](#) and [when\(\)](#) settings

30.90.1 Detailed Description

This is the FLTK text editor widget.

It allows the user to edit multiple lines of text and supports highlighting and scrolling. The buffer that is displayed in the widget is managed by the [Fl_Text_Buffer](#) class.

30.90.2 Constructor & Destructor Documentation

30.90.2.1 [Fl_Text_Editor::Fl_Text_Editor \(int X, int Y, int W, int H, const char *l = 0\)](#)

The constructor creates a new text editor widget.

References [add_default_key_bindings\(\)](#), [default_key_function\(\)](#), and [kf_default\(\)](#).

30.90.3 Member Function Documentation

30.90.3.1 [void Fl_Text_Editor::add_default_key_bindings \(Key_Binding **list\)](#)

Adds all of the default editor key bindings to the specified key binding list.

References [add_key_binding\(\)](#).

Referenced by [Fl_Text_Editor\(\)](#).

30.90.3.2 [Key_Func Fl_Text_Editor::bound_key_function \(int key, int state\) \[inline\]](#)

Returns the function associated with a key binding.

References [bound_key_function\(\)](#).

Referenced by [bound_key_function\(\)](#).

30.90.3.3 [Fl_Text_Editor::Key_Func Fl_Text_Editor::bound_key_function \(int key, int state, Key_Binding *list\)](#)

Returns the function associated with a key binding.

References [Fl_Text_Editor::Key_Binding::function](#), [Fl_Text_Editor::Key_Binding::key](#), [Fl_Text_Editor::Key_Binding::next](#), and [Fl_Text_Editor::Key_Binding::state](#).

Referenced by [handle_key\(\)](#).

30.90.3.4 void Fl_Text_Editor::default_key_function (Key_Func *f*) [inline]

Sets the default key function for unassigned keys.

Referenced by Fl_Text_Editor().

30.90.3.5 int Fl_Text_Editor::handle (int *event*) [virtual]

Handles the specified event.

You normally don't call this method directly, but instead let FLTK do it when the user interacts with the widget.

When implemented in a new widget, this function must return 0 if the widget does not use the event or 1 otherwise.

Most of the time, you want to call the inherited [handle\(\)](#) method in your overriden method so that you don't short-circuit events that you don't handle. In this last case you should return the callee retval.

Parameters:

← *event* the kind of event received

Return values:

0 if the event was not used or understood
1 if the event was used and can be deleted

See also:

[Fl_Event](#)

Reimplemented from [Fl_Text_Display](#).

References Fl_Widget::active_r(), Fl::belowmouse(), Fl_Text_Display::buffer(), Fl_Window::cursor(), Fl_Widget::do_callback(), Fl::event_button(), Fl::event_text(), fl_beep(), FL_ENTER, FL_FOCUS, FL_HIDE, FL_KEYBOARD, FL_PASTE, FL_PUSH, FL_SHORTCUT, FL_UNFOCUS, FL_WHEN_CHANGED, FL_WHEN_RELEASE, Fl_Group::focus(), Fl_Group::handle(), handle_key(), Fl_Text_Display::insert(), insert_mode(), maybe_do_callback(), Fl_Text_Display::overstrike(), Fl::paste(), Fl_Widget::redraw(), Fl_Text_Buffer::remove_selection(), Fl_Widget::set_changed(), Fl_Text_Display::shortcut(), Fl_Text_Display::show_cursor(), Fl_Text_Display::show_insert_position(), Fl_Widget::test_shortcut(), Fl::test_shortcut(), Fl::visible_focus(), Fl_Widget::when(), and Fl_Widget::window().

30.90.3.6 int Fl_Text_Editor::insert_mode () [inline]

Gets the current insert mode; if non-zero, new text is inserted before the current cursor position.

Otherwise, new text replaces text at the current cursor position.

Referenced by handle(), and handle_key().

30.90.3.7 void Fl_Text_Editor::insert_mode (int *b*) [inline]

Sets the current insert mode; if non-zero, new text is inserted before the current cursor position.

Otherwise, new text replaces text at the current cursor position.

Referenced by kf_default(), and kf_insert().

30.90.3.8 int Fl_Text_Editor::kf_backspace (int *c*, Fl_Text_Editor * *e*) [static]

Does a backspace in the current buffer.

References Fl_Text_Display::buffer(), Fl_Widget::do_callback(), FL_WHEN_CHANGED, Fl_Text_Display::insert_position(), Fl_Text_Display::move_left(), Fl_Widget::set_changed(), Fl_Text_Display::show_insert_position(), and Fl_Widget::when().

30.90.3.9 int Fl_Text_Editor::kf_c_s_move (int *c*, Fl_Text_Editor * *e*) [static]

Extends the current selection in the direction indicated by control key *c*.

References Fl_Text_Display::insert_position(), and kf_ctrl_move().

30.90.3.10 int Fl_Text_Editor::kf_copy (int *c*, Fl_Text_Editor * *e*) [static]

Does a copy of selected text or the current character in the current buffer.

References Fl_Text_Display::buffer(), Fl::copy(), and Fl_Text_Display::show_insert_position().

Referenced by kf_cut().

30.90.3.11 int Fl_Text_Editor::kf_cut (int *c*, Fl_Text_Editor * *e*) [static]

Does a cut of selected text in the current buffer.

References Fl_Widget::do_callback(), FL_WHEN_CHANGED, kf_copy(), Fl_Widget::set_changed(), and Fl_Widget::when().

30.90.3.12 int Fl_Text_Editor::kf_delete (int *c*, Fl_Text_Editor * *e*) [static]

Does a delete of selected text or the current character in the current buffer.

References Fl_Text_Display::buffer(), Fl_Widget::do_callback(), FL_WHEN_CHANGED, Fl_Text_Display::insert_position(), Fl_Widget::set_changed(), Fl_Text_Display::show_insert_position(), and Fl_Widget::when().

30.90.3.13 int Fl_Text_Editor::kf_down (int *c*, Fl_Text_Editor * *e*) [static]

Moves the text cursor one line down.

References FL_Down, and kf_move().

30.90.3.14 int Fl_Text_Editor::kf_end (int *c*, Fl_Text_Editor * *e*) [static]

Moves the text cursor to the end of the current line.

References FL_End, and kf_move().

30.90.3.15 int Fl_Text_Editor::kf_home (int, Fl_Text_Editor * *e*) [static]

Moves the text cursor to the beginning of the current line.

References FL_Home, and kf_move().

30.90.3.16 int Fl_Text_Editor::kf_insert (int c, Fl_Text_Editor * e) [static]

Toggles the insert mode in the text editor.

References `insert_mode()`.

30.90.3.17 int Fl_Text_Editor::kf_left (int c, Fl_Text_Editor * e) [static]

Moves the text cursor one character to the left.

References `FL_Left`, and `kf_move()`.

30.90.3.18 int Fl_Text_Editor::kf_move (int c, Fl_Text_Editor * e) [static]

Moves the text cursor in the direction indicated by key c.

References `Fl_Text_Display::buffer()`, `FL_Down`, `FL_End`, `FL_Home`, `FL_Left`, `FL_Page_Down`, `FL_Page_Up`, `FL_Right`, `FL_Up`, `Fl_Text_Display::insert_position()`, `Fl_Text_Display::move_down()`, `Fl_Text_Display::move_left()`, `Fl_Text_Display::move_right()`, `Fl_Text_Display::move_up()`, and `Fl_Text_Display::show_insert_position()`.

Referenced by `kf_down()`, `kf_end()`, `kf_home()`, `kf_left()`, `kf_page_down()`, `kf_page_up()`, `kf_right()`, `kf_shift_move()`, and `kf_up()`.

30.90.3.19 int Fl_Text_Editor::kf_page_down (int c, Fl_Text_Editor * e) [static]

Moves the text cursor down one page.

References `FL_Page_Down`, and `kf_move()`.

30.90.3.20 int Fl_Text_Editor::kf_page_up (int c, Fl_Text_Editor * e) [static]

Moves the text cursor up one page.

References `FL_Page_Up`, and `kf_move()`.

30.90.3.21 int Fl_Text_Editor::kf_paste (int c, Fl_Text_Editor * e) [static]

Does a paste of selected text in the current buffer.

References `Fl_Widget::do_callback()`, `FL_WHEN_CHANGED`, `Fl::paste()`, `Fl_Widget::set_changed()`, `Fl_Text_Display::show_insert_position()`, and `Fl_Widget::when()`.

30.90.3.22 int Fl_Text_Editor::kf_right (int c, Fl_Text_Editor * e) [static]

Moves the text cursor one character to the right.

References `FL_Right`, and `kf_move()`.

30.90.3.23 int Fl_Text_Editor::kf_select_all (int c, Fl_Text_Editor * e) [static]

Selects all text in the current buffer.

References `Fl_Text_Display::buffer()`.

30.90.3.24 int Fl_Text_Editor::kf_shift_move (int c, Fl_Text_Editor * e) [static]

Extends the current selection in the direction of key c.

References Fl_Text_Display::insert_position(), and kf_move().

30.90.3.25 int Fl_Text_Editor::kf_undo (int c, Fl_Text_Editor * e) [static]

Undo last edit in the current buffer.

Also deselect previous selection.

References Fl_Text_Display::buffer(), Fl_Widget::do_callback(), FL_WHEN_CHANGED, Fl_Text_Display::insert_position(), Fl_Widget::set_changed(), Fl_Text_Display::show_insert_position(), and Fl_Widget::when().

30.90.3.26 int Fl_Text_Editor::kf_up (int c, Fl_Text_Editor * e) [static]

Moves the text cursor one line up.

References FL_Up, and kf_move().

30.90.3.27 void Fl_Text_Editor::remove_all_key_bindings () [inline]

Removes all of the key bindings associated with the text editor or list.

References remove_all_key_bindings().

Referenced by remove_all_key_bindings().

30.90.3.28 void Fl_Text_Editor::remove_all_key_bindings (Key_Binding ** list)

Removes all of the key bindings associated with the text editor or list.

References Fl_Text_Editor::Key_Binding::next.

30.90.3.29 void Fl_Text_Editor::remove_key_binding (int key, int state) [inline]

Removes the key binding associated with the key "key" of state "state".

References remove_key_binding().

Referenced by remove_key_binding().

The documentation for this class was generated from the following files:

- [Fl_Text_Editor.H](#)
- [Fl_Text_Editor.cxx](#)

30.91 Fl_Text_Editor::Key_Binding Struct Reference

Simple linked list associating a key/state to a function.

```
#include <Fl_Text_Editor.H>
```

Public Attributes

- int **key**
the key pressed
- int **state**
the state of key modifiers
- **Key_Func** function
associated function
- **Key_Binding** * **next**
next key binding in the list

30.91.1 Detailed Description

Simple linked list associating a key/state to a function.

The documentation for this struct was generated from the following file:

- [Fl_Text_Editor.H](#)

30.92 Fl_Text_Selection Class Reference

This is an internal class for [Fl_Text_Buffer](#) to manage text selections.

```
#include <Fl_Text_Buffer.H>
```

Public Member Functions

- void **set** (int start, int end)
- void **set_rectangular** (int start, int end, int rectStart, int rectEnd)
- void **update** (int pos, int nDeleted, int nInserted)

Updates an individual selection for changes in the corresponding text.

- char **rectangular** ()
- int **start** ()
- int **end** ()
- int **rect_start** ()
- int **rect_end** ()
- char **selected** ()

Returns a non-zero number if any text has been selected, or 0 if no text is selected.

- void **selected** (char b)
- int **includes** (int pos, int lineStartPos, int dispIndex)

Return true if position pos with indentation dispIndex is in the [Fl_Text_Selection](#).

- int **position** (int *start, int *end)
- int **position** (int *start, int *end, int *isRect, int *rectStart, int *rectEnd)

Protected Attributes

- char **mSelected**
- char **mRectangular**
- int **mStart**
- int **mEnd**
- int **mRectStart**
- int **mRectEnd**

Friends

- class [Fl_Text_Buffer](#)

30.92.1 Detailed Description

This is an internal class for [Fl_Text_Buffer](#) to manage text selections.

Todo

members must be documented

The documentation for this class was generated from the following files:


- [Fl_Text_Buffer.H](#)
- [Fl_Text_Buffer.cxx](#)

30.93 Fl_Tile Class Reference

The [Fl_Tile](#) class lets you resize the children by dragging the border between them:.

```
#include <Fl_Tile.H>
```

Inheritance diagram for Fl_Tile::



Public Member Functions

- int [handle](#) (int)
Handles the specified event.
- [Fl_Tile](#) (int X, int Y, int W, int H, const char *l=0)
Creates a new [Fl_Tile](#) widget using the given position, size, and label string.
- void [resize](#) (int, int, int, int)
This resizes the [Fl_Group](#) widget and all of its children.
- void [position](#) (int, int, int, int)
Drag the intersection at from_x,from_y to to_x,to_y.

30.93.1 Detailed Description

The [Fl_Tile](#) class lets you resize the children by dragging the border between them:.




Figure 30.31: Fl_Tile

For the tiling to work correctly, the children of an [Fl_Tile](#) must cover the entire area of the widget, but not overlap. This means that all children must touch each other at their edges, and no gaps can't be left inside the [Fl_Tile](#).

`FL_Tile` does not normally draw any graphics of its own. The "borders" which can be seen in the snapshot above are actually part of the children. Their boxtypes have been set to `FL_DOWN_BOX` creating the impression of "ridges" where the boxes touch. What you see are actually two adjacent `FL_DOWN_BOX`'s drawn next to each other. All neighboring widgets share the same edge - the widget's thick borders make it appear as though the widgets aren't actually touching, but they are. If the edges of adjacent widgets do not touch, then it will be impossible to drag the corresponding edges.

`FL_Tile` allows objects to be resized to zero dimensions. To prevent this you can use the `resizable()` to limit where corners can be dragged to.

Even though objects can be resized to zero sizes, they must initially have non-zero sizes so the `FL_Tile` can figure out their layout. If desired, call `position()` after creating the children but before displaying the window to set the borders where you want.

Note on `resizable(FL_Widget &w)` : The "resizable" child widget (which should be invisible) limits where the border can be dragged to. If you don't set it, it will be possible to drag the borders right to the edge, and thus resize objects on the edge to zero width or height. The `resizable()` widget is not resized by dragging any borders. See also void `FL_Group::resizable(FL_Widget &w)`

30.93.2 Constructor & Destructor Documentation

30.93.2.1 `FL_Tile::FL_Tile (int X, int Y, int W, int H, const char *l = 0)` [inline]

Creates a new `FL_Tile` widget using the given position, size, and label string.

The default boxtyle is `FL_NO_BOX`.

The destructor *also deletes all the children*. This allows a whole tree to be deleted at once, without having to keep a pointer to all the children in the user code. A kludge has been done so the `FL_Tile` and all of it's children can be automatic (local) variables, but you must declare the `FL_Tile` first, so that it is destroyed last.

30.93.3 Member Function Documentation

30.93.3.1 `int FL_Tile::handle (int event)` [virtual]

Handles the specified event.

You normally don't call this method directly, but instead let FLTK do it when the user interacts with the widget.

When implemented in a new widget, this function must return 0 if the widget does not use the event or 1 otherwise.

Most of the time, you want to call the inherited `handle()` method in your overriden method so that you don't short-circuit events that you don't handle. In this last case you should return the callee retval.

Parameters:

← *event* the kind of event received

Return values:

0 if the event was not used or understood

1 if the event was used and can be deleted

See also:

[Fl_Event](#)

Reimplemented from [Fl_Group](#).

References `Fl_Widget::active()`, `Fl_Group::array()`, `Fl_Group::children()`, `Fl_Widget::do_callback()`, `Fl::event_x()`, `Fl::event_y()`, `FL_DRAG`, `FL_ENTER`, `FL_LEAVE`, `FL_MOVE`, `FL_PUSH`, `FL_RELEASE`, `Fl_Widget::h()`, `position()`, `Fl_Group::resizable()`, `Fl_Widget::set_changed()`, `Fl_Group::sizes()`, `Fl_Widget::w()`, `Fl_Widget::x()`, and `Fl_Widget::y()`.

30.93.3.2 void Fl_Tile::position (int *oix*, int *oiy*, int *newx*, int *newy*)

Drag the intersection at `from_x,from_y` to `to_x,to_y`.

This redraws all the necessary children.

References `Fl_Group::array()`, `Fl_Group::children()`, `Fl_Widget::damage_resize()`, `Fl_Widget::h()`, `Fl_Group::resizable()`, `Fl_Group::sizes()`, `Fl_Widget::w()`, `Fl_Widget::x()`, and `Fl_Widget::y()`.

Referenced by `handle()`.

30.93.3.3 void Fl_Tile::resize (int *X*, int *Y*, int *W*, int *H*) [virtual]

This resizes the [Fl_Group](#) widget and all of its children.

The [Fl_Group](#) widget first resizes itself, and then it moves and resizes all its children according to the rules documented for `Fl_Group::resizable(Fl_Widget*)`

See also:

[Fl_Group::resizable\(Fl_Widget*\)](#)
[Fl_Group::resizable\(\)](#)
[Fl_Widget::resize\(int,int,int,int\)](#)

Reimplemented from [Fl_Group](#).

References `Fl_Group::array()`, `Fl_Group::children()`, `Fl_Widget::h()`, `Fl_Widget::resize()`, `Fl_Group::sizes()`, `Fl_Widget::w()`, `Fl_Widget::x()`, and `Fl_Widget::y()`.

The documentation for this class was generated from the following files:


- [Fl_Tile.H](#)
- [Fl_Tile.cxx](#)

30.94 Fl_Tiled_Image Class Reference

This class supports tiling of images over a specified area.

```
#include <Fl_Tiled_Image.h>
```

Inheritance diagram for Fl_Tiled_Image::



Public Member Functions

- [Fl_Tiled_Image \(Fl_Image *i, int W=0, int H=0\)](#)
The constructors create a new tiled image containing the specified image.
- virtual [~Fl_Tiled_Image \(\)](#)
The destructor frees all memory and server resources that are used by the tiled image.
- virtual [Fl_Image * copy \(int W, int H\)](#)
The [copy\(\)](#) method creates a copy of the specified image.
- [Fl_Image * copy \(\)](#)
The [copy\(\)](#) method creates a copy of the specified image.
- virtual void [color_average \(Fl_Color c, float i\)](#)
The [color_average\(\)](#) method averages the colors in the image with the FLTK color value c.
- virtual void [desaturate \(\)](#)
The [desaturate\(\)](#) method converts an image to grayscale.
- virtual void [draw \(int X, int Y, int W, int H, int cx, int cy\)](#)
The [draw\(\)](#) methods draw the image.
- void [draw \(int X, int Y\)](#)
The [draw\(\)](#) methods draw the image.
- [Fl_Image * image \(\)](#)
Gets The image that is shared.

Protected Attributes

- [Fl_Image * image_](#)
- int [alloc_image_](#)

30.94.1 Detailed Description

This class supports tiling of images over a specified area.

The source (tile) image is **not** copied unless you call the [color_average\(\)](#), [desaturate\(\)](#), or [inactive\(\)](#) methods.

30.94.2 Constructor & Destructor Documentation

30.94.2.1 Fl_Tiled_Image::Fl_Tiled_Image (`Fl_Image * i, int W = 0, int H = 0`)

The constructors create a new tiled image containing the specified image.

Use a width and height of 0 to tile the whole window/widget.

References [Fl::h\(\)](#), [Fl_Image::h\(\)](#), [Fl::w\(\)](#), and [Fl_Image::w\(\)](#).

Referenced by [copy\(\)](#).

30.94.3 Member Function Documentation

30.94.3.1 void Fl_Tiled_Image::color_average (`Fl_Color c, float i`) [virtual]

The [color_average\(\)](#) method averages the colors in the image with the FLTK color value `c`.

The `i` argument specifies the amount of the original image to combine with the color, so a value of 1.0 results in no color blend, and a value of 0.0 results in a constant image of the specified color. *The original image data is not altered by this method.*

Reimplemented from [Fl_Image](#).

References [Fl_Image::color_average\(\)](#), and [Fl_Image::copy\(\)](#).

30.94.3.2 Fl_Image* Fl_Tiled_Image::copy () [inline]

The [copy\(\)](#) method creates a copy of the specified image.

If the width and height are provided, the image is resized to the specified size. The image should be deleted (or in the case of [Fl_Shared_Image](#), released) when you are done with it.

Reimplemented from [Fl_Image](#).

References [copy\(\)](#), [Fl_Image::h\(\)](#), and [Fl_Image::w\(\)](#).

Referenced by [copy\(\)](#).

30.94.3.3 Fl_Image * Fl_Tiled_Image::copy (`int W, int H`) [virtual]

The [copy\(\)](#) method creates a copy of the specified image.

If the width and height are provided, the image is resized to the specified size. The image should be deleted (or in the case of [Fl_Shared_Image](#), released) when you are done with it.

Reimplemented from [Fl_Image](#).

References [Fl_Tiled_Image\(\)](#), [Fl_Image::h\(\)](#), and [Fl_Image::w\(\)](#).

30.94.3.4 void Fl_Tiled_Image::desaturate () [virtual]

The [desaturate\(\)](#) method converts an image to grayscale.

If the image contains an alpha channel (depth = 4), the alpha channel is preserved. *This method does not alter the original image data.*

Reimplemented from [Fl_Image](#).

References [Fl_Image::copy\(\)](#), and [Fl_Image::desaturate\(\)](#).

30.94.3.5 void Fl_Tiled_Image::draw (int X, int Y) [inline]

The [draw\(\)](#) methods draw the image.

This form specifies the upper-lefthand corner of the image

Reimplemented from [Fl_Image](#).

References [draw\(\)](#), [Fl_Image::h\(\)](#), and [Fl_Image::w\(\)](#).

Referenced by [draw\(\)](#).

30.94.3.6 void Fl_Tiled_Image::draw (int X, int Y, int W, int H, int cx, int cy) [virtual]

The [draw\(\)](#) methods draw the image.

This form specifies a bounding box for the image, with the origin (upper-lefthand corner) of the image offset by the cx and cy arguments.

Reimplemented from [Fl_Image](#).

References [Fl_Image::draw\(\)](#), [fl_clip](#), [fl_pop_clip\(\)](#), [Fl_Image::h\(\)](#), and [Fl_Image::w\(\)](#).

The documentation for this class was generated from the following files:


- [Fl_Tiled_Image.H](#)
- [Fl_Tiled_Image.cxx](#)

30.95 Fl_Timer Class Reference

This is provided only to emulate the Forms Timer widget.

```
#include <Fl_Timer.H>
```

Inheritance diagram for Fl_Timer::



Public Member Functions

- int [handle](#) (int)
Handles the specified event.
- [Fl_Timer](#) (uchar t, int x, int y, int w, int h, const char *l)
Creates a new [Fl_Timer](#) widget using the given type, position, size, and label string.
- [~Fl_Timer](#) ()
Destroys the timer and removes the timeout.
- void [value](#) (double)
Sets the current timer value.
- double [value](#) () const
See void [Fl_Timer::value\(double\)](#).
- char [direction](#) () const
Gets or sets the direction of the timer.
- void [direction](#) (char d)
Gets or sets the direction of the timer.
- char [suspended](#) () const
Gets or sets whether the timer is suspended.
- void [suspended](#) (char d)
Gets or sets whether the timer is suspended.

Protected Member Functions

- void [draw](#) ()
Draw the widget.

30.95.1 Detailed Description

This is provided only to emulate the Forms Timer widget.

It works by making a timeout callback every 1/5 second. This is wasteful and inaccurate if you just want something to happen a fixed time in the future. You should directly call [Fl::add_timeout\(\)](#) instead.

30.95.2 Constructor & Destructor Documentation

30.95.2.1 `Fl_Timer::Fl_Timer (uchar t, int X, int Y, int W, int H, const char *l)`

Creates a new [Fl_Timer](#) widget using the given type, position, size, and label string.

The type parameter can be any of the following symbolic constants:

- `FL_NORMAL_TIMER` - The timer just does the callback and displays the string "Timer" in the widget.
- `FL_VALUE_TIMER` - The timer does the callback and displays the current timer value in the widget.
- `FL_HIDDEN_TIMER` - The timer just does the callback and does not display anything.

References `Fl_Widget::align()`, `Fl_Widget::box()`, `Fl_Widget::clear_visible()`, `FL_ALIGN_LEFT`, `FL_DOWN_BOX`, `Fl_Widget::selection_color()`, and `Fl_Widget::type()`.

30.95.3 Member Function Documentation

30.95.3.1 `void Fl_Timer::direction (char d) [inline]`

Gets or sets the direction of the timer.

If the direction is zero then the timer will count up, otherwise it will count down from the initial [value\(\)](#).

30.95.3.2 `char Fl_Timer::direction () const [inline]`

Gets or sets the direction of the timer.

If the direction is zero then the timer will count up, otherwise it will count down from the initial [value\(\)](#).

30.95.3.3 `void Fl_Timer::draw () [protected, virtual]`

Draw the widget.

Never call this function directly. FLTK will schedule redrawing whenever needed. If your widget must be redrawn as soon as possible, call [redraw\(\)](#) instead.

Override this function to draw your own widgets.

Implements [Fl_Widget](#).

References `Fl_Widget::box()`, `Fl_Widget::color()`, `Fl_Widget::draw_box()`, `Fl_Widget::draw_label()`, `FL_ALIGN_CENTER`, `fl_color()`, `Fl_Widget::h()`, `Fl_Widget::labelcolor()`, `Fl_Widget::labelfont()`, `Fl_Widget::labelsize()`, `Fl_Widget::selection_color()`, `Fl_Widget::type()`, `Fl_Widget::w()`, `Fl_Widget::x()`, and `Fl_Widget::y()`.

30.95.3.4 int Fl_Timer::handle (int *event*) [virtual]

Handles the specified event.

You normally don't call this method directly, but instead let FLTK do it when the user interacts with the widget.

When implemented in a new widget, this function must return 0 if the widget does not use the event or 1 otherwise.

Most of the time, you want to call the inherited [handle\(\)](#) method in your overriden method so that you don't short-circuit events that you don't handle. In this last case you should return the callee retval.

Parameters:

← *event* the kind of event received

Return values:

0 if the event was not used or understood

1 if the event was used and can be deleted

See also:

[Fl_Event](#)

Reimplemented from [Fl_Widget](#).

References [FL_RELEASE](#), and [value\(\)](#).

30.95.3.5 void Fl_Timer::suspended (char *d*)

Gets or sets whether the timer is suspended.

References [Fl::add_timeout\(\)](#), and [Fl::remove_timeout\(\)](#).

30.95.3.6 char Fl_Timer::suspended () const [inline]

Gets or sets whether the timer is suspended.

The documentation for this class was generated from the following files:


- [Fl_Timer.H](#)
- [forms_timer.cxx](#)

30.96 Fl_Toggle_Button Class Reference

The toggle button is a push button that needs to be clicked once to toggle on, and one more time to toggle off.

```
#include <Fl_Toggle_Button.H>
```

Inheritance diagram for Fl_Toggle_Button::



Public Member Functions

- [Fl_Toggle_Button \(int X, int Y, int W, int H, const char *l=0\)](#)

Creates a new Fl_Toggle_Button widget using the given position, size, and label string.

30.96.1 Detailed Description

The toggle button is a push button that needs to be clicked once to toggle on, and one more time to toggle off.

The [Fl_Toggle_Button](#) subclass displays the "on" state by drawing a pushed-in button.

Buttons generate callbacks when they are clicked by the user. You control exactly when and how by changing the values for [type\(\)](#) and [when\(\)](#).

30.96.2 Constructor & Destructor Documentation

30.96.2.1 [Fl_Toggle_Button::Fl_Toggle_Button \(int X, int Y, int W, int H, const char * l = 0\) \[inline\]](#)

Creates a new [Fl_Toggle_Button](#) widget using the given position, size, and label string.

The inherited destructor deletes the toggle button.

References [FL_TOGGLE_BUTTON](#), and [Fl_Widget::type\(\)](#).

The documentation for this class was generated from the following file:

- [Fl_Toggle_Button.H](#)

30.97 Fl_Tooltip Class Reference

The [Fl_Tooltip](#) class provides tooltip support for all FLTK widgets.

```
#include <Fl_Tooltip.H>
```

Static Public Member Functions

- static float [delay](#) ()
Gets the tooltip delay.
- static void [delay](#) (float f)
Sets the tooltip delay.
- static float [hoverdelay](#) ()
Gets the tooltip hover delay, the delay between tooltips.
- static void [hoverdelay](#) (float f)
Sets the tooltip hover delay, the delay between tooltips.
- static int [enabled](#) ()
Returns non-zero if tooltips are enabled.
- static void [enable](#) (int b=1)
Enables tooltips on all widgets (or disables if b is false).
- static void [disable](#) ()
Same as enable(0), disables tooltips on all widgets.
- static void [enter_area](#) (Fl_Widget *w, int X, int Y, int W, int H, const char *tip)
You may be able to use this to provide tooltips for internal pieces of your widget.
- static Fl_Widget * [current](#) ()
Gets the current widget target.
- static void [current](#) (Fl_Widget *)
Sets the current widget target.
- static Fl_Font [font](#) ()
Gets the typeface for the tooltip text.
- static void [font](#) (Fl_Font i)
Sets the typeface for the tooltip text.
- static Fl_Fontsize [size](#) ()
Gets the size of the tooltip text.
- static void [size](#) (Fl_Fontsize s)
Sets the size of the tooltip text.

- static [Fl_Color color \(\)](#)
Gets the background color for tooltips.
- static void [color \(unsigned c\)](#)
Sets the background color for tooltips.
- static [Fl_Color textcolor \(\)](#)
Gets the color of the text in the tooltip.
- static void [textcolor \(unsigned c\)](#)
Sets the color of the text in the tooltip.

Static Public Attributes

- static void(* [enter](#))([Fl_Widget](#) *w) = nothing
- static void(* [exit](#))([Fl_Widget](#) *w) = nothing

Friends

- void [Fl_Widget::tooltip \(const char *\)](#)

30.97.1 Detailed Description

The [Fl_Tooltip](#) class provides tooltip support for all FLTK widgets.

It contains only static methods.

30.97.2 Member Function Documentation

30.97.2.1 static void [Fl_Tooltip::color \(unsigned c\)](#) [inline, static]

Sets the background color for tooltips.

The default background color is a pale yellow.

30.97.2.2 static [Fl_Color Fl_Tooltip::color \(\)](#) [inline, static]

Gets the background color for tooltips.

The default background color is a pale yellow.

30.97.2.3 void [Fl_Tooltip::current \(Fl_Widget * w\)](#) [static]

Sets the current widget target.

Acts as though enter(widget) was done but does not pop up a tooltip. This is useful to prevent a tooltip from reappearing when a modal overlapping window is deleted. FLTK does this automatically when you click the mouse button.

References [Fl_Widget::parent\(\)](#), and [Fl_Widget::tooltip\(\)](#).

30.97.2.4 static void Fl_Tooltip::delay (float *f*) [inline, static]

Sets the tooltip delay.

The default delay is 1.0 seconds.

30.97.2.5 static float Fl_Tooltip::delay () [inline, static]

Gets the tooltip delay.

The default delay is 1.0 seconds.

Referenced by enter_area().

30.97.2.6 static void Fl_Tooltip::disable () [inline, static]

Same as enable(0), disables tooltips on all widgets.

Referenced by Fl::arg().

30.97.2.7 static void Fl_Tooltip::enable (int *b* = 1) [inline, static]

Enables tooltips on all widgets (or disables if *b* is false).

Referenced by Fl::arg(), and Fl_Window::show().

30.97.2.8 static int Fl_Tooltip::enabled () [inline, static]

Returns non-zero if tooltips are enabled.

Referenced by enter_area().

30.97.2.9 void Fl_Tooltip::enter_area (Fl_Widget * *wid*, int *x*, int *y*, int *w*, int *h*, const char * *t*) [static]

You may be able to use this to provide tooltips for internal pieces of your widget.

Call this after setting [Fl::belowmouse\(\)](#) to your widget (because that calls the above enter() method). Then figure out what thing the mouse is pointing at, and call this with the widget (this pointer is used to remove the tooltip if the widget is deleted or hidden, and to locate the tooltip), the rectangle surrounding the area, relative to the top-left corner of the widget (used to calculate where to put the tooltip), and the text of the tooltip (which must be a pointer to static data as it is not copied).

References Fl::add_timeout(), delay(), enabled(), hoverdelay(), and Fl::remove_timeout().

30.97.2.10 static void Fl_Tooltip::font (Fl_Font *i*) [inline, static]

Sets the typeface for the tooltip text.

30.97.2.11 static Fl_Font Fl_Tooltip::font () [inline, static]

Gets the typeface for the tooltip text.

30.97.2.12 static void Fl_Tooltip::hoverdelay (float *f*) [inline, static]

Sets the tooltip hover delay, the delay between tooltips.

The default delay is 0.2 seconds.

30.97.2.13 static float Fl_Tooltip::hoverdelay () [inline, static]

Gets the tooltip hover delay, the delay between tooltips.

The default delay is 0.2 seconds.

Referenced by enter_area().

30.97.2.14 static void Fl_Tooltip::size (Fl_Fontsize *s*) [inline, static]

Sets the size of the tooltip text.

30.97.2.15 static Fl_Fontsize Fl_Tooltip::size () [inline, static]

Gets the size of the tooltip text.

30.97.2.16 static void Fl_Tooltip::textcolor (unsigned *c*) [inline, static]

Sets the color of the text in the tooltip.

The default is black.

30.97.2.17 static Fl_Color Fl_Tooltip::textcolor () [inline, static]

Gets the color of the text in the tooltip.

The default is black.

The documentation for this class was generated from the following files:


- [Fl_Tooltip.H](#)
- Fl.cxx
- Fl_Tooltip.cxx

30.98 Fl_Valuator Class Reference

The [Fl_Valuator](#) class controls a single floating-point value and provides a consistent interface to set the value, range, and step, and insures that callbacks are done the same for every object.

```
#include <Fl_Valuator.h>
```

Inheritance diagram for Fl_Valuator::

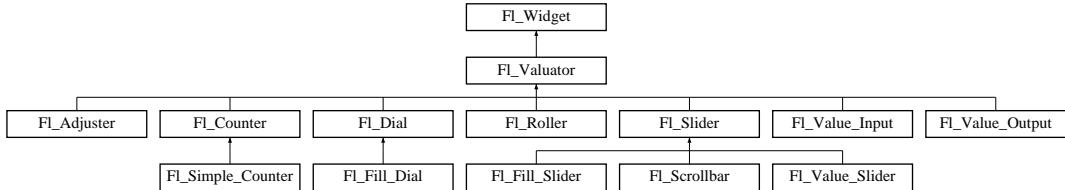

Public Member Functions

- void [bounds](#) (double a, double b)
Sets the minimum (a) and maximum (b) values for the valuator widget.
- double [minimum](#) () const
Gets the minimum value for the valuator.
- void [minimum](#) (double a)
Sets the minimum value for the valuator.
- double [maximum](#) () const
Gets the maximum value for the valuator.
- void [maximum](#) (double a)
Sets the maximum value for the valuator.
- void [range](#) (double a, double b)
Sets the minimum and maximum values for the valuator.
- void [step](#) (int a)
See double [Fl_Valuator::step\(\)](#) const.
- void [step](#) (double a, int b)
See double [Fl_Valuator::step\(\)](#) const.
- void [step](#) (double s)
See double [Fl_Valuator::step\(\)](#) const.
- double [step](#) () const
Gets or sets the step value.
- void [precision](#) (int)
Sets the step value to 1/10^{digits}.

- **double value () const**
Gets the floating point(double) value.
- **int value (double)**
Sets the current value.
- **virtual int format (char *)**
Uses internal rules to format the fields numerical value into the character array pointed to by the passed parameter.
- **double round (double)**
Round the passed value to the nearest step increment.
- **double clamp (double)**
Clamps the passed value to the valuator range.
- **double increment (double, int)**
Adds n times the step value to the passed value.

Protected Member Functions

- **int horizontal () const**
Tells if the valuator is an FL_HORIZONTAL one.
- **FL_Valuator (int X, int Y, int W, int H, const char *L)**
Creates a new [FL_Valuator](#) widget using the given position, size, and label string.
- **double previous_value () const**
Gets the previous floating point value before an event changed it.
- **void handle_push ()**
Stores the current value in the previous value.
- **double softclamp (double)**
Clamps the value, but accepts v if the previous value is not already out of range.
- **void handle_drag (double newvalue)**
Called during a drag operation, after an FL_WHEN_CHANGED event is received and before the callback.
- **void handle_release ()**
Called after an FL_WHEN_RELEASE event is received and before the callback.
- **virtual void value_damage ()**
Asks for partial redraw.
- **void set_value (double v)**
Sets the current floating point value.

30.98.1 Detailed Description

The [Fl_Valuator](#) class controls a single floating-point value and provides a consistent interface to set the value, range, and step, and insures that callbacks are done the same for every object.

There are probably more of these classes in FLTK than any others:

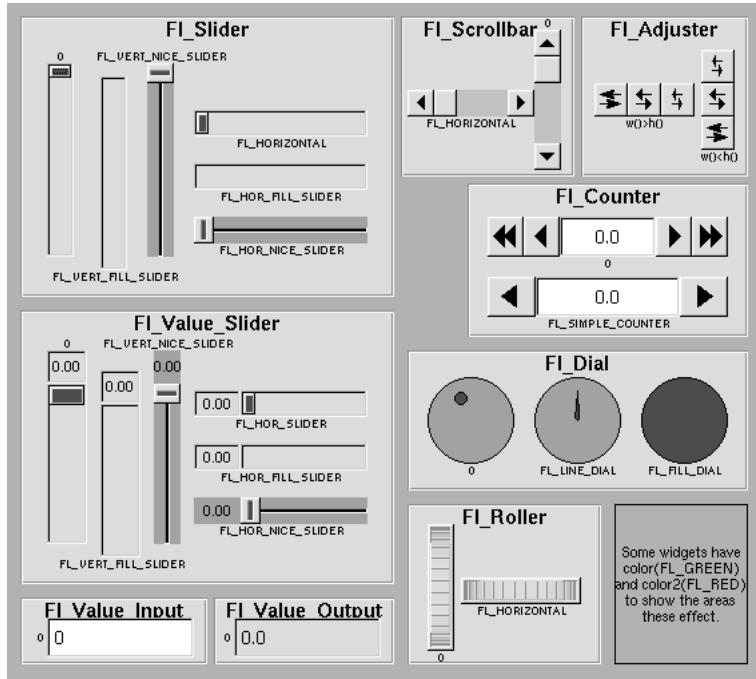


Figure 30.32: Valuators derived from [Fl_Valuator](#)

In the above diagram each box surrounds an actual subclass. These are further differentiated by setting the [type\(\)](#) of the widget to the symbolic value labeling the widget. The ones labelled "0" are the default versions with a type(0). For consistency the symbol `FL_VERTICAL` is defined as zero.

30.98.2 Constructor & Destructor Documentation

30.98.2.1 [Fl_Valuator::Fl_Valuator \(int X, int Y, int W, int H, const char * L\)](#) [protected]

Creates a new [Fl_Valuator](#) widget using the given position, size, and label string.

The default boxtyle is `FL_NO_BOX`.

References `Fl_Widget::align()`, `FL_ALIGN_BOTTOM`, `FL_WHEN_CHANGED`, and `Fl_Widget::when()`.

30.98.3 Member Function Documentation

30.98.3.1 [void Fl_Valuator::bounds \(double a, double b\)](#) [inline]

Sets the minimum (a) and maximum (b) values for the valuator widget.

Reimplemented in [Fl_Slider](#).

Referenced by Fl_Counter::Fl_Counter().

30.98.3.2 double Fl_Valuator::clamp (double v)

Clamps the passed value to the valuator range.

Referenced by Fl_Value_Output::handle(), Fl_Value_Input::handle(), Fl_Scrollbar::handle(), Fl_Roller::handle(), Fl_Dial::handle(), Fl_Counter::handle(), and Fl_Adjuster::handle().

30.98.3.3 int Fl_Valuator::format (char * buffer) [virtual]

Uses internal rules to format the fields numerical value into the character array pointed to by the passed parameter.

The actual format used depends on the current step value. If the step value has been set to zero then a g format is used. If the step value is non-zero, then a %.*f format is used, where the precision is calculated to show sufficient digits for the current step value. An integer step value, such as 1 or 1.0, gives a precision of 0, so the formatted value will appear as an integer.

This method is used by the Fl_Value.... group of widgets to format the current value into a text string. The return value is the length of the formatted text. The formatted value is written into in *buffer*. *buffer* should have space for at least 128 bytes.

You may override this function to create your own text formatting.

References value().

Referenced by Fl_Value_Slider::draw(), Fl_Value_Output::draw(), and Fl_Counter::draw().

30.98.3.4 void Fl_Valuator::handle_drag (double v) [protected]

Called during a drag operation, after an FL_WHEN_CHANGED event is received and before the callback.

References Fl_Widget::do_callback(), FL_WHEN_CHANGED, Fl_Widget::set_changed(), value_damage(), and Fl_Widget::when().

Referenced by Fl_Value_Output::handle(), Fl_Value_Input::handle(), Fl_Scrollbar::handle(), Fl_Roller::handle(), Fl_Dial::handle(), Fl_Counter::handle(), and Fl_Adjuster::handle().

30.98.3.5 void Fl_Valuator::handle_release () [protected]

Called after an FL_WHEN_RELEASE event is received and before the callback.

References Fl_Widget::clear_changed(), Fl_Widget::do_callback(), FL_WHEN_NOT_CHANGED, FL_WHEN_RELEASE, and Fl_Widget::when().

Referenced by Fl_Value_Output::handle(), Fl_Value_Input::handle(), Fl_Scrollbar::handle(), Fl_Roller::handle(), Fl_Dial::handle(), Fl_Counter::handle(), and Fl_Adjuster::handle().

30.98.3.6 double Fl_Valuator::increment (double v, int n)

Adds n times the step value to the passed value.

If step was set to zero it uses fabs(maximum() - minimum()) / 100.

Referenced by Fl_Value_Output::handle(), Fl_Value_Input::handle(), Fl_Roller::handle(), Fl_Counter::handle(), and Fl_Adjuster::handle().

30.98.3.7 void Fl_Valuator::maximum (double *a*) [inline]

Sets the maximum value for the valuator.

30.98.3.8 double Fl_Valuator::maximum () const [inline]

Gets the maximum value for the valuator.

Referenced by Fl_Slider::bounds(), Fl_Dial::draw(), Fl_Scrollbar::handle(), and Fl_Dial::handle().

30.98.3.9 void Fl_Valuator::minimum (double *a*) [inline]

Sets the minimum value for the valuator.

30.98.3.10 double Fl_Valuator::minimum () const [inline]

Gets the minimum value for the valuator.

Referenced by Fl_Slider::bounds(), Fl_Dial::draw(), Fl_Scrollbar::handle(), and Fl_Dial::handle().

30.98.3.11 void Fl_Valuator::precision (int *p*)

Sets the step value to $1/10^{\text{digits}}$.

30.98.3.12 void Fl_Valuator::range (double *a*, double *b*) [inline]

Sets the minimum and maximum values for the valuator.

When the user manipulates the widget, the value is limited to this range. This clamping is done *after* rounding to the step value (this makes a difference if the range is not a multiple of the step).

The minimum may be greater than the maximum. This has the effect of "reversing" the object so the larger values are in the opposite direction. This also switches which end of the filled sliders is filled.

Some widgets consider this a "soft" range. This means they will stop at the range, but if the user releases and grabs the control again and tries to move it further, it is allowed.

The range may affect the display. You must [redraw\(\)](#) the widget after changing the range.

30.98.3.13 double Fl_Valuator::round (double *v*)

Round the passed value to the nearest step increment.

Does nothing if step is zero.

Referenced by Fl_Value_Output::handle(), Fl_Value_Input::handle(), Fl_Roller::handle(), and Fl_Dial::handle().

30.98.3.14 void Fl_Valuator::set_value (double *v*) [inline, protected]

Sets the current floating point value.

30.98.3.15 double Fl_Valuator::step () const [inline]

Gets or sets the step value.

As the user moves the mouse the value is rounded to the nearest multiple of the step value. This is done *before* clamping it to the range. For most widgets the default step is zero.

For precision the step is stored as the ratio of two integers, A/B. You can set these integers directly. Currently setting a floating point value sets the nearest A/1 or 1/B value possible.

Referenced by Fl_Roller::draw(), Fl_Adjuster::Fl_Adjuster(), Fl_Counter::Fl_Counter(), Fl_Roller::Fl_Roller(), Fl_Scrollbar::Fl_Scrollbar(), Fl_Value_Slider::Fl_Value_Slider(), Fl_Value_Output::handle(), Fl_Value_Input::handle(), Fl_Slider::scrollvalue(), and Fl_Counter::step().

30.98.3.16 int Fl_Valuator::value (double v)

Sets the current value.

The new value is *not* clamped or otherwise changed before storing it. Use [clamp\(\)](#) or [round\(\)](#) to modify the value before calling [value\(\)](#). The widget is redrawn if the new value is different than the current one. The initial value is zero.

[changed\(\)](#) will return true if the user has moved the slider, but it will be turned off by [value\(x\)](#) and just before doing a callback (the callback can turn it back on if desired).

References Fl_Widget::clear_changed(), and [value_damage\(\)](#).

30.98.3.17 double Fl_Valuator::value () const [inline]

Gets the floating point(double) value.

See int [value\(double\)](#)

Referenced by Fl_Roller::draw(), Fl_Dial::draw(), format(), Fl_Value_Input::handle(), Fl_Roller::handle(), Fl_Dial::handle(), Fl_Counter::handle(), Fl_Adjuster::handle(), Fl_Slider::scrollvalue(), and Fl_Scrollbar::value().

The documentation for this class was generated from the following files:


- [Fl_Valuator.H](#)
- [Fl_Valuator.cxx](#)

30.99 Fl_Value_Input Class Reference

The [Fl_Value_Input](#) widget displays a numeric value.

```
#include <Fl_Value_Input.h>
```

Inheritance diagram for [Fl_Value_Input](#):



Public Member Functions

- int [handle](#) (int)
Handles the specified event.
- void [draw](#) ()
Draw the widget.
- void [resize](#) (int x, int y, int w, int h, const char *l=0)
Change the size or position of the widget.
- [Fl_Value_Input](#) (int x, int y, int w, int h, const char *l=0)
Creates a new [Fl_Value_Input](#) widget using the given position, size, and label string.
- void [soft](#) (char s)
See void [Fl_Value_Input::soft\(char s\)](#).
- char [soft](#) () const
If "soft" is turned on, the user is allowed to drag the value outside the range.
- int [shortcut](#) () const
The first form returns the current shortcut key for the Input.
- void [shortcut](#) (int s)
See int [Fl_Value_Input::shortcut\(\) const](#).
- [Fl_Font](#) [textfont](#) () const
Gets the typeface of the text in the value box.
- void [textfont](#) ([Fl_Font](#) s)
Sets the typeface of the text in the value box.
- [Fl_Fontsize](#) [textsize](#) () const
Gets the size of the text in the value box.

- void `textsize (Fl_Fontsize s)`

Sets the size of the text in the value box.

- `Fl_Color textcolor () const`

Gets the color of the text in the value box.

- void `textcolor (unsigned n)`

Sets the color of the text in the value box.

- `Fl_Color cursor_color () const`

Gets the color of the text cursor.

- void `cursor_color (unsigned n)`

Sets the color of the text cursor.

Public Attributes

- `Fl_Input input`

30.99.1 Detailed Description

The `Fl_Value_Input` widget displays a numeric value.

The user can click in the text field and edit it - there is in fact a hidden `Fl_Input` widget with type(`FL_FLOAT_INPUT`) or type(`FL_INT_INPUT`) in there - and when they hit return or tab the value updates to what they typed and the callback is done.

If `step()` is non-zero and integral, then the range of numbers is limited to integers instead of floating point numbers. As well as displaying the value as an integer, typed input is also limited to integer values, even if the hidden `Fl_Input` widget is of type(`FL_FLOAT_INPUT`).

If `step()` is non-zero, the user can also drag the mouse across the object and thus slide the value. The left button moves one `step()` per pixel, the middle by 10 `step()`, and the right button by 100 * `step()`. It is therefore impossible to select text by dragging across it, although clicking can still move the insertion cursor.

If `step()` is non-zero and integral, then the range of numbers are limited to integers instead of floating point values.



Figure 30.33: Fl_Value_Input

30.99.2 Constructor & Destructor Documentation

30.99.2.1 Fl_Value_Input::Fl_Value_Input (int X, int Y, int W, int H, const char * l = 0)

Creates a new [Fl_Value_Input](#) widget using the given position, size, and label string.

The default boxtyle is FL_DOWN_BOX.

References [Fl_Widget::align\(\)](#), [Fl_Widget::box\(\)](#), [Fl_Widget::callback\(\)](#), [Fl_Widget::color\(\)](#), [FL_ALIGN_LEFT](#), [FL_WHEN_CHANGED](#), [Fl_Widget::parent\(\)](#), [Fl_Widget::selection_color\(\)](#), [Fl_Widget::set_flag\(\)](#), [Fl_Widget::SHORTCUT_LABEL](#), and [Fl_Widget::when\(\)](#).

30.99.3 Member Function Documentation

30.99.3.1 void Fl_Value_Input::cursor_color (unsigned n) [inline]

Sets the color of the text cursor.

The text cursor is black by default.

30.99.3.2 Fl_Color Fl_Value_Input::cursor_color () const [inline]

Gets the color of the text cursor.

The text cursor is black by default.

30.99.3.3 void Fl_Value_Input::draw () [virtual]

Draw the widget.

Never call this function directly. FLTK will schedule redrawing whenever needed. If your widget must be redrawn as soon as possible, call [redraw\(\)](#) instead.

Override this function to draw your own widgets.

Implements [Fl_Widget](#).

References [Fl_Widget::box\(\)](#), [Fl_Widget::clear_damage\(\)](#), [Fl_Widget::color\(\)](#), [Fl_Widget::damage\(\)](#), [Fl_Input::draw\(\)](#), and [Fl_Widget::selection_color\(\)](#).

30.99.3.4 int Fl_Value_Input::handle (int *event*) [virtual]

Handles the specified event.

You normally don't call this method directly, but instead let FLTK do it when the user interacts with the widget.

When implemented in a new widget, this function must return 0 if the widget does not use the event or 1 otherwise.

Most of the time, you want to call the inherited [handle\(\)](#) method in your overriden method so that you don't short-circuit events that you don't handle. In this last case you should return the callee retval.

Parameters:

$\leftarrow \text{event}$ the kind of event received

Return values:

0 if the event was not used or understood

1 if the event was used and can be deleted

See also:

[Fl_Event](#)

Reimplemented from [Fl_Widget](#).

References [Fl_Valuator::clamp\(\)](#), [Fl::event_button\(\)](#), [Fl::event_is_click\(\)](#), [Fl::event_x_root\(\)](#), [FL_DRAG](#), [FL_FOCUS](#), [FL_PUSH](#), [FL_RELEASE](#), [FL_SHORTCUT](#), [Fl_Input::handle\(\)](#), [Fl_Valuator::handle_drag\(\)](#), [Fl_Valuator::handle_push\(\)](#), [Fl_Valuator::handle_release\(\)](#), [Fl_Valuator::increment\(\)](#), [Fl_Valuator::previous_value\(\)](#), [Fl_Valuator::round\(\)](#), [soft\(\)](#), [Fl_Valuator::softclamp\(\)](#), [Fl_Valuator::step\(\)](#), [Fl_Widget::take_focus\(\)](#), [Fl_Widget::type\(\)](#), [Fl_Valuator::value\(\)](#), and [Fl_Widget::when\(\)](#).

30.99.3.5 void Fl_Value_Input::resize (int *x*, int *y*, int *w*, int *h*) [virtual]

Change the size or position of the widget.

This is a virtual function so that the widget may implement its own handling of resizing. The default version does *not* call the [redraw\(\)](#) method, but instead relies on the parent widget to do so because the parent may know a faster way to update the display, such as scrolling from the old position.

Some window managers under X11 call [resize\(\)](#) a lot more often than needed. Please verify that the position or size of a widget did actually change before doing any extensive calculations.

`position(x,y)` is a shortcut for `resize(x,y,w(),h())`, and `size(w,h)` is a shortcut for `resize(x(),y(),w,h)`.

Parameters:

← *x,y* new position relative to the parent window
← *w,h* new size

See also:

[position\(int, int\)](#), [size\(int, int\)](#)

Reimplemented from [Fl_Widget](#).

References [Fl_Input_::resize\(\)](#).

30.99.3.6 int Fl_Value_Input::shortcut () const [inline]

The first form returns the current shortcut key for the Input.

The second form sets the shortcut key to key. Setting this overrides the use of '&' in the [label\(\)](#). The value is a bitwise OR of a key and a set of shift flags, for example `FL_ALT | 'a'`, `FL_ALT | (FL_F + 10)`, or just '`a`'. A value of 0 disables the shortcut.

The key can be any value returned by [Fl::event_key\(\)](#), but will usually be an ASCII letter. Use a lower-case letter unless you require the shift key to be held down.

The shift flags can be any set of values accepted by [Fl::event_state\(\)](#). If the bit is on that shift key must be pushed. Meta, Alt, Ctrl, and Shift must be off if they are not in the shift flags (zero for the other bits indicates a "don't care" setting).

30.99.3.7 char Fl_Value_Input::soft () const [inline]

If "soft" is turned on, the user is allowed to drag the value outside the range.

If they drag the value to one of the ends, let go, then grab again and continue to drag, they can get to any value. The default is true.

Referenced by [handle\(\)](#).

30.99.3.8 void Fl_Value_Input::textcolor (unsigned *n*) [inline]

Sets the color of the text in the value box.

30.99.3.9 Fl_Color Fl_Value_Input::textcolor () const [inline]

Gets the color of the text in the value box.

30.99.3.10 void Fl_Value_Input::textfont (Fl_Font *s*) [inline]

Sets the typeface of the text in the value box.

30.99.3.11 Fl_Font Fl_Value_Input::textfont () const [inline]

Gets the typeface of the text in the value box.

30.99.3.12 void Fl_Value_Input::textsize (Fl_Fontsize s) [inline]

Sets the size of the text in the value box.

30.99.3.13 Fl_Fontsize Fl_Value_Input::textsize () const [inline]

Gets the size of the text in the value box.

The documentation for this class was generated from the following files:


- [Fl_Value_Input.H](#)
- [Fl_Value_Input.cxx](#)

30.100 Fl_Value_Output Class Reference

The [Fl_Value_Output](#) widget displays a floating point value.

```
#include <Fl_Value_Output.H>
```

Inheritance diagram for Fl_Value_Output::



Public Member Functions

- **int handle (int)**
Handles the specified event.
- **void draw ()**
Draw the widget.
- **Fl_Value_Output (int x, int y, int w, int h, const char *l=0)**
Creates a new [Fl_Value_Output](#) widget using the given position, size, and label string.
- **void soft (uchar s)**
If "soft" is turned on, the user is allowed to drag the value outside the range.
- **uchar soft () const**
If "soft" is turned on, the user is allowed to drag the value outside the range.
- **Fl_Font textfont () const**
Gets the typeface of the text in the value box.
- **void textfont (Fl_Font s)**
Sets the typeface of the text in the value box.
- **Fl_Fontsize fontsize () const**
Gets the size of the text in the value box.
- **void fontsize (Fl_Fontsize s)**
- **Fl_Color textcolor () const**
Sets the color of the text in the value box.
- **void textcolor (unsigned s)**
Gets the color of the text in the value box.

30.100.1 Detailed Description

The [Fl_Value_Output](#) widget displays a floating point value.

If `step()` is not zero, the user can adjust the value by dragging the mouse left and right. The left button moves one `step()` per pixel, the middle by $10 * \text{step}()$, and the right button by $100 * \text{step}()$.

This is much lighter-weight than [Fl_Value_Input](#) because it contains no text editing code or character buffer.

Figure 30.34: Fl_Value_Output

30.100.2 Constructor & Destructor Documentation

30.100.2.1 `Fl_Value_Output::Fl_Value_Output (int X, int Y, int W, int H, const char * l = 0)`

Creates a new [Fl_Value_Output](#) widget using the given position, size, and label string.

The default boxtyle is `FL_NO_BOX`.

Inherited destructor destroys the Valuator.

References `Fl_Widget::align()`, `Fl_Widget::box()`, `FL_ALIGN_LEFT`, `FL_FOREGROUND_COLOR`, `FL_HELVETICA`, `FL_NO_BOX`, and `FL_NORMAL_SIZE`.

30.100.3 Member Function Documentation

30.100.3.1 void Fl_Value_Output::draw () [virtual]

Draw the widget.

Never call this function directly. FLTK will schedule redrawing whenever needed. If your widget must be redrawn as soon as possible, call [redraw\(\)](#) instead.

Override this function to draw your own widgets.

Implements [Fl_Widget](#).

References `Fl_Widget::active_r()`, `Fl_Widget::box()`, `Fl::box_dh()`, `Fl::box_dw()`, `Fl::box_dx()`, `Fl::box_dy()`, `Fl_Widget::color()`, `Fl_Widget::damage()`, `Fl_Widget::draw_box()`, `FL_ALIGN_LEFT`, `fl_color()`, `FL_DOWN_BOX`, `fl_rectf()`, `Fl_Valuator::format()`, `Fl_Widget::h()`, `textcolor()`, `textfont()`, `textsize()`, `Fl_Widget::w()`, `Fl_Widget::x()`, and `Fl_Widget::y()`.

30.100.3.2 int Fl_Value_Output::handle (int *event*) [virtual]

Handles the specified event.

You normally don't call this method directly, but instead let FLTK do it when the user interacts with the widget.

When implemented in a new widget, this function must return 0 if the widget does not use the event or 1 otherwise.

Most of the time, you want to call the inherited [handle\(\)](#) method in your overriden method so that you don't short-circuit events that you don't handle. In this last case you should return the callee retval.

Parameters:

← *event* the kind of event received

Return values:

0 if the event was not used or understood

1 if the event was used and can be deleted

See also:

[Fl_Event](#)

Reimplemented from [Fl_Widget](#).

References `Fl_Valuator::clamp()`, `Fl::event_button()`, `Fl::event_x()`, `FL_DRAG`, `FL_ENTER`, `FL_LEAVE`, `FL_PUSH`, `FL_RELEASE`, `Fl_Valuator::handle_drag()`, `Fl_Valuator::handle_push()`, `Fl_Valuator::handle_release()`, `Fl_Valuator::increment()`, `Fl_Valuator::previous_value()`, `Fl_Valuator::round()`, `soft()`, `Fl_Valuator::softclamp()`, and `Fl_Valuator::step()`.

30.100.3.3 uchar Fl_Value_Output::soft () const [inline]

If "soft" is turned on, the user is allowed to drag the value outside the range.

If they drag the value to one of the ends, let go, then grab again and continue to drag, they can get to any value. Default is one.

Referenced by [handle\(\)](#).

30.100.3.4 void Fl_Value_Output::soft (uchar s) [inline]

If "soft" is turned on, the user is allowed to drag the value outside the range.

If they drag the value to one of the ends, let go, then grab again and continue to drag, they can get to any value. Default is one.

30.100.3.5 void Fl_Value_Output::textcolor (unsigned s) [inline]

Gets the color of the text in the value box.

30.100.3.6 Fl_Color Fl_Value_Output::textcolor () const [inline]

Sets the color of the text in the value box.

Referenced by draw().

30.100.3.7 void Fl_Value_Output::textfont (Fl_Font s) [inline]

Sets the typeface of the text in the value box.

30.100.3.8 Fl_Font Fl_Value_Output::textfont () const [inline]

Gets the typeface of the text in the value box.

Referenced by draw().

30.100.3.9 Fl_Fontsize Fl_Value_Output::textsize () const [inline]

Gets the size of the text in the value box.

Referenced by draw().

The documentation for this class was generated from the following files:


- [Fl_Value_Output.H](#)
- [Fl_Value_Output.cxx](#)

30.101 Fl_Value_Slider Class Reference

The [Fl_Value_Slider](#) widget is a [Fl_Slider](#) widget with a box displaying the current value.

```
#include <Fl_Value_Slider.H>
```

Inheritance diagram for Fl_Value_Slider::



Public Member Functions

- void [draw \(\)](#)

Draw the widget.

- int [handle \(int\)](#)

Handles the specified event.

- [Fl_Value_Slider \(int x, int y, int w, int h, const char *l=0\)](#)

Creates a new [Fl_Value_Slider](#) widget using the given position, size, and label string.

- [Fl_Font textfont \(\) const](#)

Gets the typeface of the text in the value box.

- void [textfont \(Fl_Font s\)](#)

Sets the typeface of the text in the value box.

- [Fl_Fontsize textsize \(\) const](#)

Gets the size of the text in the value box.

- void [textsize \(Fl_Fontsize s\)](#)

Sets the size of the text in the value box.

- [Fl_Color textcolor \(\) const](#)

Gets the color of the text in the value box.

- void [textcolor \(unsigned s\)](#)

Sets the color of the text in the value box.

30.101.1 Detailed Description

The [Fl_Value_Slider](#) widget is a [Fl_Slider](#) widget with a box displaying the current value.

Figure 30.35: Fl_Value_Slider

30.101.2 Constructor & Destructor Documentation

30.101.2.1 [Fl_Value_Slider::Fl_Value_Slider \(int X, int Y, int W, int H, const char *l = 0\)](#)

Creates a new [Fl_Value_Slider](#) widget using the given position, size, and label string.

The default boxtyle is FL_DOWN_BOX.

References FL_FOREGROUND_COLOR, FL_HELVETICA, and [Fl_Valuator::step\(\)](#).

30.101.3 Member Function Documentation

30.101.3.1 [void Fl_Value_Slider::draw \(\) \[virtual\]](#)

Draw the widget.

Never call this function directly. FLTK will schedule redrawing whenever needed. If your widget must be redrawn as soon as possible, call [redraw\(\)](#) instead.

Override this function to draw your own widgets.

Reimplemented from [Fl_Slider](#).

References [Fl_Widget::active_r\(\)](#), [Fl_Widget::box\(\)](#), [Fl::box_dh\(\)](#), [Fl::box_dw\(\)](#), [Fl::box_dx\(\)](#), [Fl::box_dy\(\)](#), [Fl_Widget::color\(\)](#), [Fl_Widget::damage\(\)](#), [Fl_Widget::draw_box\(\)](#), [FL_ALIGN_CLIP](#), [fl_color\(\)](#), [Fl_Valuator::format\(\)](#), [Fl_Widget::h\(\)](#), [Fl_Valuator::horizontal\(\)](#), [textcolor\(\)](#), [textfont\(\)](#), [textsize\(\)](#), [Fl_Widget::w\(\)](#), [Fl_Widget::x\(\)](#), and [Fl_Widget::y\(\)](#).

30.101.3.2 [int Fl_Value_Slider::handle \(int event\) \[virtual\]](#)

Handles the specified event.

You normally don't call this method directly, but instead let FLTK do it when the user interacts with the widget.

When implemented in a new widget, this function must return 0 if the widget does not use the event or 1 otherwise.

Most of the time, you want to call the inherited [handle\(\)](#) method in your overriden method so that you don't short-circuit events that you don't handle. In this last case you should return the callee retval.

Parameters:

← *event* the kind of event received

Return values:

0 if the event was not used or understood

1 if the event was used and can be deleted

See also:

[Fl_Event](#)

Reimplemented from [Fl_Slider](#).

References [Fl_Widget::box\(\)](#), [Fl::box_dh\(\)](#), [Fl::box_dw\(\)](#), [Fl::box_dx\(\)](#), [Fl::box_dy\(\)](#), [FL_PUSH](#), [Fl::focus\(\)](#), [Fl_Widget::h\(\)](#), [Fl_Valuator::horizontal\(\)](#), [Fl_Widget::redraw\(\)](#), [Fl::visible_focus\(\)](#), [Fl_Widget::w\(\)](#), [Fl_Widget::x\(\)](#), and [Fl_Widget::y\(\)](#).

30.101.3.3 void Fl_Value_Slider::textcolor (unsigned *s*) [inline]

Sets the color of the text in the value box.

30.101.3.4 Fl_Color Fl_Value_Slider::textcolor () const [inline]

Gets the color of the text in the value box.

Referenced by [draw\(\)](#).

30.101.3.5 void Fl_Value_Slider::textfont (Fl_Font *s*) [inline]

Sets the typeface of the text in the value box.

30.101.3.6 Fl_Font Fl_Value_Slider::textfont () const [inline]

Gets the typeface of the text in the value box.

Referenced by [draw\(\)](#).

30.101.3.7 void Fl_Value_Slider::textsize (Fl_Fontsize *s*) [inline]

Sets the size of the text in the value box.

30.101.3.8 Fl_Fontsize Fl_Value_Slider::textsize () const [inline]

Gets the size of the text in the value box.

Referenced by draw().

The documentation for this class was generated from the following files:


- [Fl_Value_Slider.H](#)
- [Fl_Value_Slider.cxx](#)

30.102 Fl_Widget Class Reference

[Fl_Widget](#) is the base class for all widgets in FLTK.

```
#include <Fl_Widget.h>
```

Inheritance diagram for Fl_Widget::

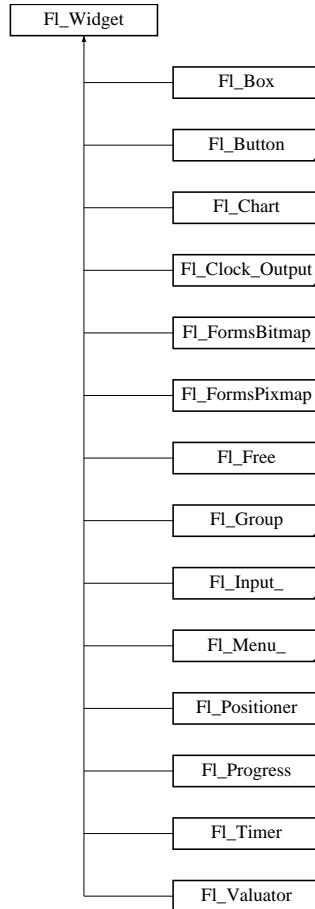

Public Member Functions

- virtual [~Fl_Widget \(\)](#)
Destroys the widget.
- virtual void [draw \(\)=0](#)
Draw the widget.
- virtual int [handle \(int event\)](#)
Handles the specified event.
- [Fl_Group * parent \(\) const](#)
Returns a pointer to the parent widget.

- void **parent** (**Fl_Group** *p)
Internal use only.
- **uchar type** () const
Gets the widget type.
- void **type** (uchar t)
Sets the widget type.
- int **x** () const
Gets the widget position in its window.
- int **y** () const
Gets the widget position in its window.
- int **w** () const
Gets the widget width.
- int **h** () const
Gets the widget height.
- virtual void **resize** (int x, int y, int w, int h)
Change the size or position of the widget.
- int **damage_resize** (int, int, int, int)
Internal use only.
- void **position** (int X, int Y)
Reposition the window or widget.
- void **size** (int W, int H)
Change the size of the widget.
- **Fl_Align align** () const
Gets the label alignment.
- void **align** (**Fl_Align** alignment)
Sets the label alignment.
- **Fl_Boxtype box** () const
Gets the box type for the widget.
- void **box** (**Fl_Boxtype** new_box)
Sets the box type for the widget.
- **Fl_Color color** () const
Gets the background color of the widget.
- void **color** (unsigned bg)
Sets the background color of the widget.

- **Fl_Color selection_color () const**
Gets the selection color.
- **void selection_color (unsigned a)**
Gets or sets the selection color.
- **void color (unsigned bg, unsigned sel)**
Sets the background and selection color of the widget.
- **const char * label () const**
Get the current label text.
- **void label (const char *text)**
Get or set the current label pointer.
- **void copy_label (Fl_CString new_label)**
Sets the current label.
- **void label (Fl_Labeltype a, const char *b)**
Shortcut to set the label text and type in one call.
- **Fl_Labeltype labeltype () const**
Gets the label type.
- **void labeltype (Fl_Labeltype a)**
Sets the label type.
- **Fl_Color labelcolor () const**
Gets the label color.
- **void labelcolor (unsigned c)**
Sets the label color.
- **Fl_Font labelfont () const**
Gets the font to use.
- **void labelfont (Fl_Font f)**
Sets the font to use.
- **Fl_Fontsize labelsize () const**
Gets the font size in pixels.
- **void labelsize (Fl_Fontsize pix)**
Gets or sets the font size in pixels.
- **Fl_Image * image ()**
Gets or sets the image to use as part of the widget label.
- **void image (Fl_Image *img)**

Gets or sets the image to use as part of the widget label.

- void **image** ([Fl_Image](#) &img)

Gets or sets the image to use as part of the widget label.

- [Fl_Image](#) * **deimage** ()

Gets the image to use as part of the widget label.

- void **deimage** ([Fl_Image](#) *img)

Sets the image to use as part of the widget label.

- void **deimage** ([Fl_Image](#) &img)

Sets the image to use as part of the widget label.

- const char * **tooltip** () const

Gets the current tooltip text.

- void **tooltip** (const char *t)

Sets the current tooltip text.

- [Fl_Callback_p](#) **callback** () const

Gets the current callback function for the widget.

- void **callback** ([Fl_Callback](#) *cb, void *p)

Sets the current callback function for the widget.

- void **callback** ([Fl_Callback](#) *cb)

Sets the current callback function for the widget.

- void **callback** ([Fl_Callback0](#) *cb)

Sets the current callback function for the widget.

- void **callback** ([Fl_Callback1](#) *cb, long p=0)

Sets the current callback function for the widget.

- void * **user_data** () const

Gets the user data for this widget.

- void **user_data** (void *v)

Sets the user data for this widget.

- long **argument** () const

Gets the current user data (long) argument that is passed to the callback function.

- void **argument** (long v)

Sets the current user data (long) argument that is passed to the callback function.

- [Fl_When](#) **when** () const

Controls when callbacks are done.

- void **when** (uchar i)
Flags used to decide when a callback is called.
- int **visible** () const
Returns whether a widget is visible.
- int **visible_r** () const
Returns whether a widget and all its parents are visible.
- void **show** ()
Makes a widget visible.
- void **hide** ()
Makes a widget invisible.
- void **set_visible** ()
Makes the widget visible.
- void **clear_visible** ()
Hides the widget.
- int **active** () const
Returns whether the widget is active.
- int **active_r** () const
active_r() returns whether the widget and all of its parents are active.
- void **activate** ()
Activate a widget.
- void **deactivate** ()
Deactivate a widget.
- int **output** () const
Return if a widget is used for output only.
- void **set_output** ()
Set a widget to output only.
- void **clear_output** ()
Set a widget to accept input.
- int **takesevents** () const
Returns if the widget is able to take events.
- int **changed** () const
Check if the widget value changed since the last callback.
- void **set_changed** ()
Mark the value of the widget as changed.

- void **clear_changed** ()
Mark the value of the widget as unchanged.
- int **take_focus** ()
Give the widget the keyboard focus.
- void **set_visible_focus** ()
Enables keyboard focus navigation with this widget.
- void **clear_visible_focus** ()
Disables keyboard focus navigation with this widget.
- void **visible_focus** (int v)
Modifies keyboard focus navigation.
- int **visible_focus** ()
Check whether this widget has a visible focus.
- void **do_callback** ()
Call the widget callback.
- void **do_callback** (**Fl_Widget** *o, void *arg=0)
Call the widget callback.
- void **do_callback** (**Fl_Widget** *o, long arg)
Call the widget callback.
- int **test_shortcut** ()
Internal use only.
- int **contains** (const **Fl_Widget** *w) const
Checks if w is a child of this widget.
- int **inside** (const **Fl_Widget** *w) const
Check if this widget is a child of w.
- void **redraw** ()
Schedule the drawing of the widget.
- void **redraw_label** ()
Schedule the drawing of the label.
- uchar **damage** () const
*Returns non-zero if **draw()** needs to be called.*
- void **clear_damage** (uchar c=0)
Clear damage flags.
- void **damage** (uchar c)

Set the damage bits for the widget.

- void **damage** (uchar c, int x, int y, int w, int h)

Set the damage bits for an area inside the widget.

- void **draw_label** (int, int, int, int, **Fl_Align**) const

Anybody can call this to force the label to draw anywhere.

- void **measure_label** (int &ww, int &hh)

Sets width ww, height hh accordingly with the labeltype size, label with images will return w() h() of the image.

- **Fl_Window** * **window** () const

*Returns a pointer to the primary **Fl_Window** widget.*

- **Fl_Color** **color2** () const

For back compatibility only.

- void **color2** (unsigned a)

For back compatibility only.

Static Public Member Functions

- static void **default_callback** (**Fl_Widget** *cb, void *d)

Sets the default callback for all widgets.

- static char **label_shortcut** (const char *t)

Internal use only.

- static int **test_shortcut** (const char *)

Internal use only.

Protected Types

- enum {

INACTIVE = 1, **INVISIBLE** = 2, **OUTPUT** = 4, **SHORTCUT_LABEL** = 64,
CHANGED = 128, **VISIBLE_FOCUS** = 512, **COPIED_LABEL** = 1024 }

flags possible values enumeration.

Protected Member Functions

- **Fl_Widget** (int x, int y, int w, int h, **Fl_CString** label=0L)

Creates a widget at the given position and size.

- void **x** (int v)

Internal use only.

- void [y](#) (int v)

Internal use only.

- void [w](#) (int v)

Internal use only.

- void [h](#) (int v)

Internal use only.

- int [flags](#) () const

Gets the widget flags mask.

- void [set_flag](#) (int c)

Sets a flag in the flags mask.

- void [clear_flag](#) (int c)

Clears a flag in the flags mask.

- void [draw_box](#) () const

Draws the widget box according its box style.

- void [draw_box](#) ([Fl_Boxtype](#), [Fl_Color](#)) const

Draws a box of type b, of color c at the widget position and size.

- void [draw_box](#) ([Fl_Boxtype](#), int, int, int, int, [Fl_Color](#)) const

Draws a box of type b, of color c at the widget position X,Y and size W,H.

- void [draw_focus](#) ()

draws a focus rectangle around the widget

- void [draw_focus](#) ([Fl_Boxtype](#), int, int, int, int) const

Draws a focus box for the widget at position X,Y and SIZE W,H .

- void [draw_label](#) () const

The normal call for a [draw\(\)](#) method.

- void [draw_label](#) (int, int, int, int) const

[draw\(\)](#) can use this instead to change the bounding box

Friends

- class [Fl_Group](#)

30.102.1 Detailed Description

[Fl_Widget](#) is the base class for all widgets in FLTK.

You can't create one of these because the constructor is not public. However you can subclass it.

All "property" accessing methods, such as [color\(\)](#), [parent\(\)](#), or [argument\(\)](#) are implemented as trivial inline functions and thus are as fast and small as accessing fields in a structure. Unless otherwise noted, the property setting methods such as [color\(n\)](#) or [label\(s\)](#) are also trivial inline functions, even if they change the widget's appearance. It is up to the user code to call [redraw\(\)](#) after these.

30.102.2 Member Enumeration Documentation

30.102.2.1 anonymous enum [protected]

flags possible values enumeration.

See [activate\(\)](#), [output\(\)](#), [visible\(\)](#), [changed\(\)](#), [set_visible_focus\(\)](#)

Enumerator:

INACTIVE the widget can't receive focus, and is disabled but potentially visible

INVISIABLE the widget is not drawn but can receive events

OUTPUT for output only

SHORTCUT_LABEL the label contains a shortcut we need to draw

CHANGED the widget value changed

VISIBLE_FOCUS accepts keyboard focus navigation if the widget can have the focus

COPIED_LABEL the widget label is internally copied, its destruction is handled by the widget

30.102.3 Constructor & Destructor Documentation

30.102.3.1 [Fl_Widget::Fl_Widget \(int x, int y, int w, int h, Fl_CString label = 0L\)](#) [protected]

Creates a widget at the given position and size.

The [Fl_Widget](#) is a protected constructor, but all derived widgets have a matching public constructor. It takes a value for [x\(\)](#), [y\(\)](#), [w\(\)](#), [h\(\)](#), and an optional value for [label\(\)](#).

Parameters:

← ***x,y*** the position of the widget relative to the enclosing window

← ***w,h*** size of the widget in pixels

← ***label*** optional text for the widget label

References [Fl_Group::add\(\)](#), [Fl_Label::color](#), [Fl_Group::current\(\)](#), [default_callback\(\)](#), [Fl_Label::deimage](#), [FL_ALIGN_CENTER](#), [FL_FOREGROUND_COLOR](#), [FL_HELVETICA](#), [FL_NO_BOX](#), [FL_NORMAL_LABEL](#), [FL_NORMAL_SIZE](#), [FL_WHEN_RELEASE](#), [Fl_Label::font](#), [Fl_Label::image](#), [Fl_Label::size](#), [Fl_Label::type](#), [Fl_Label::value](#), and [VISIBLE_FOCUS](#).

30.102.3.2 `Fl_Widget::~Fl_Widget () [virtual]`

Destroys the widget.

Destroys the widget, taking care of throwing focus before if any.

Destroying single widgets is not very common, and it is your responsibility to either remove() them from any enclosing group or destroy that group *immediately* after destroying the children. You almost always want to destroy the parent group instead which will destroy all of the child widgets and groups in that group.

Destruction does not remove from any parent group! And groups when destroyed destroy all their children. This is convenient and fast. However, it is only legal to destroy a "root" such as an [Fl_Window](#), and automatic destructors may be called.

References `Fl::clear_widget_pointer()`, `COPIED_LABEL`, `flags()`, and `Fl_Label::value`.

30.102.4 Member Function Documentation

30.102.4.1 `void Fl_Widget::activate ()`

Activate a widget.

Changing this value will send `FL_ACTIVATE` to the widget if [active_r\(\)](#) is true.

See also:

[active\(\)](#), [active_r\(\)](#), [deactivate\(\)](#)

References `active()`, `active_r()`, `clear_flag()`, `FL_ACTIVATE`, `Fl::focus()`, `handle()`, `INACTIVE`, `inside()`, `redraw()`, `redraw_label()`, and `take_focus()`.

Referenced by `Fl_File_Chooser::rescan()`, `Fl_File_Chooser::rescan_keep_filename()`, `Fl_Help_Dialog::textsize()`, `Fl_File_Chooser::type()`, and `Fl_File_Chooser::value()`.

30.102.4.2 `int Fl_Widget::active () const [inline]`

Returns whether the widget is active.

Return values:

`0` if the widget is inactive

See also:

[active_r\(\)](#), [activate\(\)](#), [deactivate\(\)](#)

References `INACTIVE`.

Referenced by `activate()`, `Fl_Tile::handle()`, `Fl_Repeat_Button::handle()`, and `Fl_Group::handle()`.

30.102.4.3 `int Fl_Widget::active_r () const`

[active_r\(\)](#) returns whether the widget and all of its parents are active.

Return values:

`0` if this or any of the parent widgets are inactive

See also:

[active\(\)](#), [activate\(\)](#), [deactivate\(\)](#)

Referenced by `activate()`, `deactivate()`, `Fl_Value_Slider::draw()`, `Fl_Value_Output::draw()`, `Fl_Scrollbar::draw()`, `Fl_Roller::draw()`, `Fl_Progress::draw()`, `Fl_Menu_Button::draw()`, `Fl_Light_Button::draw()`, `Fl_Dial::draw()`, `Fl_Counter::draw()`, `Fl_Clock_Output::draw()`, `Fl_Choice::draw()`, `Fl_Browser_::draw()`, `Fl_Adjuster::draw()`, `draw_box()`, `draw_label()`, `Fl_Input_::drawtext()`, `Fl_Text_Editor::handle()`, `Fl_Text_Display::handle()`, `Fl_Input::handle()`, `Fl_File_Input::handle()`, and `Fl_Browser::item_draw()`.

30.102.4.4 void Fl_Widget::align (Fl_Align *alignment*) [inline]

Sets the label alignment.

This controls how the label is displayed next to or inside the widget. The default value is `FL_ALIGN_CENTER`, which centers the label inside the widget.

Parameters:

← *alignment* new label alignment

See also:

[align\(\)](#), [Fl_Align](#)

30.102.4.5 Fl_Align Fl_Widget::align () const [inline]

Gets the label alignment.

Returns:

label alignment

See also:

[label\(\)](#), [align\(Fl_Align\)](#), [Fl_Align](#)

Todo

This function should not take uchar as an argument. Apart from the fact that uchar is too short with only 8 bits, it does not provide type safety (in which case we don't need to declare `Fl_Type` an enum to begin with).

Referenced by `Fl_Browser_::bbox()`, `Fl_Scroll::draw()`, `Fl_Browser_::draw()`, `draw_label()`, `Fl_Group::draw_outside_label()`, `Fl_Browser_::Fl_Browser_()`, `Fl_Chart::Fl_Chart()`, `Fl_Choice::Fl_Choice()`, `Fl_Clock_Output::Fl_Clock_Output()`, `Fl_Counter::Fl_Counter()`, `Fl_File_Chooser::Fl_File_Chooser()`, `Fl_FormsBitmap::Fl_FormsBitmap()`, `Fl_FormsPixmap::Fl_FormsPixmap()`, `Fl_Group::Fl_Group()`, `Fl_Input_::Fl_Input_()`, `Fl_Input_Choice::Fl_Input_Choice()`, `Fl_Light_Button::Fl_Light_Button()`, `Fl_Positioner::Fl_Positioner()`, `Fl_Progress::Fl_Progress()`, `Fl_Spinner::Fl_Spinner()`, `Fl_Timer::Fl_Timer()`, `Fl_Valuator::Fl_Valuator()`, `Fl_Value_Input::Fl_Value_Input()`, `Fl_Value_Output::Fl_Value_Output()`, `redraw_label()`, `Fl::reload_scheme()`, `Fl_File_Chooser::rescan_keep_filename()`, `Fl_Scroll::resize()`, `Fl_Browser_::resize()`, `Fl_Browser_::scrollbar_left()`, and `Fl_Browser_::scrollbar_right()`.

30.102.4.6 void Fl_Widget::argument (long v) [inline]

Sets the current user data (long) argument that is passed to the callback function.

Todo

The user data value must be implemented using a *union* to avoid 64 bit machine incompatibilities.

30.102.4.7 void Fl_Widget::box (Fl_Boxtype new_box) [inline]

Sets the box type for the widget.

This identifies a routine that draws the background of the widget. See `Fl_Boxtype` for the available types. The default depends on the widget, but is usually `FL_NO_BOX` or `FL_UP_BOX`.

Parameters:

\leftarrow `new_box` the new box type

See also:

[box\(\)](#), [Fl_Boxtype](#)

30.102.4.8 Fl_Boxtype Fl_Widget::box () const [inline]

Gets the box type for the widget.

Returns:

the current box type

See also:

[box\(Fl_Boxtype\)](#), [Fl_Boxtype](#)

Referenced by `Fl_Browser_::bbox()`, `Fl_Timer::draw()`, `Fl_FormsPixmap::draw()`, `Fl_FormsBitmap::draw()`, `Fl_Window::draw()`, `Fl_Value_Slider::draw()`, `Fl_Value_Output::draw()`, `Fl_Value_Input::draw()`, `Fl_Text_Display::draw()`, `Fl_Tabs::draw()`, `Fl_Slider::draw()`, `Fl_Scrollbar::draw()`, `Fl_Scroll::draw()`, `Fl_Roller::draw()`, `Fl_Return_Button::draw()`, `Fl_Progress::draw()`, `Fl_Pack::draw()`, `Fl_Menu_Button::draw()`, `Fl_Menu_Bar::draw()`, `Fl_Menu_Item::draw()`, `Fl_Light_Button::draw()`, `Fl_Input::draw()`, `Fl_File_Input::draw()`, `Fl_Dial::draw()`, `Fl_Counter::draw()`, `Fl_Clock_Output::draw()`, `Fl_Choice::draw()`, `Fl_Chart::draw()`, `Fl_Button::draw()`, `Fl_Browser_::draw()`, `Fl_Adjuster::draw()`, `Fl_Group::draw_children()`, `draw_focus()`, `draw_label()`, `Fl_Input_::drawtext()`, `Fl_Adjuster::Fl_Adjuster()`, `Fl_Box::Fl_Box()`, `Fl_Browser_::Fl_Browser_()`, `Fl_Button::Fl_Button()`, `Fl_Chart::Fl_Chart()`, `Fl_Check_Button::Fl_Check_Button()`, `Fl_Choice::Fl_Choice()`, `Fl_Clock::Fl_Clock()`, `Fl_Clock_Output::Fl_Clock_Output()`, `Fl_Color_Chooser::Fl_Color_Chooser()`, `Fl_Counter::Fl_Counter()`, `Fl_Dial::Fl_Dial()`, `Fl_File_Chooser::Fl_File_Chooser()`, `Fl_FormsBitmap::Fl_FormsBitmap()`, `Fl_FormsPixmap::Fl_FormsPixmap()`, `Fl_Help_Dialog::Fl_Help_Dialog()`, `Fl_Input_::Fl_Input_()`, `Fl_Input_Choice::Fl_Input_Choice()`, `Fl_Menu_::Fl_Menu_()`, `Fl_Positioner::Fl_Positioner()`, `Fl_Progress::Fl_Progress()`, `Fl_Roller::Fl_Roller()`, `Fl_Round_Button::Fl_Round_Button()`, `Fl_Round_Clock::Fl_Round_Clock()`, `Fl_Scrollbar::Fl_Scrollbar()`, `Fl_Slider::Fl_Slider()`, `Fl_Tabs::Fl_Tabs()`, `Fl_Text_Display::Fl_Text_Display()`, `Fl_Timer::Fl_Timer()`, `Fl_Value_Input::Fl_Value_Input()`, `Fl_Value_Output::Fl_Value_Output()`, `Fl_Wizard::Fl_Wizard()`, `Fl_Value_Slider::handle()`, `Fl_Slider::handle()`, `Fl_Menu_Button::handle()`, `Fl_Light_Button::handle()`, `Fl_Input::handle()`, `Fl_Button::handle()`, `Fl_Menu_Button::popup()`, `redraw_label()`, `Fl_Text_Display::resize()`, `Fl_Help_View::resize()`, and `Fl_Button::value()`.

30.102.4.9 void Fl_Widget::callback (Fl_Callback1 * cb, long p = 0) [inline]

Sets the current callback function for the widget.

Each widget has a single callback.

Parameters:

← *cb* new callback

← *p* user data

30.102.4.10 void Fl_Widget::callback (Fl_Callback0 * cb) [inline]

Sets the current callback function for the widget.

Each widget has a single callback.

Parameters:

← *cb* new callback

30.102.4.11 void Fl_Widget::callback (Fl_Callback * cb) [inline]

Sets the current callback function for the widget.

Each widget has a single callback.

Parameters:

← *cb* new callback

30.102.4.12 void Fl_Widget::callback (Fl_Callback * cb, void * p) [inline]

Sets the current callback function for the widget.

Each widget has a single callback.

Parameters:

← *cb* new callback

← *p* user data

30.102.4.13 Fl_Callback_p Fl_Widget::callback () const [inline]

Gets the current callback function for the widget.

Each widget has a single callback.

Returns:

current callback

Referenced by Fl_Browser::Fl_Browser(), Fl_Color_Chooser::fl_color_chooser(), Fl_Color_Chooser::Fl_Color_Chooser(), Fl_File_Chooser::Fl_File_Chooser(), Fl_Help_Dialog::Fl_Help_Dialog(), Fl_Help_View::Fl_Help_View(), Fl_Input_Choice::Fl_Input_Choice(), Fl_Scroll::Fl_Scroll(), Fl_Spinner::Fl_Spinner(), and Fl_Value_Input::Fl_Value_Input().

30.102.4.14 int Fl_Widget::changed () const [inline]

Check if the widget value changed since the last callback.

"Changed" is a flag that is turned on when the user changes the value stored in the widget. This is only used by subclasses of [Fl_Widget](#) that store values, but is in the base class so it is easier to scan all the widgets in a panel and [do_callback\(\)](#) on the changed ones in response to an "OK" button.

Most widgets turn this flag off when they do the callback, and when the program sets the stored value.

Return values:

0 if the value did not change

See also:

[set_changed\(\)](#), [clear_changed\(\)](#)*

Reimplemented in [Fl_Input_Choice](#).

References CHANGED.

Referenced by [Fl_Input_Choice::changed\(\)](#), [Fl_Text_Editor::maybe_do_callback\(\)](#), and [Fl_Menu_::picked\(\)](#).

30.102.4.15 void Fl_Widget::clear_changed () [inline]

Mark the value of the widget as unchanged.

See also:

[changed\(\)](#), [set_changed\(\)](#)

Reimplemented in [Fl_Input_Choice](#).

References CHANGED.

Referenced by [Fl_Input_Choice::clear_changed\(\)](#), [do_callback\(\)](#), [Fl_Button::handle\(\)](#), [Fl_Valuator::handle_release\(\)](#), [Fl_Input_::static_value\(\)](#), [Fl_Valuator::value\(\)](#), [Fl_Positioner::value\(\)](#), [Fl_Menu_::value\(\)](#), and [Fl_Button::value\(\)](#).

30.102.4.16 void Fl_Widget::clear_damage (uchar c = 0) [inline]

Clear damage flags.

Damage flags are cleared when parts of the widget drawing is repaired.

Parameters:

$\leftarrow c$ bitmask of flags to clear

See also:

[damage\(uchar\)](#), [damage\(\)](#)

Referenced by [Fl_Value_Input::draw\(\)](#), [Fl_Pack::draw\(\)](#), [Fl_Browser_::draw\(\)](#), [Fl_Group::draw_child\(\)](#), [Fl_Overlay_Window::flush\(\)](#), [Fl_Gl_Window::flush\(\)](#), [Fl_Double_Window::flush\(\)](#), [Fl::flush\(\)](#), [Fl_Overlay_Window::redraw_overlay\(\)](#), and [Fl_Group::update_child\(\)](#).

30.102.4.17 void Fl_Widget::clear_output () [inline]

Set a widget to accept input.

See also:

[set_output\(\)](#), [output\(\)](#)

References OUTPUT.

30.102.4.18 void Fl_Widget::clear_visible () [inline]

Hides the widget.

You must still redraw the parent to see a change in the window. Normally you want to use the [hide\(\)](#) method instead.

References INVISIBLE.

Referenced by [Fl_Scroll::draw\(\)](#), [Fl_Browser_::draw\(\)](#), [Fl_Timer::Fl_Timer\(\)](#), [Fl_Window::Fl_Window\(\)](#), and [Fl_Window::hide\(\)](#).

30.102.4.19 void Fl_Widget::clear_visible_focus () [inline]

Disables keyboard focus navigation with this widget.

Normally, all widgets participate in keyboard focus navigation.

See also:

[set_visible_focus\(\)](#), [visible_focus\(\)](#), [visible_focus\(int\)](#)

References VISIBLE_FOCUS.

Referenced by [visible_focus\(\)](#).

30.102.4.20 void Fl_Widget::color (unsigned *bg*, unsigned *sel*) [inline]

Sets the background and selection color of the widget.

The two color form sets both the background and selection colors.

Parameters:

← *bg* background color
← *sel* selection color

See also:

[color\(unsigned\)](#), [selection_color\(unsigned\)](#)

30.102.4.21 void Fl_Widget::color (unsigned *bg*) [inline]

Sets the background color of the widget.

The color is passed to the box routine. The color is either an index into an internal table of RGB colors or an RGB color value generated using `fl_rgb_color()`. The default for most widgets is `FL_BACKGROUND_COLOR`. Use [Fl::set_color\(\)](#) to redefine colors in the color map.

Parameters:

← *bg* background color

See also:

[color\(\)](#), [color\(unsigned, unsigned\)](#), [selection_color\(unsigned\)](#)

30.102.4.22 Fl_Color Fl_Widget::color () const [inline]

Gets the background color of the widget.

Returns:

current background color

See also:

[color\(unsigned\)](#), [color\(unsigned, unsigned\)](#)

Referenced by `Fl_Text_Display::clear_rect()`, `Fl_File_Chooser::color()`, `Fl_Timer::draw()`, `Fl_FormsPixmap::draw()`, `Fl_FormsBitmap::draw()`, `Fl_Window::draw()`, `Fl_Value_Slider::draw()`, `Fl_Value_Output::draw()`, `Fl_Value_Input::draw()`, `Fl_Text_Display::draw()`, `Fl_Tabs::draw()`, `Fl_Scroll::draw()`, `Fl_Roller::draw()`, `Fl_Return_Button::draw()`, `Fl_Progress::draw()`, `Fl_Pack::draw()`, `Fl_Menu_Button::draw()`, `Fl_Menu_Item::draw()`, `Fl_Light_Button::draw()`, `Fl_Input::draw()`, `Fl_File_Input::draw()`, `Fl_Dial::draw()`, `Fl_Counter::draw()`, `Fl_Clock_Output::draw()`, `Fl.Choice::draw()`, `Fl_Button::draw()`, `Fl_Browser_::draw()`, `Fl_Adjuster::draw()`, `draw_focus()`, `Fl_Text_Display::draw_string()`, `Fl_Input_::drawtext()`, `Fl_Browser_::Fl_Browser_()`, `Fl_FormsBitmap::Fl_FormsBitmap()`, `Fl_FormsPixmap::Fl_FormsPixmap()`, `Fl_Help_Dialog::Fl_Help_Dialog()`, `Fl_Help_View::Fl_Help_View()`, `Fl_Input_::Fl_Input_()`, `Fl_Progress::Fl_Progress()`, `Fl_Scrollbar::Fl_Scrollbar()`, `Fl_Text_Display::Fl_Text_Display()`, `Fl_Value_Input::Fl_Value_Input()`, and `Fl.Choice::handle()`.

30.102.4.23 void Fl_Widget::color2 (unsigned *a*) [inline]

For back compatibility only.

30.102.4.24 Fl_Color Fl_Widget::color2 () const [inline]

For back compatibility only.

Referenced by `Fl_Progress::draw()`.

30.102.4.25 int Fl_Widget::contains (const Fl_Widget * *w*) const

Checks if *w* is a child of this widget.

Parameters:

← *w* potential child widget

Returns:

Returns 1 if *w* is a child of this widget, or is equal to this widget. Returns 0 if *w* is NULL.

References parent_.

Referenced by Fl::belowmouse(), Fl_Group::handle(), inside(), and take_focus().

30.102.4.26 void Fl_Widget::copy_label (Fl_CString *new_label*)

Sets the current label.

Unlike [label\(\)](#), this method allocates a copy of the label string instead of using the original string pointer.

Parameters:

← *new_label* the new label text

See also:

[label\(\)](#)

Reimplemented in [Fl_Window](#).

References clear_flag(), COPIED_LABEL, flags(), redraw_label(), set_flag(), and Fl_Label::value.

30.102.4.27 void Fl_Widget::damage (uchar *c*, int *x*, int *y*, int *w*, int *h*)

Set the damage bits for an area inside the widget.

Setting damage bits will schedule the widget for the next redraw.

Parameters:

← *c* bitmask of flags to set

← *x,y,w,h* size of damaged area

See also:

[damage\(\)](#), [clear_damage\(uchar\)](#)

References damage(), damage_, FL_WINDOW, h(), parent(), type(), and w().

30.102.4.28 void Fl_Widget::damage (uchar *c*)

Set the damage bits for the widget.

Setting damage bits will schedule the widget for the next redraw.

Parameters:

← *c* bitmask of flags to set

See also:

[damage\(\)](#), [clear_damage\(uchar\)](#)

References damage(), FL_WINDOW, h(), type(), w(), x(), and y().

30.102.4.29 uchar Fl_Widget::damage () const [inline]

Returns non-zero if [draw\(\)](#) needs to be called.

The damage value is actually a bit field that the widget subclass can use to figure out what parts to draw.

Returns:

a bitmap of flags describing the kind of damage to the widget

See also:

[damage\(uchar\)](#), [clear_damage\(uchar\)](#)

Referenced by [Fl_Slider::bounds\(\)](#), [Fl_Text_Display::buffer_modified_cb\(\)](#), [damage\(\)](#), [Fl_Value_Slider::draw\(\)](#), [Fl_Value_Output::draw\(\)](#), [Fl_Value_Input::draw\(\)](#), [Fl_Text_Display::draw\(\)](#), [Fl_Tabs::draw\(\)](#), [Fl_Slider::draw\(\)](#), [Fl_Scrollbar::draw\(\)](#), [Fl_Scroll::draw\(\)](#), [Fl_Roller::draw\(\)](#), [Fl_Pack::draw\(\)](#), [Fl_Input::draw\(\)](#), [Fl_Group::draw\(\)](#), [Fl_File_Input::draw\(\)](#), [Fl_Dial::draw\(\)](#), [Fl_Counter::draw\(\)](#), [Fl_Browser_::draw\(\)](#), [Fl_Group::draw_children\(\)](#), [Fl_Input_::drawtext\(\)](#), [Fl_Overlay_Window::flush\(\)](#), [Fl_Gl_Window::flush\(\)](#), [Fl_Double_Window::flush\(\)](#), [Fl::flush\(\)](#), [Fl_Scrollbar::handle\(\)](#), [Fl_File_Input::handle\(\)](#), [Fl_Button::handle\(\)](#), [Fl_Text_Display::highlight_data\(\)](#), [Fl_Input_::position\(\)](#), [Fl_Text_Display::redisplay_range\(\)](#), [redraw\(\)](#), [redraw_label\(\)](#), [Fl_Browser_::redraw_line\(\)](#), [Fl_Overlay_Window::redraw_overlay\(\)](#), [Fl_Gl_Window::redraw_overlay\(\)](#), [Fl_Scroll::scroll_to\(\)](#), [Fl_Slider::slider_size\(\)](#), [Fl_Group::update_child\(\)](#), [Fl_File_Input::value\(\)](#), [Fl_Clock_Output::value\(\)](#), and [Fl_Valuator::value_damage\(\)](#).

30.102.4.30 int Fl_Widget::damage_resize (int X, int Y, int W, int H)

Internal use only.

References [h\(\)](#), [redraw\(\)](#), [resize\(\)](#), [w\(\)](#), [x\(\)](#), and [y\(\)](#).

Referenced by [Fl_Browser_::draw\(\)](#), and [Fl_Tile::position\(\)](#).

30.102.4.31 void Fl_Widget::deactivate ()

Deactivate a widget.

Inactive widgets will be drawn "grayed out", e.g. with less contrast than the active widget. Inactive widgets will not receive any keyboard or mouse button events. Other events (including FL_ENTER, FL_MOVE, FL_LEAVE, FL_SHORTCUT, and others) will still be sent. A widget is only active if [active\(\)](#) is true on it and all of its parents.

Changing this value will send FL_DEACTIVATE to the widget if [active_r\(\)](#) is true.

Currently you cannot deactivate [Fl_Window](#) widgets.

See also:

[activate\(\)](#), [active\(\)](#), [active_r\(\)](#)

Reimplemented in [Fl_Repeat_Button](#).

References [active_r\(\)](#), [FL_DEACTIVATE](#), [handle\(\)](#), [INACTIVE](#), [redraw\(\)](#), [redraw_label\(\)](#), and [set_flag\(\)](#).

Referenced by [Fl_Repeat_Button::deactivate\(\)](#), [Fl_Help_Dialog::Fl_Help_Dialog\(\)](#), [Fl_File_Chooser::rescan\(\)](#), [Fl_File_Chooser::rescan_keep_filename\(\)](#), [Fl_Help_Dialog::textsize\(\)](#), [Fl_File_Chooser::type\(\)](#), and [Fl_File_Chooser::value\(\)](#).

30.102.4.32 void Fl_Widget::default_callback (Fl_Widget * *cb*, void * *d*) [static]

Sets the default callback for all widgets.

Sets the default callback, which puts a pointer to the widget on the queue returned by [Fl::readqueue\(\)](#). You may want to call this from your own callback.

Parameters:

- ← *cb* the new callback
- ← *d* user data associated with that callback

See also:

[callback\(\)](#), [do_callback\(\)](#), [Fl::readqueue\(\)](#)

References [parent\(\)](#).

Referenced by [Fl::default_atclose\(\)](#), [do_callback\(\)](#), and [Fl_Widget\(\)](#).

30.102.4.33 void Fl_Widget::deimage (Fl_Image & *img*) [inline]

Sets the image to use as part of the widget label.

This image is used when drawing the widget in the inactive state.

Parameters:

- ← *img* the new image for the deactivated widget

30.102.4.34 void Fl_Widget::deimage (Fl_Image * *img*) [inline]

Sets the image to use as part of the widget label.

This image is used when drawing the widget in the inactive state.

Parameters:

- ← *img* the new image for the deactivated widget

30.102.4.35 Fl_Image* Fl_Widget::deimage () [inline]

Gets the image to use as part of the widget label.

This image is used when drawing the widget in the inactive state.

Returns:

the current deactivated image for this widget

30.102.4.36 void Fl_Widget::do_callback (Fl_Widget * *o*, long *arg*) [inline]

Call the widget callback.

Causes a widget to invoke its callback function, optionally with arbitrary arguments.

Parameters:

- ← *o* call the callback with *o* as the widget argument
- ← *arg* call the callback with *arg* as the user data argument

See also:

[callback\(\)](#)

References clear_changed(), and default_callback().

30.102.4.37 void Fl_Widget::do_callback (Fl_Widget * *o*, void * *arg* = 0) [inline]

Call the widget callback.

Causes a widget to invoke its callback function, optionally with arbitrary arguments.

Parameters:

- ← *o* call the callback with *o* as the widget argument
- ← *arg* call the callback with *arg* as the user data argument

See also:

[callback\(\)](#)

References clear_changed(), and default_callback().

30.102.4.38 void Fl_Widget::do_callback () [inline]

Call the widget callback.

Causes a widget to invoke its callback function, optionally with arbitrary arguments.

See also:

[callback\(\)](#)

References clear_changed(), and default_callback().

Referenced by Fl_Free::handle(), Fl_Tile::handle(), Fl_Text_Editor::handle(), Fl_Tabs::handle(), Fl_Spinner::handle(), Fl_Scrollbar::handle(), Fl_Return_Button::handle(), Fl_Repeat_Button::handle(), Fl_Input::handle(), Fl_Button::handle(), Fl_Browser_::handle(), Fl::handle(), Fl_Valuator::handle_drag(), Fl_Text_Editor::handle_key(), Fl_Valuator::handle_release(), Fl_Text_Editor::kf_backspace(), Fl_Text_Editor::kf_cut(), Fl_Text_Editor::kf_default(), Fl_Text_Editor::kf_delete(), Fl_Text_Editor::kf_enter(), Fl_Text_Editor::kf_paste(), Fl_Text_Editor::kf_undo(), Fl_Text_Editor::maybe_do_callback(), Fl_Menu_::picked(), Fl_Input_::replace(), Fl_Browser_::select(), Fl_Help_View::topline(), and Fl_Input_::undo().

30.102.4.39 virtual void Fl_Widget::draw () [pure virtual]

Draw the widget.

Never call this function directly. FLTK will schedule redrawing whenever needed. If your widget must be redrawn as soon as possible, call [redraw\(\)](#) instead.

Override this function to draw your own widgets.

Implemented in [Fl_Adjuster](#), [Fl_Box](#), [Fl_Browser](#), [Fl_Button](#), [Fl_Cairo_Window](#), [Fl_Chart](#), [Fl_Choice](#), [Fl_Clock_Output](#), [Fl_Counter](#), [Fl_Dial](#), [Fl_File_Input](#), [Fl_FormsBitmap](#), [Fl_FormsPixmap](#), [Fl_Free](#), [Fl_Gl_Window](#), [Fl_Group](#), [Fl_Input](#), [Fl_Light_Button](#), [Fl_Menu_Bar](#), [Fl_Menu_Button](#), [Fl_Pack](#), [Fl_Positioner](#), [Fl_Progress](#), [Fl_Return_Button](#), [Fl_Roller](#), [Fl_Scroll](#), [Fl_Scrollbar](#), [Fl_Slider](#), [Fl_Tabs](#), [Fl_Text_Display](#), [Fl_Timer](#), [Fl_Value_Input](#), [Fl_Value_Output](#), [Fl_Value_Slider](#), [Fl_Window](#), and [Fl_Glut_Window](#).

Referenced by [Fl_Group::draw_child\(\)](#), and [Fl_Group::update_child\(\)](#).

30.102.4.40 void Fl_Widget::draw_box (Fl_Boxtype b, int X, int Y, int W, int H, Fl_Color c) const [protected]

Draws a box of type b, of color c at the widget position X,Y and size W,H.

References [active_r\(\)](#).

30.102.4.41 void Fl_Widget::draw_box (Fl_Boxtype b, Fl_Color c) const [protected]

Draws a box of type b, of color c at the widget position and size.

References [draw_box\(\)](#).

30.102.4.42 void Fl_Widget::draw_focus (Fl_Boxtype B, int X, int Y, int W, int H) const [protected]

Draws a focus box for the widget at position X,Y and SIZE W,H .

References [Fl::box_dh\(\)](#), [Fl::box_dw\(\)](#), [Fl::box_dx\(\)](#), [Fl::box_dy\(\)](#), [color\(\)](#), [fl_color\(\)](#), [FL_DOWN_BOX](#), [FL_DOWN_FRAME](#), [fl_point\(\)](#), [fl_rect\(\)](#), [FL_THIN_DOWN_BOX](#), [FL_THIN_DOWN_FRAME](#), and [Fl::visible_focus\(\)](#).

30.102.4.43 int Fl_Widget::h () const [inline]

Gets the widget height.

Returns:

the height of the widget in pixels.

Referenced by [Fl_Browser::bbox\(\)](#), [Fl_Text_Display::buffer\(\)](#), [damage\(\)](#), [damage_resize\(\)](#), [Fl_Glut_Window::draw\(\)](#), [Fl_Timer::draw\(\)](#), [Fl_FormsPixmap::draw\(\)](#), [Fl_FormsBitmap::draw\(\)](#), [Fl_Window::draw\(\)](#), [Fl_Value_Slider::draw\(\)](#), [Fl_Value_Output::draw\(\)](#), [Fl_Text_Display::draw\(\)](#), [Fl_Tabs::draw\(\)](#), [Fl_Slider::draw\(\)](#), [Fl_Scrollbar::draw\(\)](#), [Fl_Scroll::draw\(\)](#), [Fl_Roller::draw\(\)](#), [Fl_Return_Button::draw\(\)](#), [Fl_Progress::draw\(\)](#), [Fl_Positioner::draw\(\)](#), [Fl_Pack::draw\(\)](#), [Fl_Menu_Button::draw\(\)](#), [Fl_Menu_Bar::draw\(\)](#), [Fl_Light_Button::draw\(\)](#), [Fl_Input::draw\(\)](#), [Fl_File_Input::draw\(\)](#), [Fl_Dial::draw\(\)](#), [Fl_Counter::draw\(\)](#), [Fl_Clock_Output::draw\(\)](#), [Fl_Choice::draw\(\)](#), [Fl_Chart::draw\(\)](#), [Fl_Browser::draw\(\)](#), [Fl_Adjuster::draw\(\)](#), [Fl_Group::draw_children\(\)](#), [draw_focus\(\)](#), [Fl_Group::draw_outside_label\(\)](#), [Fl_Glut_Window::draw_overlay\(\)](#), [Fl_Gl_Window::flush\(\)](#), [Fl_Double_Window::flush\(\)](#), [Fl_Group::forms_end\(\)](#), [Fl_Window::fullscreen\(\)](#), [Fl_Value_Slider::handle\(\)](#), [Fl_Tabs::handle\(\)](#), [Fl_Slider::handle\(\)](#), [Fl_Scrollbar::handle\(\)](#), [Fl_Positioner::handle\(\)](#), [Fl_Menu_Bar::handle\(\)](#), [Fl_Input::handle\(\)](#), [Fl_Dial::handle\(\)](#), [Fl_Choice::handle\(\)](#), [Fl_Button::handle\(\)](#), [Fl_Adjuster::handle\(\)](#), [Fl_Window::hotspot\(\)](#), [Fl_Gl_Window::make_current\(\)](#), [Fl_Gl_Window::ortho\(\)](#), [Fl_Menu_Button::popup\(\)](#),

`redraw_label()`, `Fl_Tile::resize()`, `Fl_Scroll::resize()`, `Fl_Overlay_Window::resize()`, `Fl_Input_::resize()`, `Fl_Help_View::resize()`, `Fl_Group::resize()`, `Fl_Gl_Window::resize()`, `Fl_Double_Window::resize()`, `Fl_Text_Display::scroll()`, `Fl_Window::show()`, `Fl_Text_Display::show_insert_position()`, `Fl_Group::sizes()`, `Fl_Help_View::topline()`, and `Fl_Text_Display::wrap_mode()`.

30.102.4.44 void Fl_Widget::h (int v) [inline, protected]

Internal use only.

Use `position(int,int)`, `size(int, int)` or `resize(int,int,int,int)` instead.

Referenced by `Fl_File_Chooser::add_extra()`, `Fl_Text_Display::buffer_modified_cb()`, `Fl::cairo_make_current()`, `damage()`, `Fl_Scroll::draw()`, `Fl_Pack::draw()`, `Fl_Group::draw_child()`, `Fl_Group::draw_outside_label()`, `Fl_File_Chooser::Fl_File_Chooser()`, `Fl_Group::forms_end()`, `Fl_Help_Dialog::h()`, `Fl_Tile::handle()`, `Fl_Window::hotspot()`, `Fl_Gl_Window::make_current()`, `Fl_Tile::position()`, `Fl_File_Chooser::preview()`, `Fl_File_Chooser::rescan_keep_filename()`, `Fl_Tile::resize()`, `Fl_Scroll::resize()`, `Fl_Group::resize()`, `Fl_Group::sizes()`, and `Fl_Group::update_child()`.

30.102.4.45 int Fl_Widget::handle (int event) [virtual]

Handles the specified event.

You normally don't call this method directly, but instead let FLTK do it when the user interacts with the widget.

When implemented in a new widget, this function must return 0 if the widget does not use the event or 1 otherwise.

Most of the time, you want to call the inherited `handle()` method in your overriden method so that you don't short-circuit events that you don't handle. In this last case you should return the callee retval.

Parameters:

← *event* the kind of event received

Return values:

0 if the event was not used or understood
1 if the event was used and can be deleted

See also:

[Fl_Event](#)

Reimplemented in `Fl_Adjuster`, `Fl_Box`, `Fl_Browser_`, `Fl_Button`, `Fl_Check_Browser`, `Fl_Choice`, `Fl_Clock`, `Fl_Counter`, `Fl_Dial`, `Fl_File_Input`, `Fl_Free`, `Fl_Group`, `Fl_Input`, `Fl_Light_Button`, `Fl_Menu_Bar`, `Fl_Menu_Button`, `Fl_Positioner`, `Fl_Repeat_Button`, `Fl_Return_Button`, `Fl_Roller`, `Fl_Scroll`, `Fl_Scrollbar`, `Fl_Slider`, `Fl_Spinner`, `Fl_Tabs`, `Fl_Text_Display`, `Fl_Text_Editor`, `Fl_Tile`, `Fl_Timer`, `Fl_Value_Input`, `Fl_Value_Output`, `Fl_Value_Slider`, `Fl_Window`, and `Fl_Glut_Window`.

Referenced by `activate()`, `Fl::belowmouse()`, `deactivate()`, `Fl::dnd()`, `Fl::focus()`, `Fl_Group::handle()`, `hide()`, `show()`, and `take_focus()`.

30.102.4.46 void Fl_Widget::hide ()

Makes a widget invisible.

See also:

[show\(\)](#), [visible\(\)](#), [visible_r\(\)](#)

Reimplemented in [Fl_Browser](#), [Fl_Double_Window](#), [Fl_Gl_Window](#), [Fl_Menu_Window](#), [Fl_Overlay_Window](#), and [Fl_Window](#).

References [FL_HIDE](#), [handle\(\)](#), [INVISIBLE](#), [parent\(\)](#), [set_flag\(\)](#), and [visible_r\(\)](#).

Referenced by [Fl::handle\(\)](#), [Fl_Browser::hide\(\)](#), [Fl_File_Chooser::preview\(\)](#), [Fl_Wizard::value\(\)](#), and [Fl_Tabs::value\(\)](#).

30.102.4.47 void Fl_Widget::image (Fl_Image & *img*) [inline]

Gets or sets the image to use as part of the widget label.

This image is used when drawing the widget in the active state.

Parameters:

← *img* the new image for the label

30.102.4.48 void Fl_Widget::image (Fl_Image * *img*) [inline]

Gets or sets the image to use as part of the widget label.

This image is used when drawing the widget in the active state.

Parameters:

← *img* the new image for the label

30.102.4.49 Fl_Image* Fl_Widget::image () [inline]

Gets or sets the image to use as part of the widget label.

This image is used when drawing the widget in the active state.

Returns:

the current image

Referenced by [Fl_File_Chooser::Fl_File_Chooser\(\)](#), [Fl_Menu_Window::Fl_Menu_Window\(\)](#), [Fl_Overlay_Window::Fl_Overlay_Window\(\)](#), [Fl_Pixmap::label\(\)](#), [Fl_RGB_Image::label\(\)](#), [Fl_Image::label\(\)](#), [Fl_Bitmap::label\(\)](#), [Fl::reload_scheme\(\)](#), and [Fl_File_Chooser::rescan_keep_filename\(\)](#).

30.102.4.50 int Fl_Widget::inside (const Fl_Widget * *w*) const [inline]

Check if this widget is a child of *w*.

Returns 1 if this widget is a child of *w*, or is equal to *w*. Returns 0 if *w* is NULL.

Parameters:

← *w* the possible parent widget.

See also:[contains\(\)](#)

References contains().

Referenced by activate(), and show().

30.102.4.51 void Fl_Widget::label (Fl_Labeltype *a*, const char * *b*) [inline]

Shortcut to set the label text and type in one call.

See also:[label\(Fl_CString\)](#), [labeltype\(Fl_Labeltype\)](#)**30.102.4.52 void Fl_Widget::label (const char * *text*)**

Get or set the current label pointer.

The label is shown somewhere on or next to the widget. The passed pointer is stored unchanged in the widget (the string is *not* copied), so if you need to set the label to a formatted value, make sure the buffer is static, global, or allocated. The [copy_label\(\)](#) method can be used to make a copy of the label string automatically.

Parameters:

← *text* pointer to new label text

See also:[copy_label\(\)](#)

Reimplemented in [Fl_Window](#).

References clear_flag(), COPIED_LABEL, flags(), redraw_label(), and [Fl_Label::value](#).

30.102.4.53 const char* Fl_Widget::label () const [inline]

Get the current label text.

Returns:

a pointer to the current label text

See also:[label\(Fl_CString\)](#), [copy_label\(Fl_CString\)](#)

Reimplemented in [Fl_Window](#).

Referenced by [Fl_File_Chooser::Fl_File_Chooser\(\)](#), [Fl_Tabs::handle\(\)](#), [Fl_Window::label\(\)](#), [Fl_File_Icon::label\(\)](#), [Fl_File_Chooser::ok_label\(\)](#), [Fl_Menu_Button::popup\(\)](#), [Fl_File_Chooser::rescan_keep_filename\(\)](#), and [test_shortcut\(\)](#).

30.102.4.54 char Fl_Widget::label_shortcut (const char **t*) [static]

Internal use only.

Referenced by test_shortcut().

30.102.4.55 void Fl_Widget::labelcolor (unsigned *c*) [inline]

Sets the label color.

The default color is FL_FOREGROUND_COLOR.

Parameters:

← *c* the new label color

30.102.4.56 Fl_Color Fl_Widget::labelcolor () const [inline]

Gets the label color.

The default color is FL_FOREGROUND_COLOR.

Returns:

the current label color

Referenced by Fl_Timer::draw(), Fl_Scrollbar::draw(), Fl_Progress::draw(), Fl_Counter::draw(), Fl_Choice::draw(), Fl_Button::draw(), and Fl_Help_Dialog::Fl_Help_Dialog().

30.102.4.57 void Fl_Widget::labelfont (Fl_Font *f*) [inline]

Sets the font to use.

Fonts are identified by indexes into a table. The default value uses a Helvetica typeface (Arial for Microsoft®Windows®). The function [Fl::set_font\(\)](#) can define new typefaces.

Parameters:

← *f* the new font for the label

See also:

[Fl_Font](#)

30.102.4.58 Fl_Font Fl_Widget::labelfont () const [inline]

Gets the font to use.

Fonts are identified by indexes into a table. The default value uses a Helvetica typeface (Arial for Microsoft®Windows®). The function [Fl::set_font\(\)](#) can define new typefaces.

Returns:

current font used by the label

See also:

[Fl_Font](#)

Referenced by Fl_Timer::draw(), Fl_File_Chooser::Fl_File_Chooser(), Fl_Help_Dialog::Fl_Help_Dialog(), and Fl_File_Chooser::rescan_keep_filename().

30.102.4.59 void Fl_Widget::labelsize (Fl_Fontsize *pix*) [inline]

Gets or sets the font size in pixels.

The default size is 14 pixels.

Parameters:

← *pix* the new font size

30.102.4.60 Fl_Fontsize Fl_Widget::labelsize () const [inline]

Gets the font size in pixels.

The default size is 14 pixels.

Returns:

the current font size

Referenced by Fl_Timer::draw(), Fl_Menu_Button::draw(), Fl_Light_Button::draw(), Fl_File_Chooser::Fl_File_Chooser(), Fl_Help_Dialog::Fl_Help_Dialog(), and Fl_File_Chooser::rescan_keep_filename().

30.102.4.61 void Fl_Widget::labeltype (Fl_Labeltype *a*) [inline]

Sets the label type.

The label type identifies the function that draws the label of the widget. This is generally used for special effects such as embossing or for using the [label\(\)](#) pointer as another form of data such as an icon. The value FL_NORMAL_LABEL prints the label as plain text.

Parameters:

← *a* new label type

See also:

[Fl_Labeltype](#)

30.102.4.62 Fl_Labeltype Fl_Widget::labeltype () const [inline]

Gets the label type.

Returns:

the current label type.

See also:

[Fl_Labeltype](#)

Referenced by `Fl_Button::draw()`, `Fl_Bitmap::label()`, and `Fl::reload_scheme()`.

30.102.4.63 void Fl_Widget::measure_label (int & *ww*, int & *hh*) [inline]

Sets width *ww*, height *hh* accordingly with the labeltype size, label with images will return `w()` `h()` of the image.

Referenced by `Fl_File_Chooser::ok_label()`.

30.102.4.64 int Fl_Widget::output () const [inline]

Return if a widget is used for output only.

`output()` means the same as `!active()` except it does not change how the widget is drawn. The widget will not receive any events. This is useful for making scrollbars or buttons that work as displays rather than input devices.

Return values:

0 if the widget is used for input and output

See also:

[set_output\(\)](#), [clear_output\(\)](#)

References OUTPUT.

30.102.4.65 void Fl_Widget::parent (Fl_Group * *p*) [inline]

Internal use only.

Use `Fl_Group::add(Fl_Widget*)` instead.

30.102.4.66 Fl_Group* Fl_Widget::parent () const [inline]

Returns a pointer to the parent widget.

Usually this is a `Fl_Group` or `Fl_Window`.

Return values:

NULL if the widget has no parent

See also:

[Fl_Group::add\(Fl_Widget*\)](#)

Referenced by `Fl::belowmouse()`, `Fl_Group::clear()`, `Fl_Tooltip::current()`, `damage()`, `default_callback()`, `Fl_Window::draw()`, `Fl_Browser::draw()`, `Fl_Group::end()`, `Fl_Value_Input::Fl_Value_Input()`, `Fl::focus()`, `Fl_Window::handle()`, `Fl::handle()`, `hide()`, `Fl_Window::hide()`, `Fl_Group::insert()`, `Fl_File_Chooser::ok_label()`, `Fl_File_Chooser::preview()`, `Fl_Scroll::scroll_to()`, `Fl_Button::setonly()`, and `window()`.

30.102.4.67 void Fl_Widget::position (int X, int Y) [inline]

Reposition the window or widget.

position(X,Y) is a shortcut for resize(X,Y,[w\(\)](#),[h\(\)](#)).

Parameters:

← X,Y new position relative to the parent window

See also:

[resize\(int, int, int, int\)](#), [size\(int, int\)](#)

Reimplemented in [Fl_Input_](#).

References [Fl_Group::resize\(\)](#).

Referenced by [Fl_File_Chooser::add_extra\(\)](#), [Fl_Input_::cut\(\)](#), [Fl_Window::hotspot\(\)](#), [Fl_Input_::mark\(\)](#), [Fl_Help_Dialog::position\(\)](#), [Fl_Scroll::resize\(\)](#), and [Fl_Scroll::scroll_to\(\)](#).

30.102.4.68 void Fl_Widget::redraw ()

Schedule the drawing of the widget.

Marks the widget as needing its [draw\(\)](#) routine called.

References [damage\(\)](#).

Referenced by [activate\(\)](#), [Fl_Chart::add\(\)](#), [Fl_Chart::bounds\(\)](#), [Fl_Check_Browser::check_all\(\)](#), [Fl_Check_Browser::check_none\(\)](#), [Fl_Check_Browser::checked\(\)](#), [Fl_Chart::clear\(\)](#), [damage_resize\(\)](#), [deactivate\(\)](#), [Fl_Value_Slider::handle\(\)](#), [Fl_Text_Editor::handle\(\)](#), [Fl_Tabs::handle\(\)](#), [Fl_Slider::handle\(\)](#), [Fl_Roller::handle\(\)](#), [Fl_Menu_Button::handle\(\)](#), [Fl_Light_Button::handle\(\)](#), [Fl_Counter::handle\(\)](#), [Fl_Choice::handle\(\)](#), [Fl_Button::handle\(\)](#), [Fl_Browser_::handle\(\)](#), [Fl_Adjuster::handle\(\)](#), [Fl_Browser::hide\(\)](#), [Fl_File_Browser::iconsize\(\)](#), [Fl_Chart::insert\(\)](#), [Fl_Help_View::leftline\(\)](#), [Fl_Progress::maximum\(\)](#), [Fl_Chart::maxsize\(\)](#), [Fl_Progress::minimum\(\)](#), [Fl_Menu_::picked\(\)](#), [Fl_Menu_Button::popup\(\)](#), [Fl_File_Chooser::preview\(\)](#), [Fl_Gl_Window::redraw_overlay\(\)](#), [Fl::reload_scheme\(\)](#), [Fl_Chart::replace\(\)](#), [Fl_File_Chooser::rescan_keep_filename\(\)](#), [Fl_Text_Display::resize\(\)](#), [Fl_Scroll::resize\(\)](#), [show\(\)](#), [Fl_Browser::show\(\)](#), [Fl_Help_View::topline\(\)](#), [Fl_Timer::value\(\)](#), [Fl_Progress::value\(\)](#), [Fl_Positioner::value\(\)](#), [Fl_File_Chooser::value\(\)](#), [Fl_Choice::value\(\)](#), [Fl_Button::value\(\)](#), [Fl_Positioner::xbounds\(\)](#), and [Fl_Positioner::ybounds\(\)](#).

30.102.4.69 void Fl_Widget::redraw_label ()

Schedule the drawing of the label.

Marks the widget or the parent as needing a redraw for the label area of a widget.

References [align\(\)](#), [box\(\)](#), [damage\(\)](#), [FL_ALIGN_BOTTOM](#), [FL_ALIGN_INSIDE](#), [FL_ALIGN_LEFT](#), [FL_ALIGN_RIGHT](#), [FL_ALIGN_TOP](#), [FL_NO_BOX](#), [h\(\)](#), [Fl_Label::measure\(\)](#), [w\(\)](#), [window\(\)](#), [x\(\)](#), and [y\(\)](#).

Referenced by [activate\(\)](#), [copy_label\(\)](#), [deactivate\(\)](#), [label\(\)](#), [show\(\)](#), and [Fl_Button::value\(\)](#).

30.102.4.70 void Fl_Widget::resize (int x, int y, int w, int h) [virtual]

Change the size or position of the widget.

This is a virtual function so that the widget may implement its own handling of resizing. The default version does *not* call the [redraw\(\)](#) method, but instead relies on the parent widget to do so because the parent may know a faster way to update the display, such as scrolling from the old position.

Some window managers under X11 call [resize\(\)](#) a lot more often than needed. Please verify that the position or size of a widget did actually change before doing any extensive calculations.

[position\(x,y\)](#) is a shortcut for [resize\(x,y,w\(\),h\(\)\)](#), and [size\(w,h\)](#) is a shortcut for [resize\(x\(\),y\(\),w,h\)](#).

Parameters:

← *x,y* new position relative to the parent window
 ← *w,h* new size

See also:

[position\(int, int\)](#), [size\(int, int\)](#)

Reimplemented in [Fl_Browser_](#), [Fl_Double_Window](#), [Fl_Gl_Window](#), [Fl_Group](#), [Fl_Help_View](#), [Fl_Input_](#), [Fl_Input_Choice](#), [Fl_Overlay_Window](#), [Fl_Scroll](#), [Fl_Spinner](#), [Fl_Text_Display](#), [Fl_Tile](#), [Fl_Value_Input](#), and [Fl_Window](#).

Referenced by [damage_resize\(\)](#), [Fl_Scroll::draw\(\)](#), [Fl_Pack::draw\(\)](#), [Fl_File_Chooser::ok_label\(\)](#), [Fl_File_Chooser::preview\(\)](#), [Fl_Tile::resize\(\)](#), [Fl_Spinner::resize\(\)](#), [Fl_Help_View::resize\(\)](#), [Fl_Group::resize\(\)](#), and [Fl_Browser_::resize\(\)](#).

30.102.4.71 void Fl_Widget::selection_color (unsigned *a*) [inline]

Gets or sets the selection color.

The selection color is defined for Forms compatibility and is usually used to color the widget when it is selected, although some widgets use this color for other purposes. You can set both colors at once with [color\(int, int\)](#).

Parameters:

← *a* the new selection color

See also:

[selection_color\(\)](#), [color\(unsigned, unsigned\)](#)

30.102.4.72 Fl_Color Fl_Widget::selection_color () const [inline]

Gets the selection color.

Returns:

the current selection color

See also:

[selection_color\(unsigned\)](#), [color\(unsigned, unsigned\)](#)

Referenced by [Fl_Text_Display::clear_rect\(\)](#), [Fl_Menu_::down_color\(\)](#), [Fl_Button::down_color\(\)](#), [Fl_Timer::draw\(\)](#), [Fl_FormsPixmap::draw\(\)](#), [Fl_FormsBitmap::draw\(\)](#), [Fl_Value_Input::draw\(\)](#), [Fl_Tabs::draw\(\)](#), [Fl_Scrollbar::draw\(\)](#), [Fl_Return_Button::draw\(\)](#), [Fl_Menu_Item::draw\(\)](#), [Fl_Light_Button::draw\(\)](#), [Fl_Dial::draw\(\)](#), [Fl_Clock_Output::draw\(\)](#), [Fl_Button::draw\(\)](#), [Fl_Browser_::draw\(\)](#),

Fl_Adjuster::draw(), Fl_Text_Display::draw_string(), Fl_Input_::drawtext(), Fl_Adjuster::Fl_Adjuster(), Fl_Check_Button::Fl_Check_Button(), Fl_Clock_Output::Fl_Clock_Output(), Fl_Counter::Fl_Counter(), Fl_Dial::Fl_Dial(), Fl_Light_Button::Fl_Light_Button(), Fl_Menu_::Fl_Menu_(), Fl_Positioner::Fl_Positioner(), Fl_Round_Button::Fl_Round_Button(), Fl_Timer::Fl_Timer(), Fl_Value_Input::Fl_Value_Input(), and Fl_Browser::item_draw().

30.102.4.73 void Fl_Widget::set_changed () [inline]

Mark the value of the widget as changed.

See also:

[changed\(\)](#), [clear_changed\(\)](#)

Reimplemented in [Fl_Input_Choice](#).

References CHANGED.

Referenced by Fl_Tile::handle(), Fl_Text_Editor::handle(), Fl_Tabs::handle(), Fl_Scrollbar::handle(), Fl_Button::handle(), Fl_Browser_::handle(), Fl_Valuator::handle_drag(), Fl_Text_Editor::handle_key(), Fl_Color_Chooser::hsv(), Fl_Text_Editor::kf_backspace(), Fl_Text_Editor::kf_cut(), Fl_Text_Editor::kf_default(), Fl_Text_Editor::kf_delete(), Fl_Text_Editor::kf_enter(), Fl_Text_Editor::kf_paste(), Fl_Text_Editor::kf_undo(), Fl_Help_Dialog::load(), Fl_Menu_::picked(), Fl_Input_::replace(), Fl_Color_Chooser::rgb(), Fl_Browser_::select(), Fl_Input_Choice::set_changed(), Fl_Input_::undo(), Fl_Help_View::value(), and Fl_Help_Dialog::value().

30.102.4.74 void Fl_Widget::set_output () [inline]

Set a widget to output only.

See also:

[output\(\)](#), [clear_output\(\)](#)

References OUTPUT.

30.102.4.75 void Fl_Widget::set_visible () [inline]

Makes the widget visible.

You must still redraw the parent widget to see a change in the window. Normally you want to use the [show\(\)](#) method instead.

References INVISIBLE.

Referenced by Fl_Scroll::draw(), Fl_Browser_::draw(), Fl_Window::hide(), and Fl_Gl_Window::show().

30.102.4.76 void Fl_Widget::set_visible_focus () [inline]

Enables keyboard focus navigation with this widget.

Note, however, that this will not necessarily mean that the widget will accept focus, but for widgets that can accept focus, this method enables it if it has been disabled.

See also:

[visible_focus\(\)](#), [clear_visible_focus\(\)](#), [visible_focus\(int\)](#)

References VISIBLE_FOCUS.

Referenced by [visible_focus\(\)](#).

30.102.4.77 void Fl_Widget::show ()

Makes a widget visible.

An invisible widget never gets redrawn and does not get events. The [visible\(\)](#) method returns true if the widget is set to be visible. The [visible_r\(\)](#) method returns true if the widget and all of its parents are visible. A widget is only visible if [visible\(\)](#) is true on it *and all of its parents*.

Changing it will send FL_SHOW or FL_HIDE events to the widget. *Do not change it if the parent is not visible, as this will send false FL_SHOW or FL_HIDE events to the widget.* [redraw\(\)](#) is called if necessary on this or the parent.

See also:

[hide\(\)](#), [visible\(\)](#), [visible_r\(\)](#)

Reimplemented in [Fl_Browser](#), [Fl_Double_Window](#), [Fl_Gl_Window](#), [Fl_Menu_Window](#), [Fl_Overlay_Window](#), [Fl_Single_Window](#), and [Fl_Window](#).

References [clear_flag\(\)](#), [FL_SHOW](#), [Fl::focus\(\)](#), [handle\(\)](#), [inside\(\)](#), [INVISILE](#), [redraw\(\)](#), [redraw_label\(\)](#), [take_focus\(\)](#), [visible\(\)](#), and [visible_r\(\)](#).

Referenced by [Fl_Help_View::Fl_Help_View\(\)](#), [Fl::handle\(\)](#), [Fl_File_Chooser::preview\(\)](#), [Fl_Browser::show\(\)](#), [Fl_Wizard::value\(\)](#), and [Fl_Tabs::value\(\)](#).

30.102.4.78 void Fl_Widget::size (int W, int H) [inline]

Change the size of the widget.

[size\(w,h\)](#) is a shortcut for [resize\(x\(\),y\(\),w,h\)](#).

Parameters:

← *W,H* new size

See also:

[position\(int, int\)](#), [resize\(int, int, int, int\)](#)

Reimplemented in [Fl_Browser](#), [Fl_Chart](#), [Fl_Help_View](#), [Fl_Input](#), and [Fl_Menu](#).

References [Fl_Group::resize\(\)](#).

Referenced by [Fl_File_Chooser::add_extra\(\)](#), [Fl_Text_Display::measure_vline\(\)](#), [Fl_Text_Display::resize\(\)](#), [Fl_Window::show\(\)](#), [Fl_Menu::size\(\)](#), [Fl_Input::size\(\)](#), [Fl_Help_View::size\(\)](#), [Fl_Chart::size\(\)](#), and [Fl_Browser::size\(\)](#).

30.102.4.79 int Fl_Widget::take_focus ()

Give the widget the keyboard focus.

Tries to make this widget be the [Fl::focus\(\)](#) widget, by first sending it an FL_FOCUS event, and if it returns non-zero, setting [Fl::focus\(\)](#) to this widget. You should use this method to assign the focus to a widget.

Returns:

true if the widget accepted the focus.

References contains(), FL_FOCUS, Fl::focus(), handle(), takesevents(), and visible_focus().

Referenced by activate(), Fl_Group::focus(), Fl_Value_Input::handle(), Fl_Spinner::handle(), Fl_Input::handle(), Fl_Group::handle(), show(), and Fl_File_Chooser::show().

30.102.4.80 int Fl_Widget::takesevents () const [inline]

Returns if the widget is able to take events.

This is the same as ([active\(\)](#) && ![output\(\)](#) && [visible\(\)](#)) but is faster.

Return values:

0 if the widget takes no events

References INACTIVE, INVISIBLE, and OUTPUT.

Referenced by Fl_Group::handle(), and take_focus().

30.102.4.81 int Fl_Widget::test_shortcut (const char * t) [static]

Internal use only.

References Fl::event_text(), and label_shortcut().

30.102.4.82 int Fl_Widget::test_shortcut ()

Internal use only.

Reimplemented in [Fl_Menu_](#).

References flags(), label(), and SHORTCUT_LABEL.

Referenced by Fl_Text_Editor::handle(), Fl_Text_Display::handle(), Fl_Tabs::handle(), Fl_Menu_Button::handle(), Fl_Choice::handle(), and Fl_Button::handle().

30.102.4.83 void Fl_Widget::tooltip (const char * t)

Sets the current tooltip text.

Sets a string of text to display in a popup tooltip window when the user hovers the mouse over the widget. The string is *not* copied, so make sure any formatted string is stored in a static, global, or allocated buffer.

If no tooltip is set, the tooltip of the parent is inherited. Setting a tooltip for a group and setting no tooltip for a child will show the group's tooltip instead. To avoid this behavior, you can set the child's tooltip to an empty string ("").

Parameters:

← t new tooltip

30.102.4.84 const char* Fl_Widget::tooltip () const [inline]

Gets the current tooltip text.

Returns:

a pointer to the tooltip text or NULL

Referenced by Fl_Tooltip::current(), Fl_File_Chooser::Fl_File_Chooser(), and Fl_Help_Dialog::Fl_Help_Dialog().

30.102.4.85 void Fl_Widget::type (uchar *t*) [inline]

Sets the widget type.

This is used for Forms compatibility.

Reimplemented in [Fl_Spinner](#).

30.102.4.86 uchar Fl_Widget::type () const [inline]

Gets the widget type.

Returns the widget type value, which is used for Forms compatibility and to simulate RTTI.

Reimplemented in [Fl_Spinner](#).

Referenced by damage(), Fl_Browser_::deselect(), Fl_Timer::draw(), Fl_Scroll::draw(), Fl_Return_Button::draw(), Fl_Menu_Button::draw(), Fl_Dial::draw(), Fl_Counter::draw(), Fl_Clock_Output::draw(), Fl_Chart::draw(), Fl_Button::draw(), Fl_Group::draw_child(), Fl_Browser_::Fl_Browser_(), Fl_Check_Browser::Fl_Check_Browser(), Fl_Clock::Fl_Clock(), Fl_Double_Window::Fl_Double_Window(), Fl_File_Chooser::Fl_File_Chooser(), Fl_Fill_Dial::Fl_Fill_Dial(), Fl_Fill_Slider::Fl_Fill_Slider(), Fl_Float_Input::Fl_Float_Input(), Fl_Free::Fl_Free(), Fl_Help_View::Fl_Help_View(), Fl_Hold_Browser::Fl_Hold_Browser(), Fl_Int_Input::Fl_Int_Input(), Fl_Light_Button::Fl_Light_Button(), Fl_Multi_Browser::Fl_Multi_Browser(), Fl_Multiline_Input::Fl_Multiline_Input(), Fl_Multiline_Output::Fl_Multiline_Output(), Fl_Output::Fl_Output(), Fl_Round_Clock::Fl_Round_Clock(), Fl_Scroll::Fl_Scroll(), Fl_Secret_Input::Fl_Secret_Input(), Fl_Select_Browser::Fl_Select_Browser(), Fl_Slider::Fl_Slider(), Fl_Spinner::Fl_Spinner(), Fl_Timer::Fl_Timer(), Fl_Toggle_Button::Fl_Toggle_Button(), Fl_Group::forms_end(), Fl_Free::handle(), Fl_Value_Input::handle(), Fl_Scrollbar::handle(), Fl_Menu_Button::handle(), Fl_Button::handle(), Fl_Browser_::handle(), Fl_Window::handle(), Fl_Valuator::horizontal(), Fl_Pack::horizontal(), Fl_Input::input_type(), Fl_Menu_Button::popup(), Fl_Input::readonly(), Fl_Group::resize(), Fl_Browser_::select(), Fl_Browser_::select_only(), Fl_Button::setonly(), Fl_Group::sizes(), Fl_Spinner::step(), Fl_Spinner::type(), Fl_File_Chooser::type(), Fl_Group::update_child(), Fl_Timer::value(), and Fl_Input::wrap().

30.102.4.87 void Fl_Widget::user_data (void * *v*) [inline]

Sets the user data for this widget.

Sets the new user data (void *) argument that is passed to the callback function.

Parameters:

$\leftarrow v$ new user data

30.102.4.88 void* Fl_Widget::user_data () const [inline]

Gets the user data for this widget.

Gets the current user data (void *) argument that is passed to the callback function.

Returns:

user data as a pointer

Referenced by Fl_File_Chooser::Fl_File_Chooser(), and Fl_Help_Dialog::Fl_Help_Dialog().

30.102.4.89 int Fl_Widget::visible () const [inline]

Returns whether a widget is visible.

Return values:

0 if the widget is not drawn and hence invisible.

See also:

[show\(\)](#), [hide\(\)](#), [visible_r\(\)](#)

References INVISIBLE.

Referenced by Fl_Browser_::bbox(), Fl_Scroll::draw(), Fl_Pack::draw(), Fl_Browser_::draw(), Fl_Group::draw_child(), Fl_Group::draw_outside_label(), Fl_Tabs::handle(), Fl_Group::handle(), Fl_Window::handle(), Fl_Scroll::resize(), show(), Fl_Group::update_child(), Fl_Wizard::value(), Fl_Tabs::value(), Fl_Help_Dialog::visible(), and Fl_File_Chooser::visible().

30.102.4.90 int Fl_Widget::visible_focus () [inline]

Check whether this widget has a visible focus.

Return values:

0 if this widget has no visible focus.

See also:

[visible_focus\(int\)](#), [set_visible_focus\(\)](#), [clear_visible_focus\(\)](#)

References VISIBLE_FOCUS.

Referenced by Fl_Window::show(), and take_focus().

30.102.4.91 void Fl_Widget::visible_focus (int *v*) [inline]

Modifies keyboard focus navigation.

Parameters:

← *v* set or clear visible focus

See also:

[set_visible_focus\(\)](#), [clear_visible_focus\(\)](#), [visible_focus\(\)](#)

References [clear_visible_focus\(\)](#), and [set_visible_focus\(\)](#).

Referenced by [Fl::focus\(\)](#).

30.102.4.92 int Fl_Widget::visible_r () const

Returns whether a widget and all its parents are visible.

Return values:

0 if the widget or any of its parents are invisible.

See also:

[show\(\)](#), [hide\(\)](#), [visible\(\)](#)

Referenced by [Fl_Text_Display::buffer_modified_cb\(\)](#), [Fl_Text_Display::draw_line_numbers\(\)](#), [Fl::flush\(\)](#), [Fl_Menu_Bar::handle\(\)](#), [hide\(\)](#), and [show\(\)](#).

30.102.4.93 int Fl_Widget::w () const [inline]

Gets the widget width.

Returns:

the width of the widget in pixels.

Referenced by [Fl_Browser_::bbox\(\)](#), [Fl_Text_Display::buffer\(\)](#), [damage\(\)](#), [damage_resize\(\)](#), [Fl_Glut_Window::draw\(\)](#), [Fl_Timer::draw\(\)](#), [Fl_FormsPixmap::draw\(\)](#), [Fl_FormsBitmap::draw\(\)](#), [Fl_Window::draw\(\)](#), [Fl_Value_Slider::draw\(\)](#), [Fl_Value_Output::draw\(\)](#), [Fl_Text_Display::draw\(\)](#), [Fl_Tabs::draw\(\)](#), [Fl_Slider::draw\(\)](#), [Fl_Scrollbar::draw\(\)](#), [Fl_Scroll::draw\(\)](#), [Fl_Roller::draw\(\)](#), [Fl_Return_Button::draw\(\)](#), [Fl_Progress::draw\(\)](#), [Fl_Positioner::draw\(\)](#), [Fl_Pack::draw\(\)](#), [Fl_Menu_Button::draw\(\)](#), [Fl_Light_Button::draw\(\)](#), [Fl_Input::draw\(\)](#), [Fl_File_Input::draw\(\)](#), [Fl_Dial::draw\(\)](#), [Fl_Counter::draw\(\)](#), [Fl_Clock_Output::draw\(\)](#), [Fl_Choice::draw\(\)](#), [Fl_Chart::draw\(\)](#), [Fl_Browser_::draw\(\)](#), [Fl_Adjuster::draw\(\)](#), [Fl_Group::draw_children\(\)](#), [draw_focus\(\)](#), [Fl_Group::draw_outside_label\(\)](#), [Fl_Glut_Window::draw_overlay\(\)](#), [Fl_Gl_Window::flush\(\)](#), [Fl_Double_Window::flush\(\)](#), [Fl_Group::forms_end\(\)](#), [Fl_Window::fullscreen\(\)](#), [Fl_Value_Slider::handle\(\)](#), [Fl_Slider::handle\(\)](#), [Fl_Scrollbar::handle\(\)](#), [Fl_Positioner::handle\(\)](#), [Fl_Menu_Bar::handle\(\)](#), [Fl_Input::handle\(\)](#), [Fl_Dial::handle\(\)](#), [Fl_Choice::handle\(\)](#), [Fl_Button::handle\(\)](#), [Fl_Browser_::handle\(\)](#), [Fl_Adjuster::handle\(\)](#), [Fl_Window::hotspot\(\)](#), [Fl_Help_View::leftline\(\)](#), [Fl_Gl_Window::make_current\(\)](#), [Fl_Gl_Window::ortho\(\)](#), [Fl_Menu_Button::popup\(\)](#), [redraw_label\(\)](#), [Fl_Tile::resize\(\)](#), [Fl_Text_Display::resize\(\)](#), [Fl_Scroll::resize\(\)](#), [Fl_Overlay_Window::resize\(\)](#), [Fl_Input_::resize\(\)](#), [Fl_Help_View::resize\(\)](#), [Fl_Group::resize\(\)](#), [Fl_Gl_Window::resize\(\)](#), [Fl_Double_Window::resize\(\)](#), [Fl_Text_Display::scroll\(\)](#), [Fl_Window::show\(\)](#), [Fl_Text_Display::show_insert_position\(\)](#), [Fl_Group::sizes\(\)](#), and [Fl_Text_Display::wrap_mode\(\)](#).

30.102.4.94 void Fl_Widget::w (int v) [inline, protected]

Internal use only.

Use [position\(int,int\)](#), [size\(int, int\)](#) or [resize\(int,int,int,int\)](#) instead.

Referenced by Fl_File_Chooser::add_extra(), Fl_Text_Display::buffer_modified_cb(), Fl::cairo_make_current(), damage(), Fl_Scroll::draw(), Fl_Pack::draw(), Fl_Group::draw_child(), Fl_Text_Display::draw_line_numbers(), Fl_Group::draw_outside_label(), Fl::first_window(), Fl_File_Chooser::Fl_File_Chooser(), Fl_Group::forms_end(), Fl_Tile::handle(), Fl_Window::hotspot(), Fl::next_window(), Fl_Tile::position(), Fl_File_Chooser::preview(), Fl_File_Chooser::rescan_keep_filename(), Fl_Tile::resize(), Fl_Scroll::resize(), Fl_Group::resize(), Fl_Group::sizes(), Fl_Group::update_child(), and Fl_Help_Dialog::w().

30.102.4.95 void Fl_Widget::when (uchar *i*) [inline]

Flags used to decide when a callback is called.

[Fl_Widget::when\(\)](#) is a set of bitflags used by subclasses of [Fl_Widget](#) to decide when to do the callback. If the value is zero then the callback is never done. Other values are described in the individual widgets. This field is in the base class so that you can scan a panel and [do_callback\(\)](#) on all the ones that don't do their own callbacks in response to an "OK" button.

Parameters:

← *i* set of flags

30.102.4.96 Fl_When Fl_Widget::when () const [inline]

Controls when callbacks are done.

The following values are useful, the default value is FL_WHEN_RELEASE:

- 0: The callback is not done, but [changed\(\)](#) is turned on.
- FL_WHEN_CHANGED: The callback is done each time the text is changed by the user.
- FL_WHEN_RELEASE: The callback will be done when this widget loses the focus, including when the window is unmapped. This is a useful value for text fields in a panel where doing the callback on every change is wasteful. However the callback will also happen if the mouse is moved out of the window, which means it should not do anything visible (like pop up an error message). You might do better setting this to zero, and scanning all the items for [changed\(\)](#) when the OK button on a panel is pressed.
- FL_WHEN_ENTER_KEY: If the user types the Enter key, the entire text is selected, and the callback is done if the text has changed. Normally the Enter key will navigate to the next field (or insert a newline for a Fl_Multiline_Input), this changes the behavior.
- FL_WHEN_ENTER_KEY|FL_WHEN_NOT_CHANGED: The Enter key will do the callback even if the text has not changed. Useful for command fields.

Return the conditions under which the callback is called.

Returns:

set of flags

Referenced by Fl_Browser_::Fl_Browser_(), Fl_Check_Browser::Fl_Check_Browser(), Fl_Choice::Fl_Choice(), Fl_File_Chooser::Fl_File_Chooser(), Fl_Help_Dialog::Fl_Help_Dialog(), Fl_Input_Choice::Fl_Input_Choice(), Fl_Menu_::Fl_Menu_(), Fl_Positioner::Fl_Positioner(), Fl_Spinner::Fl_Spinner(), Fl_Valuator::Fl_Valuator(), Fl_Value_Input::Fl_Value_Input(), Fl_Value_Input::handle(),

`Fl_Text_Editor::handle()`, `Fl_Button::handle()`, `Fl_Browser_::handle()`, `Fl_Valuator::handle_drag()`, `Fl_Text_Editor::handle_key()`, `Fl_Valuator::handle_release()`, `Fl_Text_Editor::kf_backspace()`, `Fl_Text_Editor::kf_cut()`, `Fl_Text_Editor::kf_default()`, `Fl_Text_Editor::kf_delete()`, `Fl_Text_Editor::kf_enter()`, `Fl_Text_Editor::kf_paste()`, `Fl_Text_Editor::kf_undo()`, `Fl_Text_Editor::maybe_do_callback()`, `Fl_Menu_::picked()`, `Fl_Input_::replace()`, and `Fl_Input_::undo()`.

30.102.4.97 `Fl_Window * Fl_Widget::window () const`

Returns a pointer to the primary `Fl_Window` widget.

Return values:

`NULL` if no window is associated with this widget.

Note:

for an `Fl_Window` widget, this returns its *parent* window (if any), not *this* window.

References `FL_WINDOW`, and `parent()`.

Referenced by `Fl_File_Chooser::Fl_File_Chooser()`, `Fl::focus()`, `Fl_Group::forms_end()`, `Fl_Text_Editor::handle()`, `Fl_Text_Display::handle()`, `Fl_Input::handle()`, `Fl_File_Input::handle()`, `Fl_Button::handle()`, `Fl::handle()`, `Fl_Window::hide()`, `Fl_Window::hotspot()`, `Fl_Gl_Window::make_current()`, `Fl_Menu_Item::popup()`, `redraw_label()`, `Fl_Scroll::scroll_to()`, `Fl_Wizard::value()`, `Fl_Window::x_root()`, and `Fl_Window::y_root()`.

30.102.4.98 `int Fl_Widget::x () const [inline]`

Gets the widget position in its window.

Returns:

the x position relative to the window

Referenced by `Fl_Browser_::bbox()`, `Fl_Text_Display::buffer()`, `damage()`, `damage_resize()`, `Fl_Timer::draw()`, `Fl_FormsPixmap::draw()`, `Fl_FormsBitmap::draw()`, `Fl_Window::draw()`, `Fl_Value_Slider::draw()`, `Fl_Value_Output::draw()`, `Fl_Text_Display::draw()`, `Fl_Tabs::draw()`, `Fl_Slider::draw()`, `Fl_Scrollbar::draw()`, `Fl_Scroll::draw()`, `Fl_Roller::draw()`, `Fl_Return_Button::draw()`, `Fl_Progress::draw()`, `Fl_Positioner::draw()`, `Fl_Pack::draw()`, `Fl_Menu_Button::draw()`, `Fl_Menu_Bar::draw()`, `Fl_Light_Button::draw()`, `Fl_Input::draw()`, `Fl_File_Input::draw()`, `Fl_Dial::draw()`, `Fl_Counter::draw()`, `Fl_Clock_Output::draw()`, `Fl_Choice::draw()`, `Fl_Chart::draw()`, `Fl_Browser_::draw()`, `Fl_Adjuster::draw()`, `Fl_Group::draw_children()`, `draw_focus()`, `Fl_Group::draw_outside_label()`, `Fl_Group::forms_end()`, `Fl_Window::fullscreen()`, `Fl_Value_Slider::handle()`, `Fl_Tile::handle()`, `Fl_Slider::handle()`, `Fl_Scrollbar::handle()`, `Fl_Positioner::handle()`, `Fl_Menu_Bar::handle()`, `Fl_Input::handle()`, `Fl_Dial::handle()`, `Fl_Choice::handle()`, `Fl_Button::handle()`, `Fl_Browser_::handle()`, `Fl_Adjuster::handle()`, `Fl_Window::hotspot()`, `Fl_Gl_Window::make_current()`, `Fl_Menu_Button::popup()`, `redraw_label()`, `Fl_Tile::resize()`, `Fl_Scroll::resize()`, `Fl_Help_View::resize()`, `Fl_Group::resize()`, `Fl_Gl_Window::resize()`, `Fl_Text_Display::scroll()`, `Fl_Window::show()`, `Fl_Text_Display::show_insert_position()`, `Fl_Group::sizes()`, `Fl_Text_Display::wrap_mode()`, and `Fl_Window::x_root()`.

30.102.4.99 `void Fl_Widget::x (int v) [inline, protected]`

Internal use only.

Use [position\(int,int\)](#), [size\(int, int\)](#) or [resize\(int,int,int,int\)](#) instead.

Referenced by [Fl_Text_Display::buffer_modified_cb\(\)](#), [Fl_Scroll::draw\(\)](#), [Fl_Pack::draw\(\)](#), [Fl_Browser_::draw\(\)](#), [Fl_Group::draw_child\(\)](#), [Fl_Group::draw_outside_label\(\)](#), [Fl::event_inside\(\)](#), [Fl_Group::forms_end\(\)](#), [Fl_Tile::handle\(\)](#), [Fl_Window::hotspot\(\)](#), [Fl_File_Chooser::ok_label\(\)](#), [Fl_Tile::position\(\)](#), [Fl_File_Chooser::preview\(\)](#), [Fl_Tile::resize\(\)](#), [Fl_Group::resize\(\)](#), [Fl_Scroll::scroll_to\(\)](#), [Fl_Group::sizes\(\)](#), [Fl_Group::update_child\(\)](#), and [Fl_Help_Dialog::x\(\)](#).

30.102.4.100 int Fl_Widget::y () const [inline]

Gets the widget position in its window.

Returns:

the y position relative to the window

Referenced by [Fl_Browser_::bbox\(\)](#), [Fl_Text_Display::buffer\(\)](#), [damage\(\)](#), [damage_resize\(\)](#), [Fl_Timer::draw\(\)](#), [Fl_FormsPixmap::draw\(\)](#), [Fl_FormsBitmap::draw\(\)](#), [Fl_Window::draw\(\)](#), [Fl_Value_Slider::draw\(\)](#), [Fl_Value_Output::draw\(\)](#), [Fl_Text_Display::draw\(\)](#), [Fl_Tabs::draw\(\)](#), [Fl_Slider::draw\(\)](#), [Fl_Scrollbar::draw\(\)](#), [Fl_Scroll::draw\(\)](#), [Fl_Roller::draw\(\)](#), [Fl_Return_Button::draw\(\)](#), [Fl_Progress::draw\(\)](#), [Fl_Positioner::draw\(\)](#), [Fl_Pack::draw\(\)](#), [Fl_Menu_Button::draw\(\)](#), [Fl_Menu_Bar::draw\(\)](#), [Fl_Light_Button::draw\(\)](#), [Fl_Input::draw\(\)](#), [Fl_File_Input::draw\(\)](#), [Fl_Dial::draw\(\)](#), [Fl_Counter::draw\(\)](#), [Fl_Clock_Output::draw\(\)](#), [Fl_Choice::draw\(\)](#), [Fl_Chart::draw\(\)](#), [Fl_Browser_::draw\(\)](#), [Fl_Adjuster::draw\(\)](#), [Fl_Group::draw_children\(\)](#), [draw_focus\(\)](#), [Fl_Text_Display::draw_line_numbers\(\)](#), [Fl_Group::draw_outside_label\(\)](#), [Fl_Group::forms_end\(\)](#), [Fl_Window::fullscreen\(\)](#), [Fl_Value_Slider::handle\(\)](#), [Fl_Tile::handle\(\)](#), [Fl_Tabs::handle\(\)](#), [Fl_Slider::handle\(\)](#), [Fl_Scrollbar::handle\(\)](#), [Fl_Positioner::handle\(\)](#), [Fl_Menu_Bar::handle\(\)](#), [Fl_Input::handle\(\)](#), [Fl_File_Input::handle\(\)](#), [Fl_Dial::handle\(\)](#), [Fl_Choice::handle\(\)](#), [Fl_Button::handle\(\)](#), [Fl_Adjuster::handle\(\)](#), [Fl_Gl_Window::make_current\(\)](#), [Fl_Menu_Button::popup\(\)](#), [redraw_label\(\)](#), [Fl_Tile::resize\(\)](#), [Fl_Scroll::resize\(\)](#), [Fl_Help_View::resize\(\)](#), [Fl_Group::resize\(\)](#), [Fl_Gl_Window::resize\(\)](#), [Fl_Text_Display::scroll\(\)](#), [Fl_Window::show\(\)](#), [Fl_Text_Display::show_insert_position\(\)](#), [Fl_Group::sizes\(\)](#), [Fl_Text_Display::wrap_mode\(\)](#), and [Fl_Window::y_root\(\)](#).

30.102.4.101 void Fl_Widget::y (int v) [inline, protected]

Internal use only.

Use [position\(int,int\)](#), [size\(int, int\)](#) or [resize\(int,int,int,int\)](#) instead.

Referenced by [Fl_File_Chooser::add_extra\(\)](#), [Fl_Text_Display::buffer_modified_cb\(\)](#), [Fl_Scroll::draw\(\)](#), [Fl_Pack::draw\(\)](#), [Fl_Browser_::draw\(\)](#), [Fl_Group::draw_child\(\)](#), [Fl_Group::draw_outside_label\(\)](#), [Fl::event_inside\(\)](#), [Fl_Group::forms_end\(\)](#), [Fl_Tile::handle\(\)](#), [Fl_Window::hotspot\(\)](#), [Fl_File_Chooser::ok_label\(\)](#), [Fl_Tile::position\(\)](#), [Fl_File_Chooser::preview\(\)](#), [Fl_Tile::resize\(\)](#), [Fl_Group::resize\(\)](#), [Fl_Scroll::scroll_to\(\)](#), [Fl_Group::sizes\(\)](#), [Fl_Group::update_child\(\)](#), and [Fl_Help_Dialog::y\(\)](#).

The documentation for this class was generated from the following files:


- [Fl_Widget.H](#)
- [Fl.cxx](#)
- [fl_boxtype.cxx](#)
- [fl_labeltype.cxx](#)
- [fl_shortcut.cxx](#)
- [Fl_Tooltip.cxx](#)
- [Fl_Widget.cxx](#)
- [Fl_Window.cxx](#)

30.103 Fl_Window Class Reference

This widget produces an actual window.

```
#include <Fl_Window.h>
```

Inheritance diagram for Fl_Window::

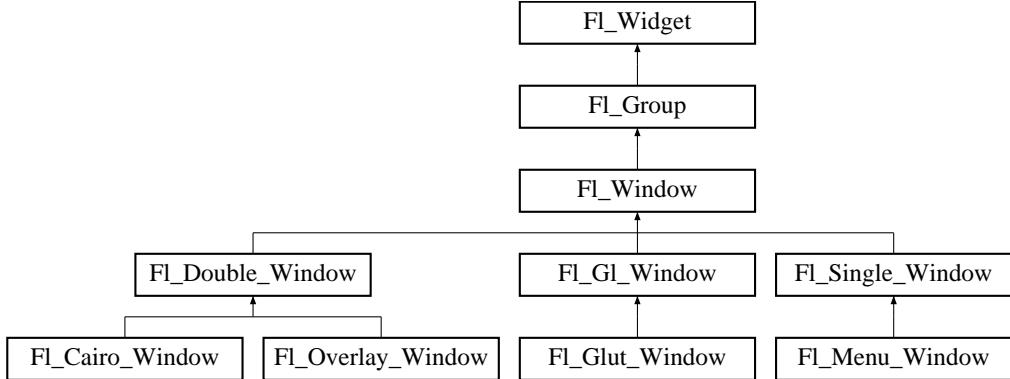

Public Member Functions

- [Fl_Window \(int w, int h, const char *title=0\)](#)
Creates a window from the given size and title.
- [Fl_Window \(int x, int y, int w, int h, const char *title=0\)](#)
Creates a window from the given position, size and title.
- virtual [~Fl_Window \(\)](#)
The destructor also deletes all the children.
- virtual int [handle \(int\)](#)
Handles the specified event.
- virtual void [resize \(int, int, int, int\)](#)
Changes the size and position of the window.
- void [border \(int b\)](#)
Gets or sets whether or not the window manager border is around the window.
- void [clear_border \(\)](#)
Fast inline function to turn the border off.
- int [border \(\) const](#)
See int [Fl_Window::border\(int\)](#).
- void [set_override \(\)](#)
Activate the flags [FL_NOBORDER|FL_OVERRIDE](#).
- int [override \(\) const](#)

Returns non zero if FL_OVERRIDE flag is set, 0 otherwise.

- **void set_modal ()**

A "modal" window, when [shown\(\)](#), will prevent any events from being delivered to other windows in the same program, and will also remain on top of the other windows (if the X window manager supports the "transient for" property).

- **int modal () const**

Returns true if this window is modal.

- **void set_non_modal ()**

A "non-modal" window (terminology borrowed from Microsoft Windows) acts like a [modal\(\)](#) one in that it remains on top, but it has no effect on event delivery.

- **int non_modal () const**

Returns true if this window is modal or non-modal.

- **void hotspot (int x, int y, int offscreen=0)**

Position the window so that the mouse is pointing at the given position, or at the center of the given widget, which may be the window itself.

- **void hotspot (const Fl_Widget *, int offscreen=0)**

See void [Fl_Window::hotspot\(int x, int y, int offscreen = 0\)](#).

- **void hotspot (const Fl_Widget &p, int offscreen=0)**

See void [Fl_Window::hotspot\(int x, int y, int offscreen = 0\)](#).

- **void free_position ()**

Undoes the effect of a previous [resize\(\)](#) or [show\(\)](#) so that the next time [show\(\)](#) is called the window manager is free to position the window.

- **void size_range (int a, int b, int c=0, int d=0, int e=0, int f=0, int g=0)**

Set the allowable range the user can resize this window to.

- **const char * label () const**

See void [Fl_Window::label\(const char\)](#).*

- **const char * iconlabel () const**

See void [Fl_Window::iconlabel\(const char\)](#).*

- **void label (const char *)**

Sets the window title bar label.

- **void iconlabel (const char *)**

Sets the icon label.

- **void label (const char *label, const char *iconlabel)**

Gets or sets the icon label.

- **void copy_label (const char *a)**

Sets the current label.

- const char * **xclass** () const

See void [Fl_Window::xclass\(const char\)](#).*

- void **xclass** (const char *c)

A string used to tell the system what type of window this is.

- const void * **icon** () const

Gets the current icon window target dependent data.

- void **icon** (const void *ic)

Sets the current icon window target dependent data.

- int **shown** ()

Returns non-zero if [show\(\)](#) has been called (but not [hide\(\)](#)).

- virtual void **show** ()

Put the window on the screen.

- virtual void **hide** ()

Remove the window from the screen.

- void **show** (int, char **)

See virtual void [Fl_Window::show\(\)](#).

- void **fullscreen** ()

Makes the window completely fill the screen, without any window manager border visible.

- void **fullscreen_off** (int, int, int, int)

Turns off any side effects of [fullscreen\(\)](#) and does resize(x,y,w,h).

- void **iconize** ()

Iconifies the window.

- int **x_root** () const

Gets the x position of the window on the screen.

- int **y_root** () const

Gets the y position of the window on the screen.

- void **make_current** ()

Sets things up so that the drawing functions in <[FL/fl_draw.H](#)> will go into this window.

- void **cursor** (Fl_Cursor, Fl_Color=FL_BLACK, Fl_Color=FL_WHITE)

Changes the cursor for this window.

- void **default_cursor** (Fl_Cursor, Fl_Color=FL_BLACK, Fl_Color=FL_WHITE)

Sets the default Window cursor as well as its color.

Static Public Member Functions

- static [Fl_Window * current\(\)](#)
Returns the last window that was made current.
- static void [default_callback\(Fl_Window *, void *v\)](#)
Back compatibility: Sets the default callback v for win to call on close event.

Protected Member Functions

- virtual void [draw\(\)](#)
Draw the widget.
- virtual void [flush\(\)](#)
Forces the window to be drawn, this window is also made current and calls draw().

Static Protected Attributes

- static [Fl_Window * current_](#)
Stores the last window that was made current.

Friends

- class [Fl_X](#)

30.103.1 Detailed Description

This widget produces an actual window.

This can either be a main window, with a border and title and all the window management controls, or a "subwindow" inside a window. This is controlled by whether or not the window has a [parent\(\)](#).

Once you create a window, you usually add children [Fl_Widget](#)'s to it by using `window->add(child)` for each new widget. See [Fl_Group](#) for more information on how to add and remove children.

There are several subclasses of [Fl_Window](#) that provide double-buffering, overlay, menu, and OpenGL support.

The window's callback is done if the user tries to close a window using the window manager and `Fl::modal()` is zero or equal to the window. [Fl_Window](#) has a default callback that calls [Fl_Window::hide\(\)](#).

30.103.2 Constructor & Destructor Documentation

30.103.2.1 [Fl_Window::Fl_Window \(int w, int h, const char * title = 0\)](#)

Creates a window from the given size and title.

If [Fl_Group::current\(\)](#) is not NULL, the window is created as a subwindow of the parent window.

The first form of the constructor creates a top-level window and asks the window manager to position the window. The second form of the constructor either creates a subwindow or a top-level window at the specified location (x,y) , subject to window manager configuration. If you do not specify the position of the window, the window manager will pick a place to show the window or allow the user to pick a location. Use `position(x,y)` or `hotspot()` before calling `show()` to request a position on the screen. See `Fl_Window::resize()` for some more details on positioning windows.

Top-level windows initially have `visible()` set to 0 and `parent()` set to NULL. Subwindows initially have `visible()` set to 1 and `parent()` set to the parent window pointer.

`Fl_Widget::box()` defaults to FL_FLAT_BOX. If you plan to completely fill the window with children widgets you should change this to FL_NO_BOX. If you turn the window border off you may want to change this to FL_UP_BOX.

References `Fl_Widget::clear_visible()`.

30.103.2.2 Fl_Window::Fl_Window (int x, int y, int w, int h, const char *title = 0)

Creates a window from the given position, size and title.

See `Fl_Window::Fl_Window(int w, int h, const char *title = 0)`

References `Fl_Widget::set_flag()`.

30.103.2.3 Fl_Window::~Fl_Window () [virtual]

The destructor *also deletes all the children*.

This allows a whole tree to be deleted at once, without having to keep a pointer to all the children in the user code. A kludge has been done so the `Fl_Window` and all of it's children can be automatic (local) variables, but you must declare the `Fl_Window` *first* so that it is destroyed last.

References `hide()`.

30.103.3 Member Function Documentation

30.103.3.1 void Fl_Window::border (int b)

Gets or sets whether or not the window manager border is around the window.

The default value is true. `border(n)` can be used to turn the border on and off, and returns non-zero if the value has been changed. *Under most X window managers this does not work after `show()` has been called, although SGI's 4DWM does work.*

References `border()`, `Fl_Widget::clear_flag()`, `Fl_Widget::set_flag()`, and `shown()`.

30.103.3.2 void Fl_Window::clear_border () [inline]

Fast inline function to turn the border off.

It only works before `show()` is called.

References `Fl_Widget::set_flag()`.

30.103.3.3 void Fl_Window::copy_label (const char * new_label)

Sets the current label.

Unlike [label\(\)](#), this method allocates a copy of the label string instead of using the original string pointer.

Parameters:

← *new_label* the new label text

See also:

[label\(\)](#)

Reimplemented from [Fl_Widget](#).

References [Fl_Widget::clear_flag\(\)](#), [Fl_Widget::COPIED_LABEL](#), [Fl_Widget::flags\(\)](#), [iconlabel\(\)](#), [label\(\)](#), and [Fl_Widget::set_flag\(\)](#).

30.103.3.4 Fl_Window * Fl_Window::current () [static]

Returns the last window that was made current.

See also:

[Fl_Window::make_current\(\)](#)

Reimplemented from [Fl_Group](#).

References [current_](#).

30.103.3.5 void Fl_Window::cursor (Fl_Cursor *c*, Fl_Color *fg* = FL_BLACK, Fl_Color *bg* = FL_WHITE)

Changes the cursor for this window.

This always calls the system, if you are changing the cursor a lot you may want to keep track of how you set it in a static variable and call this only if the new cursor is different.

The type [Fl_Cursor](#) is an enumeration defined in [<Enumerations.H>](#). (Under X you can get any XC_cursor value by passing [Fl_Cursor\(\(XC_foo/2\)+1\)](#)). The colors only work on X, they are not implemented on WIN32.

For back compatibility only.

References [Fl::get_color\(\)](#), and [shown\(\)](#).

Referenced by [default_cursor\(\)](#), [Fl_Gl_Window::flush\(\)](#), [Fl_Text_Editor::handle\(\)](#), [Fl_Text_Display::handle\(\)](#), [Fl_Input::handle\(\)](#), [Fl_File_Input::handle\(\)](#), [hide\(\)](#), [Fl_File_Chooser::rescan_keep_filename\(\)](#), and [Fl_Wizard::value\(\)](#).

30.103.3.6 void Fl_Window::default_cursor (Fl_Cursor *c*, Fl_Color *fg* = FL_BLACK, Fl_Color *bg* = FL_WHITE)

Sets the default Window cursor as well as its color.

For back compatibility only.

References [cursor\(\)](#).

30.103.3.7 void Fl_Window::draw () [protected, virtual]

Draw the widget.

Never call this function directly. FLTK will schedule redrawing whenever needed. If your widget must be redrawn as soon as possible, call [redraw\(\)](#) instead.

Override this function to draw your own widgets.

Reimplemented from [Fl_Group](#).

Reimplemented in [Fl_Cairo_Window](#), [Fl_Gl_Window](#), and [Fl_Glut_Window](#).

References [Fl_Widget::box\(\)](#), [Fl::box_dh\(\)](#), [Fl::box_dw\(\)](#), [Fl::box_dx\(\)](#), [Fl::box_dy\(\)](#), [Fl::cairo_make_current\(\)](#), [Fl_Widget::clear_flag\(\)](#), [Fl_Widget::color\(\)](#), [Fl_Widget::COPIED_LABEL](#), [fl_color\(\)](#), [fl_line\(\)](#), [Fl_Widget::flags\(\)](#), [Fl_Widget::h\(\)](#), [label\(\)](#), [Fl_Widget::parent\(\)](#), [Fl_Group::resizable\(\)](#), [Fl_Widget::set_flag\(\)](#), [Fl_Widget::w\(\)](#), [Fl_Widget::x\(\)](#), and [Fl_Widget::y\(\)](#).

Referenced by [Fl_Cairo_Window::draw\(\)](#), [Fl_Menu_Window::flush\(\)](#), [Fl_Double_Window::flush\(\)](#), and [flush\(\)](#).

30.103.3.8 void Fl_Window::flush () [protected, virtual]

Forces the window to be drawn, this window is also made current and calls [draw\(\)](#).

Reimplemented in [Fl_Double_Window](#), [Fl_Gl_Window](#), [Fl_Menu_Window](#), [Fl_Overlay_Window](#), and [Fl_Single_Window](#).

References [draw\(\)](#), [fl_clip_region\(\)](#), and [make_current\(\)](#).

30.103.3.9 void Fl_Window::fullscreen ()

Makes the window completely fill the screen, without any window manager border visible.

You must use [fullscreen_off\(\)](#) to undo this. This may not work with all window managers.

References [border\(\)](#), [Fl::h\(\)](#), [Fl_Widget::h\(\)](#), [resize\(\)](#), [Fl::screen_xywh\(\)](#), [Fl::w\(\)](#), [Fl_Widget::w\(\)](#), [Fl::x\(\)](#), [Fl_Widget::x\(\)](#), [Fl::y\(\)](#), and [Fl_Widget::y\(\)](#).

30.103.3.10 int Fl_Window::handle (int *event*) [virtual]

Handles the specified event.

You normally don't call this method directly, but instead let FLTK do it when the user interacts with the widget.

When implemented in a new widget, this function must return 0 if the widget does not use the event or 1 otherwise.

Most of the time, you want to call the inherited [handle\(\)](#) method in your overridden method so that you don't short-circuit events that you don't handle. In this last case you should return the callee retval.

Parameters:

← *event* the kind of event received

Return values:

0 if the event was not used or understood

I if the event was used and can be deleted

See also:

[Fl_Event](#)

Reimplemented from [Fl_Group](#).

Reimplemented in [Fl_Glut_Window](#).

References `FL_HIDE`, `FL_SHOW`, `FL_WINDOW`, `Fl_Widget::parent()`, `show()`, `shown()`, `Fl_Widget::type()`, and `Fl_Widget::visible()`.

Referenced by `hide()`.

30.103.3.11 void Fl_Window::hide () [virtual]

Remove the window from the screen.

If the window is already hidden or has not been shown then this does nothing and is harmless.

Reimplemented from [Fl_Widget](#).

Reimplemented in [Fl_Double_Window](#), [Fl_Gl_Window](#), [Fl_Menu_Window](#), and [Fl_Overlay_Window](#).

References `Fl::cairo_autolink_context()`, `Fl::cairo_make_current()`, `Fl_Widget::clear_visible()`, `cursor()`, `Fl::first_window()`, `FL_HIDE`, `handle()`, `hide()`, `modal()`, `Fl::next_window()`, `non_modal()`, `Fl_Widget::parent()`, `Fl_Widget::set_visible()`, `show()`, `shown()`, and `Fl_Widget::window()`.

Referenced by `Fl::default_atclose()`, `hide()`, and `~Fl_Window()`.

30.103.3.12 void Fl_Window::hotspot (int x, int y, int offscreen = 0)

Position the window so that the mouse is pointing at the given position, or at the center of the given widget, which may be the window itself.

If the optional offscreen parameter is non-zero, then the window is allowed to extend off the screen (this does not work with some X window managers).

See also:

[position\(\)](#)

References `border()`, `Fl::get_mouse()`, `Fl_Widget::h()`, `Fl_Widget::position()`, `Fl::screen_xywh()`, `Fl_Widget::w()`, and `Fl_Widget::x()`.

Referenced by `Fl_Color_Chooser::fl_color_chooser()`, `Fl_File_Chooser::Fl_File_Chooser()`, `hotspot()`, and `Fl_File_Chooser::show()`.

30.103.3.13 void Fl_Window::iconize ()

Iconifies the window.

If you call this when `shown()` is false it will `show()` it as an icon. If the window is already iconified this does nothing.

Call `show()` to restore the window.

When a window is iconified/restored (either by these calls or by the user) the `handle()` method is called with `FL_HIDE` and `FL_SHOW` events and `visible()` is turned on and off.

There is no way to control what is drawn in the icon except with the string passed to [Fl_Window::xclass\(\)](#). You should not rely on window managers displaying the icons.

References [show\(\)](#), and [shown\(\)](#).

30.103.3.14 void Fl_Window::iconlabel (const char * *iname*)

Sets the icon label.

References [Fl_Widget::flags\(\)](#), [label\(\)](#), and [Fl_Widget::set_flag\(\)](#).

30.103.3.15 void Fl_Window::label (const char * *label*, const char * *iconlabel*)

Gets or sets the icon label.

30.103.3.16 void Fl_Window::label (const char * *name*)

Sets the window title bar label.

Reimplemented from [Fl_Widget](#).

References [iconlabel\(\)](#), and [label\(\)](#).

30.103.3.17 void Fl_Window::make_current ()

Sets things up so that the drawing functions in <[FL/fl_draw.H](#)> will go into this window.

This is useful for incremental update of windows, such as in an idle callback, which will make your program behave much better if it draws a slow graphic. **Danger: incremental update is very hard to debug and maintain!**

This method only works for the [Fl_Window](#) and [Fl_Gl_Window](#) derived classes.

Reimplemented in [Fl_Gl_Window](#), [Fl_Single_Window](#), and [Fl_Glut_Window](#).

Referenced by [Fl_Double_Window::flush\(\)](#), and [flush\(\)](#).

30.103.3.18 int Fl_Window::modal () const [inline]

Returns true if this window is modal.

References [Fl_Widget::flags\(\)](#).

Referenced by [hide\(\)](#).

30.103.3.19 int Fl_Window::non_modal () const [inline]

Returns true if this window is modal or non-modal.

References [Fl_Widget::flags\(\)](#).

Referenced by [hide\(\)](#).

30.103.3.20 int Fl_Window::override () const [inline]

Returns non zero if FL_OVERRIDE flag is set, 0 otherwise.

References Fl_Widget::flags().

30.103.3.21 virtual void Fl_Window::resize (int, int, int, int) [virtual]

Changes the size and position of the window.

If [shown\(\)](#) is true, these changes are communicated to the window server (which may refuse that size and cause a further resize). If [shown\(\)](#) is false, the size and position are used when [show\(\)](#) is called. See [Fl_Group](#) for the effect of resizing on the child widgets.

You can also call the [Fl_Widget](#) methods [size\(x,y\)](#) and [position\(w,h\)](#), which are inline wrappers for this virtual function.

A top-level window can not force, but merely suggest a position and size to the operating system. The window manager may not be willing or able to display a window at the desired position or with the given dimensions. It is up to the application developer to verify window parameters after the resize request.

Reimplemented from [Fl_Group](#).

Reimplemented in [Fl_Double_Window](#), [Fl_Gl_Window](#), and [Fl_Overlay_Window](#).

Referenced by [fullscreen\(\)](#), [fullscreen_off\(\)](#), [Fl_Overlay_Window::resize\(\)](#), and [show\(\)](#).

30.103.3.22 void Fl_Window::set_modal () [inline]

A "modal" window, when [shown\(\)](#), will prevent any events from being delivered to other windows in the same program, and will also remain on top of the other windows (if the X window manager supports the "transient for" property).

Several modal windows may be shown at once, in which case only the last one shown gets events. You can See which window (if any) is modal by calling [Fl::modal\(\)](#).

References [Fl_Widget::set_flag\(\)](#).

Referenced by [Fl_Color_Chooser::fl_color_chooser\(\)](#), and [Fl_File_Chooser::Fl_File_Chooser\(\)](#).

30.103.3.23 void Fl_Window::set_non_modal () [inline]

A "non-modal" window (terminology borrowed from Microsoft Windows) acts like a [modal\(\)](#) one in that it remains on top, but it has no effect on event delivery.

There are *three* states for a window: modal, non-modal, and normal.

References [Fl_Widget::set_flag\(\)](#).

30.103.3.24 virtual void Fl_Window::show () [virtual]

Put the window on the screen.

Usually this has the side effect of opening the display. The second form is used for top-level windows and allow standard arguments to be parsed from the command-line.

If the window is already shown then it is restored and raised to the top. This is really convenient because your program can call [show\(\)](#) at any time, even if the window is already up. It also means that [show\(\)](#)

serves the purpose of raise() in other toolkits.

Reimplemented from [Fl_Widget](#).

Reimplemented in [Fl_Double_Window](#), [Fl_Gl_Window](#), [Fl_Menu_Window](#), [Fl_Overlay_Window](#), and [Fl_Single_Window](#).

Referenced by [Fl_Color_Chooser::fl_color_chooser\(\)](#), [handle\(\)](#), [Fl::handle\(\)](#), [hide\(\)](#), [iconize\(\)](#), [Fl_Single_Window::show\(\)](#), [Fl_Overlay_Window::show\(\)](#), [Fl_Gl_Window::show\(\)](#), [Fl_Double_Window::show\(\)](#), and [show\(\)](#).

30.103.3.25 int Fl_Window::shown () [inline]

Returns non-zero if [show\(\)](#) has been called (but not [hide\(\)](#)).

You can tell if a window is iconified with (`w->shown() &!w->visible()`).

Referenced by [border\(\)](#), [cursor\(\)](#), [Fl_Menu_Window::erase\(\)](#), [Fl::first_window\(\)](#), [Fl_Color_Chooser::fl_color_chooser\(\)](#), [Fl_Overlay_Window::flush\(\)](#), [handle\(\)](#), [hide\(\)](#), [iconize\(\)](#), [Fl_Glut_Window::make_current\(\)](#), [Fl_Gl_Window::redraw_overlay\(\)](#), [Fl_Menu_Window::show\(\)](#), [Fl_Gl_Window::show\(\)](#), and [Fl_File_Chooser::shown\(\)](#).

30.103.3.26 void Fl_Window::size_range (int *a*, int *b*, int *c* = 0, int *d* = 0, int *e* = 0, int *f* = 0, int *g* = 0) [inline]

Set the allowable range the user can resize this window to.

This only works for top-level windows.

- minw and minh are the smallest the window can be. Either value must be greater than 0.
- maxw and maxh are the largest the window can be. If either is *equal* to the minimum then you cannot resize in that direction. If either is zero then FLTK picks a maximum size in that direction such that the window will fill the screen.
- dw and dh are size increments. The window will be constrained to widths of minw + N * dw, where N is any non-negative integer. If these are less or equal to 1 they are ignored. (this is ignored on WIN32)
- aspect is a flag that indicates that the window should preserve it's aspect ratio. This only works if both the maximum and minimum have the same aspect ratio. (ignored on WIN32 and by many X window managers)

If this function is not called, FLTK tries to figure out the range from the setting of [resizable\(\)](#):

- If [resizable\(\)](#) is NULL (this is the default) then the window cannot be resized and the resize border and max-size control will not be displayed for the window.
- If either dimension of [resizable\(\)](#) is less than 100, then that is considered the minimum size. Otherwise the [resizable\(\)](#) has a minimum size of 100.
- If either dimension of [resizable\(\)](#) is zero, then that is also the maximum size (so the window cannot resize in that direction).

It is undefined what happens if the current size does not fit in the constraints passed to [size_range\(\)](#).

Referenced by [Fl_File_Chooser::Fl_File_Chooser\(\)](#), and [Fl_Help_Dialog::Fl_Help_Dialog\(\)](#).

30.103.3.27 void Fl_Window::xclass (const char * c) [inline]

A string used to tell the system what type of window this is.

Mostly this identifies the picture to draw in the icon. *Under X, this is turned into a XA_WM_CLASS pair by truncating at the first non-alphanumeric character and capitalizing the first character, and the second one if the first is 'x'. Thus "foo" turns into "foo, Foo", and "xprog.1" turns into "xprog, XProg".* This only works if called *before* calling [show\(\)](#).

Under Microsoft Windows this string is used as the name of the WNDCLASS structure, though it is not clear if this can have any visible effect. The passed pointer is stored unchanged. The string is not copied.

30.103.4 Member Data Documentation

30.103.4.1 Fl_Window* Fl_Window::current_ [static, protected]

Stores the last window that was made current.

See [current\(\)](#) const

Reimplemented from [Fl_Group](#).

Referenced by [current\(\)](#), [Fl_Menu_Window::flush\(\)](#), and [Fl_Gl_Window::make_current\(\)](#).

The documentation for this class was generated from the following files:


- [Fl_Window.H](#)
- [Fl.cxx](#)
- [Fl_arg.cxx](#)
- [fl_cursor.cxx](#)
- [Fl_Window.cxx](#)
- [Fl_Window_fullscreen.cxx](#)
- [Fl_Window_hotspot.cxx](#)
- [Fl_Window_iconize.cxx](#)

30.104 Fl_Wizard Class Reference

This widget is based off the [Fl_Tabs](#) widget, but instead of displaying tabs it only changes "tabs" under program control.

```
#include <Fl_Wizard.h>
```

Inheritance diagram for Fl_Wizard::



Public Member Functions

- [Fl_Wizard](#) (int, int, int, int, const char *=*0*)

The constructor creates the Fl_Wizard widget at the specified position and size.

- void [next](#) ()

This method shows the next child of the wizard.

- void [prev](#) ()

Shows the previous child.

- [Fl_Widget](#) * [value](#) ()

Gets the current visible child widget.

- void [value](#) ([Fl_Widget](#) *)

Sets the child widget that is visible.

30.104.1 Detailed Description

This widget is based off the [Fl_Tabs](#) widget, but instead of displaying tabs it only changes "tabs" under program control.

Its primary purpose is to support "wizards" that step a user through configuration or troubleshooting tasks.

As with [Fl_Tabs](#), wizard panes are composed of child (usually [Fl_Group](#)) widgets. Navigation buttons must be added separately.

30.104.2 Constructor & Destructor Documentation

30.104.2.1 Fl_Wizard::Fl_Wizard (int *xx*, int *yy*, int *ww*, int *hh*, const char * *l* = 0)

The constructor creates the [Fl_Wizard](#) widget at the specified position and size.

The inherited destructor destroys the widget and its children.

References `Fl_Widget::box()`, and `FL_THIN_UP_BOX`.

30.104.3 Member Function Documentation

30.104.3.1 void Fl_Wizard::next ()

This method shows the next child of the wizard.

If the last child is already visible, this function does nothing.

References `Fl_Group::array()`, `Fl_Group::children()`, and `value()`.

30.104.3.2 void Fl_Wizard::prev ()

Shows the previous child.

References `Fl_Group::array()`, `Fl_Group::children()`, and `value()`.

30.104.3.3 void Fl_Wizard::value (Fl_Widget * *kid*)

Sets the child widget that is visible.

References `Fl_Group::array()`, `Fl_Group::children()`, `Fl_Window::cursor()`, `Fl_Widget::show()`, `Fl_Widget::visible()`, and `Fl_Widget::window()`.

30.104.3.4 Fl_Widget * Fl_Wizard::value ()

Gets the current visible child widget.

References `Fl_Group::array()`, `Fl_Group::children()`, `Fl_Widget::hide()`, and `Fl_Widget::show()`.

Referenced by `next()`, and `prev()`.

The documentation for this class was generated from the following files:


- [Fl_Wizard.H](#)
- `Fl_Wizard.cxx`

30.105 Fl_XBM_Image Class Reference

The [Fl_XBM_Image](#) class supports loading, caching, and drawing of X Bitmap (XBM) bitmap files.

```
#include <Fl_XBM_Image.h>
```

Inheritance diagram for Fl_XBM_Image:::



Public Member Functions

- [Fl_XBM_Image](#) (const char *filename)

The constructor loads the named XBM file from the given name filename.

30.105.1 Detailed Description

The [Fl_XBM_Image](#) class supports loading, caching, and drawing of X Bitmap (XBM) bitmap files.

30.105.2 Constructor & Destructor Documentation

30.105.2.1 Fl_XBM_Image::Fl_XBM_Image (const char * *name*)

The constructor loads the named XBM file from the given name filename.

The destructor free all memory and server resources that are used by the image.

References [Fl_Bitmap::array](#), [Fl_Image::h\(\)](#), and [Fl_Image::w\(\)](#).

The documentation for this class was generated from the following files:


- [Fl_XBM_Image.H](#)
- [Fl_XBM_Image.cxx](#)

30.106 Fl_XPM_Image Class Reference

The [Fl_XPM_Image](#) class supports loading, caching, and drawing of X Pixmap (XPM) images, including transparency.

```
#include <Fl_XPM_Image.h>
```

Inheritance diagram for Fl_XPM_Image::



Public Member Functions

- [Fl_XPM_Image](#) (const char *filename)

The constructor loads the XPM image from the name filename.

30.106.1 Detailed Description

The [Fl_XPM_Image](#) class supports loading, caching, and drawing of X Pixmap (XPM) images, including transparency.

30.106.2 Constructor & Destructor Documentation

30.106.2.1 Fl_XPM_Image::Fl_XPM_Image (const char * *name*)

The constructor loads the XPM image from the name filename.

The destructor free all memory and server resources that are used by the image.

References [Fl_Image::data\(\)](#).

The documentation for this class was generated from the following files:

- [Fl_XPM_Image.H](#)
- [Fl_XPM_Image.cxx](#)

Chapter 31

File Documentation

31.1 Enumerations.H File Reference

This file contains type definitions and general enumerations.

```
#include "Fl_Export.h"  
#include "fl_types.h"
```

Defines

Version Numbers

FLTK defines some constants to help the programmer to find out, for which FLTK version a program is compiled.

The following constants are defined:

- #define **FL_MAJOR_VERSION** 1
The major release version of this FLTK library.
- #define **FL_MINOR_VERSION** 3
The minor release version for this library.
- #define **FL_PATCH_VERSION** 0
The patch version for this library.
- #define **FL_VERSION**
The FLTK version number as a double.

Mouse and Keyboard Events

*This and the following constants define the non-ASCII keys on the keyboard for **FL_KEYBOARD** and **FL_SHORTCUT** events.*

Todo

***FL_Button** and **FL_key...** constants could be structured better (use an enum or some doxygen grouping ?)*

See also:

[Fl::event_key\(\)](#) and [Fl::get_key\(int\)](#) (use ascii letters for all other keys):

- #define **FL_Button** 0xfee8
*A mouse button; use **FL_Button** + n for mouse button n.*
- #define **FL_Backspace** 0xff08
The backspace key.
- #define **FL_Tab** 0xff09
The tab key.
- #define **FL_Enter** 0xff0d
The enter key.
- #define **FL_Pause** 0xff13
The pause key.
- #define **FL_Scroll_Lock** 0xff14
The scroll lock key.
- #define **FL_Escape** 0xff1b
The escape key.
- #define **FL_Home** 0xff50
The home key.
- #define **FL_Left** 0xff51
The left arrow key.
- #define **FL_Up** 0xff52
The up arrow key.
- #define **FL_Right** 0xff53
The right arrow key.
- #define **FL_Down** 0xff54
The down arrow key.
- #define **FL_Page_Up** 0xff55
The page-up key.
- #define **FL_Page_Down** 0xff56
The page-down key.
- #define **FL_End** 0xff57
The end key.
- #define **FL_Print** 0xff61
The print (or print-screen) key.
- #define **FL_Insert** 0xff63
The insert key.

- #define **FL_Menu** 0xff67
The menu key.
- #define **FL_Help** 0xff68
The 'help' key on Mac keyboards.
- #define **FL_Num_Lock** 0xff7f
The num lock key.
- #define **FL_KP** 0xff80
*One of the keypad numbers; use **FL_KP** + *n* for number *n*.*
- #define **FL_KP_Enter** 0xff8d
*The enter key on the keypad, same as **Fl_KP**+'\r'.*
- #define **FL_KP_Last** 0xffbd
The last keypad key; use to range-check keypad.
- #define **FL_F** 0xffbd
*One of the function keys; use **FL_F** + *n* for function key *n*.*
- #define **FL_F_Last** 0xffe0
The last function key; use to range-check function keys.
- #define **FL_Shift_L** 0xffe1
The lefthand shift key.
- #define **FL_Shift_R** 0xffe2
The righthand shift key.
- #define **FL_Control_L** 0xffe3
The lefthand control key.
- #define **FL_Control_R** 0xffe4
The righthand control key.
- #define **FL_Caps_Lock** 0xffe5
The caps lock key.
- #define **FL_Meta_L** 0xffe7
The left meta/Windows key.
- #define **FL_Meta_R** 0xffe8
The right meta/Windows key.
- #define **FL_Alt_L** 0xffe9
The left alt key.
- #define **FL_Alt_R** 0xffea
The right alt key.
- #define **FL_Delete** 0xffff

The delete key.

Mouse Buttons

These constants define the button numbers for `FL_PUSH` and `FL_RELEASE` events.

See also:

[`Fl::event_button\(\)`](#)

- `#define FL_LEFT_MOUSE 1`
The left mouse button.
- `#define FL_MIDDLE_MOUSE 2`
The middle mouse button.
- `#define FL_RIGHT_MOUSE 3`
The right mouse button.

Event States

The following constants define bits in the `Fl::event_state()` value.

- `#define FL_SHIFT 0x00010000`
One of the shift keys is down.
- `#define FL_CAPS_LOCK 0x00020000`
The caps lock is on.
- `#define FL_CTRL 0x00040000`
One of the ctrl keys is down.
- `#define FL_ALT 0x00080000`
One of the alt keys is down.
- `#define FL_NUM_LOCK 0x00100000`
The num lock is on.
- `#define FL_META 0x00400000`
One of the meta/Windows keys is down.
- `#define FL_SCROLL_LOCK 0x00800000`
The scroll lock is on.
- `#define FL_BUTTON1 0x01000000`
Mouse button 1 is pushed.
- `#define FL_BUTTON2 0x02000000`
Mouse button 2 is pushed.
- `#define FL_BUTTON3 0x04000000`
Mouse button 3 is pushed.
- `#define FL_BUTTONS 0x7f000000`

Any mouse button is pushed.

- #define **FL_BUTTON**(n) (0x00800000<<(n))
Mouse button n (n > 0) is pushed.
- #define **FL_COMMAND** FL_CTRL
An alias for FL_CTRL on WIN32 and X11, or FL_META on MacOS X.

Typedefs

- typedef int **FL_Fontsize**
Size of a font in pixels.

Enumerations

- enum **Fl_Event** {

```
FL_NO_EVENT = 0, FL_PUSH = 1, FL_RELEASE = 2, FL_ENTER = 3,
FL_LEAVE = 4, FL_DRAG = 5, FL_FOCUS = 6, FL_UNFOCUS = 7,
FL_KEYDOWN = 8, FL_KEYBOARD = 8, FL_KEYUP = 9, FL_CLOSE = 10,
FL_MOVE = 11, FL_SHORTCUT = 12, FL_DEACTIVATE = 13, FL_ACTIVATE = 14,
FL_HIDE = 15, FL_SHOW = 16, FL_PASTE = 17, FL_SELECTIONCLEAR = 18,
FL_MOUSEWHEEL = 19, FL_DND_ENTER = 20, FL_DND_DRAG = 21, FL_DND_LEAVE = 22,
FL_DND_RELEASE = 23 }
```

Every time a user moves the mouse pointer, clicks a button, or presses a key, an event is generated and sent to your application.

- enum **Fl_Labeltype** {

```
FL_NORMAL_LABEL = 0, FL_NO_LABEL, _FL_SHADOW_LABEL, _FL_ENGRAVED_LABEL,
_FL_EMBOSSSED_LABEL, _FL_MULTI_LABEL, _FL_ICON_LABEL, _FL_IMAGE_LABEL,
FL_FREE_LABELTYPE }
```

The labeltype() method sets the type of the label.

When Conditions

- enum **Fl_When** {

```
FL_WHEN_NEVER = 0, FL_WHEN_CHANGED = 1, FL_WHEN_NOT_CHANGED = 2, FL_WHEN_RELEASE = 4,
FL_WHEN_RELEASE_ALWAYS = 6, FL_WHEN_ENTER_KEY = 8, FL_WHEN_ENTER_KEY_ALWAYS = 10, FL_WHEN_ENTER_KEY_CHANGED = 11 }
```

These constants determine when a callback is performed.

Variables

- `FL_EXPORT Fl_Fontsize FL_NORMAL_SIZE`
normal font size

31.1.1 Detailed Description

This file contains type definitions and general enumerations.

31.1.2 Define Documentation

31.1.2.1 `#define FL_MAJOR_VERSION 1`

The major release version of this FLTK library.

See also:

[FL_VERSION](#)

31.1.2.2 `#define FL_MINOR_VERSION 3`

The minor release version for this library.

FLTK remains mostly source-code compatible between minor version changes.

31.1.2.3 `#define FL_PATCH_VERSION 0`

The patch version for this library.

FLTK remains binary compatible between patches.

31.1.2.4 `#define FL_VERSION`

Value:

```
((double) FL_MAJOR_VERSION + \
    (double)FL_MINOR_VERSION * 0.01 + \
    (double)FL_PATCH_VERSION * 0.0001)
```

The FLTK version number as a *double*.

This is changed slightly from the beta versions because the old "const double" definition would not allow for conditional compilation...

`FL_VERSION` is a double that describes the major and minor version numbers. Version 1.1 is actually stored as 1.01 to allow for more than 9 minor releases.

The `FL_MAJOR_VERSION`, `FL_MINOR_VERSION`, and `FL_PATCH_VERSION` constants give the integral values for the major, minor, and patch releases respectively.

Referenced by `Fl::version()`.

31.1.3 Typedef Documentation

31.1.3.1 `typedef unsigned Fl_Align`

Flags to control the label alignment.

This controls how the label is displayed next to or inside the widget. The default value is `FL_ALIGN_CENTER` for most widgets, which centers the label inside the widget.

Flags can be or'd to achieve a combination of alignments.

See also:

`FL_ALIGN_CENTER`, etc.

31.1.3.2 `typedef int Fl_Font`

A font number is an index into the internal font table.

The following constants define the standard FLTK fonts:

31.1.3.3 `typedef int Fl_Fontsize`

Size of a font in pixels.

This is the approximate height of a font in pixels.

31.1.4 Enumeration Type Documentation

31.1.4.1 `enum Fl_Boxtype`

Enumerator:

`FL_NO_BOX` nothing is drawn at all, this box is invisible
`FL_FLAT_BOX` a flat box
`FL_UP_BOX` see figure 1
`FL_DOWN_BOX` see figure 1
`FL_UP_FRAME` see figure 1
`FL_DOWN_FRAME` see figure 1
`FL_THIN_UP_BOX` see figure 1
`FL_THIN_DOWN_BOX` see figure 1
`FL_THIN_UP_FRAME` see figure 1
`FL_THIN_DOWN_FRAME` see figure 1
`FL_ENGRAVED_BOX` see figure 1
`FL_EMBOSSSED_BOX` see figure 1
`FL_ENGRAVED_FRAME` see figure 1
`FL_EMBOSSSED_FRAME` see figure 1
`FL_BORDER_BOX` see figure 1
`FL_SHADOW_BOX` see figure 1

FL_BORDER_FRAME see figure 1
FL_SHADOW_FRAME see figure 1
FL_ROUNDED_BOX see figure 1
FL_RSHADOW_BOX see figure 1
FL_ROUNDED_FRAME see figure 1
FL_RFLAT_BOX see figure 1
FL_ROUND_UP_BOX see figure 1
FL_ROUND_DOWN_BOX see figure 1
FL_DIAMOND_UP_BOX see figure 1
FL_DIAMOND_DOWN_BOX see figure 1
FL_OVAL_BOX see figure 1
FL_OSHADOW_BOX see figure 1
FL_OVAL_FRAME see figure 1
FL_OFLAT_BOX see figure 1
FL_PLASTIC_UP_BOX plastic version of FL_UP_BOX
FL_PLASTIC_DOWN_BOX plastic version of FL_DOWN_BOX
FL_PLASTIC_UP_FRAME plastic version of FL_UP_FRAME
FL_PLASTIC_DOWN_FRAME plastic version of FL_DOWN_FRAME
FL_PLASTIC_THIN_UP_BOX plastic version of FL_THIN_UP_BOX
FL_PLASTIC_THIN_DOWN_BOX plastic version of FL_THIN_DOWN_BOX
FL_PLASTIC_ROUND_UP_BOX plastic version of FL_ROUND_UP_BOX
FL_PLASTIC_ROUND_DOWN_BOX plastic version of FL_ROUND_DOWN_BOX
FL_GTK_UP_BOX gtk+ version of FL_UP_BOX
FL_GTK_DOWN_BOX gtk+ version of FL_DOWN_BOX
FL_GTK_UP_FRAME gtk+ version of FL_UP_FRAME
FL_GTK_DOWN_FRAME gtk+ version of FL_DOWN_FRAME
FL_GTK_THIN_UP_BOX gtk+ version of FL_THIN_UP_BOX
FL_GTK_THIN_DOWN_BOX gtk+ version of FL_THIN_DOWN_BOX
FL_GTK_THIN_UP_FRAME gtk+ version of FL_UP_FRAME
FL_GTK_THIN_DOWN_FRAME gtk+ version of FL_THIN_DOWN_FRAME
FL_GTK_ROUND_UP_BOX gtk+ version of FL_ROUND_UP_BOX
FL_GTK_ROUND_DOWN_BOX gtk+ version of FL_ROUND_DOWN_BOX
FL_FREE_BOXTYPE the first free box type for creation of new box types

31.1.4.2 enum *Fl_Color*

The *Fl_Color* enumeration type holds a FLTK color value.

Colors are either 8-bit indexes into a virtual colormap or 24-bit RGB color values.

Color indices occupy the lower 8 bits of the value, while RGB colors occupy the upper 24 bits, for a byte organization of RGBI.

Todo

enum Fl_Color needs some more comments for values, see Fl/Enumerations.H

Enumerator:

FL_FOREGROUND_COLOR the default foreground color (0) used for labels and text

FL_BACKGROUND2_COLOR the default background color for text, list, and valuator widgets

FL_INACTIVE_COLOR the inactive foreground color

FL_SELECTION_COLOR the default selection/highlight color

31.1.4.3 enum Fl_Event

Every time a user moves the mouse pointer, clicks a button, or presses a key, an event is generated and sent to your application.

Events can also come from other programs like the window manager.

Events are identified by the integer argument passed to the [Fl_Widget::handle\(\)](#) virtual method. Other information about the most recent event is stored in static locations and acquired by calling the [Fl::event_-*\(\)](#) methods. This static information remains valid until the next event is read from the window system, so it is ok to look at it outside of the handle() method.

See also:

[Fl::event_text\(\)](#), [Fl::event_key\(\)](#), class [Fl::](#)

Enumerator:

FL_NO_EVENT No event.

FL_PUSH A mouse button has gone down with the mouse pointing at this widget.

You can find out what button by calling [Fl::event_button\(\)](#). You find out the mouse position by calling [Fl::event_x\(\)](#) and [Fl::event_y\(\)](#).

A widget indicates that it "wants" the mouse click by returning non-zero from its [Fl_Widget::handle\(\)](#) method. It will then become the [Fl::pushed\(\)](#) widget and will get [FL_DRAG](#) and the matching [FL_RELEASE](#) events. If [Fl_Widget::handle\(\)](#) returns zero then FLTK will try sending the [FL_PUSH](#) to another widget.

FL_RELEASE A mouse button has been released.

You can find out what button by calling [Fl::event_button\(\)](#).

In order to receive the [FL_RELEASE](#) event, the widget must return non-zero when handling [FL_PUSH](#).

FL_ENTER The mouse has been moved to point at this widget.

This can be used for highlighting feedback. If a widget wants to highlight or otherwise track the mouse, it indicates this by returning non-zero from its handle() method. It then becomes the [Fl::belowmouse\(\)](#) widget and will receive [FL_MOVE](#) and [FL_LEAVE](#) events.

FL_LEAVE The mouse has moved out of the widget.

In order to receive the [FL_LEAVE](#) event, the widget must return non-zero when handling [FL_ENTER](#).

FL_DRAG The mouse has moved with a button held down.

The current button state is in [Fl::event_state\(\)](#). The mouse position is in [Fl::event_x\(\)](#) and [Fl::event_y\(\)](#).

In order to receive [FL_DRAG](#) events, the widget must return non-zero when handling [FL_PUSH](#).

FL_FOCUS This indicates an *attempt* to give a widget the keyboard focus.

If a widget wants the focus, it should change itself to display the fact that it has the focus, and return non-zero from its handle() method. It then becomes the [Fl::focus\(\)](#) widget and gets FL_KEYDOWN, FL_KEYUP, and FL_UNFOCUS events.

The focus will change either because the window manager changed which window gets the focus, or because the user tried to navigate using tab, arrows, or other keys. You can check [Fl::event_key\(\)](#) to figure out why it moved. For navigation it will be the key pressed and interaction with the window manager it will be zero.

FL_UNFOCUS This event is sent to the previous [Fl::focus\(\)](#) widget when another widget gets the focus or the window loses focus.

FL_KEYDOWN A key was pressed or released.

The key can be found in [Fl::event_key\(\)](#). The text that the key should insert can be found with [Fl::event_text\(\)](#) and its length is in [Fl::event_length\(\)](#). If you use the key handle() should return 1. If you return zero then FLTK assumes you ignored the key and will then attempt to send it to a parent widget. If none of them want it, it will change the event into a FL_SHORTCUT event. To receive FL_KEYBOARD events you must also respond to the FL_FOCUS and FL_UNFOCUS events.

If you are writing a text-editing widget you may also want to call the [Fl::compose\(\)](#) function to translate individual keystrokes into foreign characters.

FL_KEYUP events are sent to the widget that currently has focus. This is not necessarily the same widget that received the corresponding FL_KEYDOWN event because focus may have changed between events.

FL_KEYBOARD Equivalent to FL_KEYDOWN.

See also:

[FL_KEYDOWN](#)

FL_KEYUP Key release event.

See also:

[FL_KEYDOWN](#)

FL_CLOSE The user clicked the close button of a window.

This event is used internally only to trigger the callback of [Fl_Window](#) derived classed. The default callback closes the window calling [Fl_Window::hide\(\)](#).

FL_MOVE The mouse has moved without any mouse buttons held down.

This event is sent to the [Fl::belowmouse\(\)](#) widget.

In order to receive FL_MOVE events, the widget must return non-zero when handling FL_ENTER.

FL_SHORTCUT If the [Fl::focus\(\)](#) widget is zero or ignores an FL_KEYBOARD event then FLTK tries sending this event to every widget it can, until one of them returns non-zero.

FL_SHORTCUT is first sent to the [Fl::belowmouse\(\)](#) widget, then its parents and siblings, and eventually to every widget in the window, trying to find an object that returns non-zero. FLTK tries really hard to not to ignore any keystrokes!

You can also make "global" shortcuts by using [Fl::add_handler\(\)](#). A global shortcut will work no matter what windows are displayed or which one has the focus.

FL_DEACTIVATE This widget is no longer active, due to [Fl_Widget::deactivate\(\)](#) being called on it or one of its parents.

[Fl_Widget::active\(\)](#) may still be true after this, the widget is only active if [Fl_Widget::active\(\)](#) is true on it and all its parents (use [Fl_Widget::active_r\(\)](#) to check this).

FL_ACTIVATE This widget is now active, due to [Fl_Widget::activate\(\)](#) being called on it or one of its parents.

FL_HIDE This widget is no longer visible, due to [Fl_Widget::hide\(\)](#) being called on it or one of its parents, or due to a parent window being minimized.

[Fl_Widget::visible\(\)](#) may still be true after this, but the widget is visible only if [visible\(\)](#) is true for it and all its parents (use [Fl_Widget::visible_r\(\)](#) to check this).

FL_SHOW This widget is visible again, due to [Fl_Widget::show\(\)](#) being called on it or one of its parents, or due to a parent window being restored.

Child Fl_Windows respond to this by actually creating the window if not done already, so if you subclass a window, be sure to pass FL_SHOW to the base class [Fl_Widget::handle\(\)](#) method!

FL_PASTE You should get this event some time after you call [Fl::paste\(\)](#).

The contents of [Fl::event_text\(\)](#) is the text to insert and the number of characters is in [Fl::event_length\(\)](#).

FL_SELECTIONCLEAR The [Fl::selection_owner\(\)](#) will get this event before the selection is moved to another widget.

This indicates that some other widget or program has claimed the selection. Motif programs used this to clear the selection indication. Most modern programs ignore this.

FL_MOUSEWHEEL The user has moved the mouse wheel.

The [Fl::event_dx\(\)](#) and [Fl::event_dy\(\)](#) methods can be used to find the amount to scroll horizontally and vertically.

FL_DND_ENTER The mouse has been moved to point at this widget.

A widget that is interested in receiving drag'n'drop data must return 1 to receive FL_DND_DRAG, FL_DND_LEAVE and FL_DND_RELEASE events.

FL_DND_DRAG The mouse has been moved inside a widget while dragging data.

A widget that is interested in receiving drag'n'drop data should indicate the possible drop position.

FL_DND_LEAVE The mouse has moved out of the widget.

FL_DND_RELEASE The user has released the mouse button dropping data into the widget.

If the widget returns 1, it will receive the data in the immediately following FL_PASTE event.

31.1.4.4 enum Fl_Labeltype

The [labeltype\(\)](#) method sets the type of the label.

The following standard label types are included:

[Todo](#)

The doxygen comments are incomplete, and some labeltypes are starting with an underscore. Also, there are three external functions undocumented (yet):

- [fl_define_FL_SHADOW_LABEL\(\)](#)
- [fl_define_FL_ENGRAVED_LABEL\(\)](#)
- [fl_define_FL_EMBOSED_LABEL\(\)](#)

Enumerator:

FL_NORMAL_LABEL draws the text (0)

FL_NO_LABEL does nothing

FL_SHADOW_LABEL draws a drop shadow under the text

FL_ENGRAVED_LABEL draws edges as though the text is engraved

_FL_EMBOSSED_LABEL draws edges as thought the text is raised
_FL_MULTI_LABEL ?
_FL_ICON_LABEL draws the icon associated with the text
_FL_IMAGE_LABEL ?
FL_FREE_LABELTYPE first free labeltype to use for creating own labeltypes

31.1.4.5 enum **Fl_When**

These constants determine when a callback is performed.

See also:

[Fl_Widget::when\(\)](#);

Todo

doxygen comments for values are incomplete and maybe wrong or unclear

Enumerator:

FL_WHEN_NEVER Never call the callback.
FL_WHEN_CHANGED Do the callback only when the widget value changes.
FL_WHEN_NOT_CHANGED Do the callback whenever the user interacts with the widget.
FL_WHEN_RELEASE Do the callback when the button or key is released and the value changes.
FL_WHEN_RELEASE_ALWAYS Do the callback when the button or key is released, even if the value doesn't change.
FL_WHEN_ENTER_KEY Do the callback when the user presses the ENTER key and the value changes.
FL_WHEN_ENTER_KEY_ALWAYS Do the callback when the user presses the ENTER key, even if the value doesn't change.
FL_WHEN_ENTER_KEY_CHANGED ?

31.1.5 Variable Documentation

31.1.5.1 const **Fl_Align** **FL_ALIGN_BOTTOM** = (**Fl_Align**)2

Align the label at the bottom of the widget.

Referenced by Fl_Group::draw_outside_label(), Fl_Browser_::Fl_Browser_(), Fl_Chart::Fl_Chart(), Fl_Clock_Output::Fl_Clock_Output(), Fl_Counter::Fl_Counter(), Fl_FormsBitmap::Fl_FormsBitmap(), Fl_FormsPixmap::Fl_FormsPixmap(), Fl_Positioner::Fl_Positioner(), Fl_Valuator::Fl_Valuator(), Fl_Widget::redraw_label(), and Fl_Text_Display::resize().

31.1.5.2 const **Fl_Align** **FL_ALIGN_CENTER** = (**Fl_Align**)0

Align the label horizontally in the middle.

Referenced by Fl_Timer::draw(), Fl_Counter::draw(), Fl_Widget::Fl_Widget(), Fl_Browser::item_draw(), and Fl::reload_scheme().

31.1.5.3 const Fl_Align FL_ALIGN_CLIP = (Fl_Align)64

All parts of the label that are larger than the widget will not be drawn .

Referenced by Fl_Value_Slider::draw(), Fl_File_Chooser::Fl_File_Chooser(), Fl_Browser::item_draw(), Fl::reload_scheme(), and Fl_File_Chooser::rescan_keep_filename().

31.1.5.4 const Fl_Align FL_ALIGN_IMAGE_OVER_TEXT = (Fl_Align)0

If the label contains an image, draw the text below the image.

31.1.5.5 const Fl_Align FL_ALIGN_INSIDE = (Fl_Align)16

Draw the label inside of the widget.

Referenced by Fl_Widget::draw_label(), Fl_Group::draw_outside_label(), Fl_File_Chooser::Fl_File_Chooser(), Fl_Light_Button::Fl_Light_Button(), Fl_Progress::Fl_Progress(), Fl_Widget::redraw_label(), Fl::reload_scheme(), and Fl_File_Chooser::rescan_keep_filename().

31.1.5.6 const Fl_Align FL_ALIGN_LEFT = (Fl_Align)4

Align the label at the left of the widget.

Inside labels appear left-justified starting at the left side of the widget, outside labels are right-justified and drawn to the left of the widget.

Referenced by Fl_Browser_::bbox(), Fl_Value_Output::draw(), Fl_Scroll::draw(), Fl_Menu_Item::draw(), Fl_Choice::draw(), Fl_Browser_::draw(), Fl_Widget::draw_label(), Fl_Group::draw_outside_label(), Fl_Choice::Fl_Choice(), Fl_File_Chooser::Fl_File_Chooser(), Fl_Input_::Fl_Input_(), Fl_Input_Choice::Fl_Input_Choice(), Fl_Light_Button::Fl_Light_Button(), Fl_Spinner::Fl_Spinner(), Fl_Timer::Fl_Timer(), Fl_Value_Input::Fl_Value_Input(), Fl_Value_Output::Fl_Value_Output(), Fl_Browser::item_draw(), Fl_Widget::redraw_label(), Fl_File_Chooser::rescan_keep_filename(), Fl_Text_Display::resize(), Fl_Scroll::resize(), Fl_Browser_::resize(), and Fl_Browser_::scrollbar_left().

31.1.5.7 const Fl_Align FL_ALIGN_RIGHT = (Fl_Align)8

Align the label to the right of the widget.

Referenced by Fl_Widget::draw_label(), Fl_Group::draw_outside_label(), Fl_File_Chooser::Fl_File_Chooser(), Fl_Browser::item_draw(), Fl_Widget::redraw_label(), Fl_Text_Display::resize(), and Fl_Browser_::scrollbar_right().

31.1.5.8 const Fl_Align FL_ALIGN_TEXT_OVER_IMAGE = (Fl_Align)32

If the label contains an image, draw the text on top of the image.

31.1.5.9 const Fl_Align FL_ALIGN_TOP = (Fl_Align)1

Align the label at the top of the widget.

Inside labels appear below the top, outside labels are drawn on top of the widget.

Referenced by Fl_Browser_::bbox(), Fl_Scroll::draw(), Fl_Browser_::draw(), Fl_Group::draw_outside_label(), Fl_Group::Fl_Group(), Fl_Widget::redraw_label(), Fl_File_Chooser::rescan_keep_filename(), Fl_Text_Display::resize(), Fl_Scroll::resize(), and Fl_Browser_::resize().

31.1.5.10 const Fl_Align FL_ALIGN_WRAP = (Fl_Align)128

Wrap text that does not fit the width of the widget.

31.2 Fl.H File Reference

Fl static class .

```
#include <FL/Fl_Cairo.H>
#include "fl_utf8.h"
#include "Enumerations.H"
```

Classes

- class Fl

The Fl is the FLTK global (static) containing state information and global methods for the current application.

Defines

- #define Fl_Object Fl_Widget
for back compatibility - use Fl_Widget!

Typedefs

- typedef void(Fl_Label_Draw_F)(const Fl_Label *, int, int, int, int, Fl_Align)
signature of some label drawing functions passed as parameters
- typedef void(Fl_Label_Measure_F)(const Fl_Label *, int &, int &)
signature of some label measurement functions passed as parameters
- typedef void(Fl_Box_Draw_F)(int, int, int, int, Fl_Color)
signature of some box drawing functions passed as parameters
- typedef void(* Fl_Timeout_Handler)(void *)
signature of some timeout callback functions passed as parameters
- typedef void(* Fl_Awake_Handler)(void *)
signature of some wakeup callback functions passed as parameters

31.2.1 Detailed Description

Fl static class .

31.3 Fl_Adjuster.H File Reference

[Fl_Adjuster](#) widget .

```
#include "Fl_Valuator.H"
```

Classes

- class [Fl_Adjuster](#)

The [Fl_Adjuster](#) widget was stolen from Prisms, and has proven to be very useful for values that need a large dynamic range.

31.3.1 Detailed Description

[Fl_Adjuster](#) widget .

31.4 fl_arc.cxx File Reference

Utility functions for drawing arcs and circles.

```
#include <FL/fl_draw.H>
#include <FL/math.h>
```

Functions

- void **fl_arc** (double x, double y, double r, double start, double end)

Add a series of points to the current path on the arc of a circle; you can get elliptical paths by using scale and rotate before calling [fl_arc\(\)](#).

31.4.1 Detailed Description

Utility functions for drawing arcs and circles.

31.4.2 Function Documentation

31.4.2.1 void **fl_arc** (double *x*, double *y*, double *r*, double *start*, double *end*)

Add a series of points to the current path on the arc of a circle; you can get elliptical paths by using scale and rotate before calling [fl_arc\(\)](#).

Parameters:

← *x,y,r* center and radius of circular arc
← *start,end* angles of start and end of arc measured in degrees counter-clockwise from 3 o'clock. If *end* is less than *start* then it draws the ark in a clockwise direction.

References [fl_transform_dx\(\)](#), [fl_transform_dy\(\)](#), and [fl_vertex\(\)](#).

31.5 fl_arci.cxx File Reference

Utility functions for drawing circles using integers.

```
#include <FL/fl_draw.H>
#include <FL/x.H>
#include <config.h>
```

Functions

- void [fl_arc](#) (int x, int y, int w, int h, double a1, double a2)
Draw ellipse sections using integer coordinates.
- void [fl_pie](#) (int x, int y, int w, int h, double a1, double a2)
Draw filled ellipse sections using integer coordinates.

31.5.1 Detailed Description

Utility functions for drawing circles using integers.

31.5.2 Function Documentation

31.5.2.1 void [fl_arc](#) (int *x*, int *y*, int *w*, int *h*, double *a1*, double *a2*)

Draw ellipse sections using integer coordinates.

These functions match the rather limited circle drawing code provided by X and WIN32. The advantage over using [fl_arc](#) with floating point coordinates is that they are faster because they often use the hardware, and they draw much nicer small circles, since the small sizes are often hard-coded bitmaps.

If a complete circle is drawn it will fit inside the passed bounding box. The two angles are measured in degrees counterclockwise from 3'o'clock and are the starting and ending angle of the arc, a2 must be greater or equal to a1.

[fl_arc\(\)](#) draws a series of lines to approximate the arc. Notice that the integer version of [fl_arc\(\)](#) has a different number of arguments than the double version [fl_arc\(double x, double y, double r, double start, double a\)](#)

Parameters:

- ← *x,y,w,h* bounding box of complete circle
- ← *a1,a2* start and end angles of arc measured in degrees counter-clockwise from 3 o'clock. a2 must be greater than or equal to a1.

Referenced by [Fl_Menu_Item::draw\(\)](#), [Fl_Light_Button::draw\(\)](#), and [Fl_Dial::draw\(\)](#).

31.5.2.2 void [fl_pie](#) (int *x*, int *y*, int *w*, int *h*, double *a1*, double *a2*)

Draw filled ellipse sections using integer coordinates.

Like fl_arc, but [fl_pie\(\)](#) draws a filled-in pie slice. This slice may extend outside the line drawn by fl_arc; to avoid this use w - 1 and h - 1.

Parameters:

- ← *x,y,w,h* bounding box of complete circle
- ← *a1,a2* start and end angles of arc measured in degrees counter-clockwise from 3 o'clock. a2 must be greater than or equal to a1.

Referenced by Fl_Menu_Item::draw(), Fl_Light_Button::draw(), and Fl_Dial::draw().

31.6 Fl_Bitmap.H File Reference

[Fl_Bitmap](#) widget .

```
#include "Fl_Image.H"
```

Classes

- class [Fl_Bitmap](#)

The [Fl_Bitmap](#) class supports caching and drawing of mono-color (bitmap) images.

31.6.1 Detailed Description

[Fl_Bitmap](#) widget .

31.7 Fl_BMP_Image.H File Reference

[Fl_BMP_Image](#) widget .
`#include "Fl_Image.H"`

Classes

- class [Fl_BMP_Image](#)

The [Fl_BMP_Image](#) class supports loading, caching, and drawing of Windows Bitmap (BMP) image files.

31.7.1 Detailed Description

[Fl_BMP_Image](#) widget .

31.8 Fl_Box.H File Reference

[Fl_Box](#) widget .

```
#include "Fl_Widget.H"
```

Classes

- class [Fl_Box](#)

This widget simply draws its box, and possibly it's label.

31.8.1 Detailed Description

[Fl_Box](#) widget .

31.9 fl_boxtype.cxx File Reference

drawing code for common box types.

```
#include <FL/F1.H>
#include <FL/F1_Widget.H>
#include <FL/fl_draw.H>
#include <config.h>
```

Defines

- #define **D1** BORDER_WIDTH
- #define **D2** (BORDER_WIDTH+BORDER_WIDTH)
- #define **fl_border_box** fl_rectbound
allow consistent naming

Functions

- **uchar * fl_gray_ramp ()**
- **void fl_frame (const char *s, int x, int y, int w, int h)**
Draws a series of line segments around the given box.
- **void fl_frame2 (const char *s, int x, int y, int w, int h)**
Draws a series of line segments around the given box.
- **void fl_no_box (int, int, int, int, Fl_Color)**
Draws a box of type FL_NO_BOX.
- **void fl_thin_down_frame (int x, int y, int w, int h, Fl_Color)**
Draws a frame of type FL_THIN_DOWN_FRAME.
- **void fl_thin_down_box (int x, int y, int w, int h, Fl_Color c)**
Draws a box of type FL_THIN_DOWN_BOX.
- **void fl_thin_up_frame (int x, int y, int w, int h, Fl_Color)**
Draws a frame of type FL_THIN_UP_FRAME.
- **void fl_thin_up_box (int x, int y, int w, int h, Fl_Color c)**
Draws a box of type FL_THIN_UP_BOX.
- **void fl_up_frame (int x, int y, int w, int h, Fl_Color)**
Draws a frame of type FL_UP_FRAME.
- **void fl_up_box (int x, int y, int w, int h, Fl_Color c)**
Draws a box of type FL_UP_BOX.
- **void fl_down_frame (int x, int y, int w, int h, Fl_Color)**

Draws a frame of type FL_DOWN_FRAME.

- void **fl_down_box** (int x, int y, int w, int h, **Fl_Color** c)
Draws a box of type FL_DOWN_BOX.
- void **fl_engraved_frame** (int x, int y, int w, int h, **Fl_Color**)
Draws a frame of type FL_ENGRAVED_FRAME.
- void **fl_engraved_box** (int x, int y, int w, int h, **Fl_Color** c)
Draws a box of type FL_ENGRAVED_BOX.
- void **fl_embossed_frame** (int x, int y, int w, int h, **Fl_Color** c)
Draws a frame of type FL_EMBOSSSED_FRAME.
- void **fl_embossed_box** (int x, int y, int w, int h, **Fl_Color** c)
Draws a box of type FL_EMBOSSSED_BOX.
- void **fl_rectbound** (int x, int y, int w, int h, **Fl_Color** bgcolor)
Draws a bounded rectangle with a given position, size and color; Equivalent to drawing a box of type FL_BORDER_BOX.

- void **fl_border_frame** (int x, int y, int w, int h, **Fl_Color** c)
Draws a frame of type FL_BORDER_FRAME.
- void **fl_internal_boxtype** (**Fl_Boxtype** t, **Fl_Box_Draw_F** *f)
Set the drawing function for a given box type.
- void **fl_draw_box** (**Fl_Boxtype** t, int x, int y, int w, int h, **Fl_Color** c)
Draw box using given type, position, size and color.

31.9.1 Detailed Description

drawing code for common box types.

31.9.2 Function Documentation

31.9.2.1 void **fl_draw_box** (**Fl_Boxtype** t, int x, int y, int w, int h, **Fl_Color** c)

Draw box using given type, position, size and color.

Parameters:

- ← **t** box type
- ← **x,y,w,h** position and size
- ← **c** color

Referenced by **Fl_Menu_Item**::draw().

31.9.2.2 void fl_frame (const char **s*, int *x*, int *y*, int *w*, int *h*)

Draws a series of line segments around the given box.

The string *s* must contain groups of 4 letters which specify one of 24 standard grayscale values, where 'A' is black and 'X' is white. The order of each set of 4 characters is: top, left, bottom, right. The results of calling [fl_frame\(\)](#) with a string that is not a multiple of 4 characters in length is undefined. The only difference between this function and [fl_frame2\(\)](#) is the order of the line segments.

Parameters:

← *s* sets of 4 grayscale values in top, left, bottom, right order

← *x,y,w,h* position and size

References [fl_color\(\)](#), [fl_xyline\(\)](#), and [fl_yxline\(\)](#).

Referenced by [fl_down_frame\(\)](#), [fl_embossed_frame\(\)](#), [fl_engraved_frame\(\)](#), and [fl_up_frame\(\)](#).

31.9.2.3 void fl_frame2 (const char **s*, int *x*, int *y*, int *w*, int *h*)

Draws a series of line segments around the given box.

The string *s* must contain groups of 4 letters which specify one of 24 standard grayscale values, where 'A' is black and 'X' is white. The order of each set of 4 characters is: bottom, right, top, left. The results of calling [fl_frame2\(\)](#) with a string that is not a multiple of 4 characters in length is undefined. The only difference between this function and [fl_frame\(\)](#) is the order of the line segments.

Parameters:

← *s* sets of 4 grayscale values in bottom, right, top, left order

← *x,y,w,h* position and size

References [fl_color\(\)](#), [fl_xyline\(\)](#), and [fl_yxline\(\)](#).

Referenced by [fl_down_frame\(\)](#), [fl_thin_down_frame\(\)](#), [fl_thin_up_frame\(\)](#), and [fl_up_frame\(\)](#).

31.9.2.4 void fl_internal_boxtype (Fl_Boxtype *t*, Fl_Box_Draw_F **f*)

Set the drawing function for a given box type.

Parameters:

← *t* box type

← *f* box drawing function

31.10 Fl_Browser.H File Reference

[Fl_Browser](#) widget .

```
#include "Fl_Browser_.H"
```

Classes

- class [Fl_Browser](#)

The [Fl_Browser](#) widget displays a scrolling list of text lines, and manages all the storage for the text.

31.10.1 Detailed Description

[Fl_Browser](#) widget .

31.11 Fl_Browser_.H File Reference

```
Fl_Browser_ widget .  
#include "Fl_Group.H"  
#include "Fl_Scrollbar.H"
```

Classes

- class [Fl_Browser_](#)
This is the base for browsers.

Defines

- #define [FL_NORMAL_BROWSER](#) 0
type() of Fl_Browser
- #define [FL_SELECT_BROWSER](#) 1
type() of FL_Select_Browser
- #define [FL_HOLD_BROWSER](#) 2
type() of Fl_Hold_Browser
- #define [FL_MULTI_BROWSER](#) 3
type() of Fl_Multi_Browser

31.11.1 Detailed Description

[Fl_Browser_](#) widget .

31.12 Fl_Button.H File Reference

[Fl_Button](#) widget .

```
#include "Fl_Widget.H"
```

Classes

- class [Fl_Button](#)

Buttons generate callbacks when they are clicked by the user.

Defines

- #define [FL_NORMAL_BUTTON](#) 0
value() remains unchanged after button press.
- #define [FL_TOGGLE_BUTTON](#) 1
value() is inverted after button press.
- #define [FL_RADIO_BUTTON](#) (FL_RESERVED_TYPE+2)
is set to 1 after button press, and all other buttons in the current group with type () == FL_RADIO_BUTTON are set to zero.
- #define [FL_HIDDEN_BUTTON](#) 3
for Forms compatibility

31.12.1 Detailed Description

[Fl_Button](#) widget .

31.12.2 Define Documentation

31.12.2.1 #define FL_RADIO_BUTTON (FL_RESERVED_TYPE+2)

is set to 1 after button press, and all other buttons in the current group with type () == FL_RADIO_BUTTON are set to zero.

Referenced by [Fl_Button::handle\(\)](#), and [Fl_Button::setonly\(\)](#).

31.13 Fl_Cairo.H File Reference

Handling transparently platform dependent cairo include files.

```
#include <FL/Fl_Export.H>
```

Classes

- class [Fl_Cairo_State](#)
Contains all the necessary info on the current cairo context.

31.13.1 Detailed Description

Handling transparently platform dependent cairo include files.

31.14 Fl_Cairo_Window.H File Reference

[Fl_Cairo_Window](#) Handling transparently a fltk window incorpore a cairo draw callback.

```
#include <FL/Fl.h>
#include <FL/Fl_Double_Window.h>
```

Classes

- class [Fl_Cairo_Window](#)

This defines a pre-configured cairo fltk window.

31.14.1 Detailed Description

[Fl_Cairo_Window](#) Handling transparently a fltk window incorpore a cairo draw callback.

31.15 Fl_Chart.H File Reference

[Fl_Chart](#) widget .

```
#include "Fl_Widget.h"
```

Classes

- struct [FL_CHART_ENTRY](#)

For internal use only.

- class [Fl_Chart](#)

Fl_Chart displays simple charts.

Defines

- #define [FL_BAR_CHART](#) 0
type() for Bar Chart variant
- #define [FL_HORBAR_CHART](#) 1
type() for Horizontal Bar Chart variant
- #define [FL_LINE_CHART](#) 2
type() for Line Chart variant
- #define [FL_FILL_CHART](#) 3
type() for Fill Line Chart variant
- #define [FL_SPIKE_CHART](#) 4
type() for Spike Chart variant
- #define [FL_PIE_CHART](#) 5
type() for Pie Chart variant
- #define [FL_SPECIALPIE_CHART](#) 6
type() for Special Pie Chart variant
- #define [FL_FILLED_CHART](#) [FL_FILL_CHART](#)
for compatibility
- #define [FL_CHART_MAX](#) 128
max entries per chart
- #define [FL_CHART_LABEL_MAX](#) 18
max label length for entry

31.15.1 Detailed Description

[Fl_Chart](#) widget .

31.16 Fl_Check_Browser.H File Reference

[Fl_Check_Browser](#) widget .

```
#include "Fl.H"
#include "Fl_Browser_.H"
```

Classes

- class [Fl_Check_Browser](#)

The [Fl_Check_Browser](#) widget displays a scrolling list of text lines that may be selected and/or checked by the user.

31.16.1 Detailed Description

[Fl_Check_Browser](#) widget .

31.17 Fl_Check_Button.H File Reference

[Fl_Check_Button](#) widget .

```
#include "Fl_Light_Button.H"
```

Classes

- class [Fl_Check_Button](#)
A button with an "checkmark" to show its status.

31.17.1 Detailed Description

[Fl_Check_Button](#) widget .

31.18 Fl_Choice.H File Reference

[Fl_Choice](#) widget .

```
#include "Fl_Menu_.H"
```

Classes

- class [Fl_Choice](#)

A button that is used to pop up a menu.

31.18.1 Detailed Description

[Fl_Choice](#) widget .

31.19 Fl_Clock.H File Reference

[Fl_Clock](#), [Fl_Clock_Output](#) widgets .

```
#include "Fl_Widget.H"
```

Classes

- class [Fl_Clock_Output](#)
This widget can be used to display a program-supplied time.
- class [Fl_Clock](#)
This widget provides a round analog clock display.

Defines

- #define [FL_SQUARE_CLOCK](#) 0
type() of Square Clock variant
- #define [FL_ROUND_CLOCK](#) 1
type() of Round Clock variant
- #define [FL_ANALOG_CLOCK](#) [FL_SQUARE_CLOCK](#)
An analog clock is square.
- #define [FL_DIGITAL_CLOCK](#) [FL_SQUARE_CLOCK](#)
Not yet implemented.

31.19.1 Detailed Description

[Fl_Clock](#), [Fl_Clock_Output](#) widgets .

31.20 fl_color.cxx File Reference

Color handling.

```
#include "Fl_XColor.H"
#include <FL/Fl.H>
#include <FL/x.H>
#include <FL/fl_draw.H>
#include "fl_cmap.h"
```

Defines

- #define **fl_overlay** 0

Functions

- **ulong fl_xpixel (uchar r, uchar g, uchar b)**
- **void fl_color (uchar r, uchar g, uchar b)**

Set the color for all subsequent drawing operations.

- **ulong fl_xpixel (Fl_Color i)**
- **void fl_color (Fl_Color i)**

Sets the color for all subsequent drawing operations.

- **Fl_Color fl_color_average (Fl_Color color1, Fl_Color color2, float weight)**
- **Fl_Color fl_inactive (Fl_Color c)**
- **Fl_Color fl_contrast (Fl_Color fg, Fl_Color bg)**

Variables

- **uchar fl_redmask**
- **uchar fl_greenmask**
- **uchar fl_bluemask**
- **int fl_redshift**
- **int fl_greenshift**
- **int fl_blueShift**
- **int fl_extrashift**
- **Fl_XColor fl_xmap [1][256]**
- **Fl_Color fl_color_**

31.20.1 Detailed Description

Color handling.

31.20.2 Function Documentation

31.20.2.1 void fl_color (Fl_Color *i*)

Sets the color for all subsequent drawing operations.

For colormapped displays, a color cell will be allocated out of *fl_colormap* the first time you use a color. If the colormap fills up then a least-squares algorithm is used to find the closest color.

Parameters:

← *i* color

References fl_color().

31.20.2.2 void fl_color (uchar *r*, uchar *g*, uchar *b*)

Set the color for all subsequent drawing operations.

The closest possible match to the RGB color is used. The RGB color is used directly on TrueColor displays. For colormap visuals the nearest index in the gray ramp or color cube is used.

Parameters:

← *r,g,b* color components

31.21 Fl_Color_Chooser.H File Reference

[Fl_Color_Chooser](#) widget .

```
#include <FL/Fl_Group.H>
#include <FL/Fl_Box.H>
#include <FL/Fl_Return_Button.H>
#include <FL/Fl_Choice.H>
#include <FL/Fl_Value_Input.H>
```

Classes

- class [Fl_Color_Chooser](#)

The [Fl_Color_Chooser](#) widget provides a standard RGB color chooser.

31.21.1 Detailed Description

[Fl_Color_Chooser](#) widget .

31.22 Fl_Counter.H File Reference

[Fl_Counter](#) widget .

```
#include "Fl_Valuator.H"
```

Classes

- class [Fl_Counter](#)

Controls a single floating point value with button (or keyboard) arrows.

Defines

- #define [FL_NORMAL_COUNTER](#) 0
type() for counter with fast buttons
- #define [FL_SIMPLE_COUNTER](#) 1
type() for counter without fast buttons

31.22.1 Detailed Description

[Fl_Counter](#) widget .

31.23 fl_curve.hxx File Reference

Utility for drawing Bezier curves, adding the points to the current fl_begin/fl_vertex/fl_end path.

```
#include <FL/fl_draw.H>
#include <math.h>
```

Functions

- void **fl_curve** (double X0, double Y0, double X1, double Y1, double X2, double Y2, double X3, double Y3)

Add a series of points on a Bezier curve to the path.

31.23.1 Detailed Description

Utility for drawing Bezier curves, adding the points to the current fl_begin/fl_vertex/fl_end path.

Incremental math implementation: I very much doubt this is optimal! From Foley/vanDam page 511. If anybody has a better algorithm, please send it!

31.23.2 Function Documentation

31.23.2.1 void **fl_curve** (double **X0**, double **Y0**, double **X1**, double **Y1**, double **X2**, double **Y2**, double **X3**, double **Y3**)

Add a series of points on a Bezier curve to the path.

The curve ends (and two of the points) are at X0,Y0 and X3,Y3.

Parameters:

← **X0,Y0** curve start point
← **X1,Y1** curve control point
← **X2,Y2** curve control point
← **X3,Y3** curve end point

References fl_transform_x(), fl_transform_y(), and fl_transformed_vertex().

31.24 Fl_Dial.H File Reference

[Fl_Dial](#) widget .

```
#include "Fl_Valuator.H"
```

Classes

- class [Fl_Dial](#)

The [Fl_Dial](#) widget provides a circular dial to control a single floating point value.

Defines

- #define [FL_NORMAL_DIAL](#) 0
type() for dial variant with dot
- #define [FL_LINE_DIAL](#) 1
type() for dial variant with line
- #define [FL_FILL_DIAL](#) 2
type() for dial variant with filled arc

31.24.1 Detailed Description

[Fl_Dial](#) widget .

31.25 Fl_Double_Window.H File Reference

[Fl_Double_Window](#) widget .

```
#include "Fl_Window.H"
```

Classes

- class [Fl_Double_Window](#)

The [Fl_Double_Window](#) provides a double-buffered window.

31.25.1 Detailed Description

[Fl_Double_Window](#) widget .

31.26 fl_draw.H File Reference

utility header to pull drawing functions together

```
#include "Enumerations.H"
```

Defines

- #define `fl_clip` `fl_push_clip`

The `fl_clip()` name is deprecated and will be removed from future releases.

Typedefs

- `typedef void(* Fl_Draw_Image_Cb)(void *, int, int, int, uchar *)`

Enumerations

- enum {

FL_SOLID = 0, **FL_DASH** = 1, **FL_DOT** = 2, **FL_DASHDOT** = 3,

FL_DASHDOTDOT = 4, **FL_CAP_FLAT** = 0x100, **FL_CAP_ROUND** = 0x200, **FL_CAP_SQUARE** = 0x300,

FL_JOIN_MITER = 0x1000, **FL_JOIN_ROUND** = 0x2000, **FL_JOIN_BEVEL** = 0x3000 }

Functions

- `FL_EXPORT void fl_color(Fl_Color i)`

Sets the color for all subsequent drawing operations.

- `void fl_color(int c)`

- `FL_EXPORT void fl_color(uchar r, uchar g, uchar b)`

Set the color for all subsequent drawing operations.

- `Fl_Color fl_color()`

Returns the last `fl_color()` that was set.

- `FL_EXPORT void fl_push_clip(int x, int y, int w, int h)`

Intersect the current clip region with a rectangle and push this new region onto the stack.

- `FL_EXPORT void fl_push_no_clip()`

Pushes an empty clip region onto the stack so nothing will be clipped.

- `FL_EXPORT void fl_pop_clip()`

Restore the previous clip region.

- `FL_EXPORT int fl_not_clipped(int x, int y, int w, int h)`

Does the rectangle intersect the current clip region?

- FL_EXPORT int **fl_clip_box** (int, int, int, int, int &x, int &y, int &w, int &h)
Intersect the rectangle with the current clip region and return the bounding box of the result.
- FL_EXPORT void **fl_point** (int x, int y)
Draw a single pixel at the given coordinates.
- FL_EXPORT void **fl_line_style** (int style, int width=0, char *dashes=0)
- FL_EXPORT void **fl_rect** (int x, int y, int w, int h)
Draw a 1-pixel border inside the given bounding box.
- void **fl_rect** (int x, int y, int w, int h, **Fl_Color** c)
Draw a 1-pixel border inside the given bounding box.
- FL_EXPORT void **fl_rectf** (int x, int y, int w, int h)
Color a rectangle that exactly fits the given bounding box.
- void **fl_rectf** (int x, int y, int w, int h, **Fl_Color** c)
Color a rectangle that exactly fills the given bounding box.
- FL_EXPORT void **fl_line** (int x, int y, int x1, int y1)
Draw a line from x,y to x1,y1.
- FL_EXPORT void **fl_line** (int x, int y, int x1, int y1, int x2, int y2)
Draw a line from x,y to x1,y1 and another from x1,y1 to x2,y2.
- FL_EXPORT void **fl_loop** (int x, int y, int x1, int y1, int x2, int y2)
Outline a 3-sided polygon with lines.
- FL_EXPORT void **fl_loop** (int x, int y, int x1, int y1, int x2, int y2, int x3, int y3)
Outline a 4-sided polygon with lines.
- FL_EXPORT void **fl_polygon** (int x, int y, int x1, int y1, int x2, int y2)
Fill a 3-sided polygon.
- FL_EXPORT void **fl_polygon** (int x, int y, int x1, int y1, int x2, int y2, int x3, int y3)
Fill a 4-sided polygon.
- FL_EXPORT void **fl_xyline** (int x, int y, int x1)
Draw horizontal line from x,y to x1,y.
- FL_EXPORT void **fl_xyline** (int x, int y, int x1, int y2)
Draw horizontal line from x,y to x1,y, then vertical from x1,y to x1,y2.
- FL_EXPORT void **fl_xyline** (int x, int y, int x1, int y2, int x3)
Draw horizontal line from x,y to x1,y then a vertical from x1,y to x1,y2 and then another horizontal from x1,y2 to x3,y2.
- FL_EXPORT void **fl_yxline** (int x, int y, int y1)
Draw a vertical line from x,y to x,y1.

- FL_EXPORT void **fl_yxline** (int x, int y, int y1, int x2)
Draw a vertical line from x,y to x,y1 then a horizontal from x,y1 to x2,y1.
- FL_EXPORT void **fl_yxline** (int x, int y, int y1, int x2, int y3)
Draw a vertical line from x,y to x,y1 then a horizontal from x,y1 to x2,y1 then another vertical from x2,y1 to x2,y3.
- FL_EXPORT void **fl_arc** (int x, int y, int w, int h, double a1, double a2)
Draw ellipse sections using integer coordinates.
- FL_EXPORT void **fl_pie** (int x, int y, int w, int h, double a1, double a2)
Draw filled ellipse sections using integer coordinates.
- FL_EXPORT void **fl_chord** (int x, int y, int w, int h, double a1, double a2)
fl_chord declaration is a place holder - the function does not yet exist
- FL_EXPORT void **fl_push_matrix** ()
Save the current transformation matrix on the stack.
- FL_EXPORT void **fl_pop_matrix** ()
Restore the current transformation matrix from the stack.
- FL_EXPORT void **fl_scale** (double x, double y)
Concatenate scaling transformation onto the current one.
- FL_EXPORT void **fl_scale** (double x)
Concatenate scaling transformation onto the current one.
- FL_EXPORT void **fl_translate** (double x, double y)
Concatenate translation transformation onto the current one.
- FL_EXPORT void **fl_rotate** (double d)
Concatenate rotation transformation onto the current one.
- FL_EXPORT void **fl_mult_matrix** (double a, double b, double c, double d, double x, double y)
Concatenate another transformation onto the current one.
- FL_EXPORT void **fl_begin_points** ()
Start drawing a list of points.
- FL_EXPORT void **fl_begin_line** ()
Start drawing a list of lines.
- FL_EXPORT void **fl_begin_loop** ()
Start drawing a closed sequence of lines.
- FL_EXPORT void **fl_begin_polygon** ()
Start drawing a convex filled polygon.
- FL_EXPORT void **fl_vertex** (double x, double y)

Add a single vertex to the current path.

- FL_EXPORT void [fl_curve](#) (double X0, double Y0, double X1, double Y1, double X2, double Y2, double X3, double Y3)

Add a series of points on a Bezier curve to the path.

- FL_EXPORT void [fl_arc](#) (double x, double y, double r, double start, double a)

Add a series of points to the current path on the arc of a circle; you can get elliptical paths by using scale and rotate before calling [fl_arc\(\)](#).

- FL_EXPORT void [fl_circle](#) (double x, double y, double r)

[fl_circle\(\)](#) is equivalent to [fl_arc\(\)](#).

- FL_EXPORT void [fl_end_points](#) ()

End list of points, and draw.

- FL_EXPORT void [fl_end_line](#) ()

End list of lines, and draw.

- FL_EXPORT void [fl_end_loop](#) ()

End closed sequence of lines, and draw.

- FL_EXPORT void [fl_end_polygon](#) ()

End convex filled polygon, and draw.

- FL_EXPORT void [fl_begin_complex_polygon](#) ()

Start drawing a complex filled polygon.

- FL_EXPORT void [fl_gap](#) ()

Call [fl_gap\(\)](#) to separate loops of the path.

- FL_EXPORT void [fl_end_complex_polygon](#) ()

End complex filled polygon, and draw.

- FL_EXPORT double [fl_transform_x](#) (double x, double y)

Transform coordinate using current transformation matrix.

- FL_EXPORT double [fl_transform_y](#) (double x, double y)

Transform coordinate using current transformation matrix.

- FL_EXPORT double [fl_transform_dx](#) (double x, double y)

Transform distance using current transformation matrix.

- FL_EXPORT double [fl_transform_dy](#) (double x, double y)

Transform distance using current transformation matrix.

- FL_EXPORT void [fl_transformed_vertex](#) (double x, double y)

Add coordinate pair to the vertex list without further transformations.

- FL_EXPORT void [fl_font](#) ([Fl_Font](#) face, [Fl_Fontsize](#) size)

- `Fl_Font fl_font ()`
- `Fl_Fontsize fl_size ()`
- `FL_EXPORT int fl_height ()`
- `int fl_height (int, int size)`
- `FL_EXPORT int fl_descent ()`
- `FL_EXPORT double fl_width (const char *)`
- `FL_EXPORT double fl_width (const char *, int n)`
- `FL_EXPORT double fl_width (Fl_Unichar)`
- `FL_EXPORT void fl_draw (const char *, int x, int y)`
- `FL_EXPORT void fl_draw (const char *, int n, int x, int y)`
- `FL_EXPORT void fl_rtl_draw (const char *, int n, int x, int y)`
- `FL_EXPORT void fl_measure (const char *, int &x, int &y, int draw_symbols=1)`
- `FL_EXPORT void fl_draw (const char *, int, int, int, Fl_Align, Fl_Image *img=0, int draw_symbols=1)`
- `FL_EXPORT void fl_draw (const char *, int, int, int, int, Fl_Align, void(*callthis)(const char *, int n, int x, int y), Fl_Image *img=0, int draw_symbols=1)`
- `FL_EXPORT const char * fl_latin1_to_local (const char *, int n=-1)`
- `FL_EXPORT const char * fl_local_to_latin1 (const char *, int n=-1)`
- `FL_EXPORT const char * fl_mac_roman_to_local (const char *, int n=-1)`
- `FL_EXPORT const char * fl_local_to_mac_roman (const char *, int n=-1)`
- `FL_EXPORT void fl_frame (const char *s, int x, int y, int w, int h)`

Draws a series of line segments around the given box.
- `FL_EXPORT void fl_frame2 (const char *s, int x, int y, int w, int h)`

Draws a series of line segments around the given box.
- `FL_EXPORT void fl_draw_box (Fl_Boxtype, int x, int y, int w, int h, Fl_Color)`

Draw box using given type, position, size and color.

 - `FL_EXPORT void fl_draw_image (const uchar *, int, int, int, int, int delta=3, int ldelta=0)`
 - `FL_EXPORT void fl_draw_image_mono (const uchar *, int, int, int, int, int delta=1, int ld=0)`
 - `FL_EXPORT void fl_draw_image (Fl_Draw_Image_Cb, void *, int, int, int, int, int delta=3)`
 - `FL_EXPORT void fl_draw_image_mono (Fl_Draw_Image_Cb, void *, int, int, int, int delta=1)`
 - `FL_EXPORT void fl_rectf (int x, int y, int w, int h, uchar r, uchar g, uchar b)`
 - `FL_EXPORT char fl_can_do_alpha_blending ()`
 - `FL_EXPORT uchar * fl_read_image (uchar *p, int x, int y, int w, int h, int alpha=0)`
 - `FL_EXPORT int fl_draw_pixmap (char *const *data, int x, int y, Fl_Color=FL_GRAY)`
 - `FL_EXPORT int fl_measure_pixmap (char *const *data, int &w, int &h)`
 - `FL_EXPORT int fl_draw_pixmap (const char *const *data, int x, int y, Fl_Color=FL_GRAY)`
 - `FL_EXPORT int fl_measure_pixmap (const char *const *data, int &w, int &h)`
 - `FL_EXPORT void fl_scroll (int X, int Y, int W, int H, int dx, int dy, void(*draw_area)(void *, int, int, int, int), void *data)`
 - `FL_EXPORT const char * fl_shortcut_label (int)`
 - `FL_EXPORT void fl_overlay_rect (int, int, int, int)`
 - `FL_EXPORT void fl_overlay_clear ()`
 - `FL_EXPORT void fl_cursor (Fl_Cursor, Fl_Color=FL_BLACK, Fl_Color=FL_WHITE)`
 - `FL_EXPORT const char * fl_expand_text (const char *from, char *buf, int maxbuf, double maxw, int &n, double &width, int wrap, int draw_symbols=0)`
 - `FL_EXPORT void fl_set_status (int X, int Y, int W, int H)`

- FL_EXPORT void **fl_set_spot** (int font, int size, int x, int y, int w, int h)
- FL_EXPORT void **fl_reset_spot** (void)
- FL_EXPORT int **fl_draw_symbol** (const char *label, int x, int y, int w, int h, **Fl_Color**)
- FL_EXPORT int **fl_add_symbol** (const char *name, void(*drawit)(**Fl_Color**), int scalable)

Variables

- FL_EXPORT char **fl_draw_shortcut**
- FL_EXPORT **Fl_Color fl_color_**
- FL_EXPORT **Fl_Font fl_font_**
- FL_EXPORT **Fl_Fontsize fl_size_**

31.26.1 Detailed Description

utility header to pull drawing functions together

31.26.2 Function Documentation

31.26.2.1 FL_EXPORT void fl_arc (double *x*, double *y*, double *r*, double *start*, double *end*)

Add a series of points to the current path on the arc of a circle; you can get elliptical paths by using scale and rotate before calling [fl_arc\(\)](#).

Parameters:

- ← *x,y,r* center and radius of circular arc
 ← *start,end* angles of start and end of arc measured in degrees counter-clockwise from 3 o'clock. If *end* is less than *start* then it draws the ark in a clockwise direction.

References [fl_transform_dx\(\)](#), [fl_transform_dy\(\)](#), and [fl_vertex\(\)](#).

31.26.2.2 FL_EXPORT void fl_arc (int *x*, int *y*, int *w*, int *h*, double *a1*, double *a2*)

Draw ellipse sections using integer coordinates.

These functions match the rather limited circle drawing code provided by X and WIN32. The advantage over using [fl_arc](#) with floating point coordinates is that they are faster because they often use the hardware, and they draw much nicer small circles, since the small sizes are often hard-coded bitmaps.

If a complete circle is drawn it will fit inside the passed bounding box. The two angles are measured in degrees counterclockwise from 3'oclock and are the starting and ending angle of the arc, a2 must be greater or equal to a1.

[fl_arc\(\)](#) draws a series of lines to approximate the arc. Notice that the integer version of [fl_arc\(\)](#) has a different number of arguments than the double version [fl_arc\(double x, double y, double r, double start, double a\)](#)

Parameters:

- ← *x,y,w,h* bounding box of complete circle
 ← *a1,a2* start and end angles of arc measured in degrees counter-clockwise from 3 o'clock. a2 must be greater than or equal to a1.

Referenced by [Fl_Menu_Item::draw\(\)](#), [Fl_Light_Button::draw\(\)](#), and [Fl_Dial::draw\(\)](#).

31.26.2.3 FL_EXPORT void fl_begin_complex_polygon()

Start drawing a complex filled polygon.

The polygon may be concave, may have holes in it, or may be several disconnected pieces. Call [fl_gap\(\)](#) to separate loops of the path.

To outline the polygon, use [fl_begin_loop\(\)](#) and replace each [fl_gap\(\)](#) with [fl_end_loop\(\);fl_begin_loop\(\)](#) pairs.

Note:

For portability, you should only draw polygons that appear the same whether "even/odd" or "non-zero" winding rules are used to fill them. Holes should be drawn in the opposite direction to the outside loop.

References [fl_begin_polygon\(\)](#).

Referenced by [Fl_File_Icon::draw\(\)](#).

31.26.2.4 FL_EXPORT void fl_begin_points()

Start drawing a list of points.

Points are added to the list with [fl_vertex\(\)](#)

31.26.2.5 FL_EXPORT void fl_circle (double *x*, double *y*, double *r*)

[fl_circle\(\)](#) is equivalent to [fl_arc\(](#)

.. $0,360$) but may be faster. It must be the *only* thing in the path: if you want a circle as part of a complex polygon you must use [fl_arc\(\)](#)

Parameters:

$\leftarrow x,y,r$ center and radius of circle

References [fl_transform_x\(\)](#), and [fl_transform_y\(\)](#).

Referenced by [Fl_Dial::draw\(\)](#), and [Fl_Clock_Output::draw\(\)](#).

31.26.2.6 FL_EXPORT int fl_clip_box (int *x*, int *y*, int *w*, int *h*, int & *X*, int & *Y*, int & *W*, int & *H*)

Intersect the rectangle with the current clip region and return the bounding box of the result.

Returns non-zero if the resulting rectangle is different to the original. This can be used to limit the necessary drawing to a rectangle. *W* and *H* are set to zero if the rectangle is completely outside the region.

Parameters:

$\leftarrow x,y,w,h$ position and size of rectangle

$\rightarrow X,Y,W,H$ position and size of resulting bounding box. *W* and *H* are set to zero if the rectangle is completely outside the region.

Returns:

Non-zero if the resulting rectangle is different to the original.

Referenced by Fl_Text_Display::draw(), Fl_Pixmap::draw(), Fl_RGB_Image::draw(), Fl_Bitmap::draw(), and Fl_Double_Window::flush().

31.26.2.7 **FL_Color fl_color()** [inline]

Returns the last [fl_color\(\)](#) that was set.

This can be used for state save/restore.

31.26.2.8 **FL_EXPORT void fl_color (uchar r, uchar g, uchar b)**

Set the color for all subsequent drawing operations.

The closest possible match to the RGB color is used. The RGB color is used directly on TrueColor displays. For colormap visuals the nearest index in the gray ramp or color cube is used.

Parameters:

$\leftarrow r, g, b$ color components

31.26.2.9 **FL_EXPORT void fl_color (Fl_Color i)**

Sets the color for all subsequent drawing operations.

For colormapped displays, a color cell will be allocated out of *fl_colormap* the first time you use a color. If the colormap fills up then a least-squares algorithm is used to find the closest color.

Parameters:

$\leftarrow i$ color

References [fl_color\(\)](#).

Referenced by Fl_Text_Display::clear_rect(), Fl_Timer::draw(), Fl_FormsPixmap::draw(), Fl_FormsBitmap::draw(), Fl_Window::draw(), Fl_Value_Slider::draw(), Fl_Value_Output::draw(), Fl_Scrollbar::draw(), Fl_Scroll::draw(), Fl_Roller::draw(), Fl_Pack::draw(), Fl_Menu_Button::draw(), Fl_Menu_Bar::draw(), Fl_Menu_Item::draw(), Fl_Light_Button::draw(), Fl_File_Icon::draw(), Fl_Dial::draw(), Fl_Counter::draw(), Fl_Clock_Output::draw(), Fl_Choice::draw(), Fl_Browser_::draw(), Fl_Adjuster::draw(), Fl_Text_Display::draw_cursor(), Fl_Image::draw_empty(), Fl_Widget::draw_focus(), Fl_Text_Display::draw_string(), Fl_Input_::drawtext(), [fl_color\(\)](#), [fl_down_box\(\)](#), [fl_embossed_box\(\)](#), [fl_engraved_box\(\)](#), [fl_frame\(\)](#), [fl_frame2\(\)](#), [fl_rect\(\)](#), [fl_rectbound\(\)](#), [fl_rectf\(\)](#), [fl_thin_down_box\(\)](#), [fl_thin_up_box\(\)](#), [fl_up_box\(\)](#), and Fl_Browser::item_draw().

31.26.2.10 **FL_EXPORT void fl_curve (double X0, double Y0, double X1, double Y1, double X2, double Y2, double X3, double Y3)**

Add a series of points on a Bezier curve to the path.

The curve ends (and two of the points) are at X0,Y0 and X3,Y3.

Parameters:

$\leftarrow X0, Y0$ curve start point

$\leftarrow X1, Y1$ curve control point

$\leftarrow X2, Y2$ curve control point
 $\leftarrow X3, Y3$ curve end point

References `fl_transform_x()`, `fl_transform_y()`, and `fl_transformed_vertex()`.

31.26.2.11 FL_EXPORT void fl_draw_box (Fl_Boxtype *t*, int *x*, int *y*, int *w*, int *h*, Fl_Color *c*)

Draw box using given type, position, size and color.

Parameters:

$\leftarrow t$ box type
 $\leftarrow x, y, w, h$ position and size
 $\leftarrow c$ color

Referenced by `Fl_Menu_Item::draw()`.

31.26.2.12 FL_EXPORT void fl_frame (const char * *s*, int *x*, int *y*, int *w*, int *h*)

Draws a series of line segments around the given box.

The string *s* must contain groups of 4 letters which specify one of 24 standard grayscale values, where 'A' is black and 'X' is white. The order of each set of 4 characters is: top, left, bottom, right. The results of calling `fl_frame()` with a string that is not a multiple of 4 characters in length is undefined. The only difference between this function and `fl_frame2()` is the order of the line segments.

Parameters:

$\leftarrow s$ sets of 4 grayscale values in top, left, bottom, right order
 $\leftarrow x, y, w, h$ position and size

References `fl_color()`, `fl_xyline()`, and `fl_yxline()`.

Referenced by `fl_down_frame()`, `fl_embossed_frame()`, `fl_engraved_frame()`, and `fl_up_frame()`.

31.26.2.13 FL_EXPORT void fl_frame2 (const char * *s*, int *x*, int *y*, int *w*, int *h*)

Draws a series of line segments around the given box.

The string *s* must contain groups of 4 letters which specify one of 24 standard grayscale values, where 'A' is black and 'X' is white. The order of each set of 4 characters is: bottom, right, top, left. The results of calling `fl_frame2()` with a string that is not a multiple of 4 characters in length is undefined. The only difference between this function and `fl_frame()` is the order of the line segments.

Parameters:

$\leftarrow s$ sets of 4 grayscale values in bottom, right, top, left order
 $\leftarrow x, y, w, h$ position and size

References `fl_color()`, `fl_xyline()`, and `fl_yxline()`.

Referenced by `fl_down_frame()`, `fl_thin_down_frame()`, `fl_thin_up_frame()`, and `fl_up_frame()`.

31.26.2.14 FL_EXPORT void fl_gap()

Call [fl_gap\(\)](#) to separate loops of the path.

It is unnecessary but harmless to call [fl_gap\(\)](#) before the first vertex, after the last vertex, or several times in a row.

References [fl_transformed_vertex\(\)](#).

Referenced by [fl_end_complex_polygon\(\)](#).

31.26.2.15 FL_EXPORT void fl_mult_matrix (double *a*, double *b*, double *c*, double *d*, double *x*, double *y*)

Concatenate another transformation onto the current one.

Parameters:

$\leftarrow \mathbf{a}, \mathbf{b}, \mathbf{c}, \mathbf{d}, \mathbf{x}, \mathbf{y}$ transformation matrix elements such that $X' = aX + cY + x$ and $Y' = bX + dY + y$

Referenced by [fl_rotate\(\)](#), [fl_scale\(\)](#), and [fl_translate\(\)](#).

31.26.2.16 FL_EXPORT int fl_not_clipped (int *x*, int *y*, int *w*, int *h*)

Does the rectangle intersect the current clip region?

Parameters:

$\leftarrow \mathbf{x}, \mathbf{y}, \mathbf{w}, \mathbf{h}$ position and size of rectangle

Returns:

non-zero if any of the rectangle intersects the current clip region. If this returns 0 you don't have to draw the object.

Note:

Under X this returns 2 if the rectangle is partially clipped, and 1 is it is entirely inside the clip region.

Referenced by [Fl_Group::draw_child\(\)](#), and [Fl_Group::update_child\(\)](#).

31.26.2.17 FL_EXPORT void fl_pie (int *x*, int *y*, int *w*, int *h*, double *a1*, double *a2*)

Draw filled ellipse sections using integer coordinates.

Like [fl_arc\(\)](#), but [fl_pie\(\)](#) draws a filled-in pie slice. This slice may extend outside the line drawn by [fl_arc](#); to avoid this use w - 1 and h - 1.

Parameters:

$\leftarrow \mathbf{x}, \mathbf{y}, \mathbf{w}, \mathbf{h}$ bounding box of complete circle

$\leftarrow \mathbf{a1}, \mathbf{a2}$ start and end angles of arc measured in degrees counter-clockwise from 3 o'clock. a2 must be greater than or equal to a1.

Referenced by [Fl_Menu_Item::draw\(\)](#), [Fl_Light_Button::draw\(\)](#), and [Fl_Dial::draw\(\)](#).

31.26.2.18 FL_EXPORT void fl_polygon (int *x*, int *y*, int *x1*, int *y1*, int *x2*, int *y2*, int *x3*, int *y3*)

Fill a 4-sided polygon.

The polygon must be convex.

31.26.2.19 FL_EXPORT void fl_polygon (int *x*, int *y*, int *x1*, int *y1*, int *x2*, int *y2*)

Fill a 3-sided polygon.

The polygon must be convex.

Referenced by Fl_Scrollbar::draw(), and Fl_Choice::draw().

31.26.2.20 FL_EXPORT void fl_pop_clip ()

Restore the previous clip region.

You must call [fl_pop_clip\(\)](#) once for every time you call [fl_push_clip\(\)](#). Unpredictable results may occur if the clip stack is not empty when you return to FLTK.

References fl_restore_clip(), and Fl::warning.

Referenced by Fl_Tiled_Image::draw(), Fl_Text_Display::draw(), Fl_Tabs::draw(), Fl_Scroll::draw(), Fl_Progress::draw(), Fl_Choice::draw(), Fl_Chart::draw(), Fl_Browser_::draw(), Fl_Group::draw_children(), Fl_Text_Display::draw_text(), and Fl_Input_::drawtext().

31.26.2.21 FL_EXPORT void fl_push_clip (int *x*, int *y*, int *w*, int *h*)

Intersect the current clip region with a rectangle and push this new region onto the stack.

Parameters:

$\leftarrow x, y, w, h$ position and size

References fl_restore_clip(), and Fl::warning.

Referenced by Fl_Text_Display::draw(), Fl_Tabs::draw(), Fl_Chart::draw(), Fl_Browser_::draw(), Fl_Group::draw_children(), Fl_Text_Display::draw_text(), and Fl_Input_::drawtext().

31.26.2.22 FL_EXPORT void fl_push_matrix ()

Save the current transformation matrix on the stack.

The maximum depth of the stack is 4.

References Fl::error.

Referenced by Fl_File_Icon::draw(), Fl_Dial::draw(), and Fl_Clock_Output::draw().

31.26.2.23 FL_EXPORT void fl_rotate (double *d*)

Concatenate rotation transformation onto the current one.

Parameters:

$\leftarrow d$ - rotation angle, counter-clockwise in degrees (not radians)

References fl_mult_matrix().

Referenced by Fl_Dial::draw(), and Fl_Clock_Output::draw().

31.26.2.24 FL_EXPORT void fl_scale (double *x*)

Concatenate scaling transformation onto the current one.

Parameters:

← *x* scale factor in both x-direction and y-direction

References fl_mult_matrix().

31.26.2.25 FL_EXPORT void fl_scale (double *x*, double *y*)

Concatenate scaling transformation onto the current one.

Parameters:

← *x,y* scale factors in x-direction and y-direction

References fl_mult_matrix().

Referenced by Fl_File_Icon::draw(), Fl_Dial::draw(), and Fl_Clock_Output::draw().

31.26.2.26 FL_EXPORT double fl_transform_dx (double *x*, double *y*)

Transform distance using current transformation matrix.

Parameters:

← *x,y* coordinate

Referenced by fl_arc().

31.26.2.27 FL_EXPORT double fl_transform_dy (double *x*, double *y*)

Transform distance using current transformation matrix.

Parameters:

← *x,y* coordinate

Referenced by fl_arc().

31.26.2.28 FL_EXPORT double fl_transform_x (double *x*, double *y*)

Transform coordinate using current transformation matrix.

Parameters:

← *x,y* coordinate

Referenced by fl_circle(), and fl_curve().

31.26.2.29 FL_EXPORT double fl_transform_y (double x, double y)

Transform coordinate using current transformation matrix.

Parameters:

← *x,y* coordinate

Referenced by fl_circle(), and fl_curve().

31.26.2.30 FL_EXPORT void fl_transformed_vertex (double xf, double yf)

Add coordinate pair to the vertex list without further transformations.

Parameters:

← *xf,yf* transformed coordinate

References fl_transformed_vertex().

Referenced by fl_curve(), fl_end_loop(), fl_gap(), fl_transformed_vertex(), and fl_vertex().

31.26.2.31 FL_EXPORT void fl_translate (double x, double y)

Concatenate translation transformation onto the current one.

Parameters:

← *x,y* translation factor in x-direction and y-direction

References fl_mult_matrix().

Referenced by Fl_File_Icon::draw(), Fl_Dial::draw(), and Fl_Clock_Output::draw().

31.26.2.32 FL_EXPORT void fl_vertex (double x, double y)

Add a single vertex to the current path.

Parameters:

← *x,y* coordinate

References fl_transformed_vertex().

Referenced by Fl_File_Icon::draw(), Fl_Dial::draw(), and fl_arc().

31.27 Fl_File_Browser.H File Reference

[Fl_File_Browser](#) widget .

```
#include "Fl_Browser.H"
#include "Fl_File_Icon.H"
#include "filename.H"
```

Classes

- class [Fl_File_Browser](#)

The Fl_File_Browser widget displays a list of filenames, optionally with file-specific icons.

31.27.1 Detailed Description

[Fl_File_Browser](#) widget .

31.28 Fl_File_Icon.H File Reference

[Fl_File_Icon](#) widget .

```
#include "Fl.H"
```

Classes

- class [Fl_File_Icon](#)

The [Fl_File_Icon](#) class manages icon images that can be used as labels in other widgets and as icons in the [FileBrowser](#) widget.

Defines

- #define [FL_ICON_COLOR](#) ([Fl_Color](#))0xffffffff
icon color [background?]

31.28.1 Detailed Description

[Fl_File_Icon](#) widget .

31.29 Fl_File_Input.H File Reference

[Fl_File_Input](#) widget .
#include <FL/Fl_Input.H>

Classes

- class [Fl_File_Input](#)
This widget displays a pathname in a text input field.

31.29.1 Detailed Description

[Fl_File_Input](#) widget .

31.30 Fl_Fill_Dial.H File Reference

[Fl_Fill_Dial](#) widget .

```
#include "Fl_Dial.H"
```

Classes

- class [Fl_Fill_Dial](#)
Draws a dial with a filled arc.

31.30.1 Detailed Description

[Fl_Fill_Dial](#) widget .

31.31 Fl_Fill_Slider.H File Reference

[Fl_Fill_Slider](#) widget .
`#include "Fl_Slider.H"`

Classes

- class [Fl_Fill_Slider](#)
Widget that draws a filled horizontal slider, useful as a progress or value meter.

31.31.1 Detailed Description

[Fl_Fill_Slider](#) widget .

31.32 Fl_Float_Input.H File Reference

[Fl_Float_Input](#) widget .
`#include "Fl_Input.H"`

Classes

- class [Fl_Float_Input](#)

The [Fl_Float_Input](#) class is a subclass of [Fl_Input](#) that only allows the user to type floating point numbers (sign, digits, decimal point, more digits, 'E' or 'e', sign, digits).

31.32.1 Detailed Description

[Fl_Float_Input](#) widget .

31.33 Fl_FormsBitmap.H File Reference

[Fl_FormsBitmap](#) widget .

```
#include "Fl_Bitmap.H"
```

Classes

- class [Fl_FormsBitmap](#)

Forms compatibility Bitmap Image Widget.

31.33.1 Detailed Description

[Fl_FormsBitmap](#) widget .

31.34 Fl_FormsPixmap.H File Reference

[Fl_FormsPixmap](#) widget .

```
#include "Fl_Pixmap.H"
```

Classes

- class [Fl_FormsPixmap](#)

Forms pixmap drawing routines.

31.34.1 Detailed Description

[Fl_FormsPixmap](#) widget .

31.35 Fl_Free.H File Reference

[Fl_Free](#) widget .

```
#include "Fl_Widget.h"
```

Classes

- class [Fl_Free](#)

Emulation of the Forms "free" widget.

Defines

- #define [FL_NORMAL_FREE](#) 1
normal event handling
- #define [FL_SLEEPING_FREE](#) 2
deactivate event handling
- #define [FL_INPUT_FREE](#) 3
accepts FL_FOCUS events
- #define [FL_CONTINUOUS_FREE](#) 4
repeated timeout handling
- #define [FL_ALL_FREE](#) 5
FL_INPUT_FREE and FL_CONTINUOUS_FREE.
- #define [FL_MOUSE](#) [FL_DRAG](#)
for backward compatibility
- #define [FL_DRAW](#) 100
for backward compatibility [UNUSED]
- #define [FL_STEP](#) 101
for backward compatibility
- #define [FL_FREEMEM](#) 102
for backward compatibility [UNUSED]
- #define [FL_FREEZE](#) 103
for backward compatibility [UNUSED]
- #define [FL_THAW](#) 104
for backward compatibility [UNUSED]

Typedefs

- `typedef int(* FL_HANDLEPTR)(Fl_Widget *, int, float, float, char)`
appropriate signature for handle function

31.35.1 Detailed Description

`Fl_Free` widget .

31.36 Fl_GIF_Image.H File Reference

[Fl_GIF_Image](#) widget .
`#include "Fl_Pixmap.H"`

Classes

- class [Fl_GIF_Image](#)

The [Fl_GIF_Image](#) class supports loading, caching, and drawing of Compuserve GIFSM images.

31.36.1 Detailed Description

[Fl_GIF_Image](#) widget .

31.37 Fl_Gl_Window.H File Reference

[Fl_Gl_Window](#) widget .

```
#include "Fl_Window.H"
```

Classes

- class [Fl_Gl_Window](#)

The [Fl_Gl_Window](#) widget sets things up so OpenGL works, and also keeps an OpenGL "context" for that window, so that changes to the lighting and projection may be reused between redraws.

Typedefs

- typedef void * [GLContext](#)
opaque pointer type to hide system specific implementation.

31.37.1 Detailed Description

[Fl_Gl_Window](#) widget .

31.38 Fl_Group.H File Reference

[Fl_Group](#), [Fl_End](#) classes .

```
#include "Fl_Widget.H"
```

Classes

- class [Fl_Group](#)

The [Fl_Group](#) class is the FLTK container widget.

- class [Fl_End](#)

This is a dummy class that allows you to end a [Fl_Group](#) in a constructor list of a class:.

31.38.1 Detailed Description

[Fl_Group](#), [Fl_End](#) classes .

31.39 Fl_Help_Dialog.H File Reference

[Fl_Help_Dialog](#) widget .

```
#include <FL/Fl.H>
#include <FL/Fl_Double_Window.H>
#include <FL/Fl_Group.H>
#include <FL/Fl_Button.H>
#include <FL/Fl_Input.H>
#include <FL/Fl_Box.H>
#include <FL/Fl_Help_View.H>
```

Classes

- class [Fl_Help_Dialog](#)

The [Fl_Help_Dialog](#) widget displays a standard help dialog window using the [Fl_Help_View](#) widget.

31.39.1 Detailed Description

[Fl_Help_Dialog](#) widget .

31.40 Fl_Help_View.H File Reference

```
Fl_Help_View widget .  
#include <stdio.h>  
#include "Fl.H"  
#include "Fl_Group.H"  
#include "Fl_Scrollbar.H"  
#include "fl_draw.H"  
#include "Fl_Shared_Image.H"
```

Classes

- struct **Fl_Help_Block**
- struct **Fl_Help_Link**

Definition of a link for the html viewer.

- struct **Fl_Help_Target**

Fl_Help_Target structure.

- class **Fl_Help_View**

The Fl_Help_View widget displays HTML text.

Typedefs

- typedef const char *(**Fl_Help_Func**)(**Fl_Widget** *, const char *)

31.40.1 Detailed Description

Fl_Help_View widget .

31.41 Fl_Hold_Browser.H File Reference

[Fl_Hold_Browser](#) widget .

```
#include "Fl_Browser.H"
```

Classes

- class [Fl_Hold_Browser](#)

The [Fl_Hold_Browser](#) is a subclass of [Fl_Browser](#) which lets the user select a single item, or no items by clicking on the empty space.

31.41.1 Detailed Description

[Fl_Hold_Browser](#) widget .

31.42 Fl_Hor_Fill_Slider.H File Reference

Fl_Hor_Fill_Slider widget .

```
#include "Fl_Slider.H"
```

Classes

- class **Fl_Hor_Fill_Slider**

31.42.1 Detailed Description

Fl_Hor_Fill_Slider widget .

31.43 Fl_Hor_Nice_Slider.H File Reference

Fl_Hor_Nice_Slider widget .

```
#include "Fl_Slider.H"
```

Classes

- class **Fl_Hor_Nice_Slider**

31.43.1 Detailed Description

Fl_Hor_Nice_Slider widget .

31.44 Fl_Hor_Slider.H File Reference

Fl_Hor_Slider widget .

```
#include "Fl_Slider.H"
```

Classes

- class **Fl_Hor_Slider**

31.44.1 Detailed Description

Fl_Hor_Slider widget .

31.45 Fl_Hor_Value_Slider.H File Reference

Fl_Hor_Value_Slider widget .
#include "Fl_Value_Slider.H"

Classes

- class **Fl_Hor_Value_Slider**

31.45.1 Detailed Description

Fl_Hor_Value_Slider widget .

31.46 Fl_Image.H File Reference

[Fl_Image](#), [Fl_RGB_Image](#) classes .

```
#include "Enumerations.H"
```

Classes

- class [Fl_Image](#)

Fl_Image is the base class used for caching and drawing all kinds of images in FLTK.

- class [Fl_RGB_Image](#)

The [Fl_RGB_Image](#) class supports caching and drawing of full-color images with 1 to 4 channels of color information.

31.46.1 Detailed Description

[Fl_Image](#), [Fl_RGB_Image](#) classes .

31.47 Fl_Input.H File Reference

[Fl_Input](#) widget .

```
#include "Fl_Input_.H"
```

Classes

- class [Fl_Input](#)

This is the FLTK text input widget.

31.47.1 Detailed Description

[Fl_Input](#) widget .

31.48 Fl_Input_.H File Reference

[Fl_Input_](#) widget .

```
#include "Fl_Widget.H"
```

Classes

- class [Fl_Input_](#)

This is a virtual base class below [Fl_Input](#).

Defines

- #define **FL_NORMAL_INPUT** 0
- #define **FL_FLOAT_INPUT** 1
- #define **FL_INT_INPUT** 2
- #define **FL_HIDDEN_INPUT** 3
- #define **FL_MULTILINE_INPUT** 4
- #define **FL_SECRET_INPUT** 5
- #define **FL_INPUT_TYPE** 7
- #define **FL_INPUT_READONLY** 8
- #define **FL_NORMAL_OUTPUT** (**FL_NORMAL_INPUT** | **FL_INPUT_READONLY**)
- #define **FL_MULTILINE_OUTPUT** (**FL_MULTILINE_INPUT** | **FL_INPUT_READONLY**)
- #define **FL_INPUT_WRAP** 16
- #define **FL_MULTILINE_INPUT_WRAP** (**FL_MULTILINE_INPUT** | **FL_INPUT_WRAP**)
- #define **FL_MULTILINE_OUTPUT_WRAP** (**FL_MULTILINE_INPUT** | **FL_INPUT_READONLY** | **FL_INPUT_WRAP**)

31.48.1 Detailed Description

[Fl_Input_](#) widget .

31.49 Fl_Input_Choice.H File Reference

[Fl_Input_Choice](#) widget .

```
#include <FL/Fl.H>
#include <FL/Fl_Group.H>
#include <FL/Fl_Input.H>
#include <FL/Fl_Menu_Button.H>
#include <FL/fl_draw.H>
#include <string.h>
```

Classes

- class [Fl_Input_Choice](#)
A combination of the input widget and a menu button.
- class [Fl_Input_Choice::InputMenuButton](#)

31.49.1 Detailed Description

[Fl_Input_Choice](#) widget .

31.50 Fl_Int_Input.H File Reference

[Fl_Int_Input](#) widget .

```
#include "Fl_Input.H"
```

Classes

- class [Fl_Int_Input](#)

The [Fl_Int_Input](#) class is a subclass of [Fl_Input](#) that only allows the user to type decimal digits (or hex numbers of the form 0xaef).

31.50.1 Detailed Description

[Fl_Int_Input](#) widget .

31.51 Fl_JPEG_Image.H File Reference

[Fl_JPEG_Image](#) class .

```
#include "Fl_Image.H"
```

Classes

- class [Fl_JPEG_Image](#)

The [Fl_JPEG_Image](#) class supports loading, caching, and drawing of Joint Photographic Experts Group (JPEG) File Interchange Format (JFIF) images.

31.51.1 Detailed Description

[Fl_JPEG_Image](#) class .

31.52 Fl_Light_Button.H File Reference

[Fl_Light_Button](#) widget .

```
#include "Fl_Button.H"
```

Classes

- class [Fl_Light_Button](#)

31.52.1 Detailed Description

[Fl_Light_Button](#) widget .

31.53 Fl_Line_Dial.H File Reference

```
Fl_Line_Dial widget .  
#include "Fl_Dial.H"
```

Classes

- class **Fl_Line_Dial**

31.53.1 Detailed Description

```
Fl_Line_Dial widget .
```

31.54 Fl_Menu_.H File Reference

[Fl_Menu_](#) widget .

```
#include "Fl_Widget.H"
#include "Fl_Menu_Item.H"
```

Classes

- class [Fl_Menu_](#)
Base class of all widgets that have a menu in FLTK.

31.54.1 Detailed Description

[Fl_Menu_](#) widget .

31.55 Fl_Menu_Bar.H File Reference

[Fl_Menu_Bar](#) widget .
#include "Fl_Menu_.H"

Classes

- class [Fl_Menu_Bar](#)
This widget provides a standard menubar interface.

31.55.1 Detailed Description

[Fl_Menu_Bar](#) widget .

31.56 Fl_Menu_Button.H File Reference

[Fl_Menu_Button](#) widget .

```
#include "Fl_Menu_.H"
```

Classes

- class [Fl_Menu_Button](#)

This is a button that when pushed pops up a menu (or hierarchy of menus) defined by an array of [Fl_Menu_Item](#) objects.

31.56.1 Detailed Description

[Fl_Menu_Button](#) widget .

31.57 Fl_Menu_Window.H File Reference

[Fl_Menu_Window](#) widget .

```
#include "Fl_Single_Window.H"
```

Classes

- class [Fl_Menu_Window](#)

The [Fl_Menu_Window](#) widget is a window type used for menus.

31.57.1 Detailed Description

[Fl_Menu_Window](#) widget .

31.58 Fl_Multi_Browser.H File Reference

[Fl_Multi_Browser](#) widget .

```
#include "Fl_Browser.H"
```

Classes

- class [Fl_Multi_Browser](#)

The [Fl_Multi_Browser](#) class is a subclass of [Fl_Browser](#) which lets the user select any set of the lines.

31.58.1 Detailed Description

[Fl_Multi_Browser](#) widget .

31.59 Fl_Multiline_Input.H File Reference

[Fl_Multiline_Input](#) widget .

```
#include "Fl_Input.H"
```

Classes

- class [Fl_Multiline_Input](#)

*This input field displays '
' characters as new lines rather than ^J, and accepts the Return, Tab, and up and down arrow keys.*

31.59.1 Detailed Description

[Fl_Multiline_Input](#) widget .

31.60 Fl_Multiline_Output.H File Reference

[Fl_Multiline_Output](#) widget .

```
#include "Fl_Output.h"
```

Classes

- class [Fl_Multiline_Output](#)

This widget is a subclass of [Fl_Output](#) that displays multiple lines of text.

31.60.1 Detailed Description

[Fl_Multiline_Output](#) widget .

31.61 Fl_Nice_Slider.H File Reference

```
Fl_Nice_Slider widget .  
#include "Fl_Slider.H"
```

Classes

- class **Fl_Nice_Slider**

31.61.1 Detailed Description

```
Fl_Nice_Slider widget .
```

31.62 Fl_Output.H File Reference

[Fl_Output](#) widget .

```
#include "Fl_Input.H"
```

Classes

- class [Fl_Output](#)

This widget displays a piece of text.

31.62.1 Detailed Description

[Fl_Output](#) widget .

31.63 Fl_Overlay_Window.H File Reference

[Fl_Overlay_Window](#) class .

```
#include "Fl_Double_Window.H"
```

Classes

- class [Fl_Overlay_Window](#)

This window provides double buffering and also the ability to draw the "overlay" which is another picture placed on top of the main image.

31.63.1 Detailed Description

[Fl_Overlay_Window](#) class .

31.64 Fl_Pack.H File Reference

[Fl_Pack](#) widget .

```
#include <FL/Fl_Group.H>
```

Classes

- class [Fl_Pack](#)

This widget was designed to add the functionality of compressing and aligning widgets.

31.64.1 Detailed Description

[Fl_Pack](#) widget .

31.65 Fl_Pixmap.H File Reference

[Fl_Pixmap](#) widget .
#include "Fl_Image.H"

Classes

- class [Fl_Pixmap](#)

The [Fl_Pixmap](#) class supports caching and drawing of colormap (pixmap) images, including transparency.

31.65.1 Detailed Description

[Fl_Pixmap](#) widget .

31.66 Fl_PNG_Image.H File Reference

[Fl_PNG_Image](#) class .

```
#include "Fl_Image.H"
```

Classes

- class [Fl_PNG_Image](#)

The [Fl_PNG_Image](#) class supports loading, caching, and drawing of Portable Network Graphics (PNG) image files.

31.66.1 Detailed Description

[Fl_PNG_Image](#) class .

31.67 Fl_PNM_Image.H File Reference

[Fl_PNM_Image](#) class .

```
#include "Fl_Image.H"
```

Classes

- class [Fl_PNM_Image](#)

The [Fl_PNM_Image](#) class supports loading, caching, and drawing of Portable Anymap (PNM, PBM, PGM, PPM) image files.

31.67.1 Detailed Description

[Fl_PNM_Image](#) class .

31.68 Fl_Positioner.H File Reference

[Fl_Positioner](#) widget .
#include "Fl_Widget.H"

Classes

- class [Fl_Positioner](#)
This class is provided for Forms compatibility.

31.68.1 Detailed Description

[Fl_Positioner](#) widget .

31.69 Fl_Preferences.H File Reference

[Fl_Preferences](#) class .

```
#include <stdio.h>
#include "Fl_Export.H"
```

Classes

- class [Fl_Preferences](#)

Fl_Preferences provides methods to store user settings between application starts.

- class [Fl_Preferences::Name](#)

'Name' provides a simple method to create numerical or more complex procedural names for entries and groups on the fly.

- struct [Fl_Preferences::Entry](#)

An entry associates a preference name to its corresponding value.

- class [Fl_Preferences::Node](#)

- class [Fl_Preferences::RootNode](#)

31.69.1 Detailed Description

[Fl_Preferences](#) class .

31.70 Fl_Progress.H File Reference

[Fl_Progress](#) widget .

```
#include "Fl_Widget.H"
```

Classes

- class [Fl_Progress](#)

Displays a progress bar for the user.

31.70.1 Detailed Description

[Fl_Progress](#) widget .

31.71 Fl_Radio_Button.H File Reference

Fl_Radio_Button widget .
#include "Fl_Button.H"

Classes

- class **Fl_Radio_Button**

31.71.1 Detailed Description

Fl_Radio_Button widget .

31.72 Fl_Radio_Light_Button.H File Reference

Fl_Radio_Light_Button widget .
#include "Fl_Light_Button.H"

Classes

- class **Fl_Radio_Light_Button**

31.72.1 Detailed Description

Fl_Radio_Light_Button widget .

31.73 Fl_Radio_Round_Button.H File Reference

```
Fl_Radio_Round_Button widget .  
#include "Fl_Round_Button.H"
```

Classes

- class **Fl_Radio_Round_Button**

31.73.1 Detailed Description

```
Fl_Radio_Round_Button widget .
```

31.74 fl_rect.cxx File Reference

Drawing and clipping routines for rectangles.

```
#include <config.h>
#include <FL/F1.H>
#include <FL/F1_Widget.H>
#include <FL/fl_draw.H>
#include <FL/x.H>
```

Defines

- #define **STACK_SIZE** 10
- #define **STACK_MAX** (STACK_SIZE - 1)

Functions

- void **fl_rect** (int x, int y, int w, int h)
Draw a 1-pixel border inside the given bounding box.
- void **fl_rectf** (int x, int y, int w, int h)
Color a rectangle that exactly fills the given bounding box.
- void **fl_xyline** (int x, int y, int x1)
Draw horizontal line from x,y to x1,y.
- void **fl_xyline** (int x, int y, int x1, int y2)
Draw horizontal line from x,y to x1,y, then vertical from x1,y to x1,y2.
- void **fl_xyline** (int x, int y, int x1, int y2, int x3)
Draw horizontal line from x,y to x1,y then a vertical from x1,y to x1,y2 and then another horizontal from x1,y2 to x3,y2.
- void **fl_yxline** (int x, int y, int y1)
Draw a vertical line from x,y to x,y1.
- void **fl_yxline** (int x, int y, int y1, int x2)
Draw a vertical line from x,y to x,y1 then a horizontal from x,y1 to x2,y1.
- void **fl_yxline** (int x, int y, int y1, int x2, int y3)
Draw a vertical line from x,y to x,y1 then a horizontal from x,y1 to x2,y1 then another vertical from x2,y1 to x2,y3.
- void **fl_line** (int x, int y, int x1, int y1)
Draw a line from x,y to x1,y1.
- void **fl_line** (int x, int y, int x1, int y1, int x2, int y2)
Draw a line from x,y to x1,y1 and another from x1,y1 to x2,y2.

- void **fl_loop** (int x, int y, int x1, int y1, int x2, int y2)
Outline a 3-sided polygon with lines.
- void **fl_loop** (int x, int y, int x1, int y1, int x2, int y2, int x3, int y3)
Outline a 4-sided polygon with lines.
- void **fl_polygon** (int x, int y, int x1, int y1, int x2, int y2)
Fill a 3-sided polygon.
- void **fl_polygon** (int x, int y, int x1, int y1, int x2, int y2, int x3, int y3)
Fill a 4-sided polygon.
- void **fl_point** (int x, int y)
Draw a single pixel at the given coordinates.
- Fl_Region **XRectangleRegion** (int x, int y, int w, int h)
- void **fl_restore_clip** ()
Undoes any clobbering of clip done by your program.
- void **fl_clip_region** (Fl_Region r)
Replace the top of the clipping stack with a clipping region of any shape.
- Fl_Region **fl_clip_region** ()
- void **fl_push_clip** (int x, int y, int w, int h)
Intersect the current clip region with a rectangle and push this new region onto the stack.
- void **fl_push_no_clip** ()
Pushes an empty clip region onto the stack so nothing will be clipped.
- void **fl_pop_clip** ()
Restore the previous clip region.
- int **fl_not_clipped** (int x, int y, int w, int h)
Does the rectangle intersect the current clip region?
- int **fl_clip_box** (int x, int y, int w, int h, int &X, int &Y, int &W, int &H)
Intersect the rectangle with the current clip region and return the bounding box of the result.

Variables

- int **fl_clip_state_number** = 0

31.74.1 Detailed Description

Drawing and clipping routines for rectangles.

31.74.2 Function Documentation

31.74.2.1 int fl_clip_box (int *x*, int *y*, int *w*, int *h*, int & *X*, int & *Y*, int & *W*, int & *H*)

Intersect the rectangle with the current clip region and return the bounding box of the result.

Returns non-zero if the resulting rectangle is different to the original. This can be used to limit the necessary drawing to a rectangle. *W* and *H* are set to zero if the rectangle is completely outside the region.

Parameters:

← *x,y,w,h* position and size of rectangle

→ *X,Y,W,H* position and size of resulting bounding box. *W* and *H* are set to zero if the rectangle is completely outside the region.

Returns:

Non-zero if the resulting rectangle is different to the original.

Referenced by Fl_Text_Display::draw(), Fl_Pixmap::draw(), Fl_RGB_Image::draw(), Fl_Bitmap::draw(), and Fl_Double_Window::flush().

31.74.2.2 Fl_Region fl_clip_region ()

Returns:

the current clipping region.

31.74.2.3 void fl_clip_region (Fl_Region *r*)

Replace the top of the clipping stack with a clipping region of any shape.

Fl_Region is an operating system specific type.

Parameters:

← *r* clipping region

References fl_restore_clip().

Referenced by Fl_Menu_Window::flush(), Fl_Double_Window::flush(), and Fl_Window::flush().

31.74.2.4 int fl_not_clipped (int *x*, int *y*, int *w*, int *h*)

Does the rectangle intersect the current clip region?

Parameters:

← *x,y,w,h* position and size of rectangle

Returns:

non-zero if any of the rectangle intersects the current clip region, If this returns 0 you don't have to draw the object.

Note:

Under X this returns 2 if the rectangle is partially clipped, and 1 is it is entirely inside the clip region.

Referenced by Fl_Group::draw_child(), and Fl_Group::update_child().

31.74.2.5 void fl_polygon (int *x*, int *y*, int *x1*, int *y1*, int *x2*, int *y2*, int *x3*, int *y3*)

Fill a 4-sided polygon.

The polygon must be convex.

31.74.2.6 void fl_polygon (int *x*, int *y*, int *x1*, int *y1*, int *x2*, int *y2*)

Fill a 3-sided polygon.

The polygon must be convex.

Referenced by Fl_Scrollbar::draw(), and Fl_Choice::draw().

31.74.2.7 void fl_pop_clip ()

Restore the previous clip region.

You must call [fl_pop_clip\(\)](#) once for every time you call [fl_push_clip\(\)](#). Unpredictable results may occur if the clip stack is not empty when you return to FLTK.

References fl_restore_clip(), and Fl::warning.

Referenced by Fl_Tiled_Image::draw(), Fl_Text_Display::draw(), Fl_Tabs::draw(), Fl_Scroll::draw(), Fl_Progress::draw(), Fl_Choice::draw(), Fl_Chart::draw(), Fl_Browser_::draw(), Fl_Group::draw_children(), Fl_Text_Display::draw_text(), and Fl_Input_::drawtext().

31.74.2.8 void fl_push_clip (int *x*, int *y*, int *w*, int *h*)

Intersect the current clip region with a rectangle and push this new region onto the stack.

Parameters:

← *x,y,w,h* position and size

References fl_restore_clip(), and Fl::warning.

Referenced by Fl_Text_Display::draw(), Fl_Tabs::draw(), Fl_Chart::draw(), Fl_Browser_::draw(), Fl_Group::draw_children(), Fl_Text_Display::draw_text(), and Fl_Input_::drawtext().

31.75 Fl_Repeat_Button.H File Reference

[Fl_Repeat_Button](#) widget .

```
#include "Fl.H"
#include "Fl_Button.H"
```

Classes

- class [Fl_Repeat_Button](#)

The [Fl_Repeat_Button](#) is a subclass of [Fl_Button](#) that generates a callback when it is pressed and then repeatedly generates callbacks as long as it is held down.

31.75.1 Detailed Description

[Fl_Repeat_Button](#) widget .

31.76 Fl_Return_Button.H File Reference

[Fl_Return_Button](#) widget .

```
#include "Fl_Button.H"
```

Classes

- class [Fl_Return_Button](#)

The [Fl_Return_Button](#) is a subclass of [Fl_Button](#) that generates a callback when it is pressed or when the user presses the Enter key.

31.76.1 Detailed Description

[Fl_Return_Button](#) widget .

31.77 Fl_Roller.H File Reference

[Fl_Roller](#) widget .

```
#include "Fl_Valuator.H"
```

Classes

- class [Fl_Roller](#)

The [Fl_Roller](#) widget is a "dolly" control commonly used to move 3D objects.

31.77.1 Detailed Description

[Fl_Roller](#) widget .

31.78 Fl_Round_Button.H File Reference

[Fl_Round_Button](#) widget .

```
#include "Fl_Light_Button.H"
```

Classes

- class [Fl_Round_Button](#)

Buttons generate callbacks when they are clicked by the user.

31.78.1 Detailed Description

[Fl_Round_Button](#) widget .

31.79 Fl_Round_Clock.H File Reference

[Fl_Round_Clock](#) widget .

```
#include "Fl_Clock.H"
```

Classes

- class [Fl_Round_Clock](#)

A clock widget of type FL_ROUND_CLOCK.

31.79.1 Detailed Description

[Fl_Round_Clock](#) widget .

31.80 Fl_Scroll.H File Reference

[Fl_Scroll](#) widget .

```
#include "Fl_Group.H"
#include "Fl_Scrollbar.H"
```

Classes

- class [Fl_Scroll](#)

This container widget lets you maneuver around a set of widgets much larger than your window.

31.80.1 Detailed Description

[Fl_Scroll](#) widget .

31.81 Fl_Scrollbar.H File Reference

[Fl_Scrollbar](#) widget .

```
#include "Fl_Slider.H"
```

Classes

- class [Fl_Scrollbar](#)

The [Fl_Scrollbar](#) widget displays a slider with arrow buttons at the ends of the scrollbar.

31.81.1 Detailed Description

[Fl_Scrollbar](#) widget .

31.82 Fl_Secret_Input.H File Reference

```
Fl_Secret_Input widget .  
#include "Fl_Input.h"
```

Classes

- class [Fl_Secret_Input](#)

The [Fl_Secret_Input](#) class is a subclass of [Fl_Input](#) that displays its input as a string of asterisks.

31.82.1 Detailed Description

```
Fl_Secret_Input widget .
```

31.83 Fl_Select_Browser.H File Reference

[Fl_Select_Browser](#) widget .

```
#include "Fl_Browser.H"
```

Classes

- class [Fl_Select_Browser](#)

The class is a subclass of [Fl_Browser](#) which lets the user select a single item, or no items by clicking on the empty space.

31.83.1 Detailed Description

[Fl_Select_Browser](#) widget .

31.84 Fl_Shared_Image.H File Reference

[Fl_Shared_Image](#) class .

```
#include "Fl_Image.H"
```

Classes

- class [Fl_Shared_Image](#)

This class supports caching, loading, and drawing of image files.

Typedefs

- typedef [Fl_Image](#) *(*[Fl_Shared_Handler](#))(const char *name, [uchar](#) *header, int headerlen)

Functions

- [FL_EXPORT void fl_register_images\(\)](#)

31.84.1 Detailed Description

[Fl_Shared_Image](#) class .

31.85 Fl_Simple_Counter.H File Reference

[Fl_Simple_Counter](#) widget .

```
#include "Fl_Counter.H"
```

Classes

- class [Fl_Simple_Counter](#)

This widget creates a counter with only 2 arrow buttons.

31.85.1 Detailed Description

[Fl_Simple_Counter](#) widget .

31.86 Fl_Single_Window.H File Reference

[Fl_Single_Window](#) class .

```
#include "Fl_Window.H"
```

Classes

- class [Fl_Single_Window](#)

This is the same as [Fl_Window](#).

31.86.1 Detailed Description

[Fl_Single_Window](#) class .

31.87 Fl_Slider.H File Reference

[Fl_Slider](#) widget .

```
#include "Fl_Valuator.H"
```

Classes

- class [Fl_Slider](#)

The [Fl_Slider](#) widget contains a sliding knob inside a box.

Defines

- #define **FL_VERT_SLIDER** 0
- #define **FL_HOR_SLIDER** 1
- #define **FL_VERT_FILL_SLIDER** 2
- #define **FL_HOR_FILL_SLIDER** 3
- #define **FL_VERT_NICE_SLIDER** 4
- #define **FL_HOR_NICE_SLIDER** 5

31.87.1 Detailed Description

[Fl_Slider](#) widget .

31.88 Fl_Spinner.H File Reference

[Fl_Spinner](#) widget .

```
#include <FL/Enumerations.H>
#include <FL/Fl_Group.H>
#include <FL/Fl_Input.H>
#include <FL/Fl_Repeat_Button.H>
#include <stdio.h>
#include <stdlib.h>
```

Classes

- class [Fl_Spinner](#)

This widget is a combination of the input widget and repeat buttons.

31.88.1 Detailed Description

[Fl_Spinner](#) widget .

31.89 Fl_Tabs.H File Reference

[Fl_Tabs](#) widget .

```
#include "Fl_Group.H"
```

Classes

- class [Fl_Tabs](#)

The [Fl_Tabs](#) widget is the "file card tabs" interface that allows you to put lots and lots of buttons and switches in a panel, as popularized by many toolkits.

31.89.1 Detailed Description

[Fl_Tabs](#) widget .

31.90 Fl_Text_Buffer.H File Reference

[Fl_Text_Buffer](#), [Fl_Text_Selection](#) widget .

```
#include "Fl_Export.h"
```

Classes

- class [Fl_Text_Selection](#)

This is an internal class for [Fl_Text_Buffer](#) to manage text selections.

- class [Fl_Text_Buffer](#)

The [Fl_Text_Buffer](#) class is used by the [Fl_Text_Display](#) and [Fl_Text_Editor](#) to manage complex text data and is based upon the excellent NEdit text editor engine - see <http://www.nedit.org/>.

Defines

- #define **FL_TEXT_MAX_EXP_CHAR_LEN** 20

Typedefs

- typedef void(* **Fl_Text_Modify_Cb**)(int pos, int nInserted, int nDeleted, int nRestyled, const char *deletedText, void *cbArg)
- typedef void(* **Fl_Text_Predelete_Cb**)(int pos, int nDeleted, void *cbArg)

31.90.1 Detailed Description

[Fl_Text_Buffer](#), [Fl_Text_Selection](#) widget .

31.91 Fl_Text_Display.H File Reference

[Fl_Text_Display](#) widget .

```
#include "fl_draw.H"
#include "Fl_Group.H"
#include "Fl_Widget.H"
#include "Fl_Scrollbar.H"
#include "Fl_Text_Buffer.H"
```

Classes

- class [Fl_Text_Display](#)
This is the FLTK text display widget.
- struct [Fl_Text_Display::Style_Table_Entry](#)
This structure associates the color,font,size of a string to draw with an attribute mask matching attr.

31.91.1 Detailed Description

[Fl_Text_Display](#) widget .

31.92 Fl_Text_Editor.H File Reference

[Fl_Text_Editor](#) widget .
#include "Fl_Text_Display.H"

Classes

- class [Fl_Text_Editor](#)
This is the FLTK text editor widget.
- struct [Fl_Text_Editor::Key_Binding](#)
Simple linked list associating a key/state to a function.

Defines

- #define **FL_TEXT_EDITOR_ANY_STATE** (-1L)

31.92.1 Detailed Description

[Fl_Text_Editor](#) widget .

31.93 Fl_Tile.H File Reference

[Fl_Tile](#) widget .

```
#include "Fl_Group.H"
```

Classes

- class [Fl_Tile](#)

The [Fl_Tile](#) class lets you resize the children by dragging the border between them:.

31.93.1 Detailed Description

[Fl_Tile](#) widget .

31.94 Fl_Tiled_Image.H File Reference

```
Fl_Tiled_Image widget .  
#include "Fl_Image.H"
```

Classes

- class [Fl_Tiled_Image](#)
This class supports tiling of images over a specified area.

31.94.1 Detailed Description

[Fl_Tiled_Image](#) widget .

31.95 Fl_Timer.H File Reference

[Fl_Timer](#) widget .

```
#include "Fl_Widget.H"
```

Classes

- class [Fl_Timer](#)

This is provided only to emulate the Forms Timer widget.

Defines

- #define **FL_NORMAL_TIMER** 0
- #define **FL_VALUE_TIMER** 1
- #define **FL_HIDDEN_TIMER** 2

31.95.1 Detailed Description

[Fl_Timer](#) widget .

31.96 Fl_Toggle_Button.H File Reference

[Fl_Toggle_Button](#) widget .

```
#include "Fl_Button.H"
```

Classes

- class [Fl_Toggle_Button](#)

The toggle button is a push button that needs to be clicked once to toggle on, and one more time to toggle off.

31.96.1 Detailed Description

[Fl_Toggle_Button](#) widget .

31.97 Fl_Tooltip.H File Reference

[Fl_Tooltip](#) widget .

```
#include <FL/Fl.H>
#include <FL/Fl_Widget.H>
```

Classes

- class [Fl_Tooltip](#)

The [Fl_Tooltip](#) class provides tooltip support for all FLTK widgets.

31.97.1 Detailed Description

[Fl_Tooltip](#) widget .

31.98 fl_types.h File Reference

This file contains simple "C"-style type definitions.

Typedefs

Miscellaneous

- `typedef unsigned char uchar`
unsigned char
- `typedef unsigned long ulong`
unsigned long
- `typedef char * Fl_String`
Flexible length utf8 Unicode text.
- `typedef const char * Fl_CString`
Flexible length utf8 Unicode read-only string.
- `typedef unsigned int Fl_Unichar`
24-bit Unicode character + 8-bit indicator for keyboard flags

31.98.1 Detailed Description

This file contains simple "C"-style type definitions.

31.98.2 Typedef Documentation

31.98.2.1 `typedef const char* Fl_CString`

Flexible length utf8 Unicode read-only string.

See also:

[Fl_String](#)

31.98.2.2 `typedef char* Fl_String`

Flexible length utf8 Unicode text.

Todo

FIXME: temporary (?) typedef to mark UTF8 and Unicode conversions

31.99 Fl_Valuator.H File Reference

[Fl_Valuator](#) widget .

```
#include "Fl_Widget.H"
```

Classes

- class [Fl_Valuator](#)

The [Fl_Valuator](#) class controls a single floating-point value and provides a consistent interface to set the value, range, and step, and insures that callbacks are done the same for every object.

Defines

- #define [FL_VERTICAL](#) 0
The valuator can work vertically.
- #define [FL_HORIZONTAL](#) 1
The valuator can work horizontally.

31.99.1 Detailed Description

[Fl_Valuator](#) widget .

31.100 Fl_Value_Input.H File Reference

[Fl_Value_Input](#) widget .

```
#include "Fl_Valuator.H"
#include "Fl_Input.H"
```

Classes

- class [Fl_Value_Input](#)
The [Fl_Value_Input](#) widget displays a numeric value.

31.100.1 Detailed Description

[Fl_Value_Input](#) widget .

31.101 Fl_Value_Output.H File Reference

[Fl_Value_Output](#) widget .

```
#include "Fl_Valuator.H"
```

Classes

- class [Fl_Value_Output](#)

The [Fl_Value_Output](#) widget displays a floating point value.

31.101.1 Detailed Description

[Fl_Value_Output](#) widget .

31.102 Fl_Value_Slider.H File Reference

[Fl_Value_Slider](#) widget .
#include "Fl_Slider.H"

Classes

- class [Fl_Value_Slider](#)

The [Fl_Value_Slider](#) widget is a [Fl_Slider](#) widget with a box displaying the current value.

31.102.1 Detailed Description

[Fl_Value_Slider](#) widget .

31.103 fl_vertex.cxx File Reference

Portable drawing code for drawing arbitrary shapes with simple 2D transformations.

```
#include <config.h>
#include <FL/fl_draw.H>
#include <FL/x.H>
#include <FL/Fl.H>
#include <FL/math.h>
#include <stdlib.h>
```

Defines

- #define **XPOINT** XPoint

Typedefs

- typedef short **COORD_T**

Enumerations

- enum { **LINE**, **LOOP**, **POLYGON**, **POINT_** }

Functions

- void **fl_push_matrix** ()

Save the current transformation matrix on the stack.
- void **fl_pop_matrix** ()

Restore the current transformation matrix from the stack.
- void **fl_mult_matrix** (double a, double b, double c, double d, double x, double y)

Concatenate another transformation onto the current one.
- void **fl_scale** (double x, double y)

Concatenate scaling transformation onto the current one.
- void **fl_scale** (double x)

Concatenate scaling transformation onto the current one.
- void **fl_translate** (double x, double y)

Concatenate translation transformation onto the current one.
- void **fl_rotate** (double d)

Concatenate rotation transformation onto the current one.
- void **fl_begin_points** ()

Start drawing a list of points.

- void `fl_begin_line()`

Start drawing a list of lines.

- void `fl_begin_loop()`

Start drawing a closed sequence of lines.

- void `fl_begin_polygon()`

Start drawing a convex filled polygon.

- double `fl_transform_x(double x, double y)`

Transform coordinate using current transformation matrix.

- double `fl_transform_y(double x, double y)`

Transform coordinate using current transformation matrix.

- double `fl_transform_dx(double x, double y)`

Transform distance using current transformation matrix.

- double `fl_transform_dy(double x, double y)`

Transform distance using current transformation matrix.

- void `fl_transformed_vertex(double xf, double yf)`

Add coordinate pair to the vertex list without further transformations.

- void `fl_vertex(double x, double y)`

Add a single vertex to the current path.

- void `fl_end_points()`

End list of points, and draw.

- void `fl_end_line()`

End list of lines, and draw.

- void `fl_end_loop()`

End closed sequence of lines, and draw.

- void `fl_end_polygon()`

End convex filled polygon, and draw.

- void `fl_begin_complex_polygon()`

Start drawing a complex filled polygon.

- void `fl_gap()`

Call `fl_gap()` to separate loops of the path.

- void `fl_end_complex_polygon()`

End complex filled polygon, and draw.

- void [fl_circle](#) (double x, double y, double r)
fl_circle() is equivalent to [fl_arc](#).

31.103.1 Detailed Description

Portable drawing code for drawing arbitrary shapes with simple 2D transformations.

31.103.2 Function Documentation

31.103.2.1 void fl_begin_complex_polygon ()

Start drawing a complex filled polygon.

The polygon may be concave, may have holes in it, or may be several disconnected pieces. Call [fl_gap\(\)](#) to separate loops of the path.

To outline the polygon, use [fl_begin_loop\(\)](#) and replace each [fl_gap\(\)](#) with [fl_end_loop\(\);fl_begin_loop\(\)](#) pairs.

Note:

For portability, you should only draw polygons that appear the same whether "even/odd" or "non-zero" winding rules are used to fill them. Holes should be drawn in the opposite direction to the outside loop.

References [fl_begin_polygon\(\)](#).

Referenced by [Fl_File_Icon::draw\(\)](#).

31.103.2.2 void fl_begin_points ()

Start drawing a list of points.

Points are added to the list with [fl_vertex\(\)](#)

31.103.2.3 void fl_circle (double x, double y, double r)

[fl_circle\(\)](#) is equivalent to [fl_arc](#).

...0,360) but may be faster. It must be the *only* thing in the path: if you want a circle as part of a complex polygon you must use [fl_arc\(\)](#)

Parameters:

← **x,y,r** center and radius of circle

References [fl_transform_x\(\)](#), and [fl_transform_y\(\)](#).

Referenced by [Fl_Dial::draw\(\)](#), and [Fl_Clock_Output::draw\(\)](#).

31.103.2.4 void fl_gap ()

Call [fl_gap\(\)](#) to separate loops of the path.

It is unnecessary but harmless to call `fl_gap()` before the first vertex, after the last vertex, or several times in a row.

References `fl_transformed_vertex()`.

Referenced by `fl_end_complex_polygon()`.

31.103.2.5 void fl_mult_matrix (double *a*, double *b*, double *c*, double *d*, double *x*, double *y*)

Concatenate another transformation onto the current one.

Parameters:

$\leftarrow a, b, c, d, x, y$ transformation matrix elements such that $X' = aX + cY + x$ and $Y' = bX + dY + y$

Referenced by `fl_rotate()`, `fl_scale()`, and `fl_translate()`.

31.103.2.6 void fl_push_matrix ()

Save the current transformation matrix on the stack.

The maximum depth of the stack is 4.

References `Fl::error`.

Referenced by `Fl_File_Icon::draw()`, `Fl_Dial::draw()`, and `Fl_Clock_Output::draw()`.

31.103.2.7 void fl_rotate (double *d*)

Concatenate rotation transformation onto the current one.

Parameters:

$\leftarrow d$ - rotation angle, counter-clockwise in degrees (not radians)

References `fl_mult_matrix()`.

Referenced by `Fl_Dial::draw()`, and `Fl_Clock_Output::draw()`.

31.103.2.8 void fl_scale (double *x*)

Concatenate scaling transformation onto the current one.

Parameters:

$\leftarrow x$ scale factor in both x-direction and y-direction

References `fl_mult_matrix()`.

31.103.2.9 void fl_scale (double *x*, double *y*)

Concatenate scaling transformation onto the current one.

Parameters:

← x,y scale factors in x-direction and y-direction

References fl_mult_matrix().

Referenced by Fl_File_Icon::draw(), Fl_Dial::draw(), and Fl_Clock_Output::draw().

31.103.2.10 double fl_transform_dx (double x, double y)

Transform distance using current transformation matrix.

Parameters:

← x,y coordinate

Referenced by fl_arc().

31.103.2.11 double fl_transform_dy (double x, double y)

Transform distance using current transformation matrix.

Parameters:

← x,y coordinate

Referenced by fl_arc().

31.103.2.12 double fl_transform_x (double x, double y)

Transform coordinate using current transformation matrix.

Parameters:

← x,y coordinate

Referenced by fl_circle(), and fl_curve().

31.103.2.13 double fl_transform_y (double x, double y)

Transform coordinate using current transformation matrix.

Parameters:

← x,y coordinate

Referenced by fl_circle(), and fl_curve().

31.103.2.14 void fl_transformed_vertex (double xf, double yf)

Add coordinate pair to the vertex list without further transformations.

Parameters:

← *xf,yf* transformed coordinate

References fl_transformed_vertex().

Referenced by fl_curve(), fl_end_loop(), fl_gap(), fl_transformed_vertex(), and fl_vertex().

31.103.2.15 void fl_translate (double x, double y)

Concatenate translation transformation onto the current one.

Parameters:

← *x,y* translation factor in x-direction and y-direction

References fl_mult_matrix().

Referenced by Fl_File_Icon::draw(), Fl_Dial::draw(), and Fl_Clock_Output::draw().

31.103.2.16 void fl_vertex (double x, double y)

Add a single vertex to the current path.

Parameters:

← *x,y* coordinate

References fl_transformed_vertex().

Referenced by Fl_File_Icon::draw(), Fl_Dial::draw(), and fl_arc().

31.104 Fl_Widget.H File Reference

[Fl_Widget](#), [Fl_Label](#) classes .

```
#include "Enumerations.H"
```

Classes

- struct [Fl_Label](#)

This struct stores all information for a text or mixed graphics label.

- class [Fl_Widget](#)

Fl_Widget is the base class for all widgets in FLTK.

Defines

- #define [FL_RESERVED_TYPE](#) 100

Reserved type numbers (necessary for my cheapo RTTI) start here.

Typedefs

- typedef void([Fl_Callback](#))([Fl_Widget](#) *, void *)

Default callback type definition for all fltk widgets (by far the most used).

- typedef [Fl_Callback](#) * [Fl_Callback_p](#)

Default callback type pointer definition for all fltk widgets.

- typedef void([Fl_Callback0](#))([Fl_Widget](#) *)

One parameter Callback type definition passing only the widget.

- typedef void([Fl_Callback1](#))([Fl_Widget](#) *, long)

Callback type definition passing the widget and a long data value.

31.104.1 Detailed Description

[Fl_Widget](#), [Fl_Label](#) classes .

31.104.2 Define Documentation

31.104.2.1 #define FL_RESERVED_TYPE 100

Reserved type numbers (necessary for my cheapo RTTI) start here.

grep the header files for "RESERVED_TYPE" to find the next available number.

31.105 Fl_Window.H File Reference

[Fl_Window](#) widget .

```
#include "Fl_Group.H"
```

Classes

- class [Fl_Window](#)

This widget produces an actual window.

Defines

- #define [FL_WINDOW](#) 0xF0
window type id all subclasses have type() >= this
- #define [FL_DOUBLE_WINDOW](#) 0xF1
double window type id

31.105.1 Detailed Description

[Fl_Window](#) widget .

31.106 Fl_Wizard.H File Reference

[Fl_Wizard](#) widget .

```
#include <FL/Fl_Group.H>
```

Classes

- class [Fl_Wizard](#)

This widget is based off the [Fl_Tabs](#) widget, but instead of displaying tabs it only changes "tabs" under program control.

31.106.1 Detailed Description

[Fl_Wizard](#) widget .

31.107 Fl_XBM_Image.H File Reference

[Fl_XBM_Image](#) class .

```
#include "Fl_Bitmap.H"
```

Classes

- class [Fl_XBM_Image](#)

The [Fl_XBM_Image](#) class supports loading, caching, and drawing of X Bitmap (XBM) bitmap files.

31.107.1 Detailed Description

[Fl_XBM_Image](#) class .

31.108 Fl_XPM_Image.H File Reference

[Fl_XPM_Image](#) class .

```
#include "Fl_Pixmap.h"
```

Classes

- class [Fl_XPM_Image](#)

The [Fl_XPM_Image](#) class supports loading, caching, and drawing of X Pixmap (XPM) images, including transparency.

31.108.1 Detailed Description

[Fl_XPM_Image](#) class .

Index

~Fl_Browser
 Fl_Browser, 288
~Fl_Check_Browser
 Fl_Check_Browser, 322
~Fl_Double_Window
 Fl_Double_Window, 352
~Fl_File_Chooser
 Fl_File_Chooser, 363
~Fl_Group
 Fl_Group, 406
~Fl_Help_View
 Fl_Help_View, 422
~Fl_Menu_Window
 Fl_Menu_Window, 488
~Fl_Preferences
 Fl_Preferences, 514
~Fl_RGB_Image
 Fl_RGB_Image, 536
~Fl_Scrollbar
 Fl_Scrollbar, 551
~Fl_Shared_Image
 Fl_Shared_Image, 558
~Fl_Text_Display
 Fl_Text_Display, 606
~Fl_Widget
 Fl_Widget, 673
~Fl_Window
 Fl_Window, 707
_FL_DIAMOND_DOWN_BOX
 Enumerations.H, 726
_FL_DIAMOND_UP_BOX
 Enumerations.H, 726
_FL_EMBOSSDED_LABEL
 Enumerations.H, 729
_FL_ENGRAVED_LABEL
 Enumerations.H, 729
_FL_GTK_DOWN_BOX
 Enumerations.H, 726
_FL_GTK_DOWN_FRAME
 Enumerations.H, 726
_FL_GTK_ROUND_DOWN_BOX
 Enumerations.H, 726
_FL_GTK_ROUND_UP_BOX
 Enumerations.H, 726
_FL_GTK_THIN_DOWN_BOX
 Enumerations.H, 726
_FL_GTK_THIN_UP_FRAME
 Enumerations.H, 726
_FL_ICON_LABEL
 Enumerations.H, 730
_FL_IMAGE_LABEL
 Enumerations.H, 730
_FL_MULTI_LABEL
 Enumerations.H, 730
_FL_OFLAT_BOX
 Enumerations.H, 726
_FL_OSHADOW_BOX
 Enumerations.H, 726
_FL_OVAL_BOX
 Enumerations.H, 726
_FL_OVAL_FRAME
 Enumerations.H, 726
_FL_PLASTIC_DOWN_BOX
 Enumerations.H, 726
_FL_PLASTIC_DOWN_FRAME
 Enumerations.H, 726
_FL_PLASTIC_ROUND_DOWN_BOX
 Enumerations.H, 726
_FL_PLASTIC_ROUND_UP_BOX
 Enumerations.H, 726
_FL_PLASTIC_THIN_DOWN_BOX
 Enumerations.H, 726
_FL_PLASTIC_THIN_UP_BOX
 Enumerations.H, 726
_FL_PLASTIC_UP_BOX
 Enumerations.H, 726
_FL_PLASTIC_UP_FRAME
 Enumerations.H, 726
_FL_RFLAT_BOX
 Enumerations.H, 726
_FL_ROUNDED_BOX
 Enumerations.H, 726

_FL_ROUNDED_FRAME
 Enumerations.H, 726
_FL_ROUND_DOWN_BOX
 Enumerations.H, 726
_FL_ROUND_UP_BOX
 Enumerations.H, 726
_FL_RSHADOW_BOX
 Enumerations.H, 726
_FL_SHADOW_BOX
 Enumerations.H, 725
_FL_SHADOW_FRAME
 Enumerations.H, 726
_FL_SHADOW_LABEL
 Enumerations.H, 729
_remove
 Fl_Browser, 288

activate
 Fl_Menu_Item, 479
 Fl_Widget, 674
active
 Fl_Menu_Item, 479
 Fl_Widget, 674
active_r
 Fl_Widget, 674
activevisible
 Fl_Menu_Item, 480
add
 Fl_Browser, 288
 Fl_Chart, 316
 Fl_Check_Browser, 323
 Fl_File_Icon, 371
 Fl_Input_Choice, 449
 Fl_Menu_, 462
 Fl_Menu_Item, 480
add_awake_handler_
 Fl, 261
add_check
 Fl, 261
add_color
 Fl_File_Icon, 371
add_default_key_bindings
 Fl_Text_Editor, 623
add_extra
 Fl_File_Chooser, 364
add_fd
 Fl, 262
add_handler
 fl_events, 218
add_idle
 Fl, 262
add_modify_callback
 Fl_Text_Buffer, 586
add_pdelete_callback

 Fl_Text_Buffer, 586
 add_timeout
 Fl, 262
 add_vertex
 Fl_File_Icon, 371
align
 Fl_Widget, 675
angle1
 Fl_Dial, 349
append
 Fl_Text_Buffer, 586
appendfile
 Fl_Text_Buffer, 586
arg
 Fl, 263
args
 Fl, 263
argument
 Fl_Menu_Item, 480
 Fl_Widget, 675
array
 Fl_Group, 406
atclose
 fl_windows, 215
autosize
 Fl_Chart, 316, 317
awake
 fl_multithread, 237

b
 Fl_Color_Chooser, 341
background
 Fl, 264
background2
 Fl, 264
begin
 Fl_Group, 406
belowmouse
 fl_events, 219
bitmap
 Fl_FormsBitmap, 382
border
 Fl_Window, 707
bottomline
 Fl_Browser, 289
bound_key_function
 Fl_Text_Editor, 623
bounds
 Fl_Chart, 317
 Fl_Slider, 566
 Fl_Valuator, 647
box
 Fl_Widget, 676
box_dh

Fl, 265
 box_dw
 Fl, 265
 box_dx
 Fl, 265
 box_dy
 Fl, 266
 buffer
 Fl_Text_Display, 606
 Cairo support functions and classes, 241
 cairo_autolink_context
 group_cairo, 241
 cairo_cc
 group_cairo, 242
 cairo_make_current
 group_cairo, 242
 calc_line_starts
 Fl_Text_Display, 606
 callback
 Fl_Menu_Item, 480
 Fl_Widget, 676, 677
 can_do
 Fl_Gl_Window, 393
 can_do_overlay
 Fl_Gl_Window, 393
 CHANGED
 Fl_Widget, 673
 changed
 Fl_Input_Choice, 449
 Fl_Widget, 677
 character
 Fl_Text_Buffer, 586
 character_width
 Fl_Text_Buffer, 587
 check
 Fl, 266
 Fl_Menu_Item, 480
 check_all
 Fl_Check_Browser, 323
 check_none
 Fl_Check_Browser, 323
 checkbox
 Fl_Menu_Item, 480
 checked
 Fl_Check_Browser, 323
 Fl_Menu_Item, 481
 child
 Fl_Group, 407
 clamp
 Fl_Valuator, 648
 clear
 Fl_Button, 308
 Fl_Check_Browser, 323
 Fl_File_Icon, 371
 Fl_Group, 407
 Fl_Input_Choice, 449
 Fl_Menu_, 463
 Fl_Menu_Item, 481
 Fl_Scroll, 547
 clear_border
 Fl_Window, 707
 clear_changed
 Fl_Input_Choice, 449
 Fl_Widget, 678
 clear_damage
 Fl_Widget, 678
 clear_output
 Fl_Widget, 678
 clear_overlay
 Fl_Menu_Window, 488
 clear_rectangular
 Fl_Text_Buffer, 587
 clear_selection
 Fl_Help_View, 422
 clear_visible
 Fl_Widget, 679
 clear_visible_focus
 Fl_Widget, 679
 clip_children
 Fl_Group, 407
 col
 FL_CHART_ENTRY, 320
 color
 Fl_File_Chooser, 364
 Fl_Tooltip, 642
 Fl_Widget, 679, 680
 Color & Font functions, 234
 color2
 Fl_Widget, 680
 color_average
 Fl_Image, 429
 Fl_Pixmap, 502
 Fl_RGB_Image, 536
 Fl_Shared_Image, 558
 Fl_Tiled_Image, 635
 column_char
 Fl_Browser, 289
 column_widths
 Fl_Browser, 289
 Common Dialogs classes and functions, 243
 compose
 fl_events, 219
 compose_reset
 fl_events, 219
 contains
 Fl_Widget, 680
 context

Fl_Gl_Window, 393
context_valid
 Fl_Gl_Window, 393
COPIED_LABEL
 Fl_Widget, 673
copy
 Fl_Bitmap, 278
 fl_clipboard, 228
 Fl_Image, 429
 Fl_Input_, 440
 Fl_Menu_, 463
 Fl_Pixmap, 502
 Fl_RGB_Image, 536, 537
 Fl_Shared_Image, 559
 Fl_Tiled_Image, 635
copy_cuts
 Fl_Input_, 441
copy_label
 Fl_Widget, 681
 Fl_Window, 707
count
 Fl_File_Chooser, 364
 Fl_Image, 430
count_displayed_characters
 Fl_Text_Buffer, 587
count_lines
 Fl_Text_Buffer, 587
 Fl_Text_Display, 607
current
 Fl_Group, 407
 Fl_Tooltip, 642
 Fl_Window, 708
current_
 Fl_Window, 714
cursor
 Fl_Window, 708
cursor_color
 Fl_Input_, 441
 Fl_Text_Display, 607
 Fl_Value_Input, 653
cursor_style
 Fl_Text_Display, 607
cut
 Fl_Input_, 441
d
 Fl_Image, 430
damage
 Fl, 266
 Fl_Widget, 681
damage_resize
 Fl_Widget, 682
data
 Fl_Browser, 289
Fl_Image, 430
deactivate
 Fl_Menu_Item, 481
 Fl_Repeat_Button, 530
 Fl_Widget, 682
default_atclose
 fl_windows, 214
default_callback
 Fl_Widget, 682
default_cursor
 Fl_Window, 708
default_key_function
 Fl_Text_Editor, 623
deimage
 Fl_Widget, 683
delay
 Fl_Tooltip, 642, 643
delete_widget
 fl_del_widget, 239
deleteEntry
 Fl_Preferences, 515
deleteGroup
 Fl_Preferences, 515
deleting
 Fl_Browser_, 300
desaturate
 Fl_Image, 430
 Fl_Pixmap, 502
 Fl_RGB_Image, 537
 Fl_Shared_Image, 559
 Fl_Tiled_Image, 635
deselect
 Fl_Browser_, 300
direction
 Fl_Timer, 638
directory
 Fl_File_Chooser, 364
 Fl_Help_View, 422
disable
 Fl_Tooltip, 643
display
 Fl, 266
 Fl_Browser_, 300
display_insert
 Fl_Text_Display, 607
dnd
 fl_clipboard, 228
dnd_text_ops
 Fl, 267
do_callback
 Fl_Menu_Item, 481
 Fl_Widget, 683, 684
do_widget_deletion
 fl_del_widget, 239

down_box
 Fl_Button, 308
 Fl_File_Input, 376
 Fl_Menu_, 463
 draw
 Fl_Adjuster, 275
 Fl_Bitmap, 279
 Fl_Box, 283
 Fl_Browser_, 301
 Fl_Button, 308
 Fl_Chart, 317
 Fl_Choice, 329
 Fl_Clock_Output, 337
 Fl_Counter, 346
 Fl_Dial, 349
 Fl_File_Icon, 372
 Fl_FormsBitmap, 382
 Fl_FormsPixmap, 385
 Fl_Free, 387
 Fl_Gl_Window, 393
 Fl_Glut_Window, 400
 Fl_Group, 407
 Fl_Image, 430, 431
 Fl_Input, 435
 Fl_Label, 455
 Fl_Light_Button, 457
 Fl_Menu_Bar, 469
 Fl_Menu_Button, 472
 Fl_Menu_Item, 481
 Fl_Pack, 499
 Fl_Pixmap, 502
 Fl_Positioner, 508
 Fl_Progress, 528
 Fl_Return_Button, 533
 Fl_RGB_Image, 537
 Fl_Roller, 540
 Fl_Scroll, 547
 Fl_Scrollbar, 551
 Fl_Shared_Image, 559
 Fl_Slider, 566
 Fl_Tabs, 576
 Fl_Text_Display, 608
 Fl_Tiled_Image, 636
 Fl_Timer, 638
 Fl_Value_Input, 653
 Fl_Value_Output, 659
 Fl_Value_Slider, 662
 Fl_Widget, 684
 Fl_Window, 708
 draw_box
 Fl_Widget, 685
 draw_box_active
 Fl, 267
 draw_child
 Fl_Group, 408
 draw_children
 Fl_Group, 408
 draw_empty
 Fl_Image, 431
 draw_focus
 Fl_Widget, 685
 draw_line_numbers
 Fl_Text_Display, 608
 draw_outside_label
 Fl_Group, 408
 draw_overlay
 Fl_Glut_Window, 400
 draw_range
 Fl_Text_Display, 608
 draw_string
 Fl_Text_Display, 608
 draw_text
 Fl_Text_Display, 608
 drawtext
 Fl_Input_, 441
 enable
 Fl_Tooltip, 643
 enabled
 Fl_Tooltip, 643
 end
 Fl_Group, 408
 enter_area
 Fl_Tooltip, 643
 entries
 Fl_Preferences, 515
 entry
 Fl_Preferences, 515
 entryExists
 Fl_Preferences, 516
 Enumerations.H, 719
 _FL_DIAMOND_DOWN_BOX, 726
 _FL_DIAMOND_UP_BOX, 726
 _FL_EMBORESSED_LABEL, 729
 _FL_ENGRAVED_LABEL, 729
 _FL_GTK_DOWN_BOX, 726
 _FL_GTK_DOWN_FRAME, 726
 _FL_GTK_ROUND_DOWN_BOX, 726
 _FL_GTK_ROUND_UP_BOX, 726
 _FL_GTK_THIN_DOWN_BOX, 726
 _FL_GTK_THIN_DOWN_FRAME, 726
 _FL_GTK_THIN_UP_BOX, 726
 _FL_GTK_THIN_UP_FRAME, 726
 _FL_GTK_UP_BOX, 726
 _FL_GTK_UP_FRAME, 726
 _FL_ICON_LABEL, 730
 _FL_IMAGE_LABEL, 730
 _FL_MULTI_LABEL, 730

_FL_OFLAT_BOX, 726
_FL_OSHADOW_BOX, 726
_FL_OVAL_BOX, 726
_FL_OVAL_FRAME, 726
_FL_PLASTIC_DOWN_BOX, 726
_FL_PLASTIC_DOWN_FRAME, 726
_FL_PLASTIC_ROUND_DOWN_BOX, 726
_FL_PLASTIC_ROUND_UP_BOX, 726
_FL_PLASTIC_THIN_DOWN_BOX, 726
_FL_PLASTIC_THIN_UP_BOX, 726
_FL_PLASTIC_UP_BOX, 726
_FL_PLASTIC_UP_FRAME, 726
_FL_RFLAT_BOX, 726
_FL_ROUNDED_BOX, 726
_FL_ROUNDED_FRAME, 726
_FL_ROUND_DOWN_BOX, 726
_FL_ROUND_UP_BOX, 726
_FL_RSHADOW_BOX, 726
_FL_SHADOW_BOX, 725
_FL_SHADOW_FRAME, 726
_FL_SHADOW_LABEL, 729
FL_ACTIVATE, 728
FL_BACKGROUND2_COLOR, 727
FL_BORDER_BOX, 725
FL_BORDER_FRAME, 725
FL_CLOSE, 728
FL_DEACTIVATE, 728
FL_DND_DRAG, 729
FL_DND_ENTER, 729
FL_DND_LEAVE, 729
FL_DND_RELEASE, 729
FL_DOWN_BOX, 725
FL_DOWN_FRAME, 725
FL_DRAG, 727
FL_EMBOSSSED_BOX, 725
FL_EMBOSSSED_FRAME, 725
FL_ENGRAVED_BOX, 725
FL_ENGRAVED_FRAME, 725
FL_ENTER, 727
FL_FLAT_BOX, 725
FL_FOCUS, 727
FL_FOREGROUND_COLOR, 727
FL_FREE_BOXTYPE, 726
FL_FREELABELTYPE, 730
FL_HIDE, 728
FL_INACTIVE_COLOR, 727
FL_KEYBOARD, 728
FL_KEYDOWN, 728
FL_KEYUP, 728
FL_LEAVE, 727
FL_MOUSEWHEEL, 729
FL_MOVE, 728
FL_NO_BOX, 725
FL_NO_EVENT, 727
FL_NO_LABEL, 729
FL_NORMAL_LABEL, 729
FL_PASTE, 729
FL_PUSH, 727
FL_RELEASE, 727
FL_SELECTION_COLOR, 727
FL_SELECTIONCLEAR, 729
FL_SHORTCUT, 728
FL_SHOW, 729
FL_THIN_DOWN_BOX, 725
FL_THIN_DOWN_FRAME, 725
FL_THIN_UP_BOX, 725
FL_THIN_UP_FRAME, 725
FL_UNFOCUS, 728
FL_UP_BOX, 725
FL_UP_FRAME, 725
FL_WHEN_CHANGED, 730
FL_WHEN_ENTER_KEY, 730
FL_WHEN_ENTER_KEY_ALWAYS, 730
FL_WHEN_ENTER_KEY_CHANGED, 730
FL_WHEN_NEVER, 730
FL_WHEN_NOT_CHANGED, 730
FL_WHEN_RELEASE, 730
FL_WHEN_RELEASE_ALWAYS, 730
FL_Align, 725
FL_ALIGN_BOTTOM, 730
FL_ALIGN_CENTER, 730
FL_ALIGN_CLIP, 730
FL_ALIGN_IMAGE_OVER_TEXT, 731
FL_ALIGN_INSIDE, 731
FL_ALIGN_LEFT, 731
FL_ALIGN_RIGHT, 731
FL_ALIGN_TEXT_OVER_IMAGE, 731
FL_ALIGN_TOP, 731
FL_ALIGN_WRAP, 732
FL_Boxtype, 725
FL_Color, 726
FL_Event, 727
FL_Font, 725
FL_Fontsize, 725
FL_Labeltype, 729
FL_MAJOR_VERSION, 724
FL_MINOR_VERSION, 724
FL_PATCH_VERSION, 724
FL_VERSION, 724
FL_When, 730
error
 group_comdlg, 249
errorcolor
 Fl_File_Input, 376
event
 fl_events, 220
event_alt
 fl_events, 220

event_button
 fl_events, 220
 event_button1
 fl_events, 220
 event_button2
 fl_events, 220
 event_button3
 fl_events, 221
 event_buttons
 fl_events, 221
 event_clicks
 fl_events, 221
 event_ctrl
 fl_events, 221
 event_dx
 fl_events, 222
 event_dy
 fl_events, 222
 event_inside
 fl_events, 222
 event_is_click
 fl_events, 222
 event_key
 fl_events, 222, 223
 event_length
 fl_events, 223
 event_original_key
 fl_events, 224
 event_shift
 fl_events, 224
 event_state
 fl_events, 224
 event_text
 fl_events, 224
 event_x_root
 fl_events, 225
 event_y_root
 fl_events, 225
 Events handling functions, 216
 expand_character
 Fl_Text_Buffer, 587, 588

 fatal
 group_comdlg, 249
 filename
 Fl_Help_View, 422
 filetype
 Fl_File_Browser, 356
 filter
 Fl_File_Browser, 356
 Fl_File_Chooser, 364
 filter_value
 Fl_File_Chooser, 365
 find
 Fl_File_Icon, 372
 Fl_Group, 408
 find_item
 Fl_Browser_, 301
 Fl_Menu_, 463
 find_line_end
 Fl_Text_Display, 609
 find_shortcut
 Fl_Menu_Item, 482
 find_wrap_range
 Fl_Text_Display, 609
 findchar_backward
 Fl_Text_Buffer, 588
 findchar_forward
 Fl_Text_Buffer, 588
 findchars_backward
 Fl_Text_Buffer, 588
 findchars_forward
 Fl_Text_Buffer, 589
 first
 Fl_File_Icon, 372
 Fl_Menu_Item, 482
 first_window
 fl_windows, 214
 Fl, 251
 add_awake_handler_, 261
 add_check, 261
 add_fd, 262
 add_idle, 262
 add_timeout, 262
 arg, 263
 args, 263
 background, 264
 background2, 264
 box_dh, 265
 box_dw, 265
 box_dx, 265
 box_dy, 266
 check, 266
 damage, 266
 display, 266
 dnd_text_ops, 267
 draw_box_active, 267
 flush, 267
 foreground, 267
 get_awake_handler_, 267
 get_boxtype, 267
 get_system_colors, 268
 gl_visual, 268
 help, 272
 idle, 272
 own_colormap, 268
 ready, 268
 release, 268

reload_scheme, 269
remove_check, 269
remove_fd, 269
remove_timeout, 269
repeat_timeout, 269
run, 270
scheme, 270
set_boxtype, 270
set_idle, 270
set_labeltype, 271
version, 271
visible_focus, 271
visual, 271
wait, 272

FL.H, 733
FL_ACTIVATE
 Enumerations.H, 728
FL_BACKGROUND2_COLOR
 Enumerations.H, 727
FL_BORDER_BOX
 Enumerations.H, 725
FL_BORDER_FRAME
 Enumerations.H, 725
FL_CLOSE
 Enumerations.H, 728
FL_DEACTIVATE
 Enumerations.H, 728
FL_DND_DRAG
 Enumerations.H, 729
FL_DND_ENTER
 Enumerations.H, 729
FL_DND_LEAVE
 Enumerations.H, 729
FL_DND_RELEASE
 Enumerations.H, 729
FL_DOWN_BOX
 Enumerations.H, 725
FL_DOWN_FRAME
 Enumerations.H, 725
FL_DRAG
 Enumerations.H, 727
FL_EMBOSSSED_BOX
 Enumerations.H, 725
FL_EMBOSSSED_FRAME
 Enumerations.H, 725
FL_ENGRAVED_BOX
 Enumerations.H, 725
FL_ENGRAVED_FRAME
 Enumerations.H, 725
FL_ENTER
 Enumerations.H, 727
FL_FLAT_BOX
 Enumerations.H, 725
FL_FOCUS

 Enumerations.H, 727
 FL_FOREGROUND_COLOR
 Enumerations.H, 727
 FL_FREE_BOXTYPE
 Enumerations.H, 726
 FL_FREE_LABELTYPE
 Enumerations.H, 730
 FL_HIDE
 Enumerations.H, 728
 FL_INACTIVE_COLOR
 Enumerations.H, 727
 FL_KEYBOARD
 Enumerations.H, 728
 FL_KEYDOWN
 Enumerations.H, 728
 FL_KEYUP
 Enumerations.H, 728
 FL_LEAVE
 Enumerations.H, 727
 FL_MOUSEWHEEL
 Enumerations.H, 729
 FL_MOVE
 Enumerations.H, 728
 FL_NO_BOX
 Enumerations.H, 725
 FL_NO_EVENT
 Enumerations.H, 727
 FL_NO_LABEL
 Enumerations.H, 729
 FL_NORMAL_LABEL
 Enumerations.H, 729
 FL_PASTE
 Enumerations.H, 729
Fl_Preferences
 SYSTEM, 513
 USER, 513
FL_PUSH
 Enumerations.H, 727
FL_RELEASE
 Enumerations.H, 727
FL_SELECTION_COLOR
 Enumerations.H, 727
FL_SELECTIONCLEAR
 Enumerations.H, 729
FL_SHORTCUT
 Enumerations.H, 728
FL_SHOW
 Enumerations.H, 729
FL_THIN_DOWN_BOX
 Enumerations.H, 725
FL_THIN_DOWN_FRAME
 Enumerations.H, 725
FL_THIN_UP_BOX
 Enumerations.H, 725

FL_THIN_UP_FRAME
 Enumerations.H, 725
FL_UNFOCUS
 Enumerations.H, 728
FL_UP_BOX
 Enumerations.H, 725
FL_UP_FRAME
 Enumerations.H, 725
FL_WHEN_CHANGED
 Enumerations.H, 730
FL_WHEN_ENTER_KEY
 Enumerations.H, 730
FL_WHEN_ENTER_KEY_ALWAYS
 Enumerations.H, 730
FL_WHEN_ENTER_KEY_CHANGED
 Enumerations.H, 730
FL_WHEN_NEVER
 Enumerations.H, 730
FL_WHEN_NOT_CHANGED
 Enumerations.H, 730
FL_WHEN_RELEASE
 Enumerations.H, 730
FL_WHEN_RELEASE_ALWAYS
 Enumerations.H, 730
Fl_Widget
 CHANGED, 673
 COPIED_LABEL, 673
 INACTIVE, 673
 INVISIBLE, 673
 OUTPUT, 673
 SHORTCUT_LABEL, 673
 VISIBLE_FOCUS, 673
Fl_Adjuster, 274
 draw, 275
Fl_Adjuster, 275
Fl_Adjuster, 275
 handle, 275
 soft, 276
Fl_Adjuster.H, 734
fl_alert
 group_comdlg, 244
Fl_Align
 Enumerations.H, 725
FL_ALIGN_BOTTOM
 Enumerations.H, 730
FL_ALIGN_CENTER
 Enumerations.H, 730
FL_ALIGN_CLIP
 Enumerations.H, 730
FL_ALIGN_IMAGE_OVER_TEXT
 Enumerations.H, 731
FL_ALIGN_INSIDE
 Enumerations.H, 731
FL_ALIGN_LEFT
 Enumerations.H, 731
fl_arc
 fl_arc.cxx, 735
 fl_arci.cxx, 736
 fl_draw.H, 767
 fl_arc.cxx, 735
 fl_arc, 735
 fl_arci.cxx, 736
 fl_arc, 736
 fl_pie, 736
fl_ask
 group_comdlg, 244
fl_attributes
 free_color, 235
 get_color, 235
 get_font, 235
 get_font_name, 235
 get_font_sizes, 235
 set_color, 235, 236
 set_font, 236
 set_fonts, 236
fl_begin_complex_polygon
 fl_draw.H, 767
 fl_vertex.cxx, 857
fl_begin_points
 fl_draw.H, 768
 fl_vertex.cxx, 857
Fl_Bitmap, 277
 copy, 278
 draw, 279
Fl_Bitmap, 278
Fl_Bitmap, 278
 label, 279
 uncache, 279
Fl_Bitmap.H, 738
Fl_BMP_Image, 281
 Fl_BMP_Image, 281
 Fl_BMP_Image, 281
Fl_BMP_Image.H, 739
Fl_Box, 282
 draw, 283
Fl_Box, 282
Fl_Box, 282
 handle, 283
Fl_Box.H, 740
Fl_Boxtype

Enumerations.H, 725
 fl_boxtype.cxx, 741
 fl_draw_box, 742
 fl_frame, 742
 fl_frame2, 743
 fl_internal_boxtype, 743
 Fl_Browser, 284
 ~Fl_Browser, 288
 _remove, 288
 add, 288
 bottomline, 289
 column_char, 289
 column_widths, 289
 data, 289
 Fl_Browser, 288
 Fl_Browser, 288
 format_char, 290
 full_height, 290
 hide, 291
 incr_height, 291
 insert, 291
 item_first, 292
 item_next, 292
 item_prev, 292
 item_select, 292
 item_selected, 292
 item_width, 292
 lineposition, 292
 load, 293
 make_visible, 293
 middleline, 293
 replace, 293
 select, 293
 selected, 293
 show, 294
 size, 294
 swap, 295
 text, 295
 topline, 295
 value, 295
 Fl_Browser.H, 744
 Fl_Browser_, 296
 deleting, 300
 deselect, 300
 display, 300
 draw, 301
 find_item, 301
 Fl_Browser_, 300
 Fl_Browser_, 300
 full_height, 301
 full_width, 301
 handle, 301
 has_scrollbar, 301
 incr_height, 302
 inserting, 302
 item_first, 302
 item_height, 302
 item_next, 302
 item_prev, 303
 item_quick_height, 303
 item_select, 303
 item_selected, 303
 item_width, 303
 new_list, 303
 redraw_lines, 304
 replacing, 304
 resize, 304
 scrollbar, 305
 scrollbar_left, 304
 scrollbar_right, 304
 select, 304
 select_only, 305
 selection, 305
 top, 305
 Fl_Browser_.H, 745
 Fl_Button, 306
 clear, 308
 down_box, 308
 draw, 308
 Fl_Button, 308
 Fl_Button, 308
 handle, 309
 set, 309
 shortcut, 309, 310
 value, 310
 Fl_Button.H, 746
 FL_RADIO_BUTTON, 746
 Fl_Cairo.H, 747
 Fl_Cairo_State, 311
 Fl_Cairo_Window, 312
 Fl_Cairo_Window.H, 748
 Fl_Chart, 314
 add, 316
 autosize, 316, 317
 bounds, 317
 draw, 317
 Fl_Chart, 316
 Fl_Chart, 316
 insert, 317
 maxsize, 318
 replace, 318
 size, 318
 textcolor, 319
 textfont, 319
 textsize, 319
 Fl_Chart.H, 749
 FL_CHART_ENTRY, 320
 col, 320

str, 320
 val, 320
Fl_Check_Browser, 321
 ~Fl_Check_Browser, 322
 add, 323
 check_all, 323
 check_none, 323
 checked, 323
 clear, 323
Fl_Check_Browser, 322
Fl_Check_Browser, 322
 handle, 323
 nchecked, 323
 nitems, 323
 remove, 324
 set_checked, 324
 text, 324
 value, 324
Fl_Check_Browser.H, 751
Fl_Check_Button, 325
 Fl_Check_Button, 326
 Fl_Check_Button, 326
Fl_Check_Button.H, 752
Fl_Choice, 327
 draw, 329
Fl_Choice, 328
Fl_Choice, 328
 handle, 329
 value, 330
fl_choice
 group_comdlg, 244
Fl_Choice.H, 753
fl_circle
 fl_draw.H, 768
 fl_vertex.cxx, 857
fl_clip_box
 fl_draw.H, 768
 fl_rect.cxx, 825
fl_clip_region
 fl_rect.cxx, 825
fl_clipboard
 copy, 228
 dnd, 228
 paste, 229
 selection, 229
 selection_owner, 229, 230
Fl_Clock, 332
 Fl_Clock, 333
 Fl_Clock, 333
 handle, 334
 update, 334
Fl_Clock.H, 754
Fl_Clock_Output, 335
 draw, 337
Fl_Clock_Output, 336
Fl_Clock_Output, 336
 hour, 337
 minute, 337
 second, 337
 value, 337, 338
Fl_Color
 Enumerations.H, 726
fl_color
 fl_color.cxx, 756
 fl_draw.H, 769
 fl_color.cxx, 755
 fl_color, 756
Fl_Color_Chooser, 339
 b, 341
Fl_Color_Chooser, 341
Fl_Color_Chooser, 341
 g, 341
 hsv, 341
 hsv2rgb, 342
 hue, 342
 r, 342
 rgb, 342
 rgb2hsv, 342
 saturation, 343
 value, 343
fl_color_chooser
 group_comdlg, 245, 246
Fl_Color_Chooser.H, 757
Fl_Counter, 344
 draw, 346
Fl_Counter, 346
Fl_Counter, 346
 handle, 346
 lstep, 347
 step, 347
Fl_Counter.H, 758
Fl_CString
 fl_types.h, 850
fl_curve
 fl_curve.cxx, 759
 fl_draw.H, 769
 fl_curve.cxx, 759
 fl_curve, 759
fl_del_widget
 delete_widget, 239
 do_widget_deletion, 239
 watch_widget_pointer, 239
Fl_Dial, 348
 angle1, 349
 draw, 349
Fl_Dial, 349
Fl_Dial, 349
 handle, 350

Fl_Dial.H, 760
fl_dir_chooser
 group_comdlg, 246
Fl_Double_Window, 351
 ~Fl_Double_Window, 352
 flush, 352
 hide, 352
 resize, 353
 show, 353
Fl_Double_Window.H, 761
fl_draw.H, 762
 fl_arc, 767
 fl_begin_complex_polygon, 767
 fl_begin_points, 768
 fl_circle, 768
 fl_clip_box, 768
 fl_color, 769
 fl_curve, 769
 fl_draw_box, 770
 fl_frame, 770
 fl_frame2, 770
 fl_gap, 770
 fl_mult_matrix, 771
 fl_not_clipped, 771
 fl_pie, 771
 fl_polygon, 771, 772
 fl_pop_clip, 772
 fl_push_clip, 772
 fl_push_matrix, 772
 fl_rotate, 772
 fl_scale, 773
 fl_transform_dx, 773
 fl_transform_dy, 773
 fl_transform_x, 773
 fl_transform_y, 773
 fl_transformed_vertex, 774
 fl_translate, 774
 fl_vertex, 774
fl_draw_box
 fl_boxtyle.cxx, 742
 fl_draw.H, 770
Fl_End, 354
Fl_Event
 Enumerations.H, 727
fl_events
 add_handler, 218
 belowmouse, 219
 compose, 219
 compose_reset, 219
 event, 220
 event_alt, 220
 event_button, 220
 event_button1, 220
 event_button2, 220
 event_button3, 221
 event_buttons, 221
 event_clicks, 221
 event_ctrl, 221
 event_dx, 222
 event_dy, 222
 event_inside, 222
 event_is_click, 222
 event_key, 222, 223
 event_length, 223
 event_original_key, 224
 event_shift, 224
 event_state, 224
 event_text, 224
 event_x_root, 225
 event_y_root, 225
 focus, 225
 get_key, 225
 get_mouse, 226
 handle, 226
 pushed, 226
 test_shortcut, 226
Fl_File_Browser, 355
 filetype, 356
 filter, 356
 Fl_File_Browser, 356
 Fl_File_Browser, 356
 iconsize, 356, 357
 load, 357
Fl_File_Browser.H, 775
Fl_File_Chooser, 358
 ~Fl_File_Chooser, 363
 add_extra, 364
 color, 364
 count, 364
 directory, 364
 filter, 364
 filter_value, 365
 Fl_File_Chooser, 363
 Fl_File_Chooser, 363
 hide, 365
 iconsize, 365
 label, 365
 preview, 366
 rescan, 366
 show, 366
 textcolor, 366
 textfont, 366, 367
 textsize, 367
 type, 367
 value, 367
 visible, 367
fl_file_chooser
 group_comdlg, 247

fl_file_chooser_callback
 group_comdlg, 248
 fl_file_chooser_ok_label
 group_comdlg, 248
 Fl_File_Icon, 369
 add, 371
 add_color, 371
 add_vertex, 371
 clear, 371
 draw, 372
 find, 372
 first, 372
 Fl_File_Icon, 370
 Fl_File_Icon, 370
 label, 372
 labeltype, 372
 load, 373
 load_fti, 373
 load_image, 373
 load_system_icons, 373
 next, 374
 pattern, 374
 size, 374
 type, 374
 value, 374
 Fl_File_Icon.H, 776
 Fl_File_Input, 375
 down_box, 376
 errorcolor, 376
 Fl_File_Input, 376
 Fl_File_Input, 376
 handle, 377
 value, 377
 Fl_File_Input.H, 777
 Fl_Fill_Dial, 378
 Fl_Fill_Dial, 378
 Fl_Fill_Dial, 378
 Fl_Fill_Dial.H, 778
 Fl_Fill_Slider, 379
 Fl_Fill_Slider, 379
 Fl_Fill_Slider, 379
 Fl_Fill_Slider.H, 779
 Fl_Float_Input, 380
 Fl_Float_Input, 380
 Fl_Float_Input, 380
 Fl_Float_Input.H, 780
 Fl_Font
 Enumerations.H, 725
 Fl_Font_Descriptor, 381
 Fl_Fontsize
 Enumerations.H, 725
 Fl_FormsBitmap, 382
 bitmap, 382
 draw, 382
 set, 383
 Fl_FormsBitmap.H, 781
 Fl_FormsPixmap, 384
 draw, 385
 Fl_FormsPixmap, 384
 Fl_FormsPixmap, 384
 Pixmap, 385
 set, 385
 Fl_FormsPixmap.H, 782
 fl_frame
 fl_boxtyle.cxx, 742
 fl_draw.H, 770
 fl_frame2
 fl_boxtyle.cxx, 743
 fl_draw.H, 770
 Fl_Free, 386
 draw, 387
 Fl_Free, 387
 Fl_Free, 387
 handle, 387
 Fl_Free.H, 783
 fl_gap
 fl_draw.H, 770
 fl_vertex.cxx, 857
 Fl_GIF_Image, 389
 Fl_GIF_Image, 389
 Fl_GIF_Image, 389
 Fl_GIF_Image.H, 785
 Fl_Gl_Window, 390
 can_do, 393
 can_do_overlay, 393
 context, 393
 context_valid, 393
 draw, 393
 Fl_Gl_Window, 392
 Fl_Gl_Window, 392
 flush, 394
 make_current, 394
 make_overlay_current, 394
 mode, 394
 ortho, 395
 redraw_overlay, 395
 resize, 395
 show, 396
 swap_buffers, 396
 valid, 396
 Fl_Gl_Window.H, 786
 Fl_Glut_Bitmap_Font, 398
 Fl_Glut_Window, 399
 draw, 400
 draw_overlay, 400
 Fl_Glut_Window, 400
 Fl_Glut_Window, 400
 handle, 401

make_current, 401
Fl_Group, 403
 ~Fl_Group, 406
 array, 406
 begin, 406
 child, 407
 clear, 407
 clip_children, 407
 current, 407
 draw, 407
 draw_child, 408
 draw_children, 408
 draw_outside_label, 408
 end, 408
 find, 408
 Fl_Group, 406
 Fl_Group, 406
 focus, 409
 handle, 409
 init_sizes, 409
 insert, 410
 remove, 410
 resizable, 411
 resize, 411
 sizes, 412
 update_child, 412
Fl_Group.H, 787
Fl_Help_Dialog, 414
 Fl_Help_Dialog, 415
 Fl_Help_Dialog, 415
 h, 416
 hide, 416
 load, 416
 position, 416
 resize, 416
 show, 416
 textsize, 416
 value, 417
 visible, 417
 w, 417
 x, 417
 y, 417
Fl_Help_Dialog.H, 788
Fl_Help_Link, 418
Fl_Help_Target, 419
Fl_Help_View, 420
 ~Fl_Help_View, 422
 clear_selection, 422
 directory, 422
 filename, 422
 leftline, 422
 link, 422
 load, 423
 resize, 423
 select_all, 423
 size, 423
 textcolor, 423
 textfont, 424
 textsize, 424
 title, 424
 topline, 424
 value, 424
Fl_Help_View.H, 789
Fl_Hold_Browser, 426
 Fl_Hold_Browser, 426
 Fl_Hold_Browser, 426
Fl_Hold_Browser.H, 790
Fl_Hor_Fill_Slider.H, 791
Fl_Hor_Nice_Slider.H, 792
Fl_Hor_Slider.H, 793
Fl_Hor_Value_Slider.H, 794
Fl_Image, 427
 color_average, 429
 copy, 429
 count, 430
 d, 430
 data, 430
 desaturate, 430
 draw, 430, 431
 draw_empty, 431
 Fl_Image, 429
 Fl_Image, 429
 h, 431
 inactive, 431
 label, 431, 432
 ld, 432
 uncache, 432
 w, 432
Fl_Image.H, 795
Fl_Input, 433
 draw, 435
 Fl_Input, 435
 Fl_Input, 435
 handle, 435
fl_input
 group_comdlg, 248
Fl_Input.H, 796
Fl_Input_, 437
 copy, 440
 copy_cuts, 441
 cursor_color, 441
 cut, 441
 drawtext, 441
 Fl_Input_, 440
 Fl_Input_, 440
 index, 441
 input_type, 442
 insert, 442

mark, 442
 maximum_size, 442
 position, 442
 readonly, 443
 replace, 443
 resize, 443
 shortcut, 444
 size, 444
 static_value, 444
 textcolor, 445
 textfont, 445
 textszie, 445
 undo, 445
 up_down_position, 445
 value, 446
 wrap, 446
Fl_Input_.H, 797
Fl_Input_Choice, 447
 add, 449
 changed, 449
 clear, 449
 clear_changed, 449
Fl_Input_Choice, 449
Fl_Input_Choice, 449
 input, 450
 menu, 450
 menubutton, 450
 resize, 450
 set_changed, 450
 value, 450
Fl_Input_Choice.H, 798
Fl_Int_Input, 452
 Fl_Int_Input, 452
 Fl_Int_Input, 452
Fl_Int_Input.H, 799
fl_internal_boxtype
 fl_boxtype.cxx, 743
Fl_JPEG_Image, 453
 Fl_JPEG_Image, 453
 Fl_JPEG_Image, 453
Fl_JPEG_Image.H, 800
Fl_Label, 454
 draw, 455
 measure, 455
 type, 455
Fl_Labeltype
 Enumerations.H, 729
Fl_Light_Button, 456
 draw, 457
 Fl_Light_Button, 457
 Fl_Light_Button, 457
 handle, 457
Fl_Light_Button.H, 801
Fl_Line_Dial.H, 802
FL_MAJOR_VERSION
 Enumerations.H, 724
Fl_Menu_, 459
 add, 462
 clear, 463
 copy, 463
 down_box, 463
 find_item, 463
Fl_Menu_, 462
Fl_Menu_, 462
 global, 463
 menu, 464
 mode, 464
 mvalue, 464
 picked, 464
 remove, 465
 replace, 465
 shortcut, 465
 size, 465
 test_shortcut, 465
 text, 466
 textcolor, 466
 textfont, 466
 textszie, 466
 value, 466, 467
Fl_Menu_.H, 803
Fl_Menu_Bar, 468
 draw, 469
Fl_Menu_Bar, 469
Fl_Menu_Bar, 469
 handle, 469
Fl_Menu_Bar.H, 804
Fl_Menu_Button, 471
 draw, 472
Fl_Menu_Button, 472
Fl_Menu_Button, 472
 handle, 473
 popup, 473
Fl_Menu_Button.H, 805
Fl_Menu_Item, 474
 activate, 479
 active, 479
 activevisible, 480
 add, 480
 argument, 480
 callback, 480
 check, 480
 checkbox, 480
 checked, 481
 clear, 481
 deactivate, 481
 do_callback, 481
 draw, 481
 find_shortcut, 482

first, 482
hide, 482
label, 482
labelcolor, 482
labelfont, 483
labelsize, 483
labeltype, 483
measure, 483
next, 483, 484
popup, 484
pulldown, 484
radio, 484
set, 485
setonly, 485
shortcut, 485
show, 485
submenu, 485
test_shortcut, 485
uncheck, 486
value, 486
visible, 486
Fl_Menu_Window, 487
 ~Fl_Menu_Window, 488
 clear_overlay, 488
 Fl_Menu_Window, 488
 Fl_Menu_Window, 488
 flush, 488
 hide, 488
 set_overlay, 489
 show, 489
Fl_Menu_Window.H, 806
fl_message
 group_comdlg, 248
FL_MINOR_VERSION
 Enumerations.H, 724
fl_mult_matrix
 fl_draw.H, 771
 fl_vertex.cxx, 858
Fl_Multi_Browser, 490
 Fl_Multi_Browser, 490
 Fl_Multi_Browser, 490
Fl_Multi_Browser.H, 807
Fl_Multiline_Input, 491
 Fl_Multiline_Input, 491
 Fl_Multiline_Input, 491
Fl_Multiline_Input.H, 808
Fl_Multiline_Output, 492
 Fl_Multiline_Output, 492
 Fl_Multiline_Output, 492
Fl_Multiline_Output.H, 809
fl_multithread
 awake, 237
 lock, 238
 thread_message, 238
unlock, 238
Fl_Nice_Slider.H, 810
fl_not_clipped
 fl_draw.H, 771
 fl_rect.cxx, 825
Fl_Output, 493
 Fl_Output, 494
 Fl_Output, 494
Fl_Output.H, 811
Fl_Overlay_Window, 495
 Fl_Overlay_Window, 496
 Fl_Overlay_Window, 496
 hide, 496
 redraw_overlay, 496
 resize, 496
 show, 497
Fl_Overlay_Window.H, 812
Fl_Pack, 498
 draw, 499
 Fl_Pack, 499
 Fl_Pack, 499
Fl_Pack.H, 813
fl_password
 group_comdlg, 248
FL_PATCH_VERSION
 Enumerations.H, 724
fl_pie
 fl_arci.cxx, 736
 fl_draw.H, 771
Fl_Pixmap, 500
 color_average, 502
 copy, 502
 desaturate, 502
 draw, 502
 Fl_Pixmap, 501
 Fl_Pixmap, 501
 label, 503
 uncache, 503
Fl_Pixmap.H, 814
Fl_PNG_Image, 504
 Fl_PNG_Image, 504
 Fl_PNG_Image, 504
Fl_PNG_Image.H, 815
Fl_PNM_Image, 505
 Fl_PNM_Image, 505
 Fl_PNM_Image, 505
Fl_PNM_Image.H, 816
fl_polygon
 fl_draw.H, 771, 772
 fl_rect.cxx, 826
fl_pop_clip
 fl_draw.H, 772
 fl_rect.cxx, 826
Fl_Positioner, 506

draw, 508
 Fl_Positioner, 508
 Fl_Positioner, 508
 handle, 508
 value, 508
 xbounds, 509
 xstep, 509
 xvalue, 509
 ybounds, 509
 ystep, 509
 yvalue, 509
 Fl_Positioner.H, 817
 Fl_Preferences, 510
 ~Fl_Preferences, 514
 deleteEntry, 515
 deleteGroup, 515
 entries, 515
 entry, 515
 entryExists, 516
 Fl_Preferences, 513, 514
 Fl_Preferences, 513, 514
 flush, 516
 get, 516–518
 getUserdataPath, 519
 group, 519
 groupExists, 520
 groups, 520
 Root, 512
 set, 520–522
 size, 522
 Fl_Preferences.H, 818
 Fl_Preferences::Entry, 524
 Fl_Preferences::Name, 525
 Name, 525
 Fl_Progress, 527
 draw, 528
 Fl_Progress, 528
 Fl_Progress, 528
 maximum, 528
 minimum, 528
 value, 528
 Fl_Progress.H, 819
 fl_push_clip
 fl_draw.H, 772
 fl_rect.cxx, 826
 fl_push_matrix
 fl_draw.H, 772
 fl_vertex.cxx, 858
 FL_RADIO_BUTTON
 Fl_Button.H, 746
 Fl_Radio_Button.H, 820
 Fl_Radio_Light_Button.H, 821
 Fl_Radio_Round_Button.H, 822
 fl_rect.cxx, 823
 fl_clip_box, 825
 fl_clip_region, 825
 fl_not_clipped, 825
 fl_polygon, 826
 fl_pop_clip, 826
 fl_push_clip, 826
 Fl_Repeat_Button, 530
 deactivate, 530
 Fl_Repeat_Button, 530
 Fl_Repeat_Button, 530
 handle, 531
 Fl_Repeat_Button.H, 827
 FL_RESERVED_TYPE
 Fl_Widget.H, 861
 Fl_Return_Button, 532
 draw, 533
 Fl_Return_Button, 533
 Fl_Return_Button, 533
 handle, 533
 Fl_Return_Button.H, 828
 Fl_RGB_Image, 535
 ~Fl_RGB_Image, 536
 color_average, 536
 copy, 536, 537
 desaturate, 537
 draw, 537
 Fl_RGB_Image, 536
 Fl_RGB_Image, 536
 label, 537, 538
 uncache, 538
 Fl_Roller, 539
 draw, 540
 Fl_Roller, 540
 Fl_Roller, 540
 handle, 540
 Fl_Roller.H, 829
 fl_rotate
 fl_draw.H, 772
 fl_vertex.cxx, 858
 Fl_Round_Button, 542
 Fl_Round_Button.H, 830
 Fl_Round_Clock, 544
 Fl_Round_Clock, 544
 Fl_Round_Clock, 544
 Fl_Round_Clock.H, 831
 fl_scale
 fl_draw.H, 773
 fl_vertex.cxx, 858
 fl_screen
 h, 231
 screen_xywh, 231, 232
 w, 232
 x, 232
 y, 232

Fl_Scroll, 545
 clear, 547
 draw, 547
 Fl_Scroll, 547
 Fl_Scroll, 547
 handle, 548
 resize, 548
 scroll_to, 548
 xposition, 548
 yposition, 549
Fl_Scroll.H, 832
Fl_Scrollbar, 550
 ~Fl_Scrollbar, 551
 draw, 551
 Fl_Scrollbar, 551
 Fl_Scrollbar, 551
 handle, 552
 linesize, 552
 value, 552
Fl_Scrollbar.H, 833
Fl_Secret_Input, 554
 Fl_Secret_Input, 554
 Fl_Secret_Input, 554
Fl_Secret_Input.H, 834
Fl_Select_Browser, 555
 Fl_Select_Browser, 555
 Fl_Select_Browser, 555
Fl_Select_Browser.H, 835
Fl_Shared_Image, 556
 ~Fl_Shared_Image, 558
 color_average, 558
 copy, 559
 desaturate, 559
 draw, 559
 Fl_Shared_Image, 558
 Fl_Shared_Image, 558
 get, 560
 num_images, 560
 refcount, 560
 release, 560
 uncache, 560
Fl_Shared_Image.H, 836
Fl_Simple_Counter, 561
Fl_Simple_Counter.H, 837
Fl_Single_Window, 562
 flush, 563
 make_current, 563
 show, 563
Fl_Single_Window.H, 838
Fl_Slider, 564
 bounds, 566
 draw, 566
 Fl_Slider, 565
 Fl_Slider, 565
 handle, 566
 scrollvalue, 567
 slider, 567
 slider_size, 567
Fl_Slider.H, 839
Fl_Spinner, 568
 Fl_Spinner, 570
 Fl_Spinner, 570
 format, 570
 handle, 570
 maximum, 570
 maximum, 571
 minimum, 571
 mininum, 571
 range, 571
 resize, 571
 step, 571
 textcolor, 572
 textfont, 572
 textsize, 572
 type, 572
 value, 573
Fl_Spinner.H, 840
Fl_String
 fl_types.h, 850
Fl_Tabs, 574
 draw, 576
 Fl_Tabs, 575
 Fl_Tabs, 575
 handle, 576
 value, 576, 577
Fl_Tabs.H, 841
Fl_Text_Buffer, 578
 add_modify_callback, 586
 add_predelete_callback, 586
 append, 586
 appendfile, 586
 character, 586
 character_width, 587
 clear_rectangular, 587
 count_displayed_characters, 587
 count_lines, 587
 expand_character, 587, 588
 findchar_backward, 588
 findchar_forward, 588
 findchars_backward, 588
 findchars_forward, 589
 Fl_Text_Buffer, 586
 Fl_Text_Buffer, 586
 highlight, 589
 highlight_position, 589
 highlight_selection, 589
 highlight_text, 589
 insert, 589

insert_, 590
 insert_column, 590
 insert_column_, 590
 insertfile, 590
 length, 591
 line_start, 591
 line_text, 591
 mModifyProcs, 597
 mNullSubsChar, 597
 mPredeleteProcs, 597
 mTabDist, 597
 null_substitution_character, 591
 outputfile, 591
 overlay_rectangular, 591
 overlay_rectangular_, 592
 primary_selection, 592
 rectangular_selection_boundaries, 592
 remove, 592
 remove_, 592
 remove_modify_callback, 593
 remove_predelete_callback, 593
 remove_rectangular_, 593
 remove_secondary_selection, 593
 remove_selection, 593
 remove_selection_, 593
 replace_rectangular, 594
 replace_secondary_selection, 594
 replace_selection, 594
 replace_selection_, 594
 rewind_lines, 594
 secondary_select, 594
 secondary_selection, 595
 secondary_selection_position, 595
 secondary_selection_text, 595
 secondary_unselect, 595
 select, 595
 selection_text, 595
 substitute_null_characters, 596
 tab_distance, 596
 text, 596
 text_in_rectangle, 596
 text_range, 596
 unhighlight, 596
 unsubstitute_null_characters, 597
 word_end, 597
Fl_Text_Buffer.H, 842
Fl_Text_Display, 599
 ~**Fl_Text_Display**, 606
 buffer, 606
 calc_line_starts, 606
 count_lines, 607
 cursor_color, 607
 cursor_style, 607
 display_insert, 607
 draw, 608
 draw_line_numbers, 608
 draw_range, 608
 draw_string, 608
 draw_text, 608
 find_line_end, 609
 find_wrap_range, 609
Fl_Text_Display, 606
Fl_Text_Display, 606
 get_absolute_top_line_number, 609
 handle, 609
 highlight_data, 610
 insert, 610
 line_end, 611
 maintain_absolute_top_line_number, 611
 measure_deleted_lines, 611
 measure_proportional_character, 611
 move_down, 612
 move_left, 612
 move_right, 612
 move_up, 612
 next_word, 612
 offset_line_starts, 612
 overstrike, 613
 position_style, 613
 position_to_line, 613
 position_to_linecol, 613
 position_to_xy, 614
 previous_word, 614
 redisplay_range, 614
 reset_absolute_top_line_number, 614
 scroll, 614
 scrollbar_width, 614, 615
 shortcut, 615
 show_insert_position, 615
 skip_lines, 615
 textcolor, 615
 textfont, 616
 textsize, 616
 word_end, 616
 word_start, 616
 wrap_mode, 616
 wrap_uses_character, 616
 wrapped_column, 617
 wrapped_line_counter, 617
 wrapped_row, 617
 xy_to_position, 618
 xy_to_rowcol, 618
Fl_Text_Display.H, 843
Fl_Text_Display::Style_Table_Entry, 619
Fl_Text_Editor, 620
 add_default_key_bindings, 623
 bound_key_function, 623
 default_key_function, 623

Fl_Text_Editor, 623
Fl_Text_Editor, 623
handle, 624
insert_mode, 624
kf_backspace, 624
kf_c_s_move, 625
kf_copy, 625
kf_cut, 625
kf_delete, 625
kf_down, 625
kf_end, 625
kf_home, 625
kf_insert, 625
kf_left, 626
kf_move, 626
kf_page_down, 626
kf_page_up, 626
kf_paste, 626
kf_right, 626
kf_select_all, 626
kf_shift_move, 626
kf_undo, 627
kf_up, 627
remove_all_key_bindings, 627
remove_key_binding, 627
Fl_Text_Editor.H, 844
Fl_Text_Editor::Key_Binding, 628
Fl_Text_Selection, 629
Fl_Tile, 631
 Fl_Tile, 632
 Fl_Tile, 632
 handle, 632
 position, 633
 resize, 633
Fl_Tile.H, 845
Fl_Tiled_Image, 634
 color_average, 635
 copy, 635
 desaturate, 635
 draw, 636
 Fl_Tiled_Image, 635
 Fl_Tiled_Image, 635
Fl_Tiled_Image.H, 846
Fl_Timer, 637
 direction, 638
 draw, 638
 Fl_Timer, 638
 Fl_Timer, 638
 handle, 638
 suspended, 639
Fl_Timer.H, 847
Fl_Toggle_Button, 640
 Fl_Toggle_Button, 640
 Fl_Toggle_Button, 640
Fl_Toggle_Button.H, 848
Fl_Tooltip, 641
 color, 642
 current, 642
 delay, 642, 643
 disable, 643
 enable, 643
 enabled, 643
 enter_area, 643
 font, 643
 hoverdelay, 643, 644
 size, 644
 textcolor, 644
Fl_Tooltip.H, 849
fl_transform_dx
 fl_draw.H, 773
 fl_vertex.cxx, 859
fl_transform_dy
 fl_draw.H, 773
 fl_vertex.cxx, 859
fl_transform_x
 fl_draw.H, 773
 fl_vertex.cxx, 859
fl_transform_y
 fl_draw.H, 773
 fl_vertex.cxx, 859
fl_transformed_vertex
 fl_draw.H, 774
 fl_vertex.cxx, 859
fl_translate
 fl_draw.H, 774
 fl_vertex.cxx, 860
fl_types.h, 850
 Fl_CString, 850
 Fl_String, 850
Fl_Valuator, 645
 bounds, 647
 clamp, 648
 Fl_Valuator, 647
 Fl_Valuator, 647
 format, 648
 handle_drag, 648
 handle_release, 648
 increment, 648
 maximum, 648, 649
 minimum, 649
 precision, 649
 range, 649
 round, 649
 set_value, 649
 step, 649
 value, 650
Fl_Valuator.H, 851
Fl_Value_Input, 651

cursor_color, 653
 draw, 653
 Fl_Value_Input, 653
 Fl_Value_Input, 653
 handle, 654
 resize, 654
 shortcut, 655
 soft, 655
 textcolor, 655
 textfont, 655
 textszie, 655, 656
 Fl_Value_Input.H, 852
 Fl_Value_Output, 657
 draw, 659
 Fl_Value_Output, 658
 Fl_Value_Output, 658
 handle, 659
 soft, 659
 textcolor, 660
 textfont, 660
 textszie, 660
 Fl_Value_Output.H, 853
 Fl_Value_Slider, 661
 draw, 662
 Fl_Value_Slider, 662
 Fl_Value_Slider, 662
 handle, 662
 textcolor, 663
 textfont, 663
 textszie, 663
 Fl_Value_Slider.H, 854
 FL_VERSION
 Enumerations.H, 724
 fl_vertex
 fl_draw.H, 774
 fl_vertex.cxx, 860
 fl_vertex.cxx, 855
 fl_begin_complex_polygon, 857
 fl_begin_points, 857
 fl_circle, 857
 fl_gap, 857
 fl_mult_matrix, 858
 fl_push_matrix, 858
 fl_rotate, 858
 fl_scale, 858
 fl_transform_dx, 859
 fl_transform_dy, 859
 fl_transform_x, 859
 fl_transform_y, 859
 fl_transformed_vertex, 859
 fl_translate, 860
 fl_vertex, 860
 Fl_When
 Enumerations.H, 730

Fl_Widget, 665
 ~Fl_Widget, 673
 activate, 674
 active, 674
 active_r, 674
 align, 675
 argument, 675
 box, 676
 callback, 676, 677
 changed, 677
 clear_changed, 678
 clear_damage, 678
 clear_output, 678
 clear_visible, 679
 clear_visible_focus, 679
 color, 679, 680
 color2, 680
 contains, 680
 copy_label, 681
 damage, 681
 damage_resize, 682
 deactivate, 682
 default_callback, 682
 deimage, 683
 do_callback, 683, 684
 draw, 684
 draw_box, 685
 draw_focus, 685
 Fl_Widget, 673
 Fl_Widget, 673
 h, 685, 686
 handle, 686
 hide, 686
 image, 687
 inside, 687
 label, 688
 label_shortcut, 688
 labelcolor, 689
 labelfont, 689
 labelsize, 690
 labeltype, 690
 measure_label, 691
 output, 691
 parent, 691
 position, 691
 redraw, 692
 redraw_label, 692
 resize, 692
 selection_color, 693
 set_changed, 694
 set_output, 694
 set_visible, 694
 set_visible_focus, 694
 show, 695

size, 695
take_focus, 695
takesevents, 696
test_shortcut, 696
tooltip, 696
type, 697
user_data, 697
visible, 698
visible_focus, 698
visible_r, 699
w, 699
when, 700
window, 701
x, 701
y, 702

Fl_Widget.H, 861
FL_RESERVED_TYPE, 861

Fl_Window, 703
~Fl_Window, 707
border, 707
clear_border, 707
copy_label, 707
current, 708
current_, 714
cursor, 708
default_cursor, 708
draw, 708
Fl_Window, 706, 707
Fl_Window, 706, 707
flush, 709
fullscreen, 709
handle, 709
hide, 710
hotspot, 710
iconize, 710
iconlabel, 711
label, 711
make_current, 711
modal, 711
non_modal, 711
override, 711
resize, 712
set_modal, 712
set_non_modal, 712
show, 712
shown, 713
size_range, 713
xclass, 713

Fl_Window.H, 862
fl_windows
atclose, 215
default_atclose, 214
first_window, 214
grab, 214

modal, 215
next_window, 215
set_atclose, 215

Fl_Wizard, 715
Fl_Wizard, 715
Fl_Wizard, 715
next, 716
prev, 716
value, 716

Fl_Wizard.H, 863
Fl_XBM_Image, 717
Fl_XBM_Image, 717
Fl_XBM_Image, 717

Fl_XBM_Image.H, 864
Fl_XPM_Image, 718
Fl_XPM_Image, 718
Fl_XPM_Image, 718

Fl_XPM_Image.H, 865
flush
Fl, 267
Fl_Double_Window, 352
Fl_Gl_Window, 394
Fl_Menu_Window, 488
Fl_Preferences, 516
Fl_Single_Window, 563
Fl_Window, 709

focus
fl_events, 225
Fl_Group, 409

font
Fl_Tooltip, 643

foreground
Fl, 267

format
Fl_Spinner, 570
Fl_Valuator, 648

format_char
Fl_Browser, 290

free_color
fl_attributes, 235

full_height
Fl_Browser, 290
Fl_Browser_, 301

full_width
Fl_Browser_, 301

fullscreen
Fl_Window, 709

g
Fl_Color_Chooser, 341

get
Fl_Preferences, 516–518
Fl_Shared_Image, 560

get_absolute_top_line_number

Fl_Text_Display, 609
 get_awake_handler_
 Fl, 267
 get_boxtype
 Fl, 267
 get_color
 fl_attributes, 235
 get_font
 fl_attributes, 235
 get_font_name
 fl_attributes, 235
 get_font_sizes
 fl_attributes, 235
 get_key
 fl_events, 225
 get_mouse
 fl_events, 226
 get_system_colors
 Fl, 268
 getUserdataPath
 Fl_Preferences, 519
 gl_visual
 Fl, 268
 global
 Fl_Menu_, 463
 grab
 fl_windows, 214
 group
 Fl_Preferences, 519
 group_cairo
 cairo_autolink_context, 241
 cairo_cc, 242
 cairo_make_current, 242
 group_comdlg
 error, 249
 fatal, 249
 fl_alert, 244
 fl_ask, 244
 fl_choice, 244
 fl_color_chooser, 245, 246
 fl_dir_chooser, 246
 fl_file_chooser, 247
 fl_file_chooser_callback, 248
 fl_file_chooser_ok_label, 248
 fl_input, 248
 fl_message, 248
 fl_password, 248
 warning, 249
 groupExists
 Fl_Preferences, 520
 groups
 Fl_Preferences, 520
 h

Fl_Help_Dialog, 416
 Fl_Image, 431
 fl_screen, 231
 Fl_Widget, 685, 686
 handle
 Fl_Adjuster, 275
 Fl_Box, 283
 Fl_Browser_, 301
 Fl_Button, 309
 Fl_Check_Browser, 323
 Fl_Choice, 329
 Fl_Clock, 334
 Fl_Counter, 346
 Fl_Dial, 350
 fl_events, 226
 Fl_File_Input, 377
 Fl_Free, 387
 Fl_Glut_Window, 401
 Fl_Group, 409
 Fl_Input, 435
 Fl_Light_Button, 457
 Fl_Menu_Bar, 469
 Fl_Menu_Button, 473
 Fl_Positioner, 508
 Fl_Repeat_Button, 531
 Fl_Return_Button, 533
 Fl_Roller, 540
 Fl_Scroll, 548
 Fl_Scrollbar, 552
 Fl_Slider, 566
 Fl_Spinner, 570
 Fl_Tabs, 576
 Fl_Text_Display, 609
 Fl_Text_Editor, 624
 Fl_Tile, 632
 Fl_Timer, 638
 Fl_Value_Input, 654
 Fl_Value_Output, 659
 Fl_Value_Slider, 662
 Fl_Widget, 686
 Fl_Window, 709
 handle_drag
 Fl_Valuator, 648
 handle_release
 Fl_Valuator, 648
 has_scrollbar
 Fl_Browser_, 301
 help
 Fl, 272
 hide
 Fl_Browser, 291
 Fl_Double_Window, 352
 Fl_File_Chooser, 365
 Fl_Help_Dialog, 416

Fl_Menu_Item, 482
Fl_Menu_Window, 488
Fl_Overlay_Window, 496
Fl_Widget, 686
Fl_Window, 710
highlight
 Fl_Text_Buffer, 589
highlight_data
 Fl_Text_Display, 610
highlight_position
 Fl_Text_Buffer, 589
highlight_selection
 Fl_Text_Buffer, 589
highlight_text
 Fl_Text_Buffer, 589
hotspot
 Fl_Window, 710
hour
 Fl_Clock_Output, 337
hoverdelay
 Fl_Tooltip, 643, 644
hsv
 Fl_Color_Chooser, 341
hsv2rgb
 Fl_Color_Chooser, 342
hue
 Fl_Color_Chooser, 342
iconize
 Fl_Window, 710
iconlabel
 Fl_Window, 711
iconsize
 Fl_File_Browser, 356, 357
 Fl_File_Chooser, 365
idle
 Fl, 272
image
 Fl_Widget, 687
INACTIVE
 Fl_Widget, 673
inactive
 Fl_Image, 431
incr_height
 Fl_Browser, 291
 Fl_Browser_, 302
increment
 Fl_Valuator, 648
index
 Fl_Input_, 441
init_sizes
 Fl_Group, 409
input
 Fl_Input_Choice, 450
 input_type
 Fl_Input_, 442
insert
 Fl_Browser, 291
 Fl_Chart, 317
 Fl_Group, 410
 Fl_Input_, 442
 Fl_Text_Buffer, 589
 Fl_Text_Display, 610
insert_
 Fl_Text_Buffer, 590
insert_column
 Fl_Text_Buffer, 590
insert_column_
 Fl_Text_Buffer, 590
insert_mode
 Fl_Text_Editor, 624
insertfile
 Fl_Text_Buffer, 590
inserting
 Fl_Browser_, 302
inside
 Fl_Widget, 687
INVISIBLE
 Fl_Widget, 673
item_first
 Fl_Browser, 292
 Fl_Browser_, 302
item_height
 Fl_Browser_, 302
item_next
 Fl_Browser, 292
 Fl_Browser_, 302
item_prev
 Fl_Browser, 292
 Fl_Browser_, 303
item_quick_height
 Fl_Browser_, 303
item_select
 Fl_Browser, 292
 Fl_Browser_, 303
item_selected
 Fl_Browser, 292
 Fl_Browser_, 303
item_width
 Fl_Browser, 292
 Fl_Browser_, 303
kf_backspace
 Fl_Text_Editor, 624
kf_c_s_move
 Fl_Text_Editor, 625
kf_copy
 Fl_Text_Editor, 625

kf_cut
 Fl_Text_Editor, 625
 kf_delete
 Fl_Text_Editor, 625
 kf_down
 Fl_Text_Editor, 625
 kf_end
 Fl_Text_Editor, 625
 kf_home
 Fl_Text_Editor, 625
 kf_insert
 Fl_Text_Editor, 625
 kf_left
 Fl_Text_Editor, 626
 kf_move
 Fl_Text_Editor, 626
 kf_page_down
 Fl_Text_Editor, 626
 kf_page_up
 Fl_Text_Editor, 626
 kf_paste
 Fl_Text_Editor, 626
 kf_right
 Fl_Text_Editor, 626
 kf_select_all
 Fl_Text_Editor, 626
 kf_shift_move
 Fl_Text_Editor, 626
 kf_undo
 Fl_Text_Editor, 627
 kf_up
 Fl_Text_Editor, 627

 label
 Fl_Bitmap, 279
 Fl_File_Chooser, 365
 Fl_File_Icon, 372
 Fl_Image, 431, 432
 Fl_Menu_Item, 482
 Fl_Pixmap, 503
 Fl_RGB_Image, 537, 538
 Fl_Widget, 688
 Fl_Window, 711
 label_shortcut
 Fl_Widget, 688
 labelcolor
 Fl_Menu_Item, 482
 Fl_Widget, 689
 labelfont
 Fl_Menu_Item, 483
 Fl_Widget, 689
 labelsize
 Fl_Menu_Item, 483
 Fl_Widget, 690

 labeltype
 Fl_File_Icon, 372
 Fl_Menu_Item, 483
 Fl_Widget, 690
 ld
 Fl_Image, 432
 leftline
 Fl_Help_View, 422
 length
 Fl_Text_Buffer, 591
 line_end
 Fl_Text_Display, 611
 line_start
 Fl_Text_Buffer, 591
 line_text
 Fl_Text_Buffer, 591
 lineposition
 Fl_Browser, 292
 linesize
 Fl_Scrollbar, 552
 link
 Fl_Help_View, 422
 load
 Fl_Browser, 293
 Fl_File_Browser, 357
 Fl_File_Icon, 373
 Fl_Help_Dialog, 416
 Fl_Help_View, 423
 load_fti
 Fl_File_Icon, 373
 load_image
 Fl_File_Icon, 373
 load_system_icons
 Fl_File_Icon, 373
 lock
 fl_multithread, 238
 lstep
 Fl_Counter, 347

 maintain_absolute_top_line_number
 Fl_Text_Display, 611
 make_current
 Fl_Gl_Window, 394
 Fl_Glut_Window, 401
 Fl_Single_Window, 563
 Fl_Window, 711
 make_overlay_current
 Fl_Gl_Window, 394
 make_visible
 Fl_Browser, 293
 mark
 Fl_Input_, 442
 maximum
 Fl_Progress, 528

Fl_Spinner, 570
Fl_Valuator, 648, 649
maximum_size
 Fl_Input_, 442
maximum
 Fl_Spinner, 571
maxsize
 Fl_Chart, 318
measure
 Fl_Label, 455
 Fl_Menu_Item, 483
measure_deleted_lines
 Fl_Text_Display, 611
measure_label
 Fl_Widget, 691
measure_proportional_character
 Fl_Text_Display, 611
menu
 Fl_Input_Choice, 450
 Fl_Menu_, 464
menubutton
 Fl_Input_Choice, 450
middleline
 Fl_Browser, 293
minimum
 Fl_Progress, 528
 Fl_Spinner, 571
 Fl_Valuator, 649
minum
 Fl_Spinner, 571
minute
 Fl_Clock_Output, 337
mModifyProcs
 Fl_Text_Buffer, 597
mNullSubsChar
 Fl_Text_Buffer, 597
modal
 Fl_Window, 711
 fl_windows, 215
mode
 Fl_Gl_Window, 394
 Fl_Menu_, 464
move_down
 Fl_Text_Display, 612
move_left
 Fl_Text_Display, 612
move_right
 Fl_Text_Display, 612
move_up
 Fl_Text_Display, 612
mPredeleteProcs
 Fl_Text_Buffer, 597
mTabDist
 Fl_Text_Buffer, 597

Multithreading support functions, 237
mvalue
 Fl_Menu_, 464

Name
 Fl_Preferences::Name, 525

nchecked
 Fl_Check_Browser, 323

new_list
 Fl_Browser_, 303

next
 Fl_File_Icon, 374
 Fl_Menu_Item, 483, 484
 Fl_Wizard, 716

next_window
 fl_windows, 215

next_word
 Fl_Text_Display, 612

nitems
 Fl_Check_Browser, 323

non_modal
 Fl_Window, 711

null_substitution_character
 Fl_Text_Buffer, 591

num_images
 Fl_Shared_Image, 560

offset_line_starts
 Fl_Text_Display, 612

ortho
 Fl_Gl_Window, 395

OUTPUT
 Fl_Widget, 673

output
 Fl_Widget, 691

outputfile
 Fl_Text_Buffer, 591

overlay_rectangular
 Fl_Text_Buffer, 591

overlay_rectangular_
 Fl_Text_Buffer, 592

override
 Fl_Window, 711

overstrike
 Fl_Text_Display, 613

own_colormap
 Fl, 268

parent
 Fl_Widget, 691

paste
 fl_clipboard, 229

pattern
 Fl_File_Icon, 374

picked
 Fl_Menu_, 464
 Pixmap
 Fl_FormsPixmap, 385
 popup
 Fl_Menu_Button, 473
 Fl_Menu_Item, 484
 position
 Fl_Help_Dialog, 416
 Fl_Input_, 442
 Fl_Tile, 633
 Fl_Widget, 691
 position_style
 Fl_Text_Display, 613
 position_to_line
 Fl_Text_Display, 613
 position_to_linecol
 Fl_Text_Display, 613
 position_to_xy
 Fl_Text_Display, 614
 precision
 Fl_Valuator, 649
 prev
 Fl_Wizard, 716
 preview
 Fl_File_Chooser, 366
 previous_word
 Fl_Text_Display, 614
 primary_selection
 Fl_Text_Buffer, 592
 pulldown
 Fl_Menu_Item, 484
 pushed
 fl_events, 226

 r
 Fl_Color_Chooser, 342
 radio
 Fl_Menu_Item, 484
 range
 Fl_Spinner, 571
 Fl_Valuator, 649
 readonly
 Fl_Input_, 443
 ready
 Fl, 268
 rectangular_selection_boundaries
 Fl_Text_Buffer, 592
 redisplay_range
 Fl_Text_Display, 614
 redraw
 Fl_Widget, 692
 redraw_label
 Fl_Widget, 692

 redraw_lines
 Fl_Browser_, 304
 redraw_overlay
 Fl_Gl_Window, 395
 Fl_Overlay_Window, 496
 refcount
 Fl_Shared_Image, 560
 release
 Fl, 268
 Fl_Shared_Image, 560
 reload_scheme
 Fl, 269
 remove
 Fl_Check_Browser, 324
 Fl_Group, 410
 Fl_Menu_, 465
 Fl_Text_Buffer, 592
 remove_
 Fl_Text_Buffer, 592
 remove_all_key_bindings
 Fl_Text_Editor, 627
 remove_check
 Fl, 269
 remove_fd
 Fl, 269
 remove_key_binding
 Fl_Text_Editor, 627
 remove_modify_callback
 Fl_Text_Buffer, 593
 remove_predelete_callback
 Fl_Text_Buffer, 593
 remove_rectangular_
 Fl_Text_Buffer, 593
 remove_secondary_selection
 Fl_Text_Buffer, 593
 remove_selection
 Fl_Text_Buffer, 593
 remove_selection_
 Fl_Text_Buffer, 593
 remove_timeout
 Fl, 269
 repeat_timeout
 Fl, 269
 replace
 Fl_Browser, 293
 Fl_Chart, 318
 Fl_Input_, 443
 Fl_Menu_, 465
 replace_rectangular
 Fl_Text_Buffer, 594
 replace_secondary_selection
 Fl_Text_Buffer, 594
 replace_selection
 Fl_Text_Buffer, 594

replace_selection_
 Fl_Text_Buffer, 594

replacing
 Fl_Browser_, 304

rescan
 Fl_File_Chooser, 366

reset_absolute_top_line_number
 Fl_Text_Display, 614

resizable
 Fl_Group, 411

resize
 Fl_Browser_, 304
 Fl_Double_Window, 353
 Fl_Gl_Window, 395
 Fl_Group, 411
 Fl_Help_Dialog, 416
 Fl_Help_View, 423
 Fl_Input_, 443
 Fl_Input_Choice, 450
 Fl_Overlay_Window, 496
 Fl_Scroll, 548
 Fl_Spinner, 571
 Fl_Tile, 633
 Fl_Value_Input, 654
 Fl_Widget, 692
 Fl_Window, 712

rewind_lines
 Fl_Text_Buffer, 594

rgb
 Fl_Color_Chooser, 342

rgb2hsv
 Fl_Color_Chooser, 342

Root
 Fl_Preferences, 512

round
 Fl_Valuator, 649

run
 Fl, 270

Safe widget deletion support functions, 239

saturation
 Fl_Color_Chooser, 343

scheme
 Fl, 270

Screen functions, 231

screen_xywh
 fl_screen, 231, 232

scroll
 Fl_Text_Display, 614

scroll_to
 Fl_Scroll, 548

scrollbar
 Fl_Browser_, 305

scrollbar_left
 Fl_Browser_, 304

scrollbar_right
 Fl_Browser_, 304

scrollbar_width
 Fl_Text_Display, 614, 615

scrollvalue
 Fl_Slider, 567

second
 Fl_Clock_Output, 337

secondary_select
 Fl_Text_Buffer, 594

secondary_selection
 Fl_Text_Buffer, 595

secondary_selection_position
 Fl_Text_Buffer, 595

secondary_selection_text
 Fl_Text_Buffer, 595

secondary_unselect
 Fl_Text_Buffer, 595

select
 Fl_Browser, 293
 Fl_Browser_, 304
 Fl_Text_Buffer, 595

select_all
 Fl_Help_View, 423

select_only
 Fl_Browser_, 305

selected
 Fl_Browser, 293

selection
 Fl_Browser_, 305
 fl_clipboard, 229

Selection & Clipboard functions, 228

selection_color
 Fl_Widget, 693

selection_owner
 fl_clipboard, 229, 230

selection_text
 Fl_Text_Buffer, 595

set
 Fl_Button, 309
 Fl_FormsBitmap, 383
 Fl_FormsPixmap, 385
 Fl_Menu_Item, 485
 Fl_Preferences, 520–522

set_atclose
 fl_windows, 215

set_boxtype
 Fl, 270

set_changed
 Fl_Input_Choice, 450
 Fl_Widget, 694

set_checked
 Fl_Check_Browser, 324

set_color
 fl_attributes, 235, 236
 set_font
 fl_attributes, 236
 set_fonts
 fl_attributes, 236
 set_idle
 Fl, 270
 set_labeltype
 Fl, 271
 set_modal
 Fl_Window, 712
 set_non_modal
 Fl_Window, 712
 set_output
 Fl_Widget, 694
 set_overlay
 Fl_Menu_Window, 489
 set_value
 Fl_Valuator, 649
 set_visible
 Fl_Widget, 694
 set_visible_focus
 Fl_Widget, 694
 setonly
 Fl_Menu_Item, 485
 shortcut
 Fl_Button, 309, 310
 Fl_Input_, 444
 Fl_Menu_, 465
 Fl_Menu_Item, 485
 Fl_Text_Display, 615
 Fl_Value_Input, 655
 SHORTCUT_LABEL
 Fl_Widget, 673
 show
 Fl_Browser, 294
 Fl_Double_Window, 353
 Fl_File_Chooser, 366
 Fl_Gl_Window, 396
 Fl_Help_Dialog, 416
 Fl_Menu_Item, 485
 Fl_Menu_Window, 489
 Fl_Overlay_Window, 497
 Fl_Single_Window, 563
 Fl_Widget, 695
 Fl_Window, 712
 show_insert_position
 Fl_Text_Display, 615
 shown
 Fl_Window, 713
 size
 Fl_Browser, 294
 Fl_Chart, 318
 Fl_File_Icon, 374
 Fl_Help_View, 423
 Fl_Input_, 444
 Fl_Menu_, 465
 Fl_Preferences, 522
 Fl_Tooltip, 644
 Fl_Widget, 695
 size_range
 Fl_Window, 713
 sizes
 Fl_Group, 412
 skip_lines
 Fl_Text_Display, 615
 slider
 Fl_Slider, 567
 slider_size
 Fl_Slider, 567
 soft
 Fl_Adjuster, 276
 Fl_Value_Input, 655
 Fl_Value_Output, 659
 static_value
 Fl_Input_, 444
 step
 Fl_Counter, 347
 Fl_Spinner, 571
 Fl_Valuator, 649
 str
 FL_CHART_ENTRY, 320
 submenu
 Fl_Menu_Item, 485
 substitute_null_characters
 Fl_Text_Buffer, 596
 suspended
 Fl_Timer, 639
 swap
 Fl_Browser, 295
 swap_buffers
 Fl_Gl_Window, 396
 SYSTEM
 Fl_Preferences, 513
 tab_distance
 Fl_Text_Buffer, 596
 take_focus
 Fl_Widget, 695
 takesevents
 Fl_Widget, 696
 test_shortcut
 fl_events, 226
 Fl_Menu_, 465
 Fl_Menu_Item, 485
 Fl_Widget, 696
 text

Fl_Browser, 295
Fl_Check_Browser, 324
Fl_Menu_, 466
Fl_Text_Buffer, 596
text_in_rectangle
 Fl_Text_Buffer, 596
text_range
 Fl_Text_Buffer, 596
textcolor
 Fl_Chart, 319
 Fl_File_Chooser, 366
 Fl_Help_View, 423
 Fl_Input_, 445
 Fl_Menu_, 466
 Fl_Spinner, 572
 Fl_Text_Display, 615
 Fl_Tooltip, 644
 Fl_Value_Input, 655
 Fl_Value_Output, 660
 Fl_Value_Slider, 663
textfont
 Fl_Chart, 319
 Fl_File_Chooser, 366, 367
 Fl_Help_View, 424
 Fl_Input_, 445
 Fl_Menu_, 466
 Fl_Spinner, 572
 Fl_Text_Display, 616
 Fl_Value_Input, 655
 Fl_Value_Output, 660
 Fl_Value_Slider, 663
textsize
 Fl_Chart, 319
 Fl_File_Chooser, 367
 Fl_Help_Dialog, 416
 Fl_Help_View, 424
 Fl_Input_, 445
 Fl_Menu_, 466
 Fl_Spinner, 572
 Fl_Text_Display, 616
 Fl_Value_Input, 655, 656
 Fl_Value_Output, 660
 Fl_Value_Slider, 663
thread_message
 fl_multithread, 238
title
 Fl_Help_View, 424
tooltip
 Fl_Widget, 696
top
 Fl_Browser_, 305
topline
 Fl_Browser, 295
 Fl_Help_View, 424

type
 Fl_File_Chooser, 367
 Fl_File_Icon, 374
 Fl_Label, 455
 Fl_Spinner, 572
 Fl_Widget, 697

uncache
 Fl_Bitmap, 279
 Fl_Image, 432
 Fl_Pixmap, 503
 Fl_RGB_Image, 538
 Fl_Shared_Image, 560

uncheck
 Fl_Menu_Item, 486

undo
 Fl_Input_, 445

unhighlight
 Fl_Text_Buffer, 596

unlock
 fl_multithread, 238

unsubstitute_null_characters
 Fl_Text_Buffer, 597

up_down_position
 Fl_Input_, 445

update
 Fl_Clock, 334

update_child
 Fl_Group, 412

USER
 Fl_Preferences, 513

user_data
 Fl_Widget, 697

val
 FL_CHART_ENTRY, 320

valid
 Fl_Gl_Window, 396

value
 Fl_Browser, 295
 Fl_Button, 310
 Fl_Check_Browser, 324
 Fl_Choice, 330
 Fl_Clock_Output, 337, 338
 Fl_Color_Chooser, 343
 Fl_File_Chooser, 367
 Fl_File_Icon, 374
 Fl_File_Input, 377
 Fl_Help_Dialog, 417
 Fl_Help_View, 424
 Fl_Input_, 446
 Fl_Input_Choice, 450
 Fl_Menu_, 466, 467
 Fl_Menu_Item, 486

Fl_Positioner, 508
Fl_Progress, 528
Fl_Scrollbar, 552
Fl_Spinner, 573
Fl_Tabs, 576, 577
Fl_Valuator, 650
Fl_Wizard, 716
version
 Fl, 271
visible
 Fl_File_Chooser, 367
 Fl_Help_Dialog, 417
 Fl_Menu_Item, 486
 Fl_Widget, 698
VISIBLE_FOCUS
 Fl_Widget, 673
visible_focus
 Fl, 271
 Fl_Widget, 698
visible_r
 Fl_Widget, 699
visual
 Fl, 271

w
 Fl_Help_Dialog, 417
 Fl_Image, 432
 fl_screen, 232
 Fl_Widget, 699
wait
 Fl, 272
warning
 group_comdlg, 249
watch_widget_pointer
 fl_del_widget, 239
when
 Fl_Widget, 700
window
 Fl_Widget, 701
Windows handling functions, 213
word_end
 Fl_Text_Buffer, 597
 Fl_Text_Display, 616
word_start
 Fl_Text_Display, 616
wrap
 Fl_Input_, 446
wrap_mode
 Fl_Text_Display, 616
wrap_uses_character
 Fl_Text_Display, 616
wrapped_column
 Fl_Text_Display, 617
wrapped_line_counter